



Antenna Datasheet

Product OC: YEMA300QXA

Version: 1.8

Date: 2026-01-19

Status: Released

Product Name: 4G & Wi-Fi & GNSS 3in1 Adhesive Mount Combo External Antenna

Key Features:

Frequency Band: 4G: 698–960 MHz, 1700–2700 MHz; Wi-Fi: 2400–2500 MHz, 5150–5850 MHz; GNSS: 1559–1606 MHz

Dimensions: 143.73 mm × 51.33 mm × 15 mm

Efficiency: Up to 50 % (4G), Up to 50 % (Wi-Fi)

GNSS LNA Gain: 18 ±3 dB

RoHS and REACH Compliant

IP68

Overview

Quectel YEMA300QXA is a 4G & Wi-Fi & GNSS Adhesive mount 3in1 combo antenna optimized for 4G, Wi-Fi and GNSS networks. With dimensions of 143.73 mm × 51.33 mm × 15 mm, the antenna can integrate a variety of antennas, such as 4G, GNSS and Wi-Fi antennas. The antenna is available with connection via 3 cable lengths from 300–5,000 mm, terminated with SMA Male connectors. Ideal for applications where the antenna is required to be discrete, this low profile, screw mount omni-directional antenna is easy to install with maximum durability assured thanks to its IP67 rated enclosure. It is compatible with Quectel 's RM520x Series modules.

YEMA300QXA is made up of 3 antennas, with 1 × 4G antenna covering 698–960 MHz and 1700–2700 MHz, 1 × Wi-Fi antenna covering 2400–2500 MHz and 5150–5850 MHz and 1 × GNSS L1 antenna covering 1559–1606 MHz. In the meantime, this product also offers high isolation between antennas to avoid self-interference. All in all, this unique product is designed to provide stable and high-speed data connection to 5G & GNSS applications. YEMA300QXA can be used in harsh environments thanks to its robust PC enclosure.

- **Typical Applications Include:**

- ✓ HD Video over LTE
- ✓ First Responder and Emergency Services
- ✓ Transportation and Automotive
- ✓ Automotive vehicle tracking
- ✓ Telematics

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Below are the variants based on YEMA300QXA.

Combo variants overview							
OC	4G LMH	4G MH/Wi-Fi	GNSS L1 (28 dB)	GNSS L1 (17 dB)	Total	Mounting Type	Screw Nut
YEMA300QXA	1	1	-	1	3in1	Adhesive	-
YEMA300L1AH	2	-	-	1	3in1	Adhesive	-
YEMA200L1AH	2	-	-	-	2in1	Adhesive	-
YEMN209L1BH	1	1	-	-	2in1	Adhesive	-

Contents

Overview	1
Contents	3
1 Specification	4
1.1. Electrical.....	4
1.1.1. 4G.....	5
1.1.2. Wi-Fi.....	5
1.1.3. GNSS.....	6
1.2. Mechanical & Environmental.....	7
1.3. Block Diagram (Active Antenna).....	8
1.4. Supported GNSS Frequency Bands.....	9
2 Drawing	11
3 Detailed Performance	12
3.1. S-Parameter Test.....	12
3.1.1. VSWR.....	12
3.1.2. Return Loss.....	15
3.1.3. Isolation.....	18
3.1.4. GNSS LNA Gain.....	21
3.1.5. GNSS Noise Figure.....	22
3.2. Radiation Performance Test.....	23
3.2.1. Efficiency.....	23
3.2.2. Average Gain.....	26
3.2.3. Peak Gain.....	28
3.2.4. 3D & 2D Radiation Pattern.....	31
4 Packaging	37
5 Installation	39
6 Appendix Reference	40
Contact Us	42
Legal Notices	43
Revision History	45

1 Specification

Test Condition: In Free Space

1.1. Electrical

Electrical Specifications		
Frequency Range	4G	698–960 MHz, 1700–2700 MHz
	Wi-Fi	2400–2500 MHz, 5150–5850 MHz
	GNSS	1559–1606 MHz
Radiation Pattern	4G	Omni-directional
	Wi-Fi	Omni-directional
	GNSS	Directional
Polarization	4G	Linear
	Wi-Fi	Linear
	GNSS	RHCP
Impedance	50 Ω	
Isolation	≤ -11.9 dB	

1.1.1. 4G

Electrical – Detail												
Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	SPEC	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000
Max. VSWR		-	3.7	5.2	-	1.9	1.7	1.7	1.6	-	-	-
Max. Return Loss (dB)		-	-4.8	-3.4	-	-9.9	-11.6	-12.0	-12.6	-	-	-
AVG Eff. (%)		-	42.2	45.6	-	55.4	49.0	51.0	51.5	-	-	-
AVG AVG Gain (dB)		-	-3.8	-3.5	-	-2.6	-3.1	-2.9	-2.9	-	-	-
Max. Peak Gain (dBi)		-	2.3	2.3	-	4.1	1.7	1.3	2.1	-	-	-
VSWR							≤ 5.2					
Return Loss							≤ -3.4 dB					
Peak Gain							≤ 4.1 dBi					

1.1.2. Wi-Fi

Specification	Band	Band	Wi-Fi 2G	Wi-Fi 5G	Wi-Fi 6G
		Freq. (MHz)	2400–2500	5150–5850	5925–7125
Max. VSWR			1.7	1.5	-
Max. Return Loss (dB)			-11.4	-14.6	-
AVG Eff. (%)			51.0	50.4	-
AVG AVG Gain (dB)			-2.9	-3.0	-
Max. Peak Gain (dBi)			2.2	2.7	-
VSWR			≤ 1.7		
Return Loss			≤ -11.4 dB		
Peak Gain			≤ 2.7 dBi		

1.1.3. GNSS

Band	GPS L5 GALILEO E5a BDS B2a- B2I QZSS L5 IRNSS L5	GALILEO E5b BDS B2b	GPS L2 QZSS L2C	GLONASS G2	BDS B3	BDS B1I	GPS L1 GALILEO E1 BDS B1C QZSS L1	GLONASS G1
Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
VSWR	-	-	-	-	-	1.86	1.55	1.91
Return Loss (dB)	-	-	-	-	-	-10.4	-13.2	-10.1
Efficiency (%)	-	-	-	-	-	50.1	70.3	75.9
Peak Gain (dBi)	-	-	-	-	-	0.66	2.31	2.42


LNA Electrical

LNA Gain	18 ±3 dB @ 3-5 V 17 ±3 dB @ 1.8 V
Noise Figure	≤ 2.5 dB
Output VSWR	< 2.0
Input VSWR	< 2.0
Filter Out-of-Band Attenuation	36 dB f0 ±100 MHz f0 (1588 MHz)
Working Voltage	1.8–5 V
Working Current	8.5 ±2 mA
Impedance	50 Ω

1.2. Mechanical & Environmental

Mechanical		
Antenna Dimensions		143.73 mm × 51.33 mm × 15 mm
Casing Material & Color		PC & Black
Cable Type & Color & Length	4G	RG174LL & Black & 1028 ±28 mm
	Wi-Fi	RG174LL & Black & 1028 ±28 mm
	GNSS	RG174 & Black & 1028 ±28 mm
Connector Type	4G	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
	Wi-Fi	RP SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
	GNSS	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
Mounting Type		Adhesive
Weight		Typ. 125.5 g
Environmental		
Operation Temperature		-40 °C to +85 °C
Storage Temperature		-40 °C to +85 °C
Ingress Protection (IP) Rating		IP68
RoHS and REACH Compliant		Yes
Housing Flame Rating		UL 94 V-0
Housing UV Resistant		UL 746c f1


1.3. Block Diagram (Active Antenna)

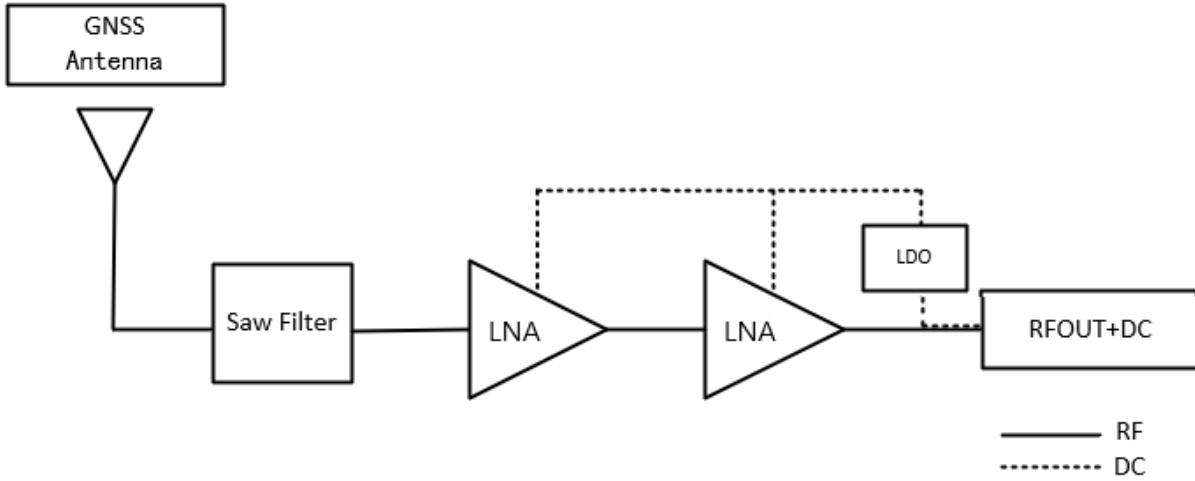


1.4. Supported GNSS Frequency Bands

GNSS Frequency Bands (MHz)					
GPS	L1 Centre 1575.42 (1565–1586)	L2 Centre 1227.6 (1217–1238)	L5 Centre 1176.45 (1164–1189)		
	√	-	-		
GLONASS	G1-L10C-L10F Centre 1601 (1595–1606)	G2-L20C-L20F Centre 1248.06 (1241–1255)	G3-L30C Centre 1202.025 (1189–1213)		
	√	-	-		
GALILEO	E1 Centre 1575.42 (1563–1588)	E5a Centre 1176.45 (1166–1187)	E5b Centre 1207.14 (1197–1218)	E6 Centre 1278.75 (1258–1300)	
	√	-	-	-	
BDS	B1I Centre 1561.098 (1559–1564)	B1C (BDS-3) Centre 1575.42 (1559–1592)	B2a-B2I Centre 1176.45 (1166–1187)	B2b Centre 1207.14 (1197–1217)	B3 Centre 1268.52 (1258–1279)
	√	√	-	-	-
QZSS	L1 Centre 1575.42 (1573–1578)	L2C Centre 1227.6 (1226–1229)	L5 Centre 1176.45 (1166–1187)	L6 Centre 1278.75 (1257–1300)	
	√	-	-	-	
IRNSS	L5 Centre 1176.45 (1164–1189)				
	-				

GNSS Bands and Constellations

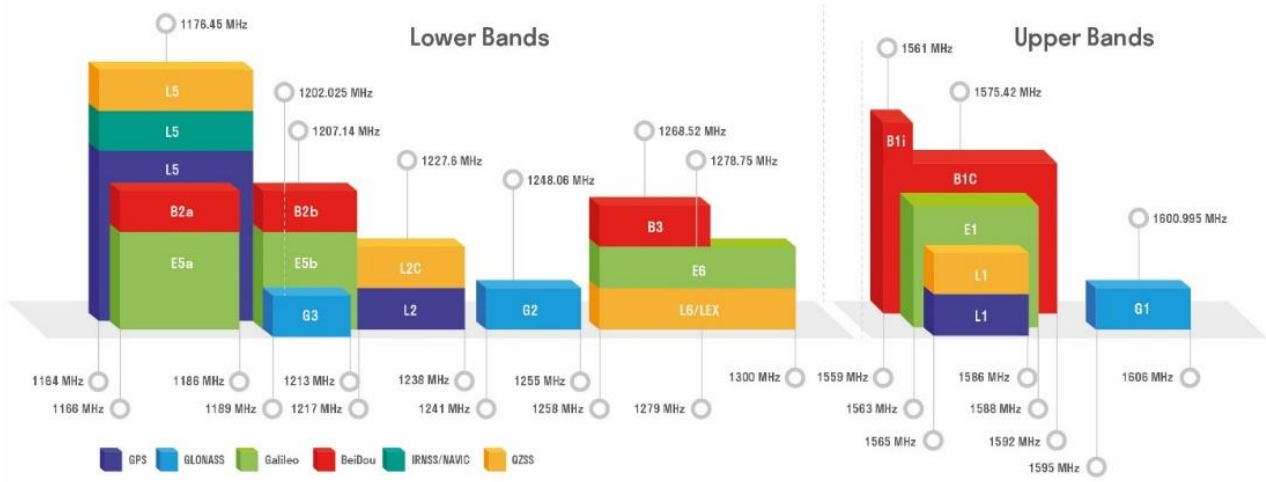


2 Drawing

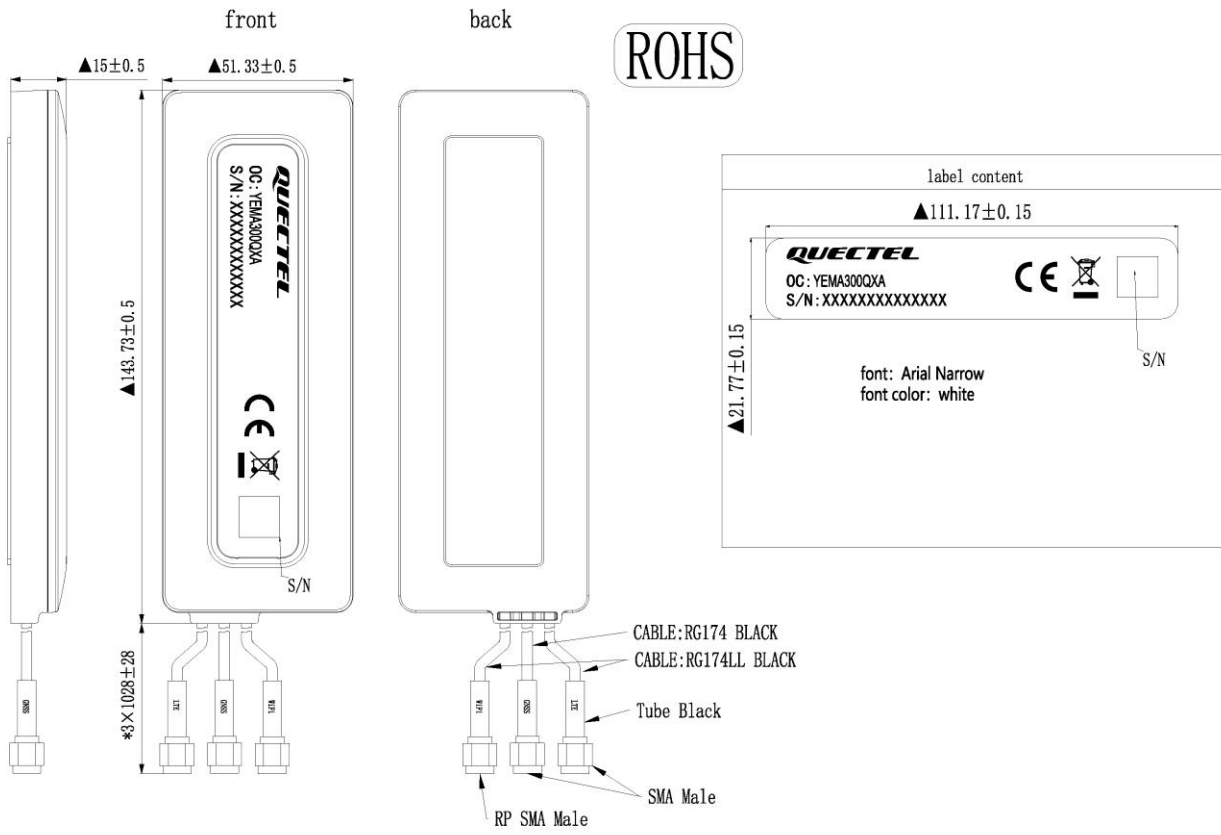

3 Detailed Performance


3.1. S-Parameter Test

3.1.1. VSWR

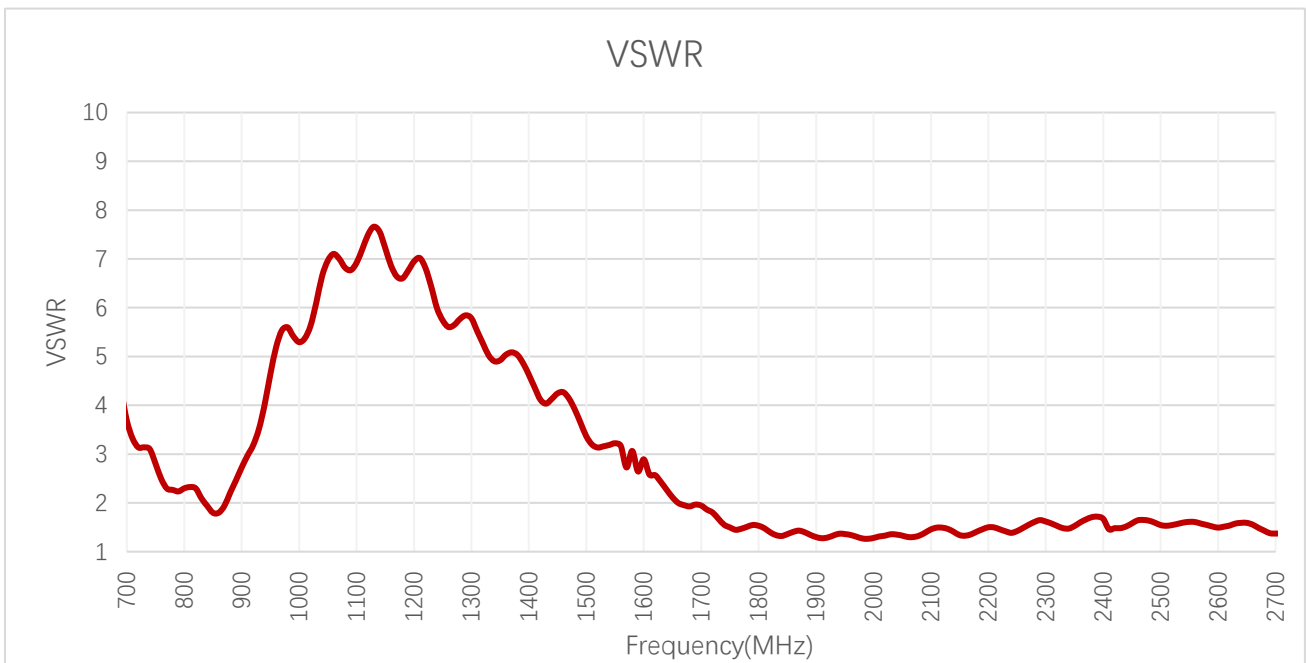


VSWR – 4G

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
VSWR	-	-	3.3	2.1	2.7	5.2	-	1.9	1.6	1.4
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
VSWR	1.4	1.4	1.5	1.6	1.5	1.4	-	-	-	-

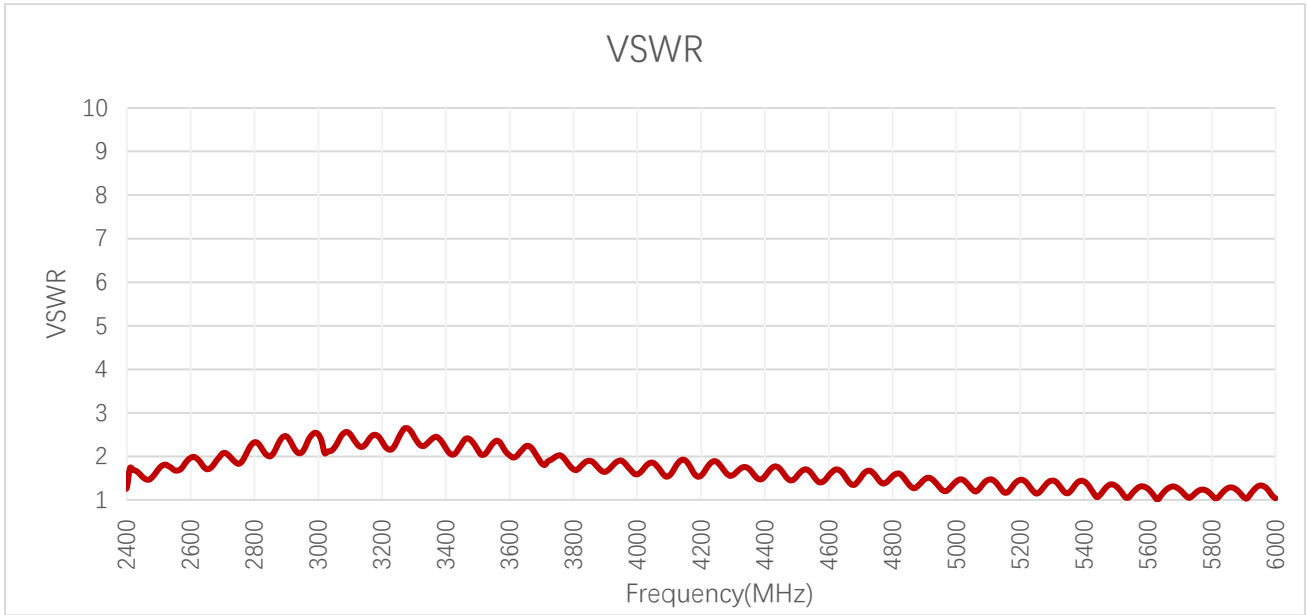

VSWR – Wi-Fi


Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
VSWR	1.3	1.5	1.7	1.2	1.3	1.3	-	-	-	-

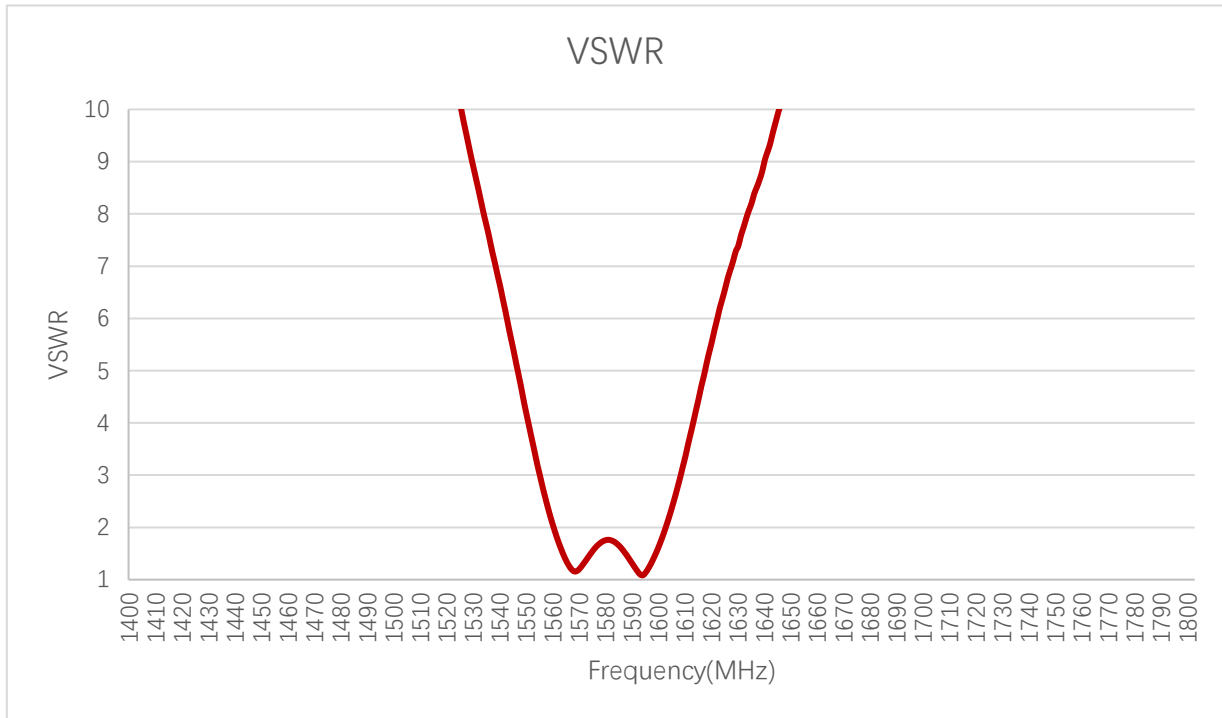

VSWR – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
VSWR	-	-	-	-	-	1.86	1.55	1.9

3.1.2. Return Loss

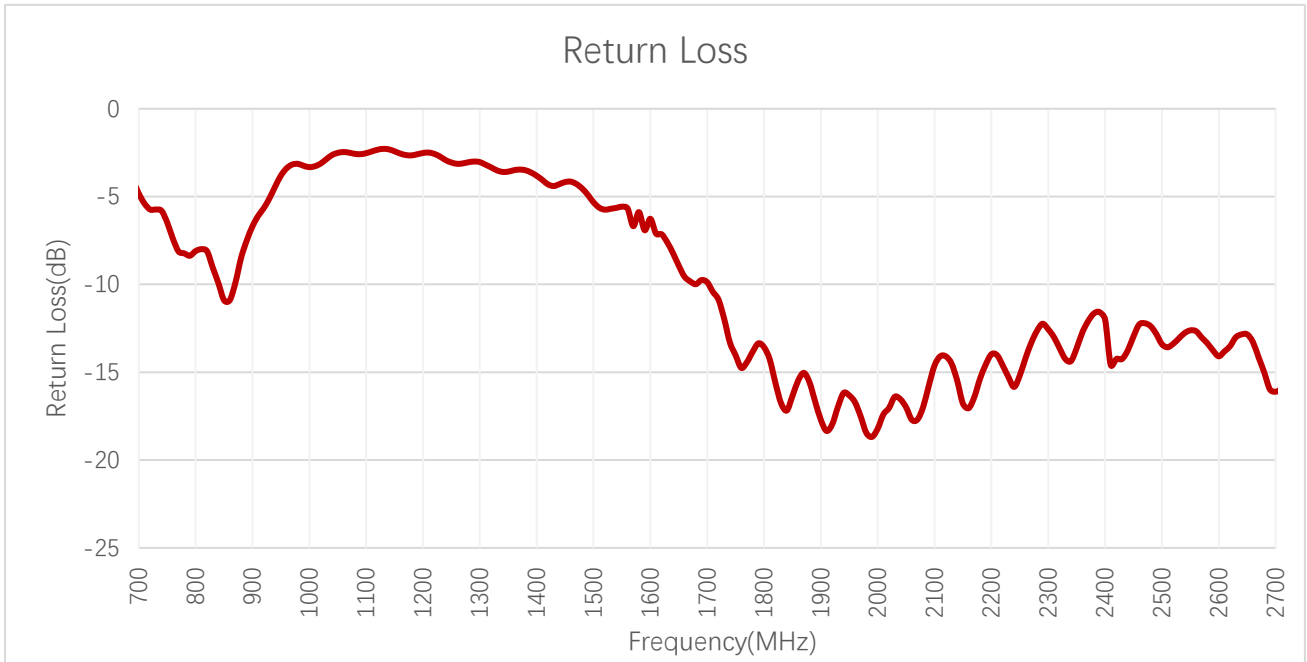


Return Loss (dB) – 4G

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Return Loss (dB)	-	-	-5.4	-9.0	-6.7	-3.4	-	-10.4	-13.3	-15.6
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Return Loss (dB)	-16.3	-15.5	-13.6	-13.0	-14.1	-16.0	-	-	-	-

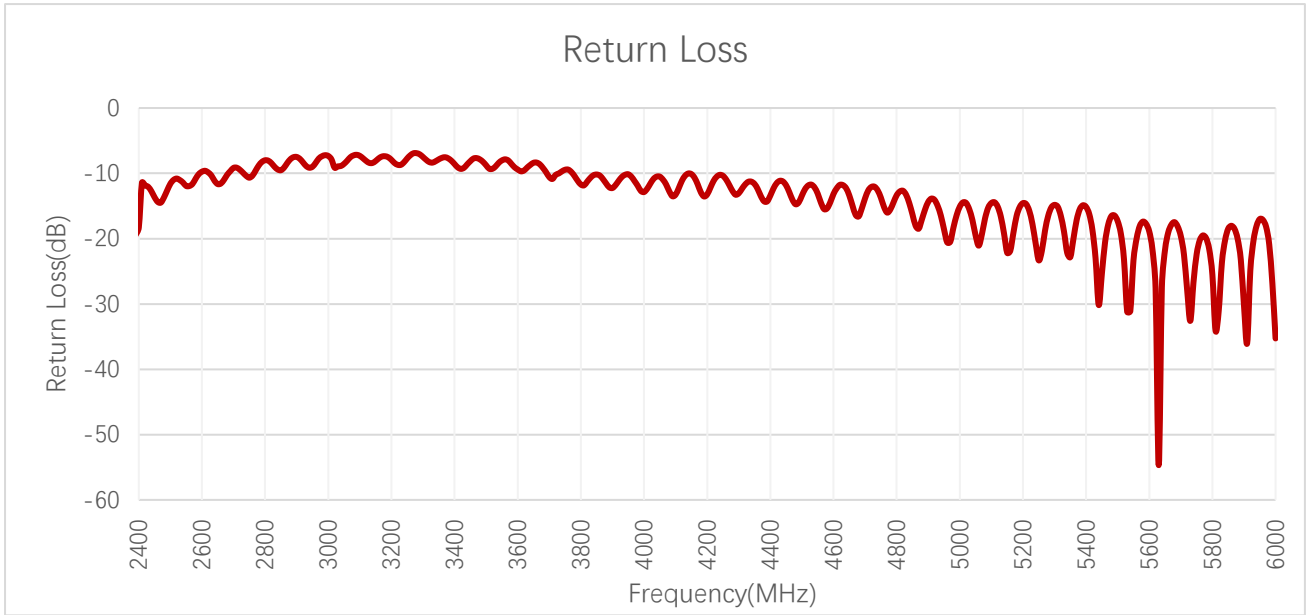

Return Loss – Wi-Fi


Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Return Loss	-18.3	-13.7	-11.6	-22.2	-17.3	-18.5	-	-	-	-

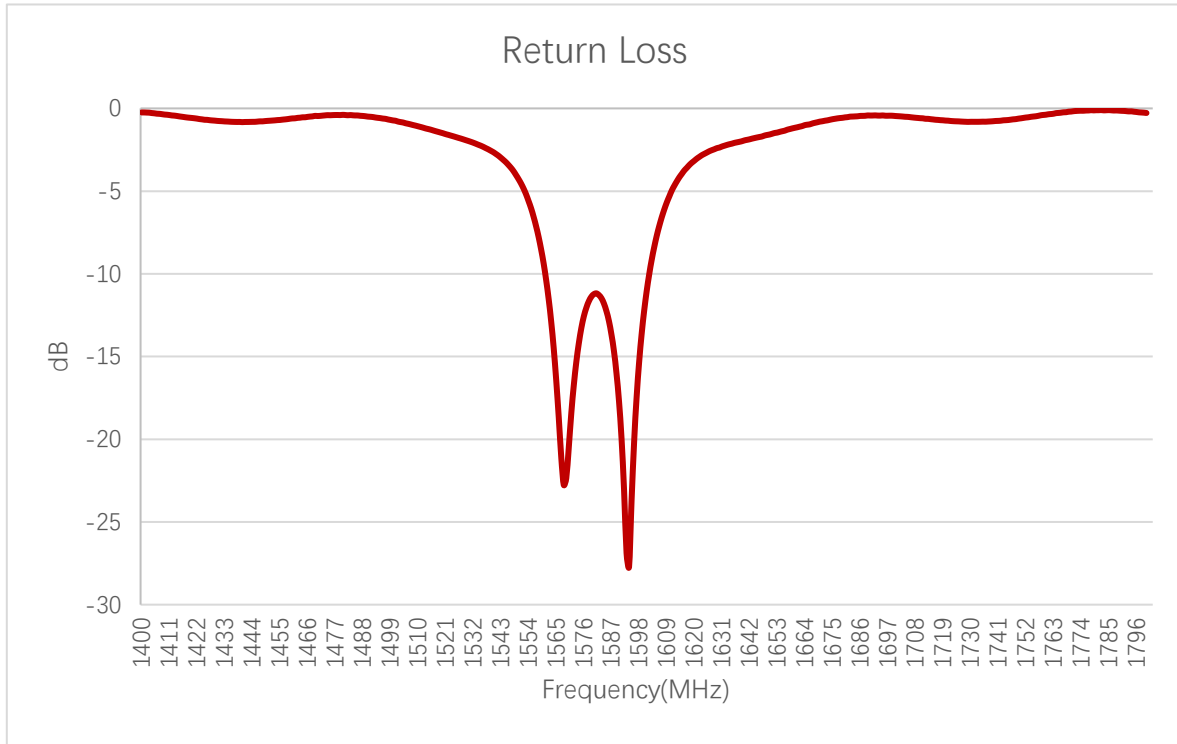


Return Loss (dB) – GNSS

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Return Loss (dB)	-	-	-	-	-	-10.3	-13.2	-10.1

3.1.3. Isolation

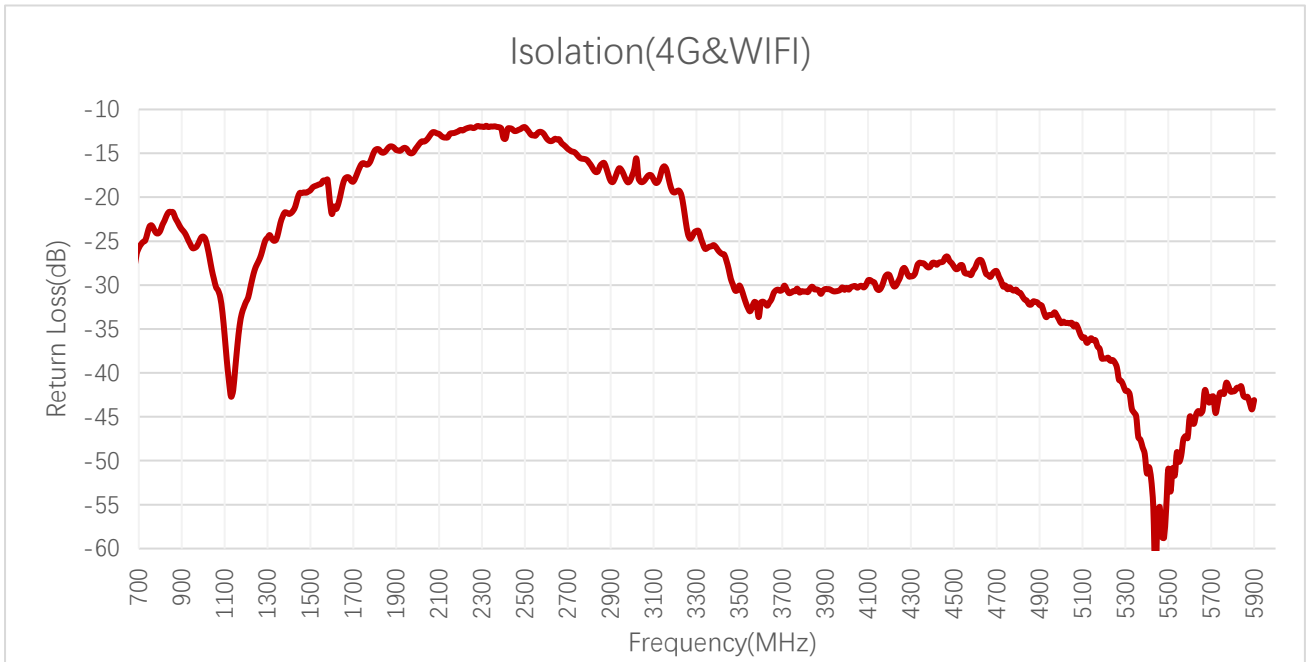


Band	B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	Wi-Fi 5G
Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	5150– 5850
Isolation (dB)	-	-23.1	-21.7	-	-12.6	-11.9	-12.0	-12.0	-36.3

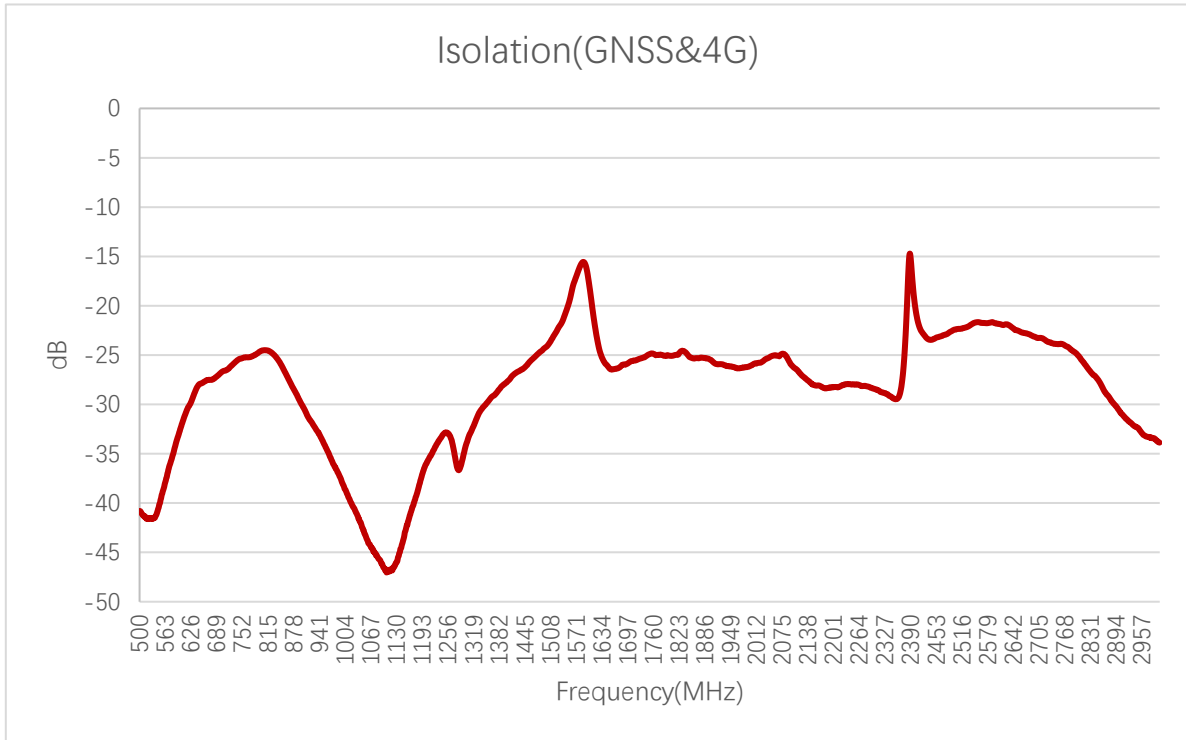

Max Isolation (dB) – GNSS & 4G


Band	B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	Wi-Fi 5G	BDS B1I	GPS L1	GLONASS G1
Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	515– 5850	1559– 1564	1565– 1586	1595–1606
Isolation (dB)	-	-	-	-	-	-	-	-	-	-18	-16.4	-18

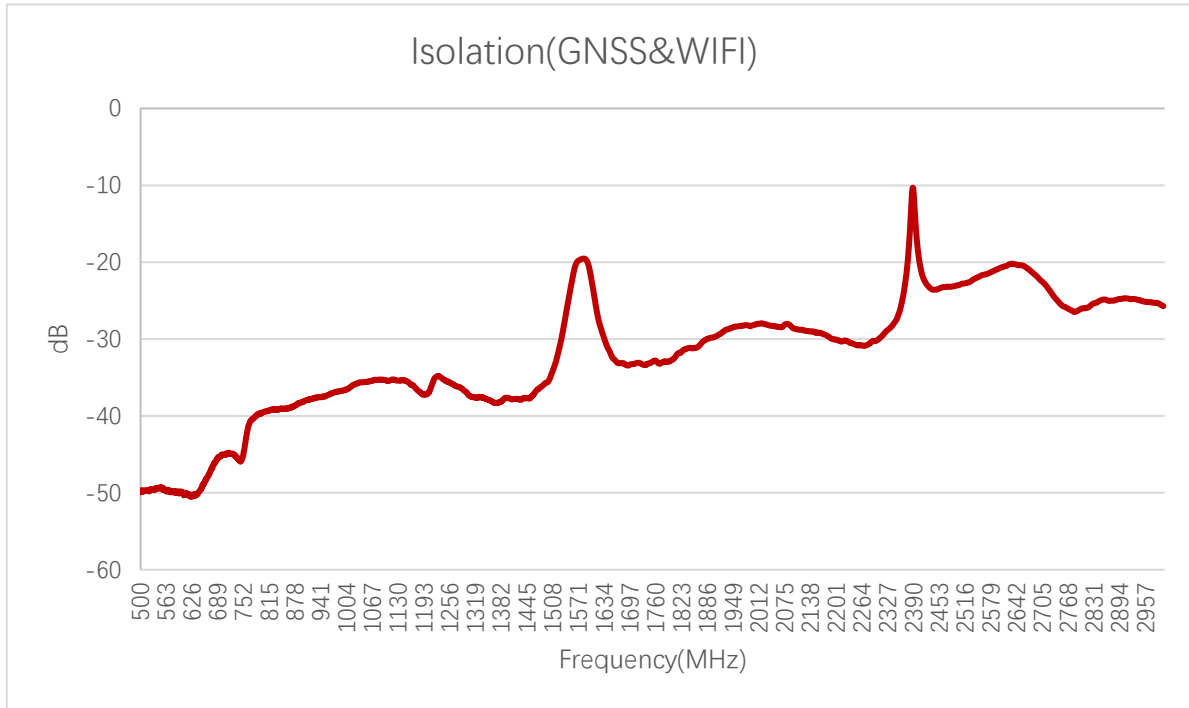

Max Isolation (dB) – GNSS & Wi-Fi

Band	B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	Wi-Fi 5G	BDS B1I	GPS L1	GLONASS G1
Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	5150– 5850	1559– 1564	1565– 1586	1595–1606
Isolation (dB)	-	-	-	-	-	-	-	-	-	-20.7	-19.6	-22.3


3.1.4. GNSS LNA Gain

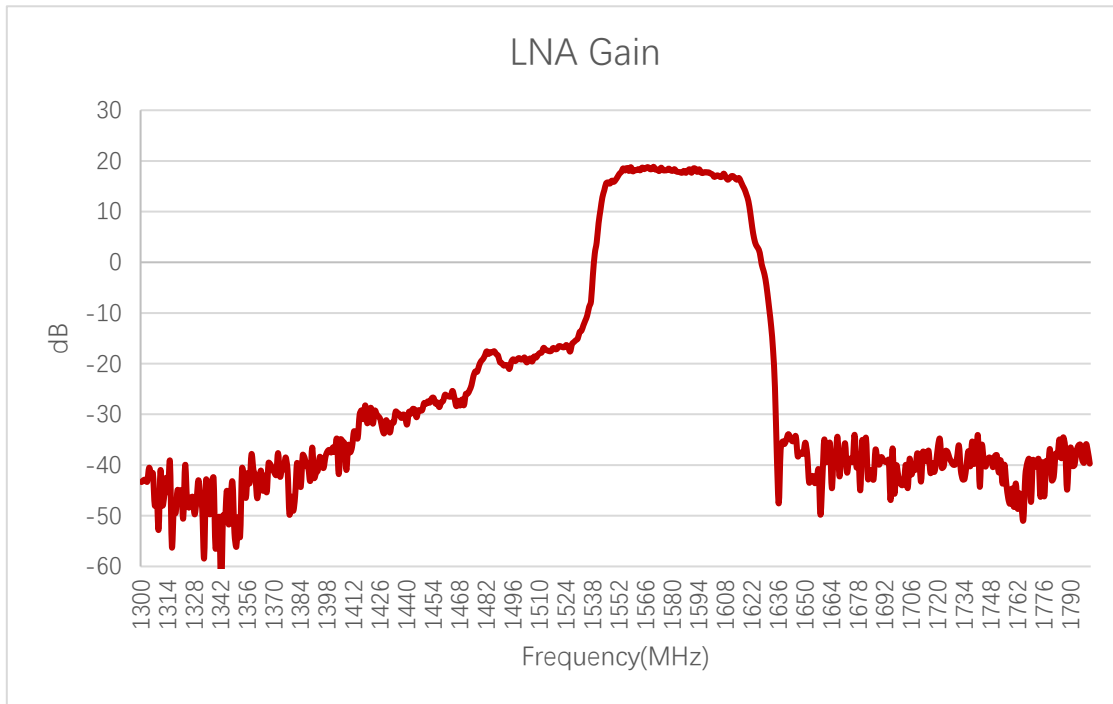

LNA Gain (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
LNA Gain (dB)	-	-	-	-	-	18.1	18.1	16.8

3.1.5. GNSS Noise Figure

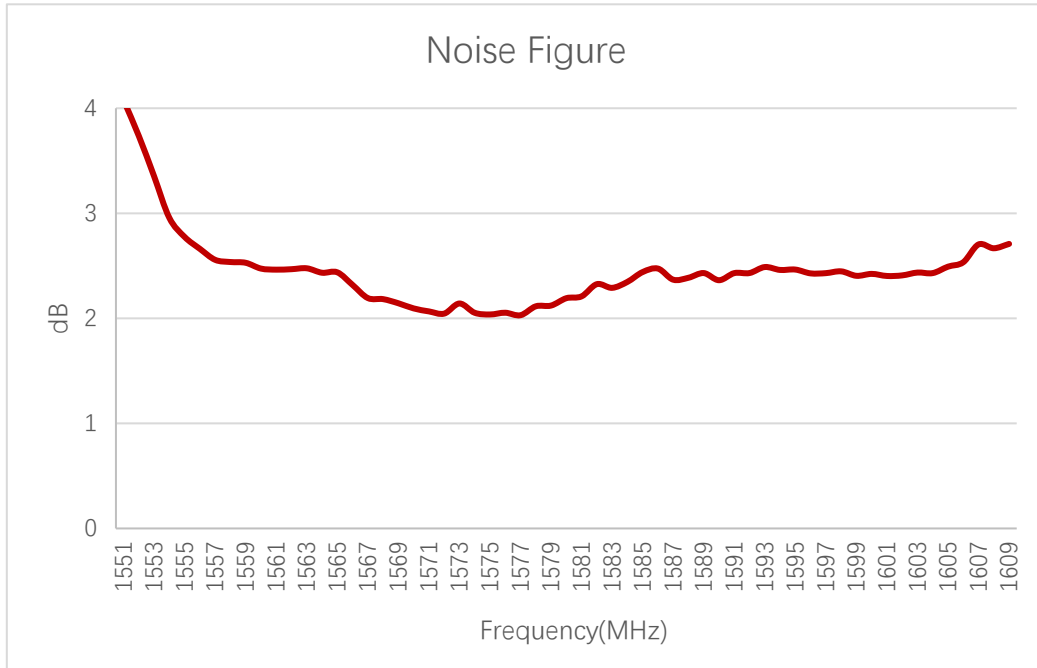



Noise Figure (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Noise Figure (dB)	-	-				2.46	2.03	2.4

3.2. Radiation Performance Test


3.2.1. Efficiency

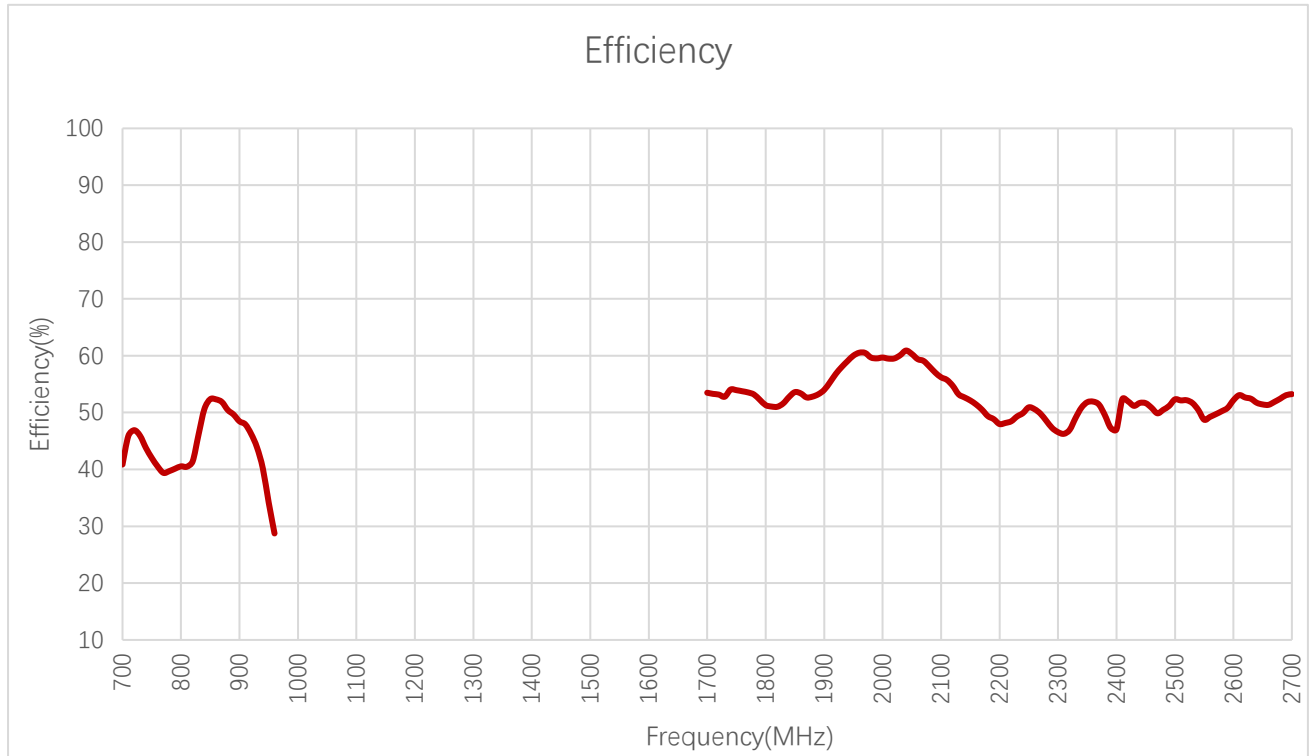

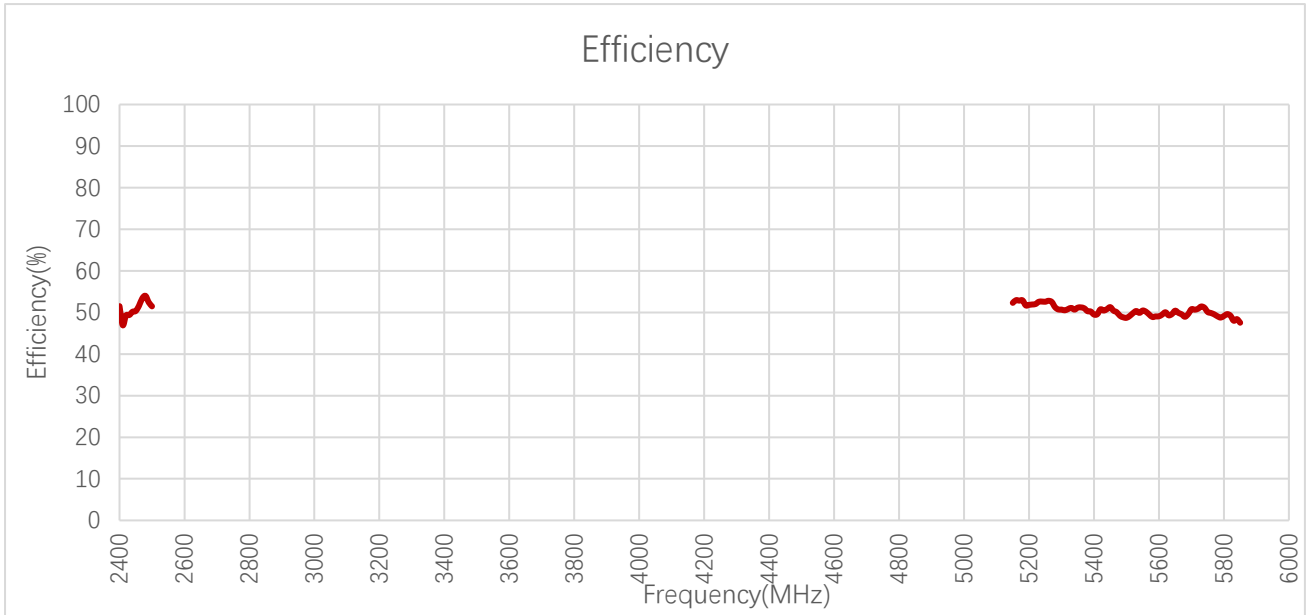

Efficiency (%) – Wi-Fi


Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Efficiency (%)	51.5	50.4	51.5	52.3	48.7	47.5	-	-	-	-

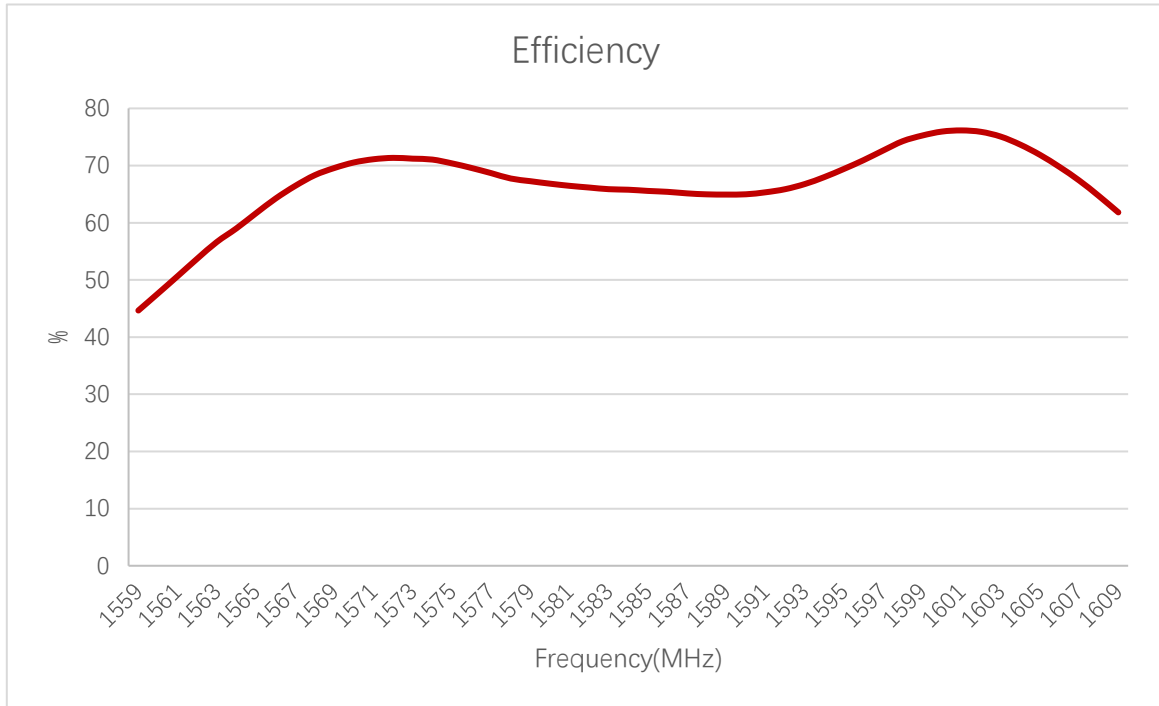

Efficiency (%) – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Efficiency	-	-	-	-	-	50.6	70	75.9

3.2.2. Average Gain

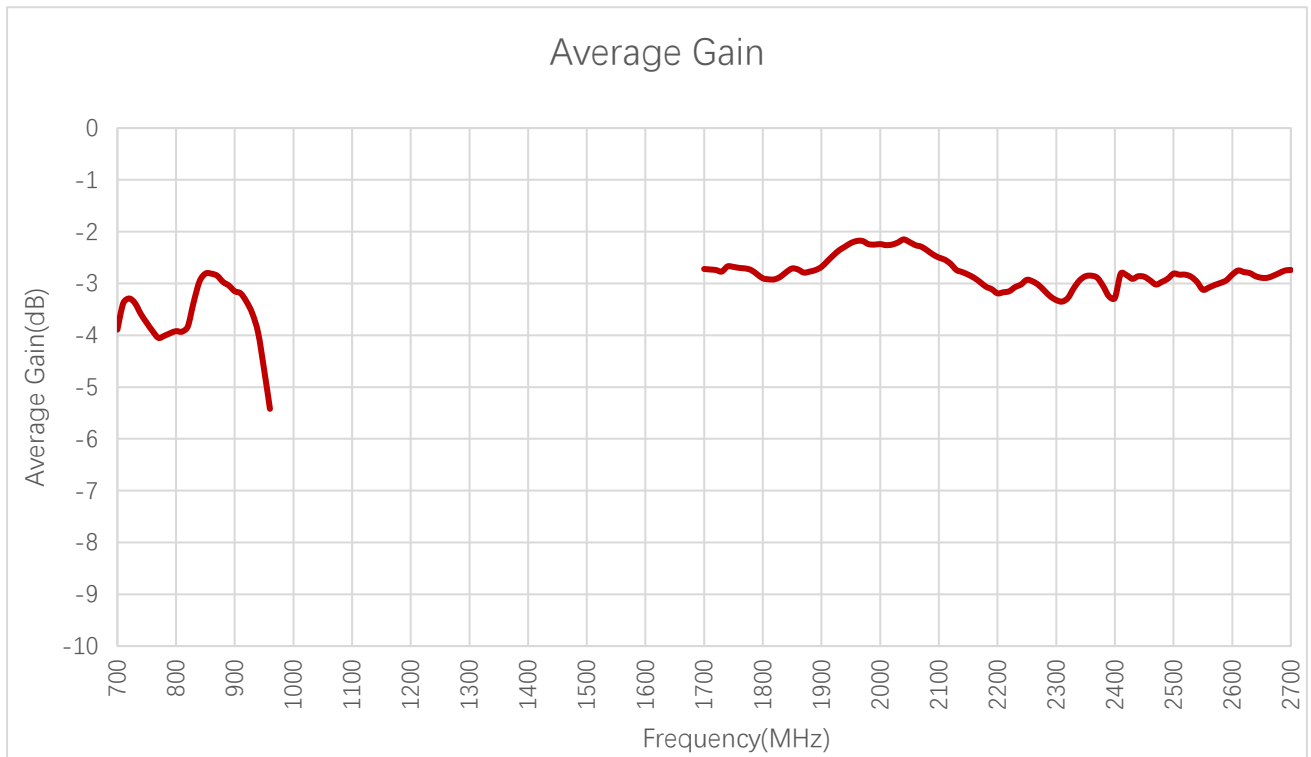

Average Gain (dB) – 4G


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Average Gain (dB)	-	-	-3.4	-3.4	-3.2	-5.4	-	-2.7	-2.7	-2.8
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Average Gain (dB)	-2.2	-2.8	-2.9	-2.9	-2.8	-2.8	-	-	-	-

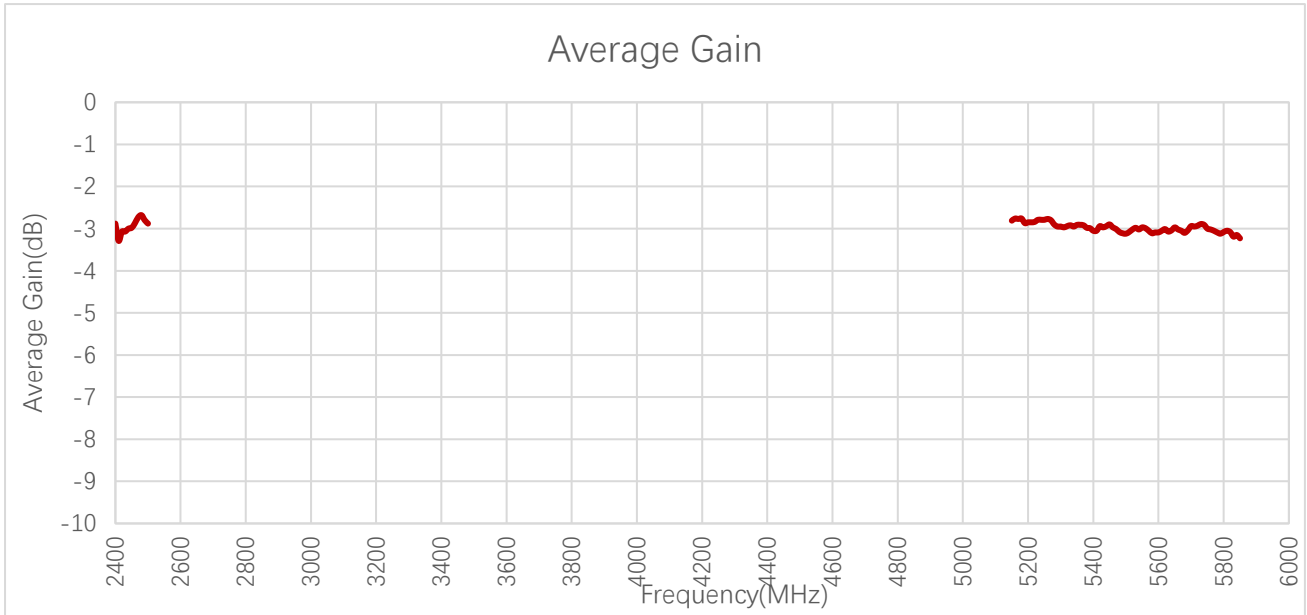

Average Gain (dB) – Wi-Fi


Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Average Gain (dB)	-2.9	-3.0	-2.9	-2.8	-3.1	-3.2	-	-	-	-

3.2.3. Peak Gain

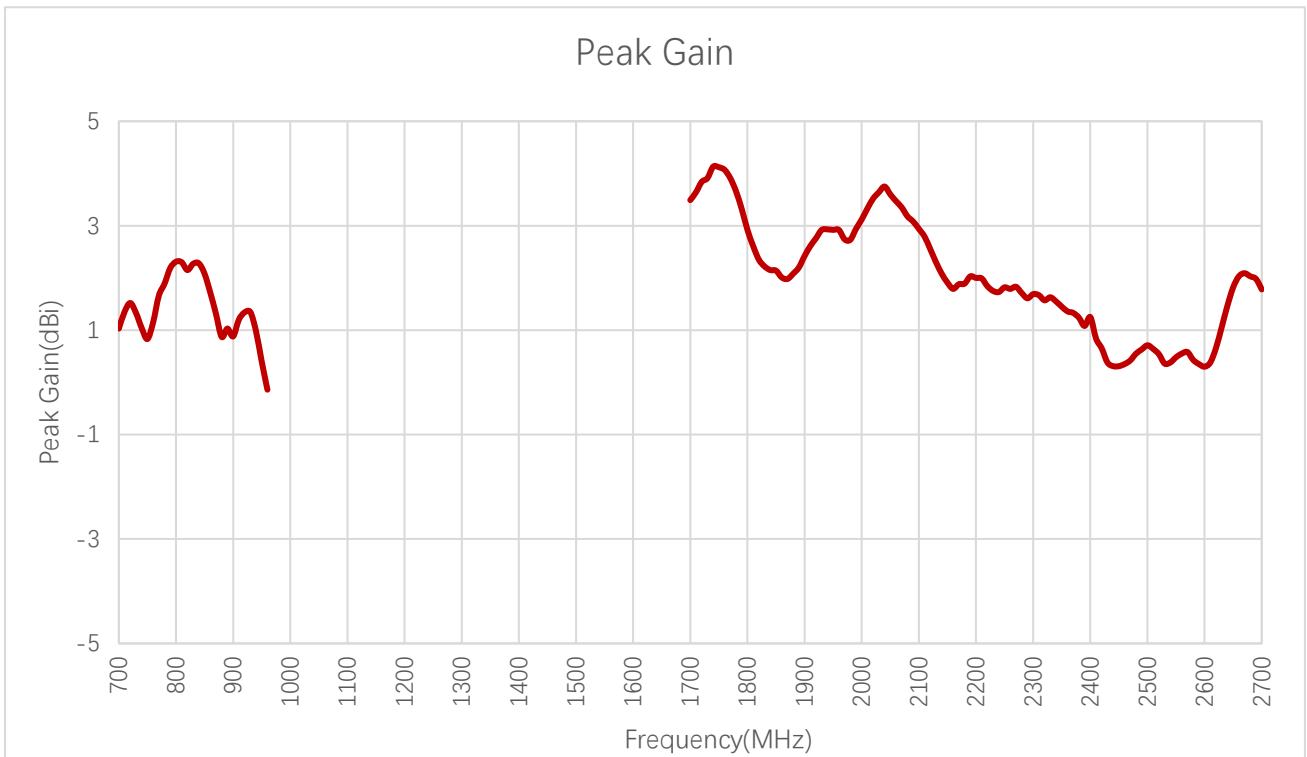


Peak Gain (dBi) – 4G

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Peak Gain (dBi)	-	-	1.4	2.3	0.9	-0.1	-	3.6	4.1	2.1
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Peak Gain (dBi)	2.9	2.1	1.5	0.3	0.3	2.0	-	-	-	-

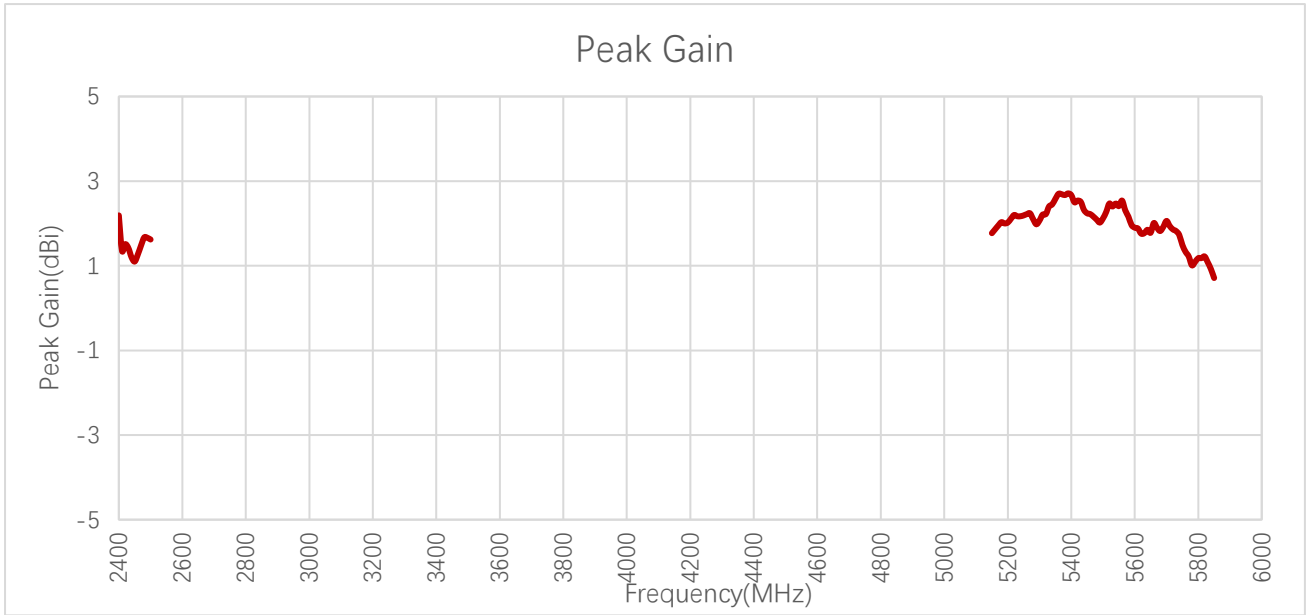

Peak Gain (dB) – Wi-Fi

Frequency (MHz)	2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Peak Gain (dB)	2.2	1.1	1.6	1.8	2.1	0.7	-	-	-	-

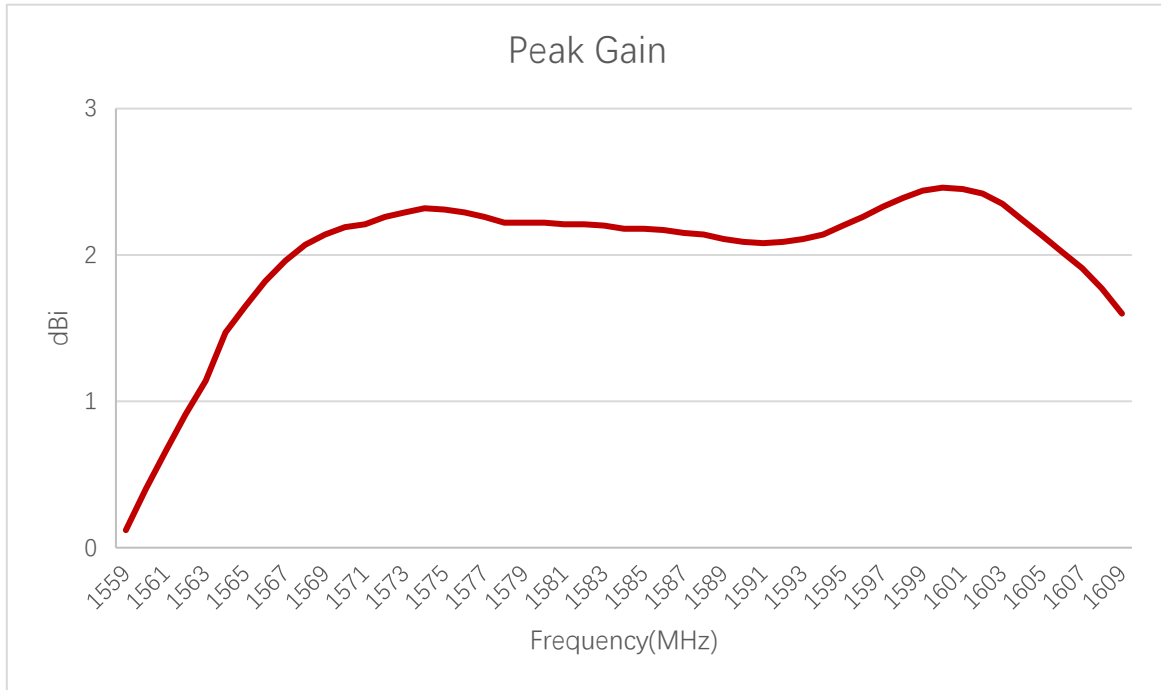


Peak Gain (dBi) – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Peak Gain (dBi)	-	-	-	-	-	0.66	2.31	2.42


3.2.4. 3D & 2D Radiation Pattern


- Test Chamber: SH-SY-16M (GNSS)
- Test Chamber: HF-G-1 (4G + Wi-Fi)
- Test Condition: In Free Space

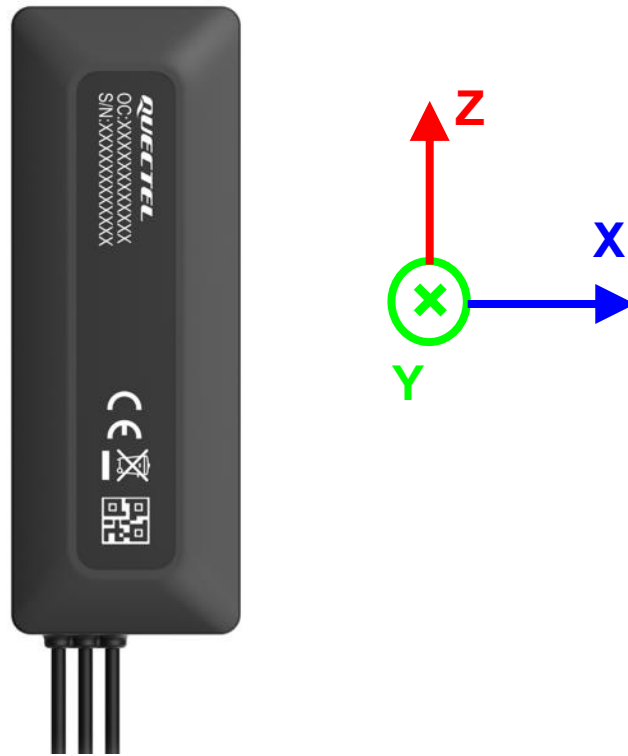


● **4G**

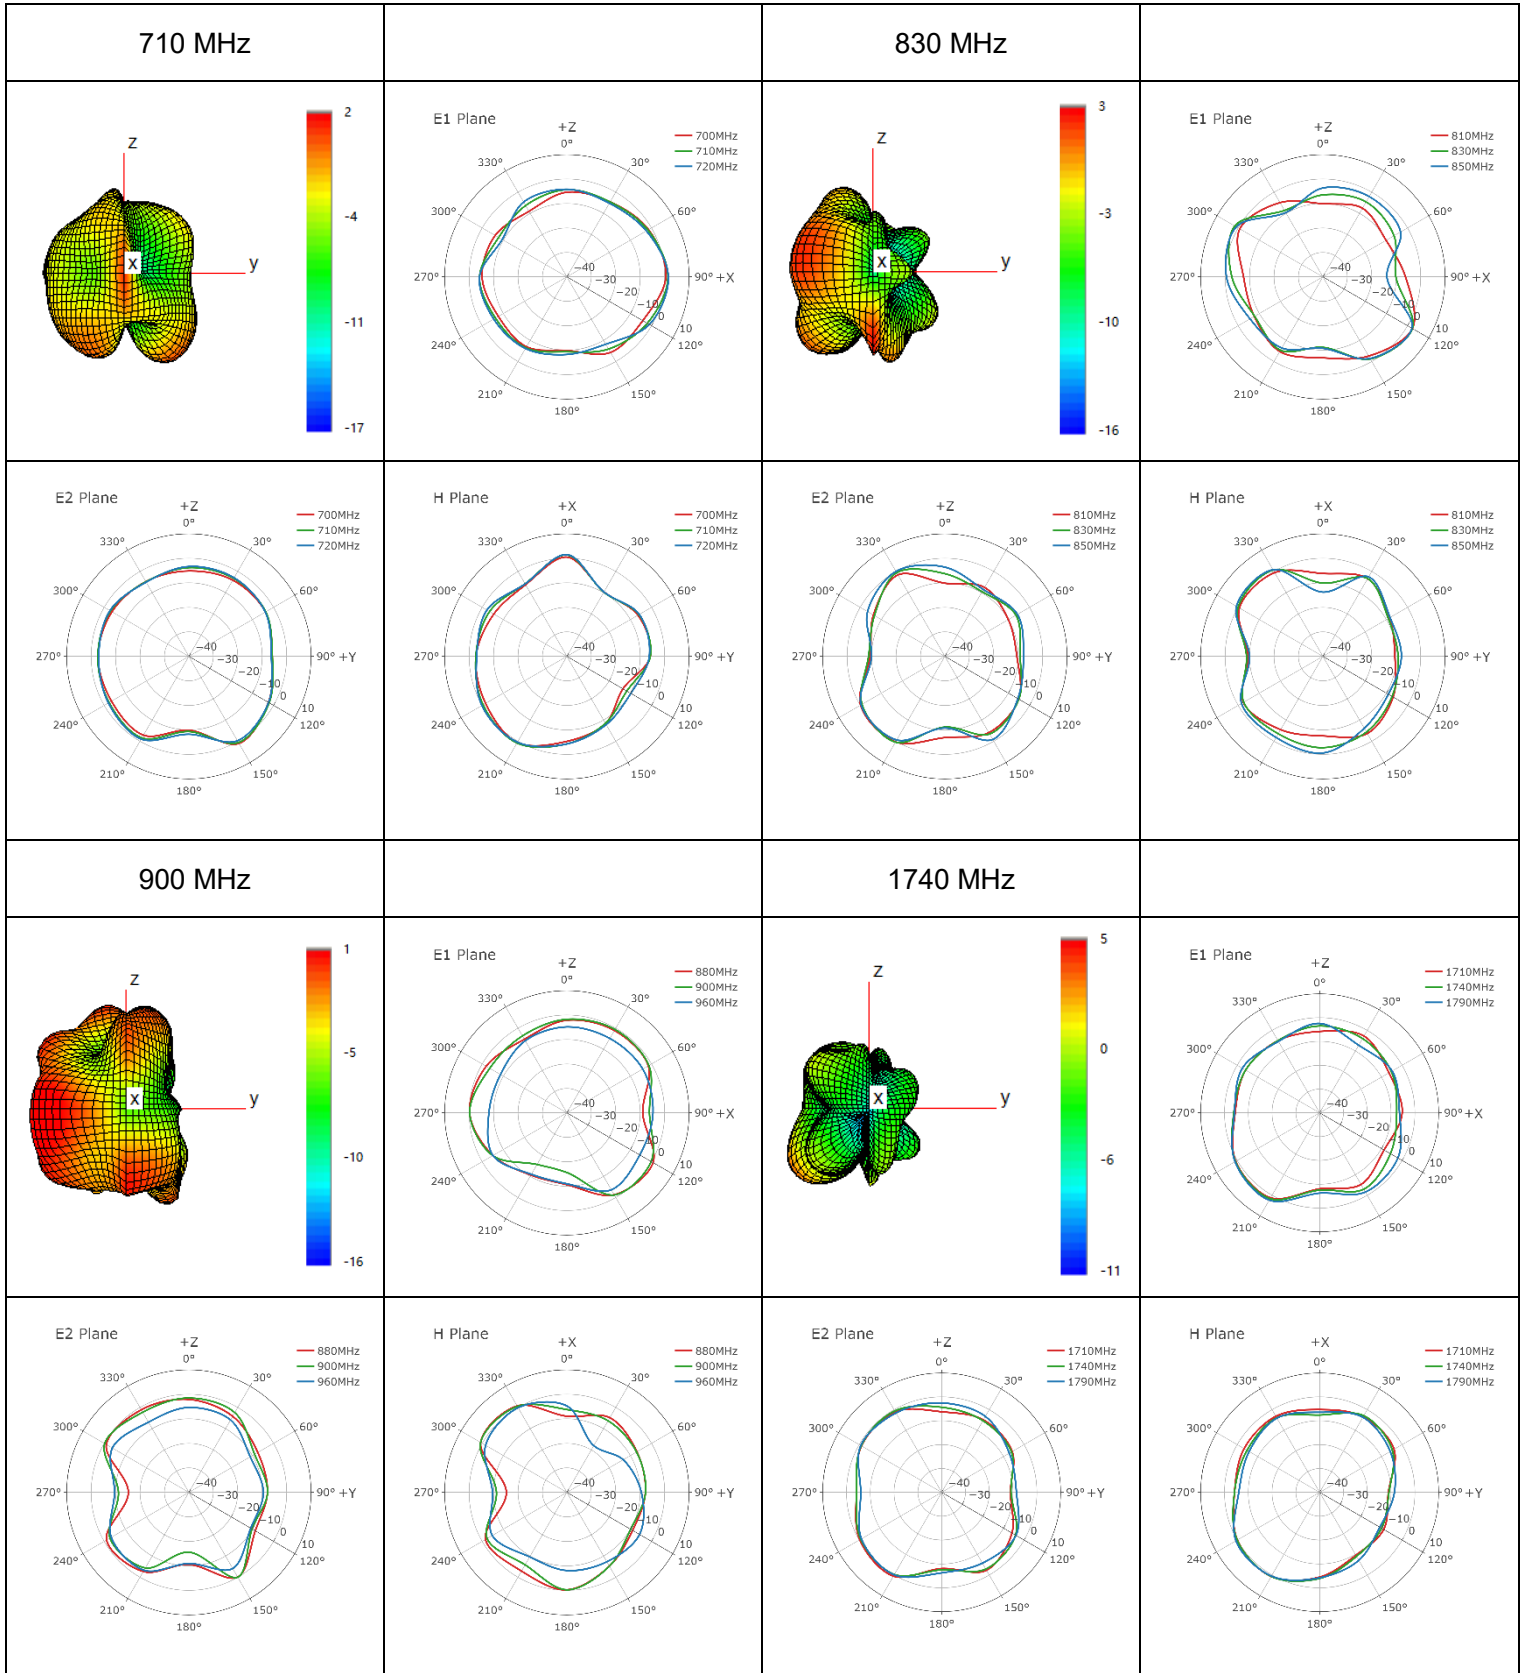


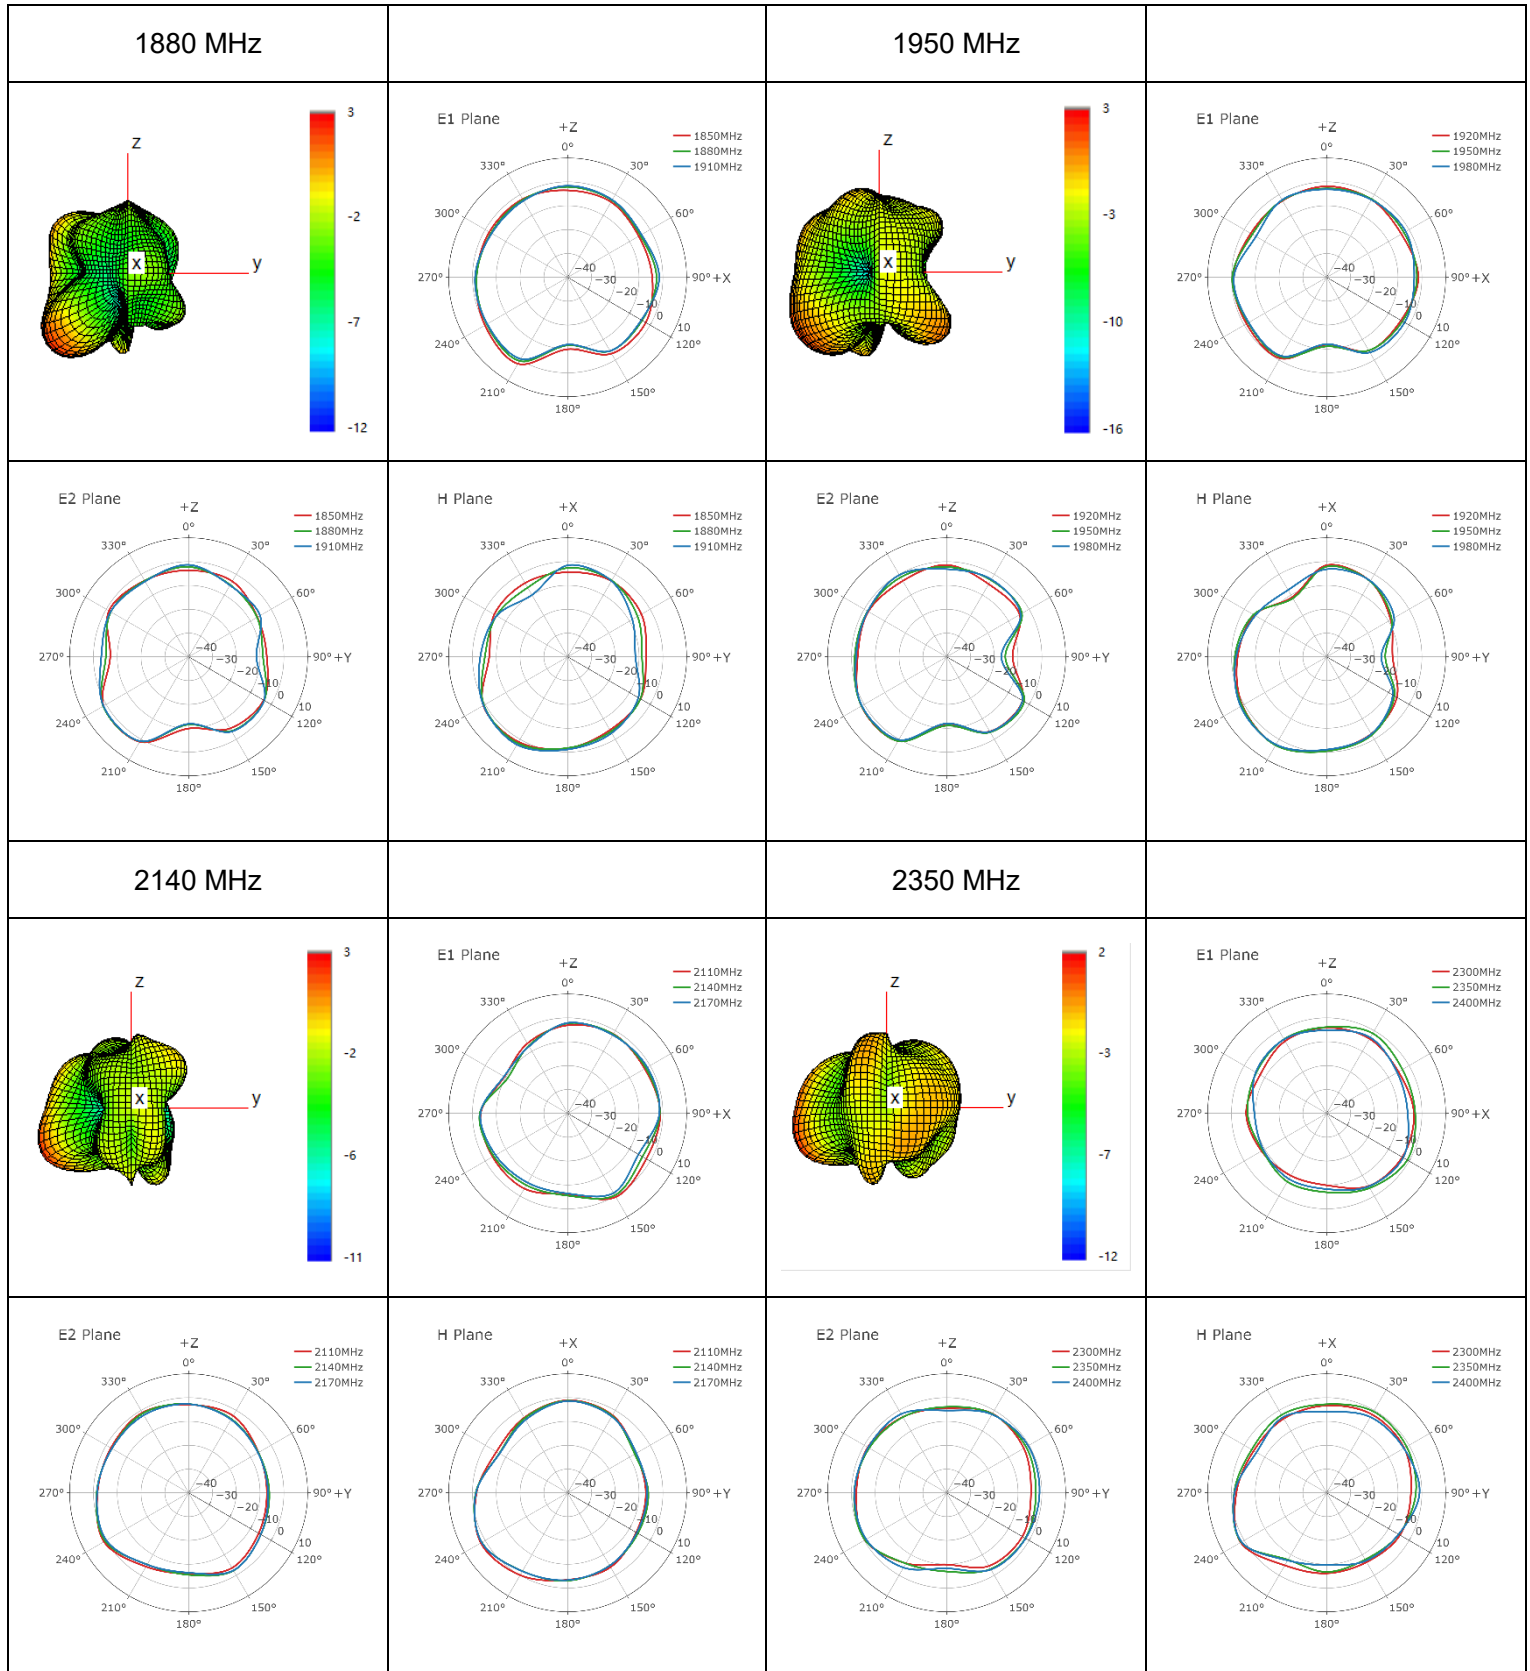

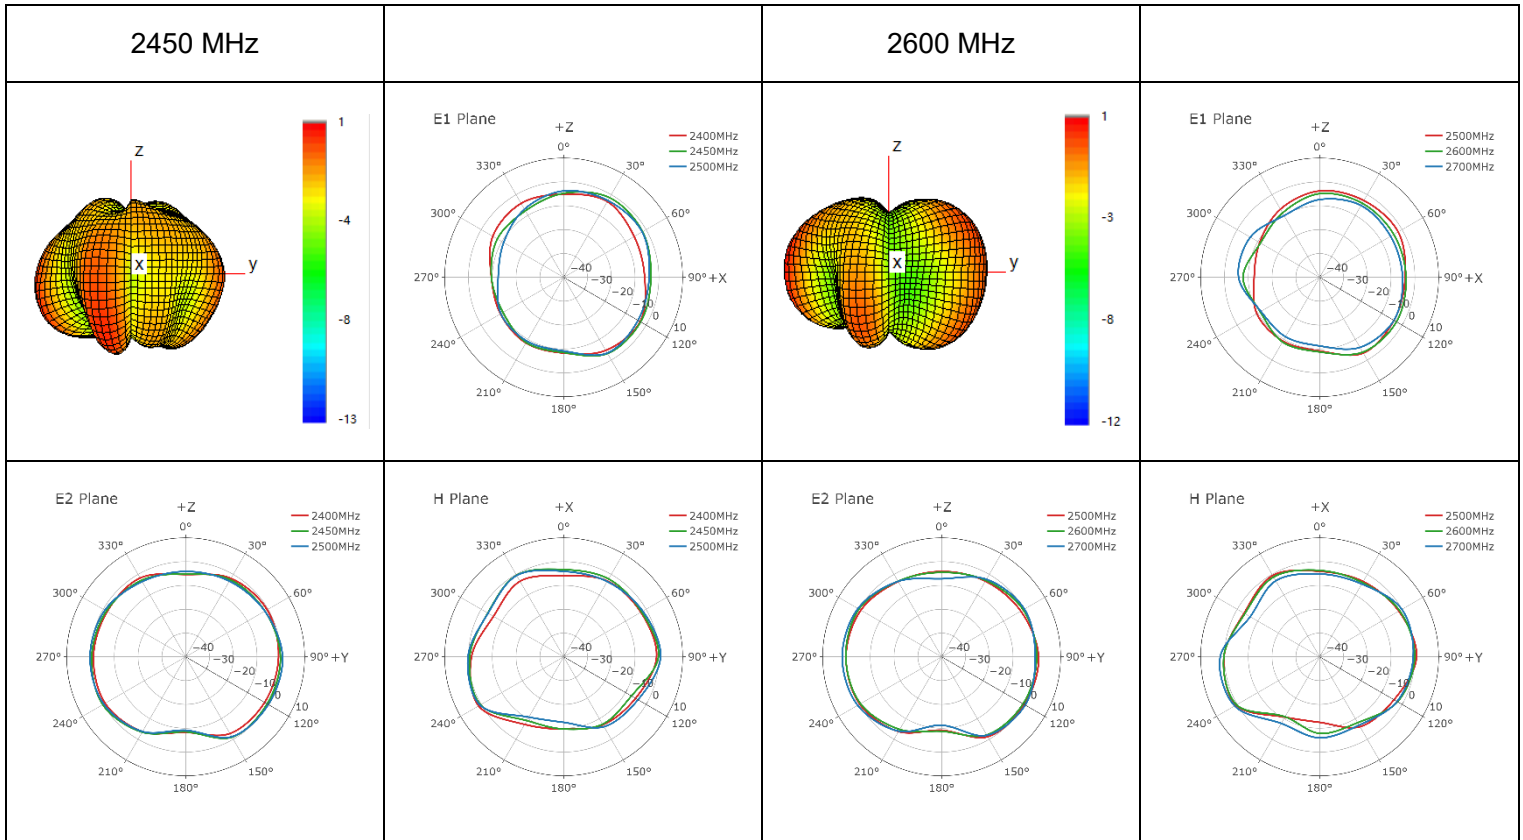



● **Wi-Fi**

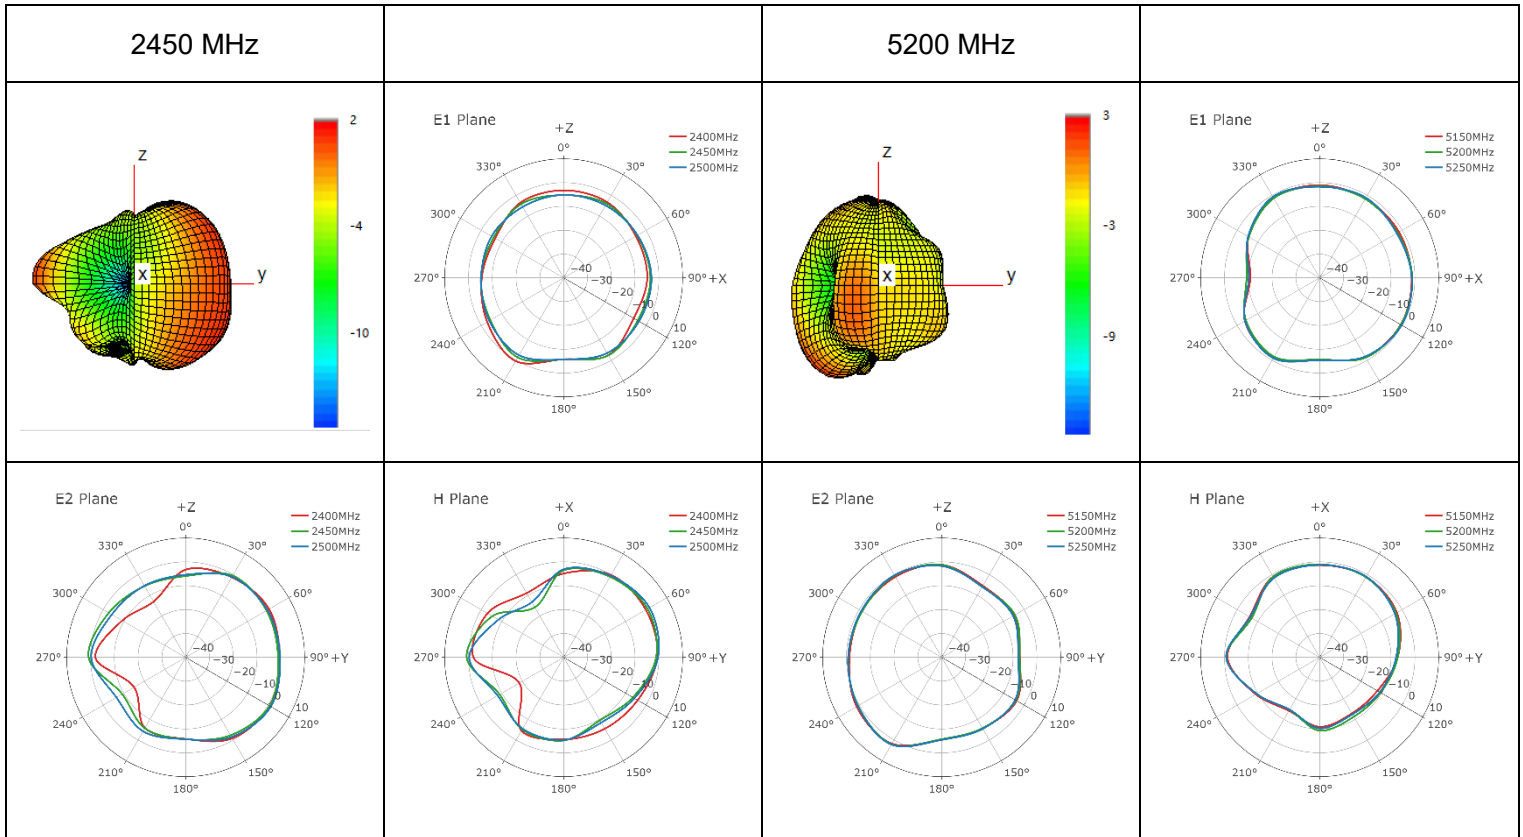


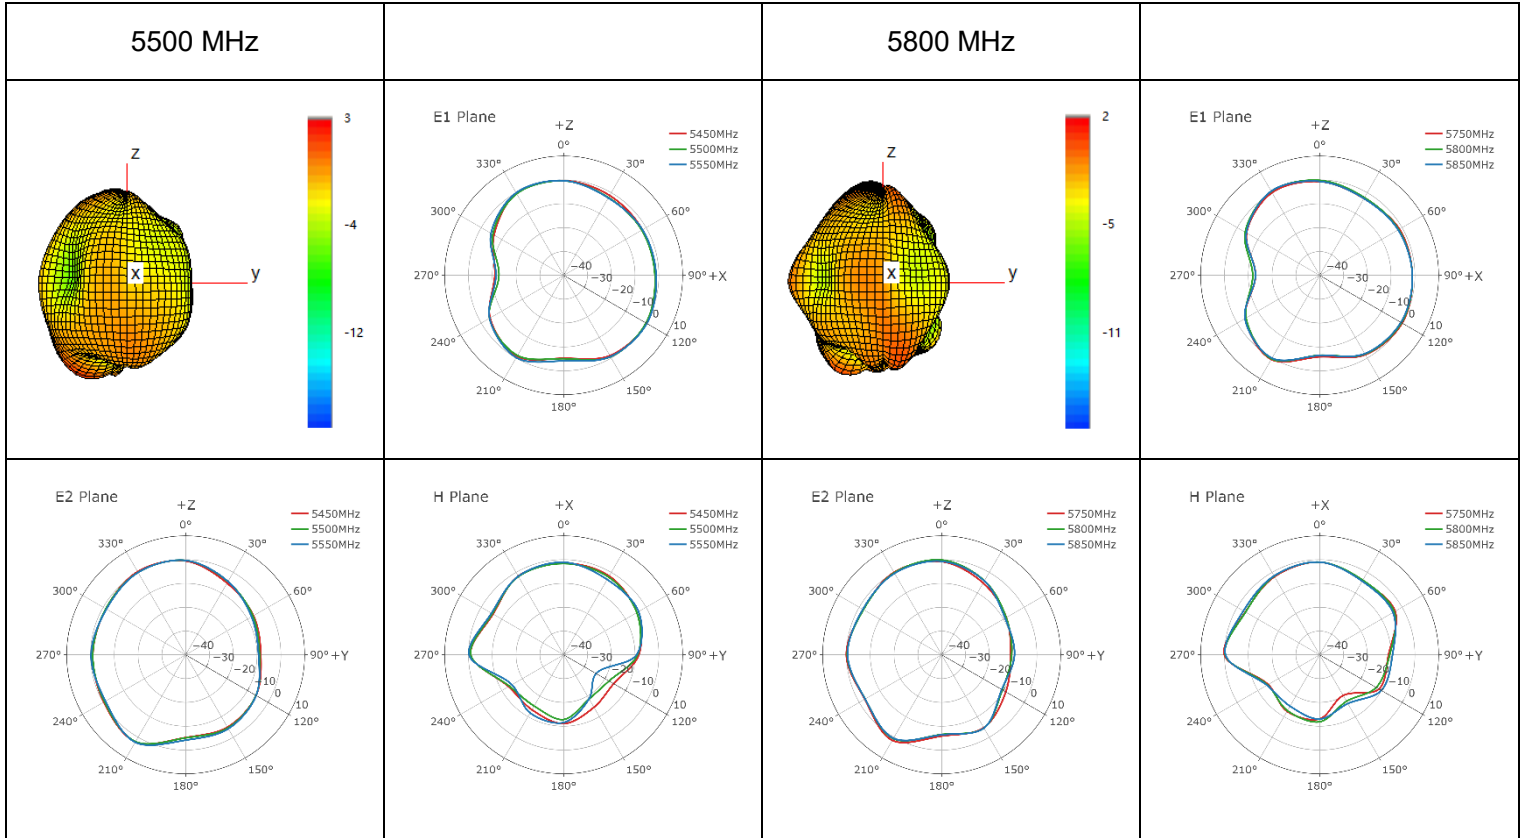


● **GNSS**


1561 MHz

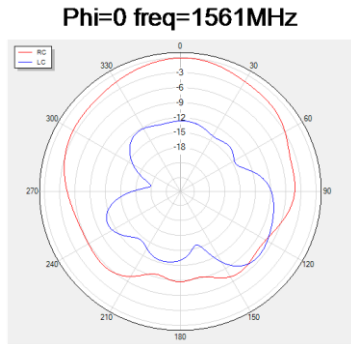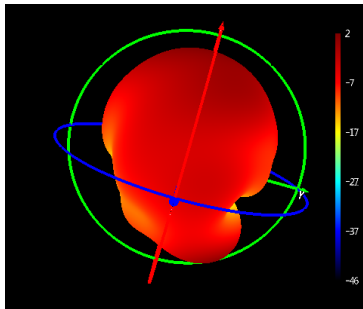


1575 MHz

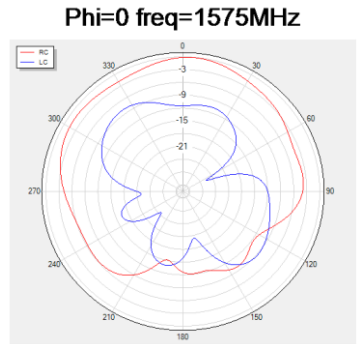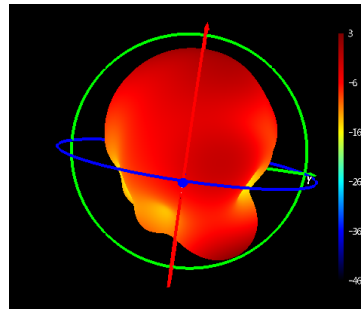


Phi=90 freq=1561MHz




Theta=90 freq=1561MHz

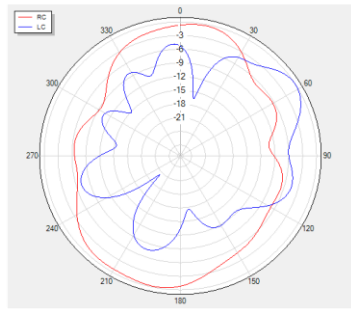



Phi=90 freq=1575MHz

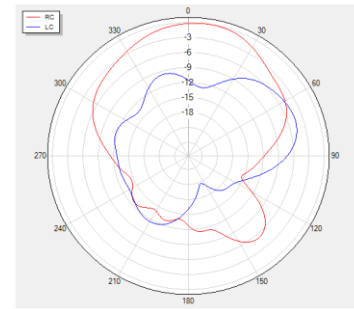


Theta=90 freq=1575MHz

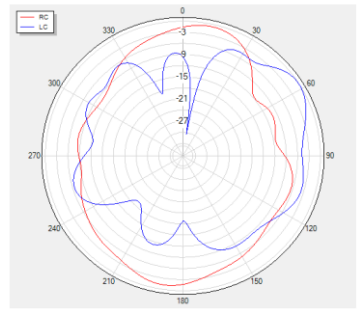


1602 MHz

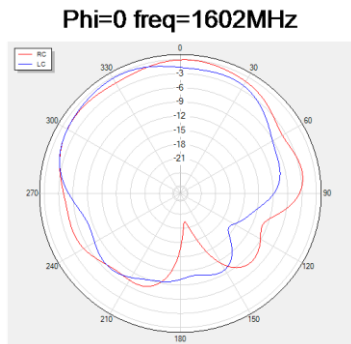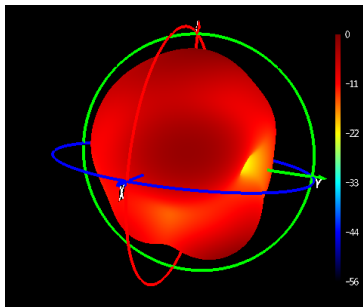




Phi=90 freq=1602MHz


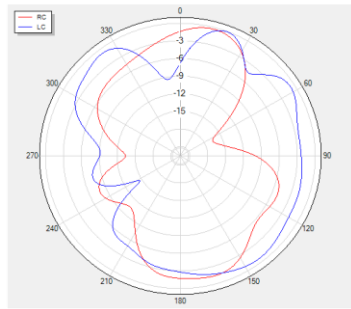


Theta=90 freq=1602MHz




4 Packaging

Step	Packaging Picture / 2D Picture	Description
1		<p>The product is wrapped in a bubble bag and placed in a ziplock bag. (1 Antenna / Small PE Bag)</p>
2		<p>8 antenna products in a big PE bag. (8 Antennas / Big PE Bag)</p>
3		<p>(10 PE Bags / Carton Box) (80 Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. <u>Carton Size:</u> <u>L × W × H = 370 × 370 × 295 mm</u></p>

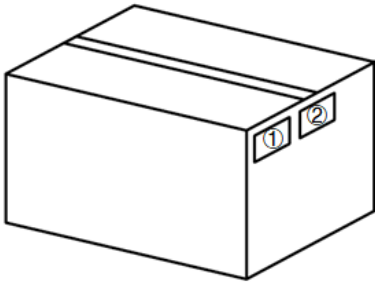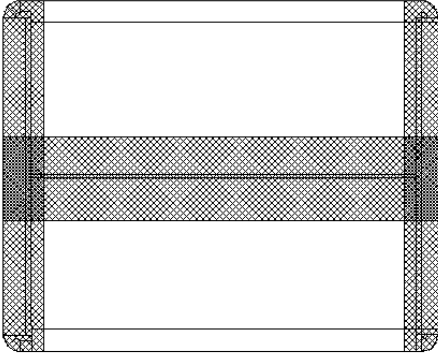4		<p>Position for Attaching Labels</p> <ul style="list-style-type: none">① Carton Label② Quality Label
5		<p>Sealing Cartons H-shaped sealing cartons</p>

5 Installation

- Recommended clean surface size and material as below view (adhesive).

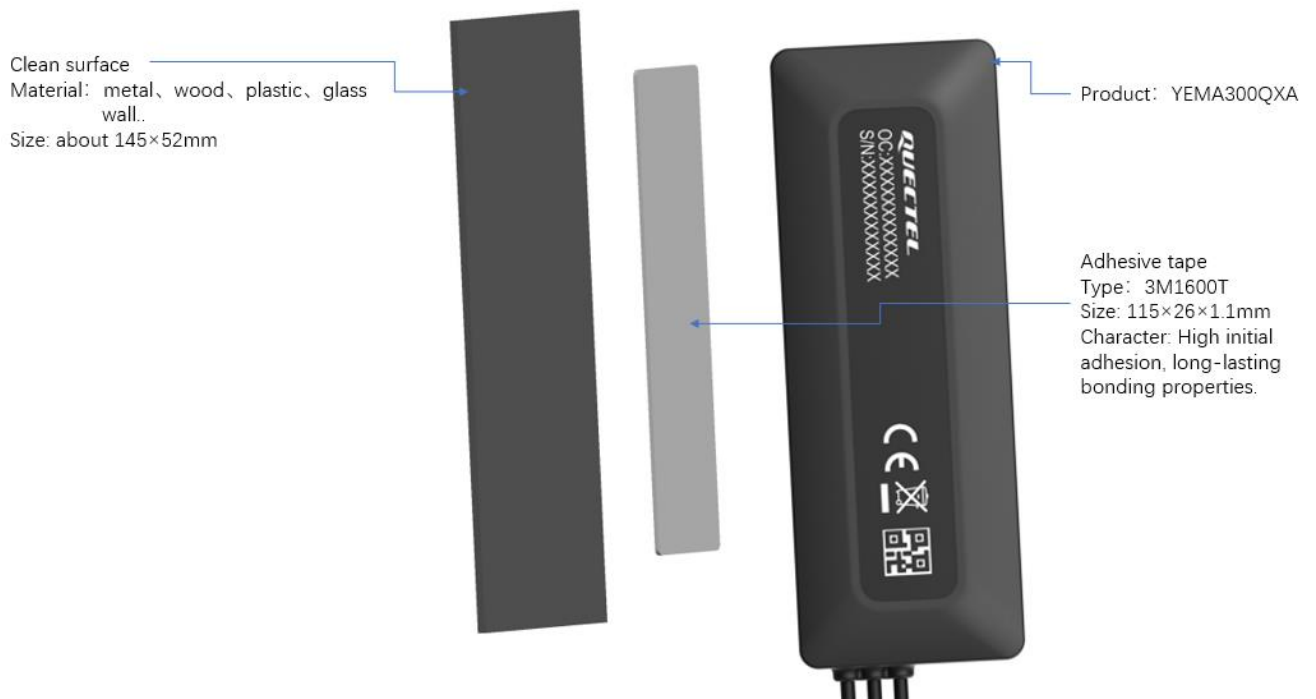

Installation Instructions					
Tube Mark	Tube Color	Cable	Connector	Frequency (MHz)	Technology
LTE	Black	RG174LL	SMA Male	700–960 MHz, 1700–2700 MHz	4G/3G/2G
GNSS	Black	RG174	SMA Male	1559–1606 MHz	GPS/GLONASS/GALILEO/ BDS/QZSS
Wi-Fi	Black	RG174LL	SMA Male	2400–2500 MHz, 5150–5850 MHz	Wi-Fi/BT

6 Appendix Reference

Abbreviation	Description
4G	4th-Generation Mobile Communication Technology
3G	3rd-Generation Mobile Communication Technology
2G	2nd-Generation Mobile Communication Technology
GNSS	Global Navigation Satellite System
GLONASS	Global Navigation Satellite System (Russia)
GPS	Global Positioning System
QZSS	Quasi-Zenith Satellite System
IRNSS	Indian Regional Navigation Satellite System
LTE	Long Term Evolution
LTE-A	LTE-Advanced
NB-IoT	Narrow Band Internet of Things
LPWA	Low Power Wide Area
WCDMA	Wideband Code Division Multiple Access
GSM	Global System for Mobile Communications
Wi-Fi	Wireless Fidelity
GND	Ground
LMH	Low-Middle-High Bands
MH	Middle-High Envelope Bands
VSWR	Voltage Standing Wave Ratio
S-Parameter	Scatter Parameter
LNA	Low Noise Amplifier

GPRS	General Packet Radio Service
WLAN	Wireless Local Area Network
RHCP	Right Hand Circularly Polarized
RoHS	Restriction of Hazardous Substances
REACH	Registration, Evaluation, Authorisation and Restriction of Chemicals
IP	Ingress Protection

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<https://www.quectel.com/contact/>.

For technical support, or to report documentation errors, please visit:

<https://www.quectel.com/tech-support/>.

Or email us at: support@quectel.com.

Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

Use and Disclosure Restrictions

License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the intended project.

Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

Disclaimer

- a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
- b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
- c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
- d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2026. All rights reserved.

Revision History

Version	Date	Author	Note
-	2023-10-19	Junsen Li/ Christopher Yao/ Rojin Luo/ David Liu/ Aria Chu	Creation of the document
1.0	2023-10-19	Junsen LI/ Christopher Yao/ Rojin Luo/ David Liu/ Aria Chu	First official release
1.1	2023-11-29	Rojin Luo	Updated connector type (Chapter 1.2).
1.2	2024-03-19	Rojin Luo/ Rainey Liao	<ol style="list-style-type: none"> Updated the product name. Updated the overview. Add related products OC (Chapter 4). Added Chapters 5 and 6.
1.3	2024-08-16	Christopher Yao	<ol style="list-style-type: none"> Added a picture about GNSS bands and constellations (Chapter 1.4). Optimized the charts (Chapter 3).
1.4	2024-09-26	Rojin Luo	Added UV resistant and flame rating (Chapter 1.2).
1.5	2025-03-11	Rojin Luo/ Rainey Liao	<ol style="list-style-type: none"> Updated the starting frequency to 698 MHz (Homepage, Overview and Chapter 1.1). Updated the IP Rating (Homepage and Chapter 1.2).
1.6	2025-04-24	Aria Chu	Updated the antenna image (Cover page).
1.7	2025-10-14	Junsen Li	Added LNA gains according to different supply voltages (Chapter 1.1.3).
1.8	2026-01-19	Strong Qiang	Updated the packaging (Chapter 4).

QUECTEL

www.quectel.com