



# Antenna Datasheet

**Product OC:** YEMJ4F0JBAM

**Version:** 1.0

**Date:** 2026-04-15

**Status:** Released

**Product Name:** 5G 4in1 Screw Mount Combo External Antenna

**Key Features:**

Frequency Band: 1695–2700 MHz, 3300–6000 MHz

Dimensions:  $\Phi$  210 mm  $\times$  14 mm

RoHS & REACH Compliant

# Overview

Quectel YEMJ4F0JBAM is a 5G 4in1 screw mount combo antenna optimized for 5G and multi-band wireless applications. With low-profile design of  $\Phi$  210 mm × 14 mm, the antenna integrates four independent antenna elements covering 1695–2700 MHz and 3300–6000 MHz, making it ideal for 5G NR, LTE, Wi-Fi, and other high-band connectivity. Each of the four ports (ANT-1 to ANT-4) offers omnidirectional radiation, linear polarization, and excellent isolation ( $\leq -17$  dB). The antenna delivers high efficiency (up to 85.8 %) and peak gain up to 5.2 dBi, ensuring reliable performance in MIMO and multi-antenna systems.

Housed in a durable white PC+ASA enclosure, the YEMJ4F0JBAM supports screw mounting and is designed for outdoor and industrial environments. It features four N-Female connectors with 500 mm low-loss cable (Kingsignal 670-141 SXE), operates from -40 °C to +60 °C, and is IP65 rated (ingress protection) as well as RoHS and REACH compliant. Typical applications include 5G CPE, industrial routers, gateways, vehicle telematics, and IoT devices requiring high-performance multi-antenna integration.

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

# Contents

|                                           |           |
|-------------------------------------------|-----------|
| <b>Overview.....</b>                      | <b>1</b>  |
| <b>Contents .....</b>                     | <b>2</b>  |
| <b>1 Specification.....</b>               | <b>3</b>  |
| 1.1. Electrical.....                      | 3         |
| 1.1.1. ANT-1 .....                        | 4         |
| 1.1.2. ANT-2 .....                        | 4         |
| 1.1.3. ANT-3 .....                        | 5         |
| 1.1.4. ANT-4 .....                        | 5         |
| 1.2. Supported Bands .....                | 6         |
| 1.3. Mechanical & Environmental .....     | 8         |
| <b>2 Drawing .....</b>                    | <b>9</b>  |
| <b>3 Detailed Performance .....</b>       | <b>10</b> |
| 3.1. S-Parameter Test .....               | 10        |
| 3.1.1. VSWR .....                         | 10        |
| 3.1.2. Return Loss.....                   | 11        |
| 3.1.3. Isolation.....                     | 12        |
| 3.1.3.1. Test Status: In Free Space ..... | 12        |
| 3.2. Radiation Performance Test.....      | 13        |
| 3.2.1. Efficiency.....                    | 13        |
| 3.2.2. Average Gain .....                 | 14        |
| 3.2.3. Peak Gain .....                    | 15        |
| 3.2.4. 3D & 2D Radiation Pattern .....    | 16        |
| <b>4 Packaging .....</b>                  | <b>29</b> |
| <b>Contact Us.....</b>                    | <b>31</b> |
| <b>Legal Notices .....</b>                | <b>32</b> |
| <b>Revision History .....</b>             | <b>34</b> |

# 1 Specification

Test Condition: In Free Space

## 1.1. Electrical

| Electrical Specifications |                |                              |
|---------------------------|----------------|------------------------------|
| Frequency Range           | ANT-1, 2, 3, 4 | 1695–2700 MHz, 3300–6000 MHz |
| Radiation Pattern         | ANT-1, 2, 3, 4 | Omni-directional             |
| Polarization              | ANT-1, 2, 3, 4 | Linear                       |
| Impedance                 |                | 50 $\Omega$                  |
| Isolation                 |                | $\leq -17.0$ dB              |

### 1.1.1. ANT-1

| Electrical – Detail   |                |             |                     |                   |                  |               |               |               |                     |               |               |
|-----------------------|----------------|-------------|---------------------|-------------------|------------------|---------------|---------------|---------------|---------------------|---------------|---------------|
| SPEC                  | Band           | B71         | B12<br>/B13<br>/B28 | B5<br>/B8<br>/B26 | B1<br>/B2<br>/B3 | B40           | Wi-Fi<br>2G   | B38<br>/B41   | B42<br>/B48<br>/n77 | n79           | Wi-Fi<br>5G   |
|                       | Freq.<br>(MHz) | 600–<br>700 | 700–<br>810         | 820–<br>960       | 1700–<br>2170    | 2300–<br>2400 | 2400–<br>2500 | 2500–<br>2690 | 3300–<br>4200       | 4400–<br>5000 | 5150–<br>5850 |
| Max. VSWR             |                | -           | -                   | -                 | 1.8              | 1.4           | 1.4           | 1.4           | 1.7                 | 1.4           | 1.4           |
| Max. Return Loss (dB) |                | -           | -                   | -                 | -11.2            | -15.9         | -14.8         | -15.0         | -11.9               | -15.7         | -15.4         |
| AVG Eff. (%)          |                | -           | -                   | -                 | 79.8             | 81.8          | 78.4          | 78.7          | 73.3                | 81.6          | 79.5          |
| AVG AVG Gain (dB)     |                | -           | -                   | -                 | -1.0             | -0.9          | -1.1          | -1.0          | -1.4                | -0.9          | -1.0          |
| Max. Peak Gain (dBi)  |                | -           | -                   | -                 | 2.7              | 2.3           | 1.9           | 3.4           | 3.4                 | 4.4           | 4.3           |
| VSWR                  |                | ≤ 1.8       |                     |                   |                  |               |               |               |                     |               |               |
| Return Loss           |                | ≤ -11.2 dB  |                     |                   |                  |               |               |               |                     |               |               |
| Peak Gain             |                | ≤ 4.4 dBi   |                     |                   |                  |               |               |               |                     |               |               |

### 1.1.2. ANT-2

| Electrical – Detail   |                |             |                     |                   |                  |               |               |               |                     |               |               |
|-----------------------|----------------|-------------|---------------------|-------------------|------------------|---------------|---------------|---------------|---------------------|---------------|---------------|
| SPEC                  | Band           | B71         | B12<br>/B13<br>/B28 | B5<br>/B8<br>/B26 | B1<br>/B2<br>/B3 | B40           | Wi-Fi<br>2G   | B38<br>/B41   | B42<br>/B48<br>/n77 | n79           | Wi-Fi<br>5G   |
|                       | Freq.<br>(MHz) | 600–<br>700 | 700–<br>810         | 820–<br>960       | 1700–<br>2170    | 2300–<br>2400 | 2400–<br>2500 | 2500–<br>2690 | 3300–<br>4200       | 4400–<br>5000 | 5150–<br>5850 |
| Max. VSWR             |                | -           | -                   | -                 | 1.6              | 1.3           | 1.4           | 1.4           | 1.7                 | 1.4           | 1.3           |
| Max. Return Loss (dB) |                | -           | -                   | -                 | -12.7            | -16.7         | -15.7         | -15.7         | -11.8               | -15.1         | -17.6         |
| AVG Eff. (%)          |                | -           | -                   | -                 | 79.5             | 82.2          | 83.0          | 80.4          | 72.6                | 81.2          | 81.5          |
| AVG AVG Gain (dB)     |                | -           | -                   | -                 | -1.0             | -0.9          | -0.8          | -0.9          | -1.4                | -0.9          | -0.9          |
| Max. Peak Gain (dBi)  |                | -           | -                   | -                 | 3.3              | 2.8           | 3.2           | 3.0           | 3.5                 | 4.4           | 4.5           |
| VSWR                  |                | ≤ 1.7       |                     |                   |                  |               |               |               |                     |               |               |
| Return Loss           |                | ≤ -11.8 dB  |                     |                   |                  |               |               |               |                     |               |               |
| Peak Gain             |                | ≤ 4.5 dBi   |                     |                   |                  |               |               |               |                     |               |               |

### 1.1.3. ANT-3

| Electrical – Detail   |                |             |                     |                   |                  |               |               |               |                     |               |               |
|-----------------------|----------------|-------------|---------------------|-------------------|------------------|---------------|---------------|---------------|---------------------|---------------|---------------|
| SPEC                  | Band           | B71         | B12<br>/B13<br>/B28 | B5<br>/B8<br>/B26 | B1<br>/B2<br>/B3 | B40           | Wi-Fi<br>2G   | B38<br>/B41   | B42<br>/B48<br>/n77 | n79           | Wi-Fi<br>5G   |
|                       | Freq.<br>(MHz) | 600–<br>700 | 700–<br>810         | 820–<br>960       | 1700–<br>2170    | 2300–<br>2400 | 2400–<br>2500 | 2500–<br>2690 | 3300–<br>4200       | 4400–<br>5000 | 5150–<br>5850 |
| Max. VSWR             |                | -           | -                   | -                 | 1.5              | 1.4           | 1.4           | 1.5           | 1.7                 | 1.4           | 1.3           |
| Max. Return Loss (dB) |                | -           | -                   | -                 | -13.4            | -16.3         | -15.1         | -14.7         | -11.7               | -15.1         | -16.8         |
| AVG Eff. (%)          |                | -           | -                   | -                 | 79.5             | 78.8          | 78.2          | 76.3          | 72.7                | 82.3          | 81.3          |
| AVG AVG Gain (dB)     |                | -           | -                   | -                 | -1.0             | -1.0          | -1.1          | -1.2          | -1.4                | -0.9          | -0.9          |
| Max. Peak Gain (dBi)  |                | -           | -                   | -                 | 3.0              | 2.2           | 2.4           | 2.1           | 3.4                 | 4.8           | 4.5           |
| VSWR                  |                | ≤ 1.7       |                     |                   |                  |               |               |               |                     |               |               |
| Return Loss           |                | ≤ -11.7 dB  |                     |                   |                  |               |               |               |                     |               |               |
| Peak Gain             |                | ≤ 4.8 dBi   |                     |                   |                  |               |               |               |                     |               |               |

### 1.1.4. ANT-4

| Electrical – Detail   |                |             |                     |                   |                  |               |               |               |                     |               |               |
|-----------------------|----------------|-------------|---------------------|-------------------|------------------|---------------|---------------|---------------|---------------------|---------------|---------------|
| SPEC                  | Band           | B71         | B12<br>/B13<br>/B28 | B5<br>/B8<br>/B26 | B1<br>/B2<br>/B3 | B40           | Wi-Fi<br>2G   | B38<br>/B41   | B42<br>/B48<br>/n77 | n79           | Wi-Fi<br>5G   |
|                       | Freq.<br>(MHz) | 600–<br>700 | 700–<br>810         | 820–<br>960       | 1700–<br>2170    | 2300–<br>2400 | 2400–<br>2500 | 2500–<br>2690 | 3300–<br>4200       | 4400–<br>5000 | 5150–<br>5850 |
| Max. VSWR             |                | -           | -                   | -                 | 1.6              | 1.4           | 1.4           | 1.5           | 1.7                 | 1.4           | 1.3           |
| Max. Return Loss (dB) |                | -           | -                   | -                 | -12.3            | -15.9         | -15.4         | -14.4         | -11.5               | -15.1         | -17.2         |
| AVG Eff. (%)          |                | -           | -                   | -                 | 79.5             | 80.7          | 80.1          | 79.5          | 74.1                | 79.9          | 79.9          |
| AVG AVG Gain (dB)     |                | -           | -                   | -                 | -1.0             | -0.9          | -1.0          | -1.0          | -1.3                | -1.0          | -1.0          |
| Max. Peak Gain (dBi)  |                | -           | -                   | -                 | 3.4              | 2.9           | 2.9           | 3.1           | 4.1                 | 5.2           | 5.1           |
| VSWR                  |                | ≤ 1.7       |                     |                   |                  |               |               |               |                     |               |               |
| Return Loss           |                | ≤ -11.5 dB  |                     |                   |                  |               |               |               |                     |               |               |
| Peak Gain             |                | ≤ 5.2 dBi   |                     |                   |                  |               |               |               |                     |               |               |

## 1.2. Supported Bands


| 5G NR/ LTE/ LTE-Advanced/ WCDMA/ HSPA/ HSPA+/ GPRS/ GSM/ NB-IoT |                 |               |                |                |
|-----------------------------------------------------------------|-----------------|---------------|----------------|----------------|
| Band                                                            | Frequency (MHz) | Uplink (MHz)  | Downlink (MHz) | ANT-1, 2, 3, 4 |
| 1                                                               | 2100            | 1920–1980     | 2110–2170      | √              |
| 2                                                               | 1900            | 1850–1910     | 1930–1990      | √              |
| 3                                                               | 1800            | 1710–1785     | 1805–1880      | √              |
| 4                                                               | 1700            | 1710–1755     | 2110–2155      | √              |
| 5                                                               | 850             | 824–849       | 869–894        | -              |
| 7                                                               | 2600            | 2500–2570     | 2620–2690      | √              |
| 8                                                               | 900             | 880–915       | 925–960        | -              |
| 9                                                               | 1800            | 1749.9–1784.9 | 1844.9–1879.9  | √              |
| 11                                                              | 1500            | 1427.9–1447.9 | 1475.9–1495.9  | -              |
| 12                                                              | 700             | 699–716       | 729–746        | -              |
| 13                                                              | 700             | 777–787       | 746–756        | -              |
| 14                                                              | 700             | 788–798       | 758–768        | -              |
| 17                                                              | 700             | 704–716       | 734–746        | -              |
| 18                                                              | 850             | 815–830       | 860–875        | -              |
| 19                                                              | 850             | 830–845       | 875–890        | -              |
| 20                                                              | 800             | 832–862       | 791–821        | -              |
| 21                                                              | 1500            | 1447.9–1462.9 | 1495.9–1510.9  | -              |
| 22                                                              | 3500            | 3410–3490     | 3510–3590      | √              |
| 23                                                              | 2100            | 2000–2020     | 2180–2200      | √              |
| 24                                                              | 1600            | 1626.5–1660.5 | 1525–1559      | -              |
| 25                                                              | 1900            | 1850–1915     | 1930–1995      | √              |
| 26                                                              | 850             | 814–849       | 859–894        | -              |

| 5G NR/ LTE/ LTE-Advanced/ WCDMA/ HSPA/ HSPA+/ GPRS/ GSM/ NB-IoT |                 |              |                |                |
|-----------------------------------------------------------------|-----------------|--------------|----------------|----------------|
| Band                                                            | Frequency (MHz) | Uplink (MHz) | Downlink (MHz) | ANT-1, 2, 3, 4 |
| 28                                                              | 700             | 703–748      | 758–803        | -              |
| 31                                                              | 450             | 452.5–457.5  | 462.5–467.5    | -              |
| 34                                                              | 2100            | 2010–2025    |                | √              |
| 38                                                              | 2600            | 2570–2620    |                | √              |
| 39                                                              | 1900            | 1880–1920    |                | √              |
| 40                                                              | 2300            | 2300–2400    |                | √              |
| 41                                                              | 2500            | 2496–2690    |                | √              |
| 42                                                              | 3500            | 3400–3600    |                | √              |
| 48                                                              | 3500            | 3550–3700    |                | √              |
| 66                                                              | 1700            | 1710–1780    | 2110–2200      | √              |
| 71                                                              | 600             | 663–698      | 617–652        | -              |
| 74                                                              | 1500            | 1427–1470    | 1475–1518      | -              |
| 77                                                              | 3500            | 3300–4200    |                | √              |
| 78                                                              | 3500            | 3300–3800    |                | √              |
| 79                                                              | 4500            | 4400–5000    |                | √              |

### 1.3. Mechanical & Environmental

| Mechanical                  |                                         |
|-----------------------------|-----------------------------------------|
| Antenna Dimensions          | Φ 210 mm × 14 mm                        |
| Material & Color            | PC + ASA & White                        |
| Cable Type & Color & Length | Kingsignal 670-141 SXE & White & 500 mm |
| Connector Type              | N-Female                                |
| Mounting Type               | Screw                                   |
| Weight                      | Typ. 384 g                              |
| Environmental               |                                         |
| Operation Temperature       | -40 °C to +60 °C                        |
| Storage Temperature         | -40 °C to +60 °C                        |
| RoHS & REACH Compliant      | Yes                                     |


## 2 Drawing

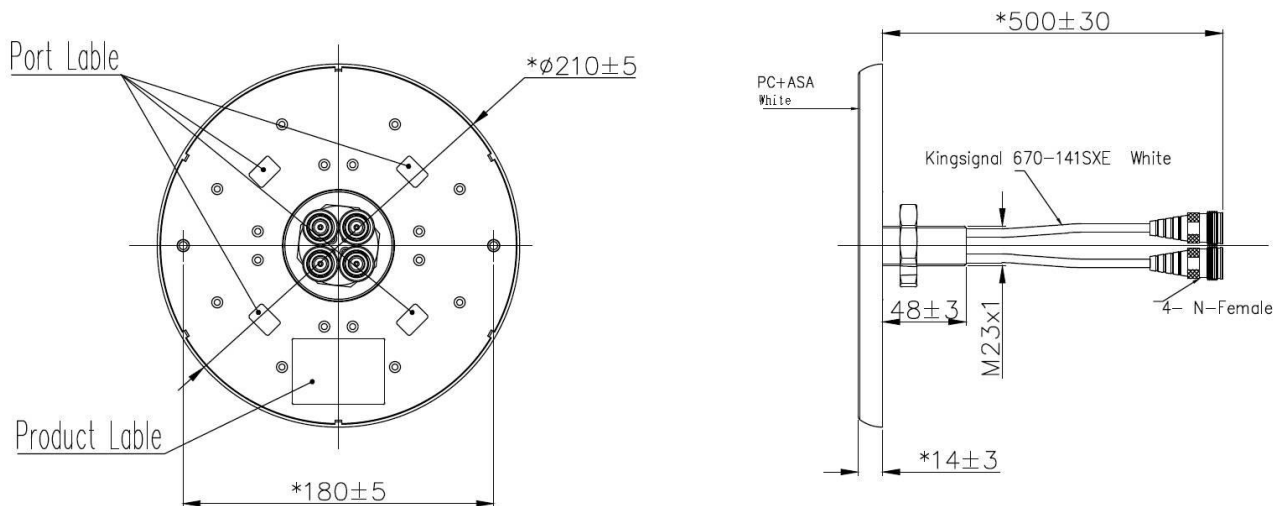

# 3 Detailed Performance

## 3.1. S-Parameter Test


### 3.1.1. VSWR

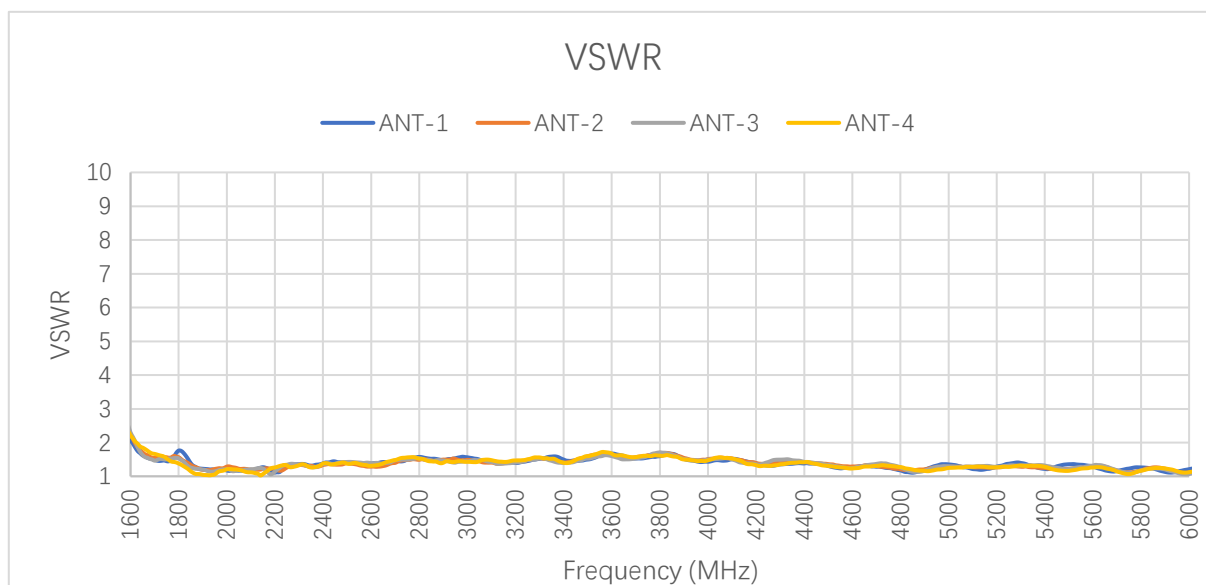

**VSWR**

| Frequency (MHz) | 600  | 630  | 710  | 830  | 900  | 960  | 1440 | 1710 | 1740 | 1880 |
|-----------------|------|------|------|------|------|------|------|------|------|------|
| ANT-1           | -    | -    | -    | -    | -    | -    | -    | 1.5  | 1.5  | 1.2  |
| ANT-2           | -    | -    | -    | -    | -    | -    | -    | 1.6  | 1.6  | 1.2  |
| ANT-3           | -    | -    | -    | -    | -    | -    | -    | 1.5  | 1.5  | 1.2  |
| ANT-4           | -    | -    | -    | -    | -    | -    | -    | 1.6  | 1.6  | 1.1  |
| Frequency (MHz) | 1950 | 2140 | 2350 | 2450 | 2600 | 3600 | 4700 | 5000 | 5500 | 6000 |
| ANT-1           | 1.2  | 1.3  | 1.3  | 1.4  | 1.4  | 1.7  | 1.3  | 1.4  | 1.4  | 1.2  |
| ANT-2           | 1.2  | 1.2  | 1.3  | 1.3  | 1.3  | 1.6  | 1.3  | 1.3  | 1.2  | 1.1  |
| ANT-3           | 1.1  | 1.2  | 1.3  | 1.4  | 1.4  | 1.6  | 1.4  | 1.3  | 1.2  | 1.1  |
| ANT-4           | 1.1  | 1.0  | 1.3  | 1.4  | 1.3  | 1.7  | 1.3  | 1.2  | 1.2  | 1.1  |

### 3.1.2. Return Loss

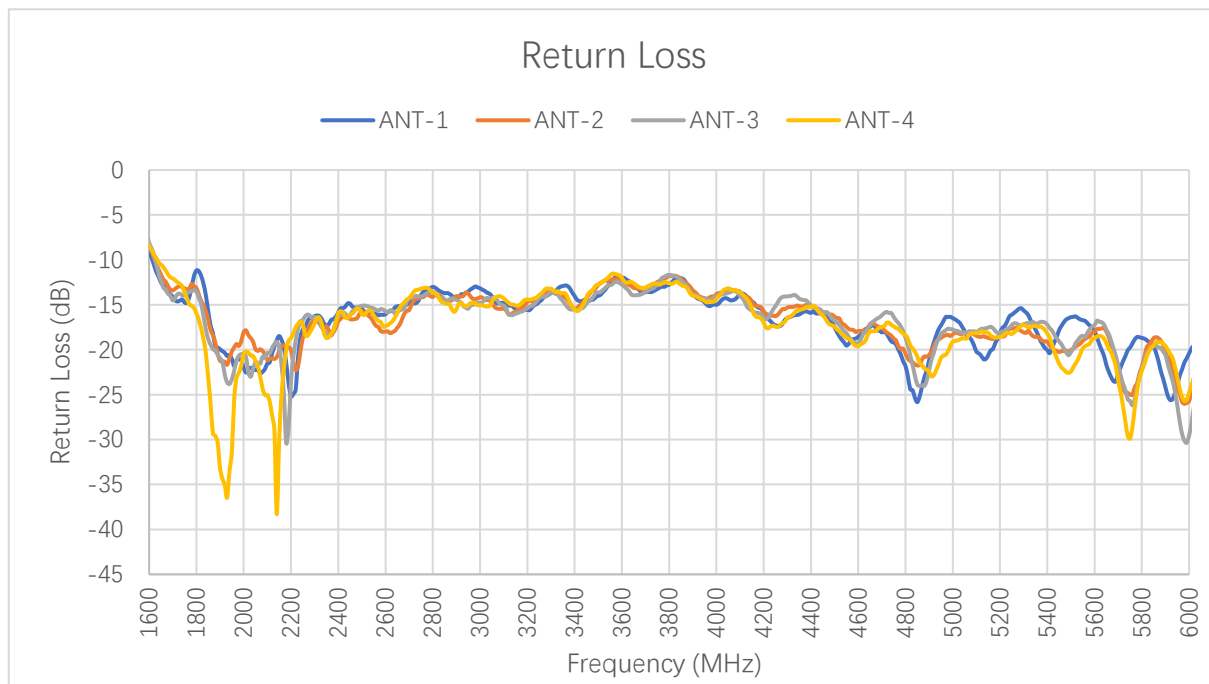


**Return Loss (dB)**

| Frequency (MHz) | 600   | 630   | 710   | 830   | 900   | 960   | 1440  | 1710  | 1740  | 1880  |
|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| ANT-1           | -     | -     | -     | -     | -     | -     | -     | -14.5 | -14.4 | -19.6 |
| ANT-2           | -     | -     | -     | -     | -     | -     | -     | -13.2 | -13.1 | -19.2 |
| ANT-3           | -     | -     | -     | -     | -     | -     | -     | -14.2 | -13.9 | -20.1 |
| ANT-4           | -     | -     | -     | -     | -     | -     | -     | -12.3 | -13.0 | -29.6 |
| Frequency (MHz) | 1950  | 2140  | 2350  | 2450  | 2600  | 3600  | 4700  | 5000  | 5500  | 6000  |
| ANT-1           | -21.0 | -18.9 | -17.4 | -14.9 | -16.1 | -12.0 | -18.1 | -16.5 | -16.4 | -20.4 |
| ANT-2           | -20.2 | -20.8 | -17.4 | -16.6 | -18.0 | -12.3 | -17.6 | -18.3 | -20.0 | -25.7 |
| ANT-3           | -23.3 | -19.1 | -18.2 | -16.1 | -15.7 | -12.8 | -16.2 | -17.7 | -20.3 | -29.5 |
| ANT-4           | -31.4 | -38.3 | -18.7 | -16.2 | -17.4 | -12.0 | -17.4 | -19.1 | -22.4 | -24.8 |


### 3.1.3. Isolation

#### 3.1.3.1. Test Status: In Free Space

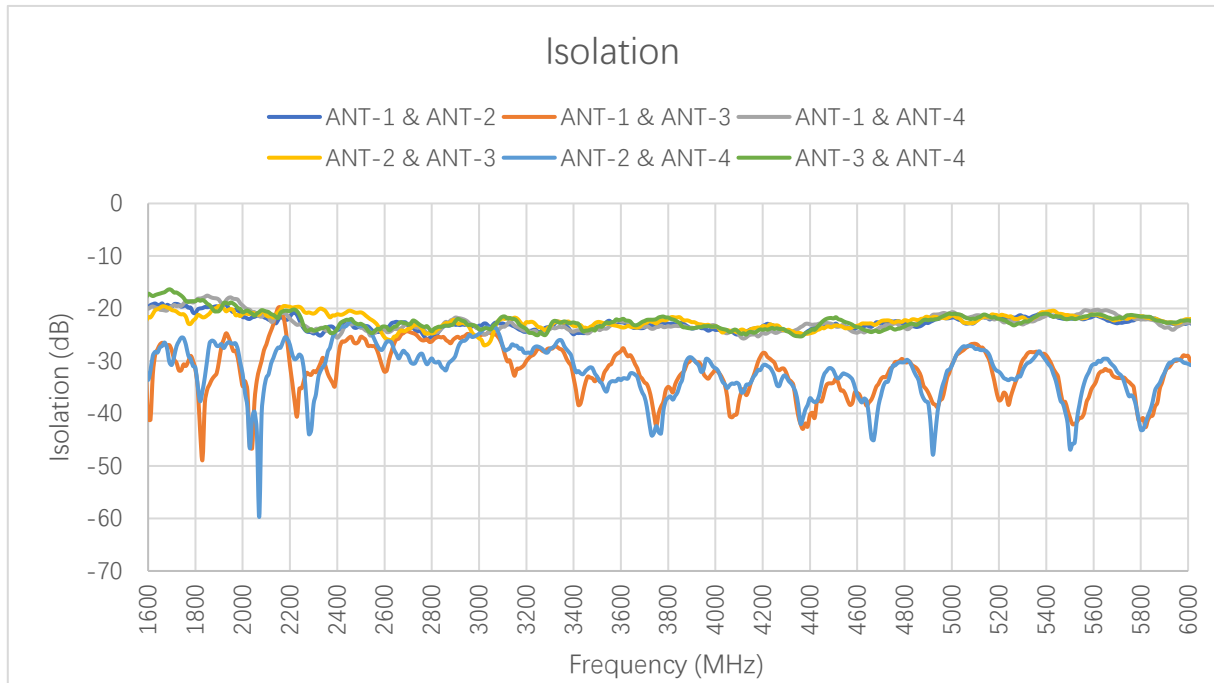

## 3.2. Radiation Performance Test


### 3.2.1. Efficiency

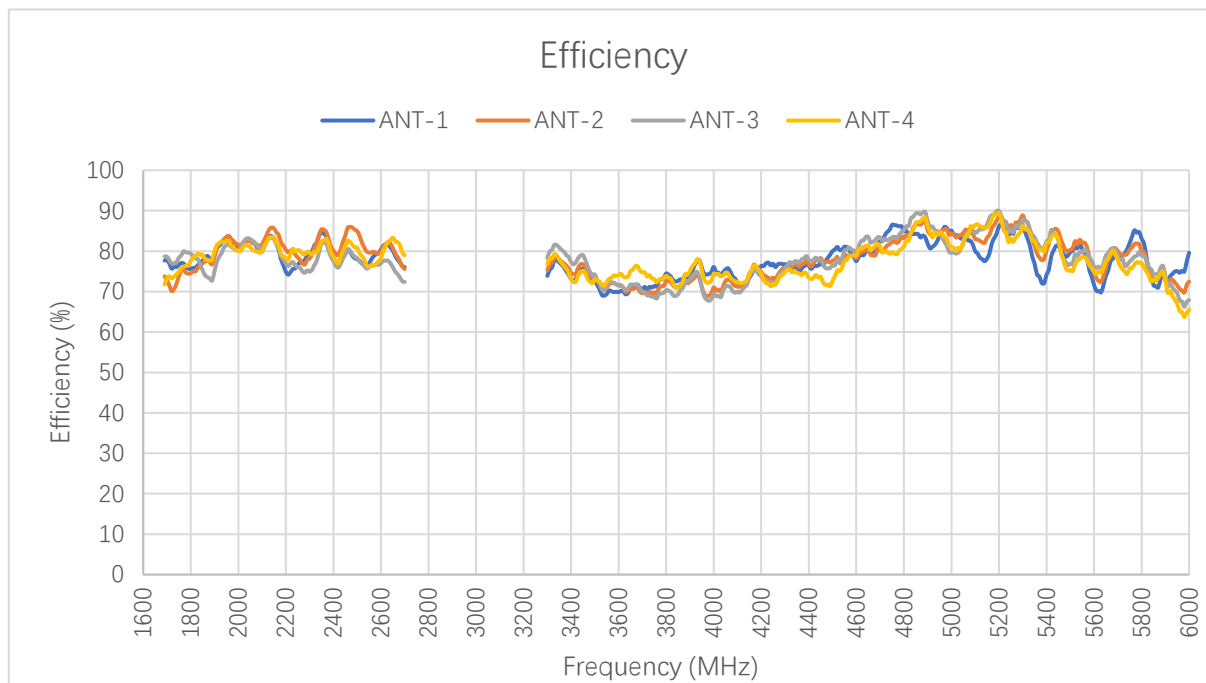

**Efficiency (%)**

| Frequency (MHz) | 600  | 630  | 710  | 830  | 900  | 960  | 1440 | 1710 | 1740 | 1880 |
|-----------------|------|------|------|------|------|------|------|------|------|------|
| ANT-1           | -    | -    | -    | -    | -    | -    | -    | 76.9 | 76.1 | 78.1 |
| ANT-2           | -    | -    | -    | -    | -    | -    | -    | 71.5 | 71.9 | 77.3 |
| ANT-3           | -    | -    | -    | -    | -    | -    | -    | 77.8 | 77.3 | 73.2 |
| ANT-4           | -    | -    | -    | -    | -    | -    | -    | 73.8 | 74.2 | 77.6 |
| Frequency (MHz) | 1950 | 2140 | 2350 | 2450 | 2600 | 3600 | 4700 | 5000 | 5500 | 6000 |
| ANT-1           | 83.4 | 83.7 | 84.7 | 79.4 | 80.4 | 69.8 | 82.4 | 85.1 | 79.8 | 79.6 |
| ANT-2           | 83.4 | 85.8 | 85.4 | 83.8 | 79.9 | 71.7 | 80.6 | 84.4 | 80.4 | 72.4 |
| ANT-3           | 81.4 | 83.3 | 81.9 | 79.1 | 77.0 | 71.4 | 83.4 | 79.6 | 76.9 | 67.9 |
| ANT-4           | 82.5 | 83.4 | 82.5 | 81.2 | 78.3 | 74.1 | 81.2 | 81.0 | 75.3 | 65.5 |


### 3.2.2. Average Gain

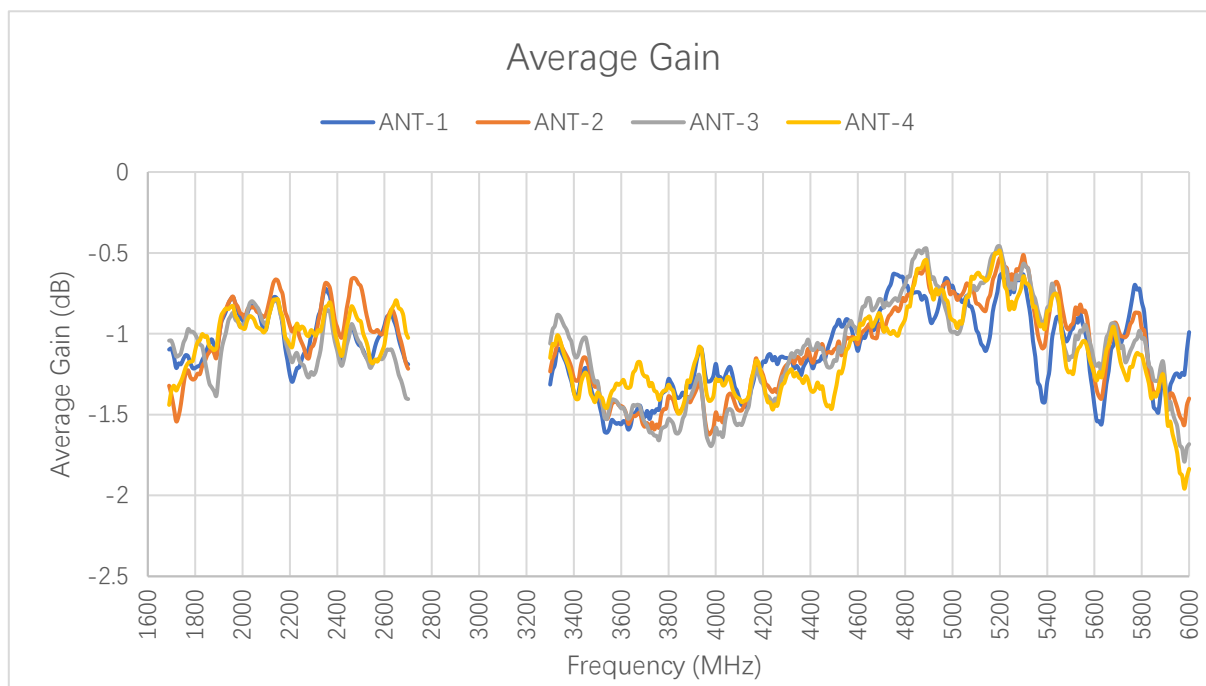

**Average Gain (dB)**

| Frequency (MHz) | 600  | 630  | 710  | 830  | 900  | 960  | 1440 | 1710 | 1740 | 1880 |
|-----------------|------|------|------|------|------|------|------|------|------|------|
| ANT-1           | -    | -    | -    | -    | -    | -    | -    | -1.1 | -1.2 | -1.1 |
| ANT-2           | -    | -    | -    | -    | -    | -    | -    | -1.5 | -1.4 | -1.1 |
| ANT-3           | -    | -    | -    | -    | -    | -    | -    | -1.1 | -1.1 | -1.4 |
| ANT-4           | -    | -    | -    | -    | -    | -    | -    | -1.3 | -1.3 | -1.1 |
| Frequency (MHz) | 1950 | 2140 | 2350 | 2450 | 2600 | 3600 | 4700 | 5000 | 5500 | 6000 |
| ANT-1           | -0.8 | -0.8 | -0.7 | -1.0 | -0.9 | -1.6 | -0.8 | -0.7 | -1.0 | -1.0 |
| ANT-2           | -0.8 | -0.7 | -0.7 | -0.8 | -1.0 | -1.4 | -0.9 | -0.7 | -0.9 | -1.4 |
| ANT-3           | -0.9 | -0.8 | -0.9 | -1.0 | -1.1 | -1.5 | -0.8 | -1.0 | -1.1 | -1.7 |
| ANT-4           | -0.8 | -0.8 | -0.8 | -0.9 | -1.1 | -1.3 | -0.9 | -0.9 | -1.2 | -1.8 |

### 3.2.3. Peak Gain

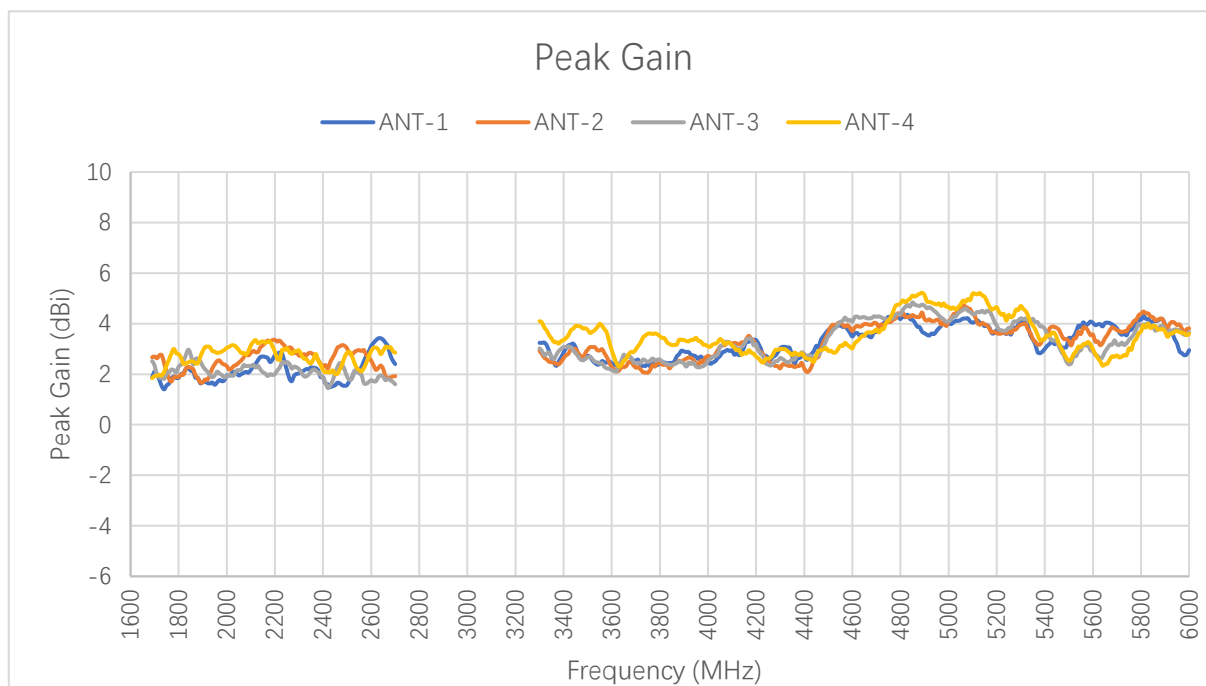


Peak Gain (dBi)


| Frequency (MHz) | 600  | 630  | 710  | 830  | 900  | 960  | 1440 | 1710 | 1740 | 1880 |
|-----------------|------|------|------|------|------|------|------|------|------|------|
| ANT-1           | -    | -    | -    | -    | -    | -    | -    | 2.0  | 1.4  | 1.9  |
| ANT-2           | -    | -    | -    | -    | -    | -    | -    | 2.6  | 2.4  | 1.8  |
| ANT-3           | -    | -    | -    | -    | -    | -    | -    | 2.0  | 1.8  | 2.6  |
| ANT-4           | -    | -    | -    | -    | -    | -    | -    | 1.9  | 2.1  | 2.4  |
| Frequency (MHz) | 1950 | 2140 | 2350 | 2450 | 2600 | 3600 | 4700 | 5000 | 5500 | 6000 |
| ANT-1           | 1.6  | 2.7  | 2.3  | 1.6  | 3.1  | 2.4  | 3.7  | 4.1  | 3.4  | 3.0  |
| ANT-2           | 2.4  | 3.1  | 2.8  | 2.8  | 2.5  | 2.3  | 4.0  | 4.1  | 3.3  | 3.8  |
| ANT-3           | 2.0  | 2.2  | 2.1  | 2.0  | 1.8  | 2.2  | 4.3  | 4.1  | 2.4  | 3.7  |
| ANT-4           | 2.9  | 3.3  | 2.4  | 2.0  | 2.9  | 3.0  | 3.8  | 4.7  | 2.5  | 3.6  |

### 3.2.4. 3D & 2D Radiation Pattern


- Test Condition: In Free Space
- Test Chamber: FS-G-1

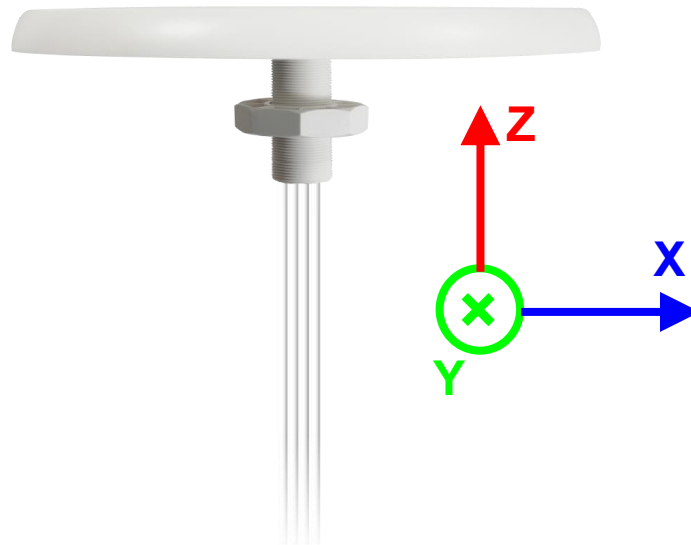


● **ANT-1**

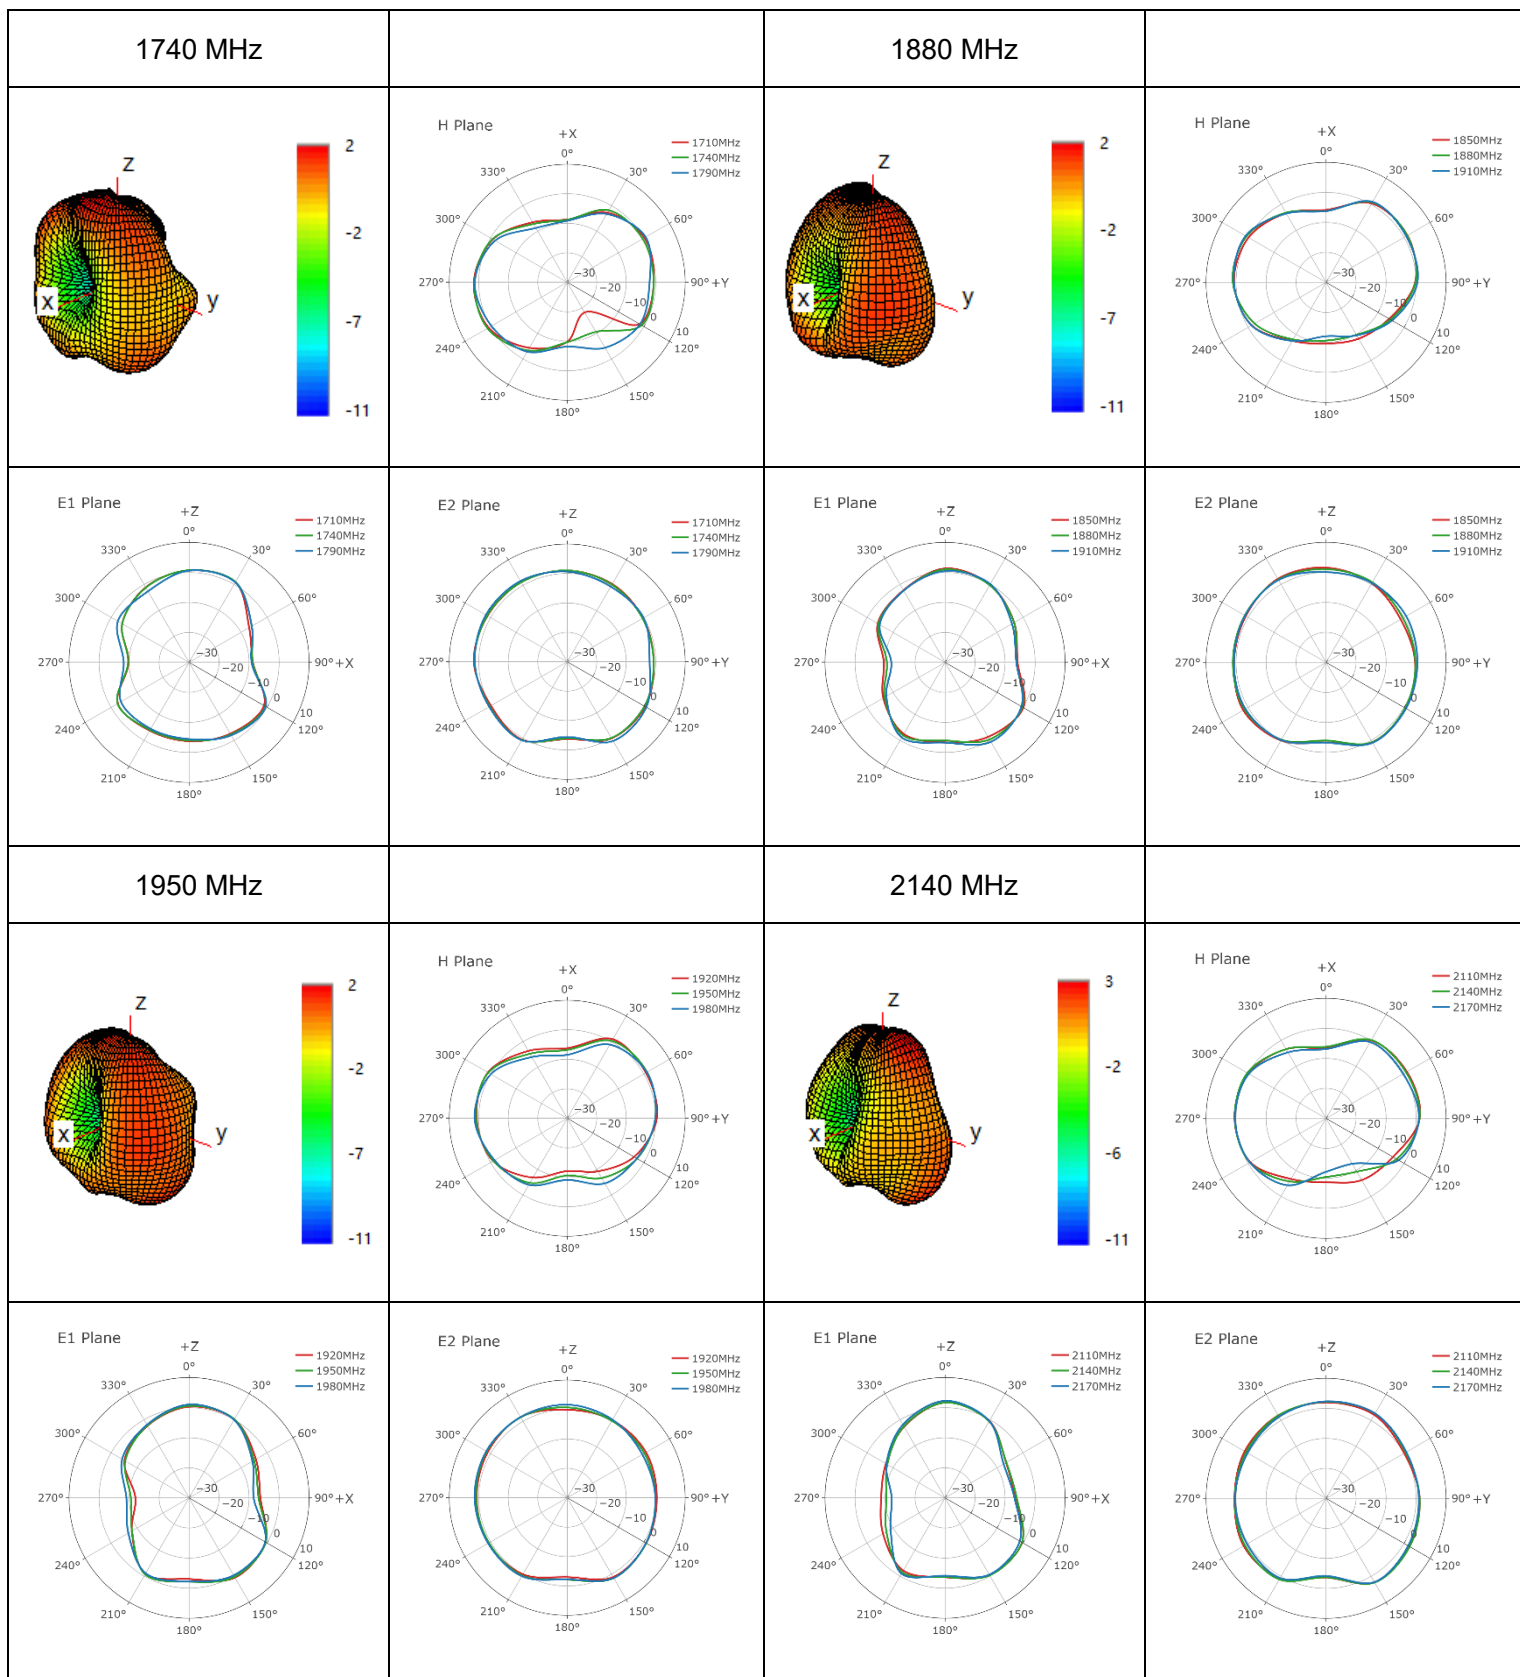


● **ANT-1**

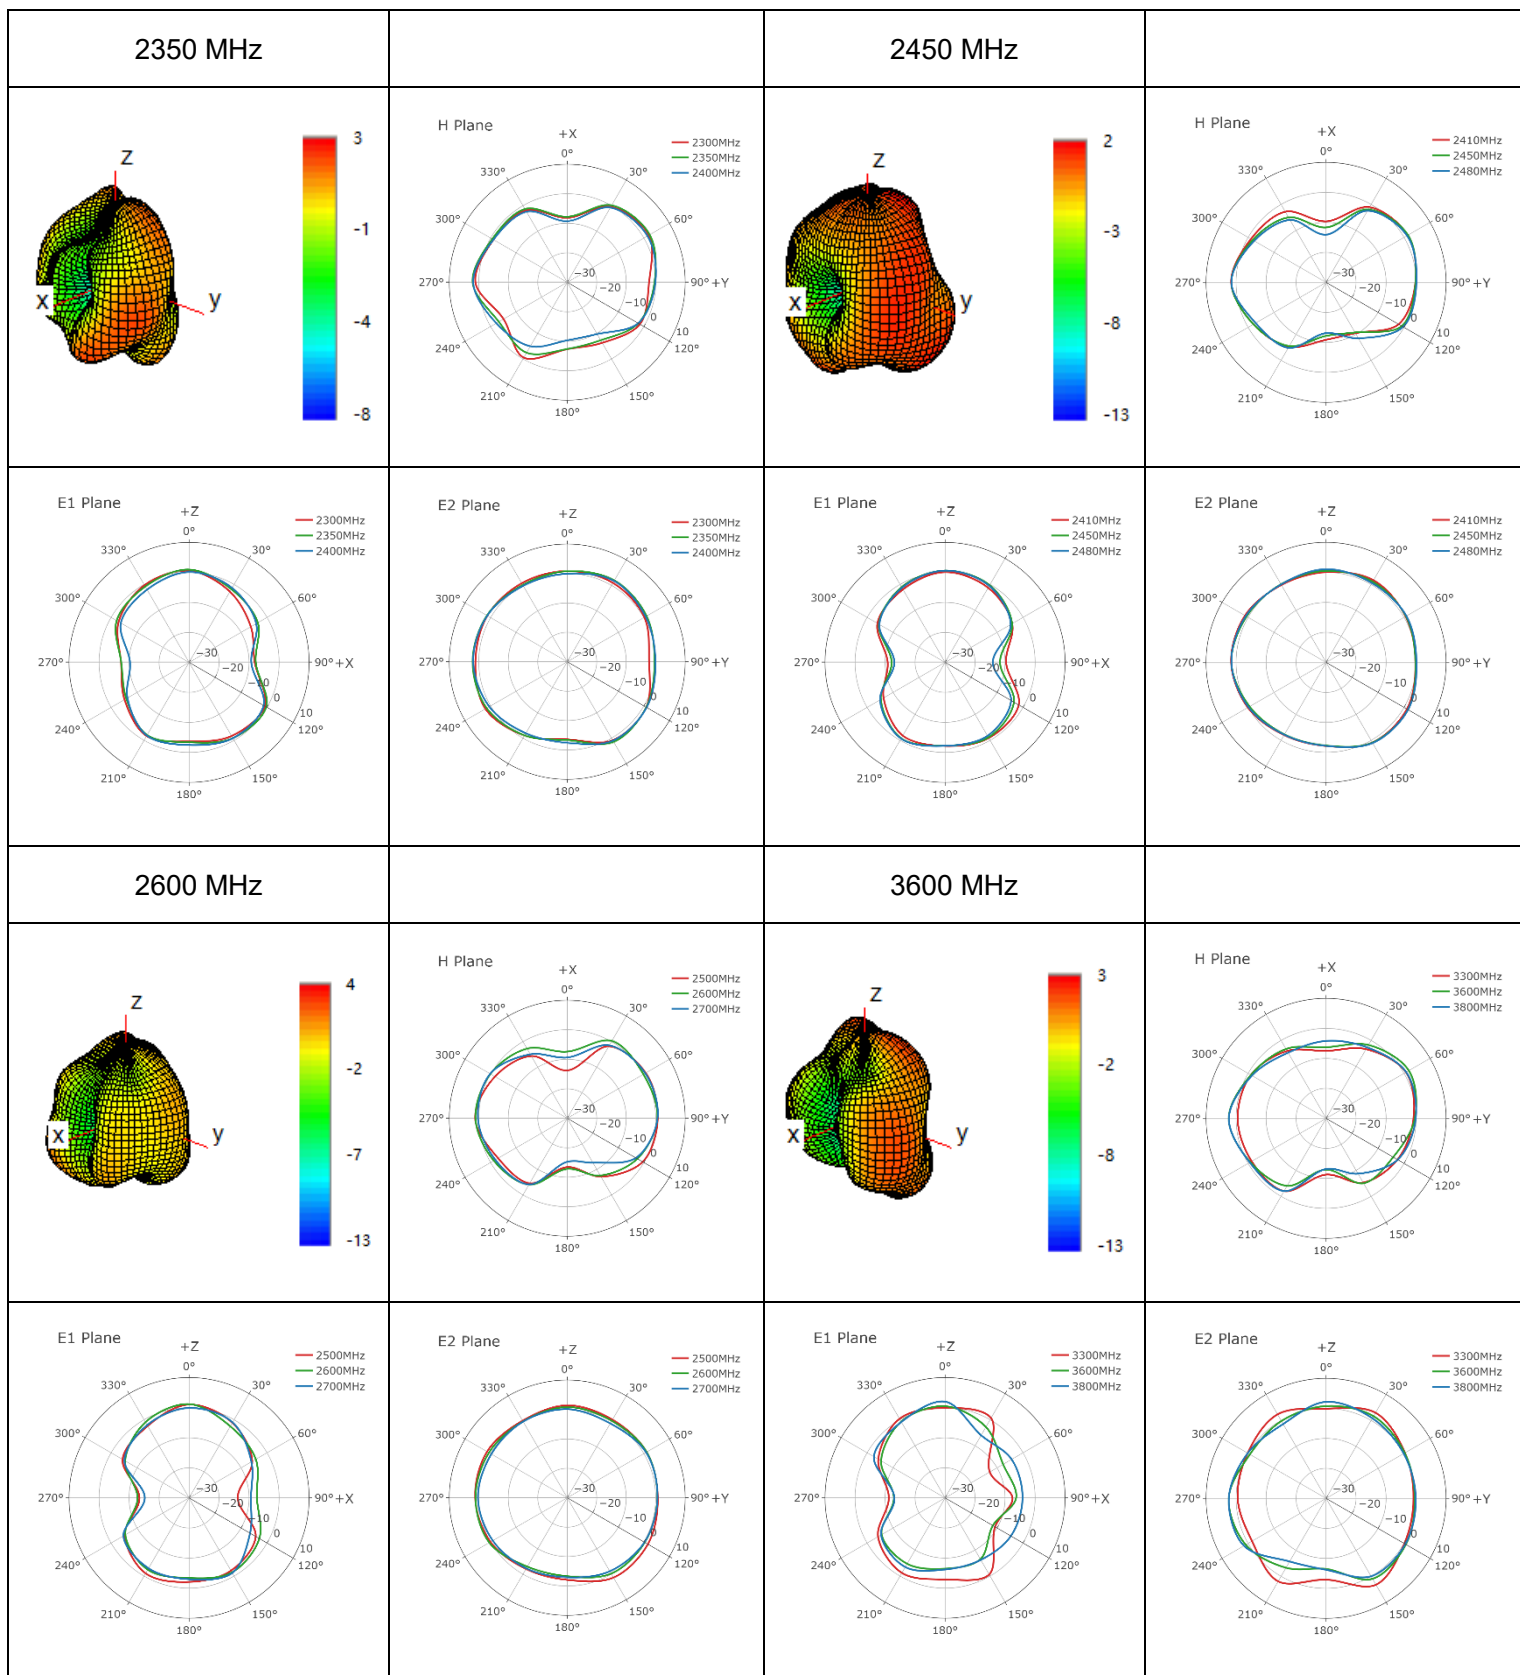


● **ANT-1**

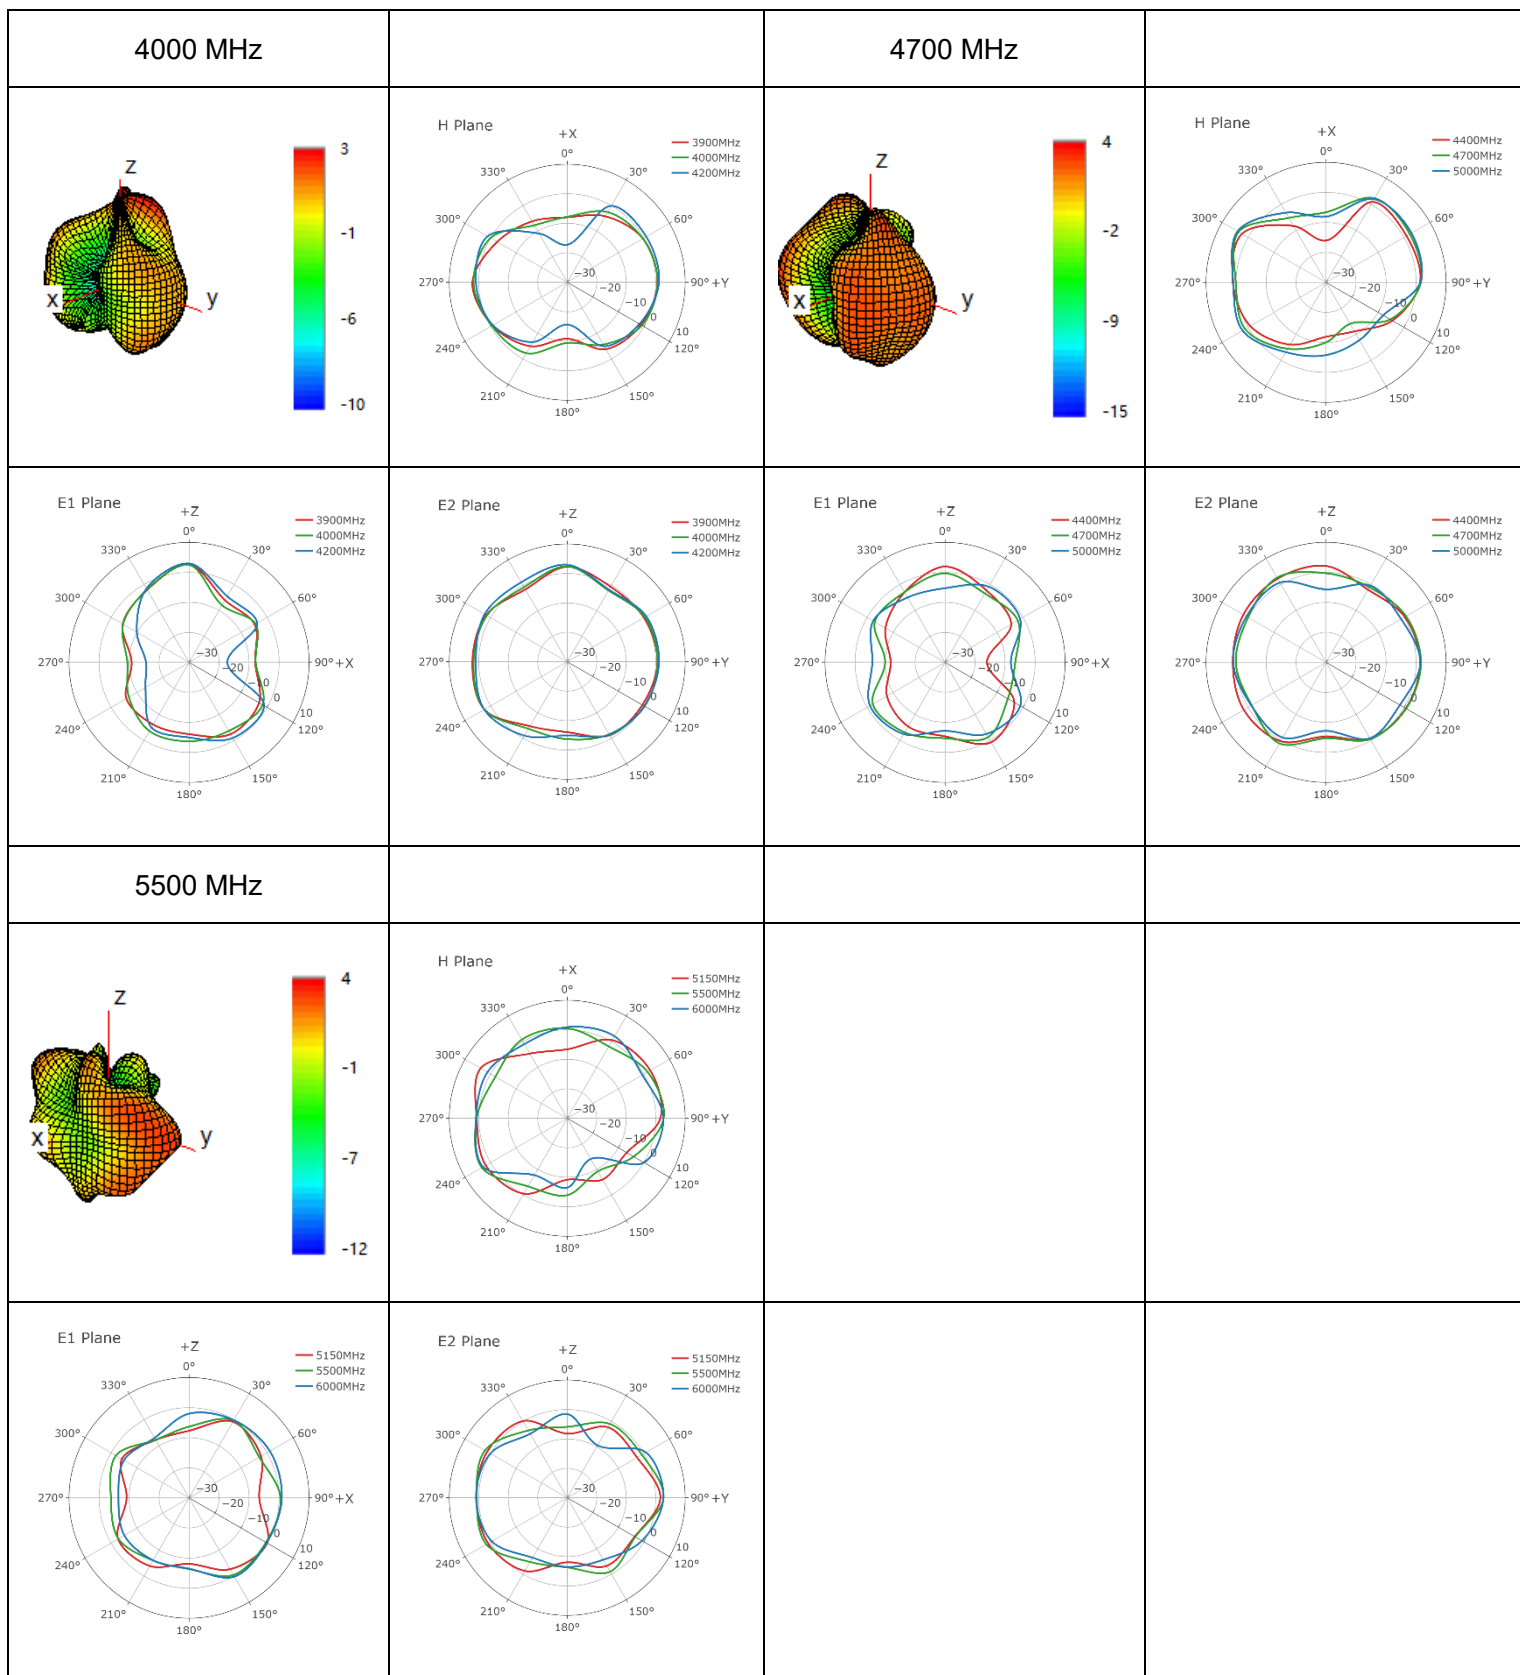


● **ANT-2**

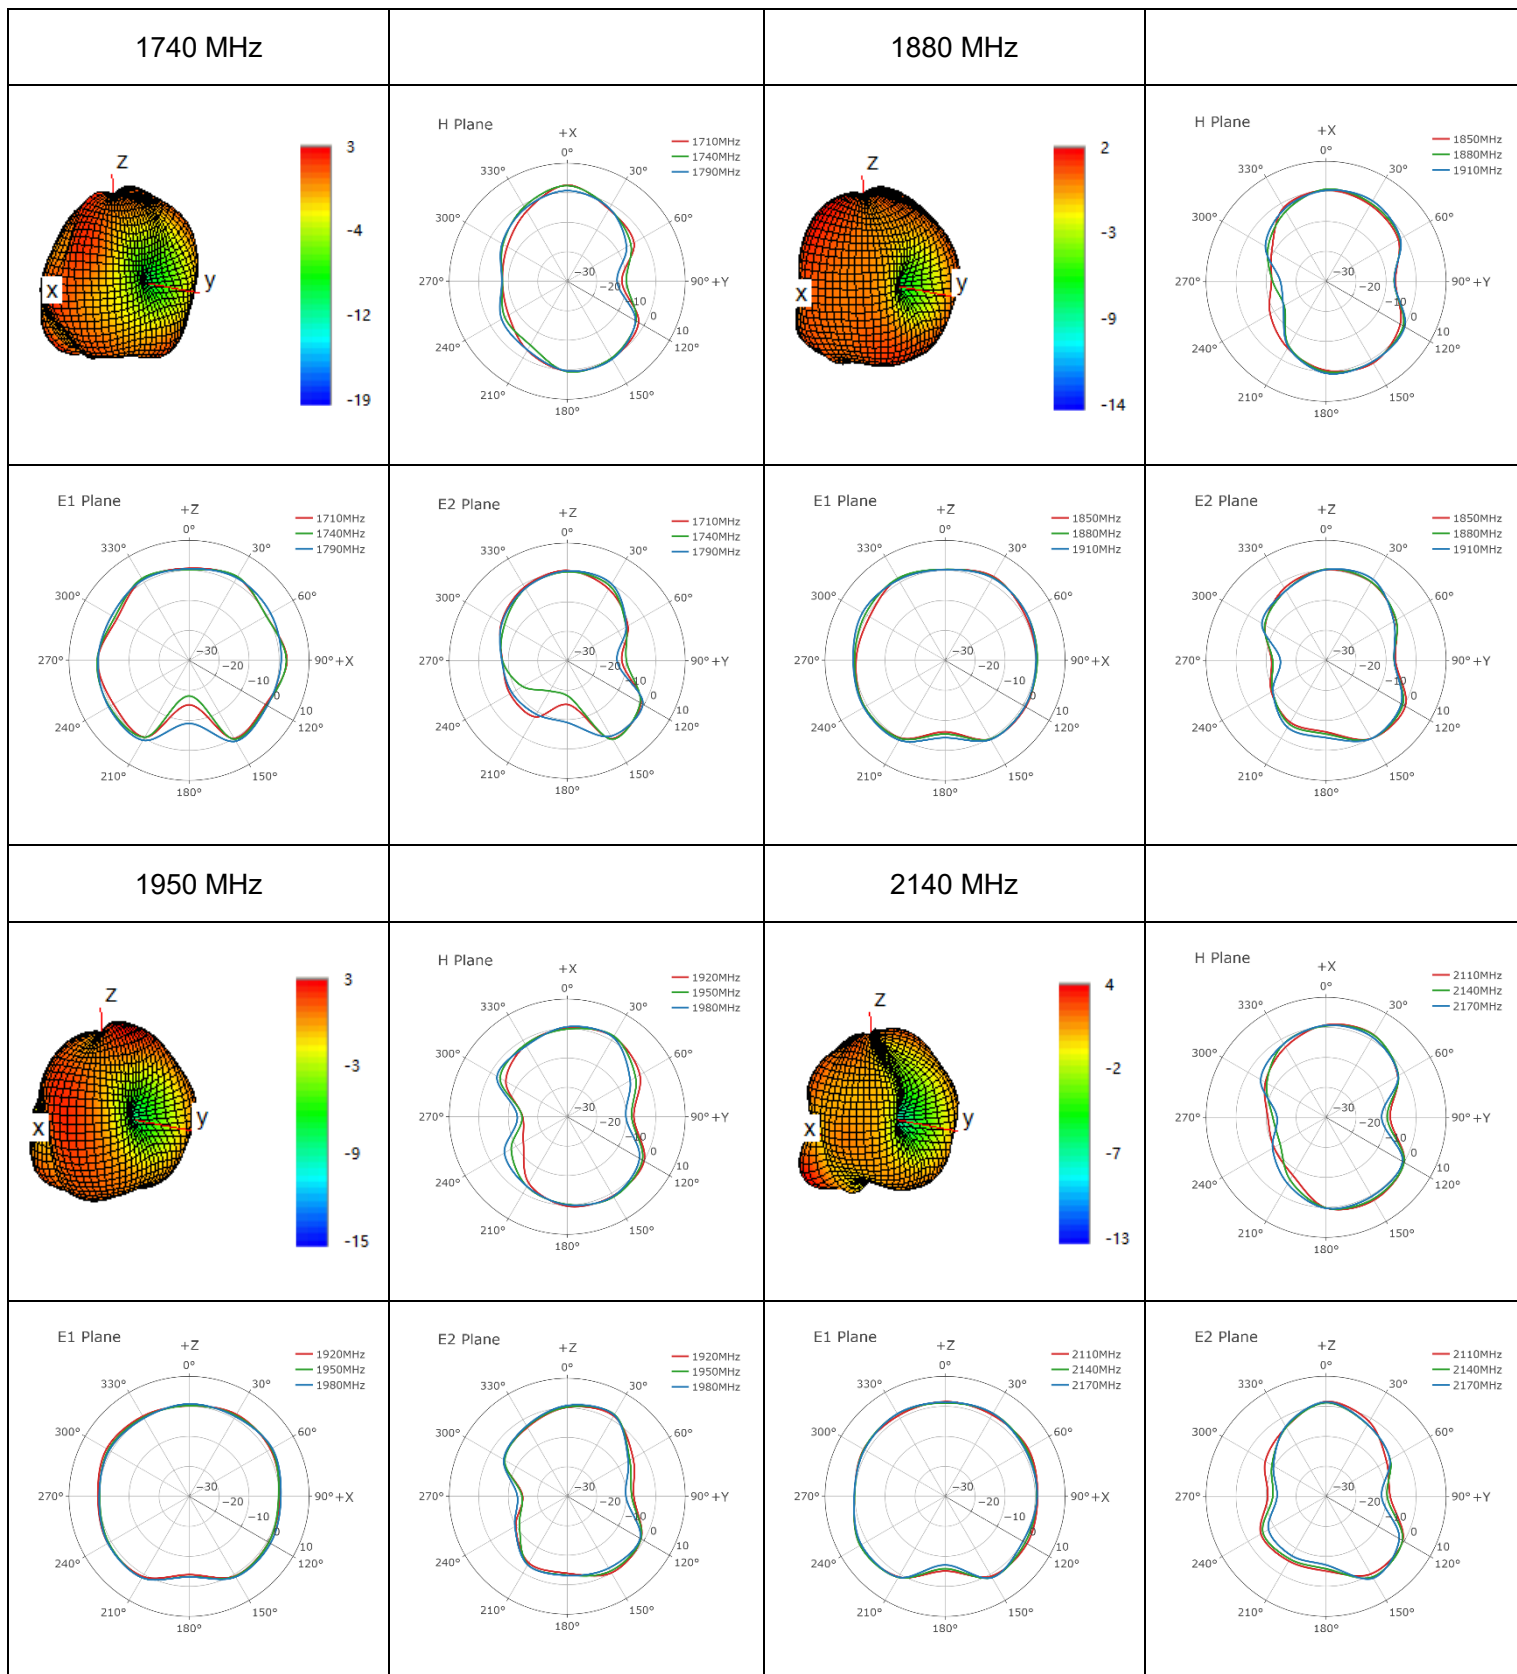


● **ANT-2**

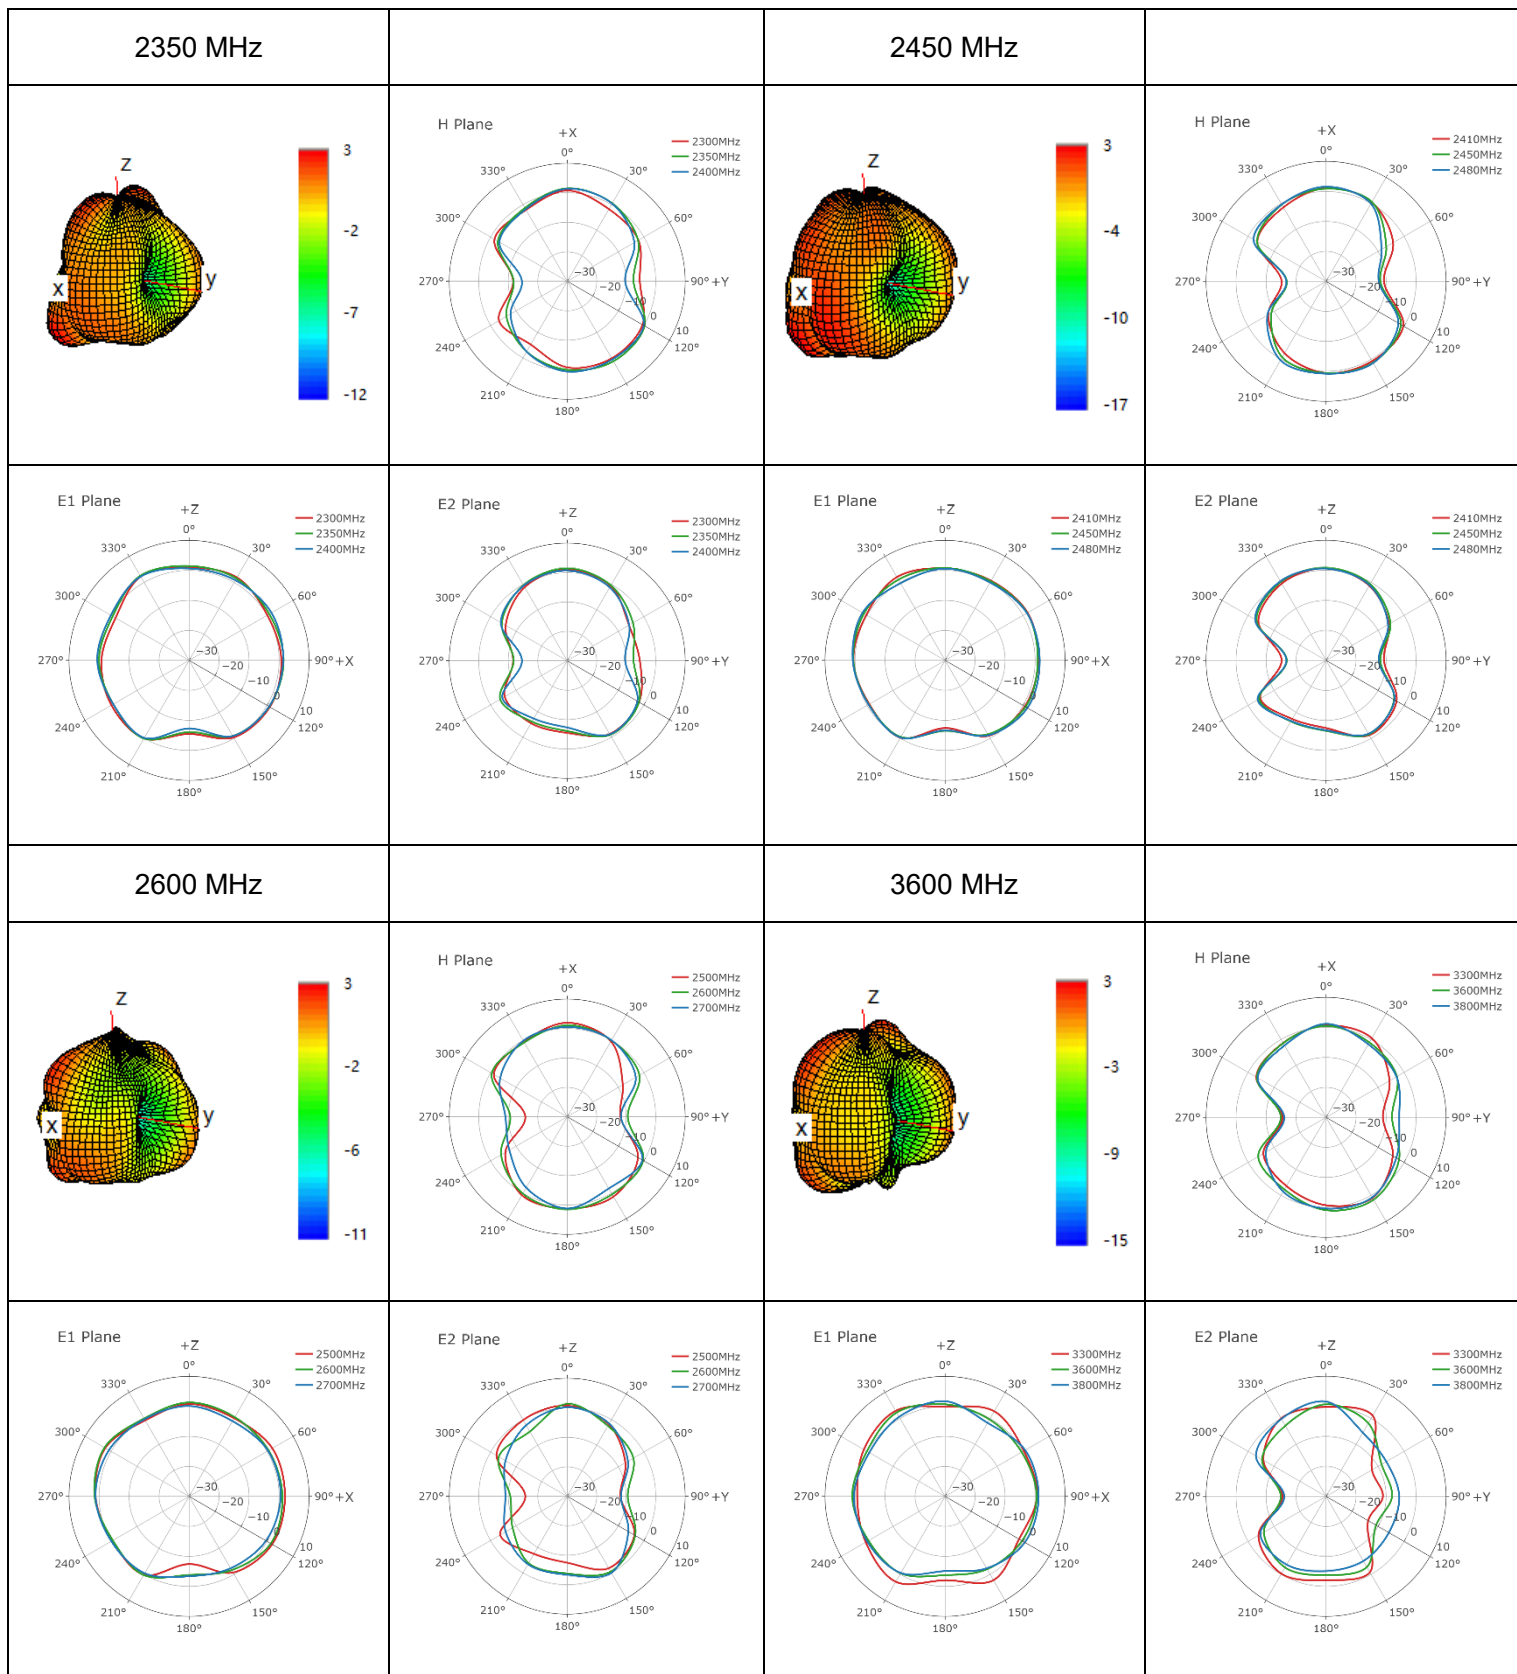


● **ANT-2**

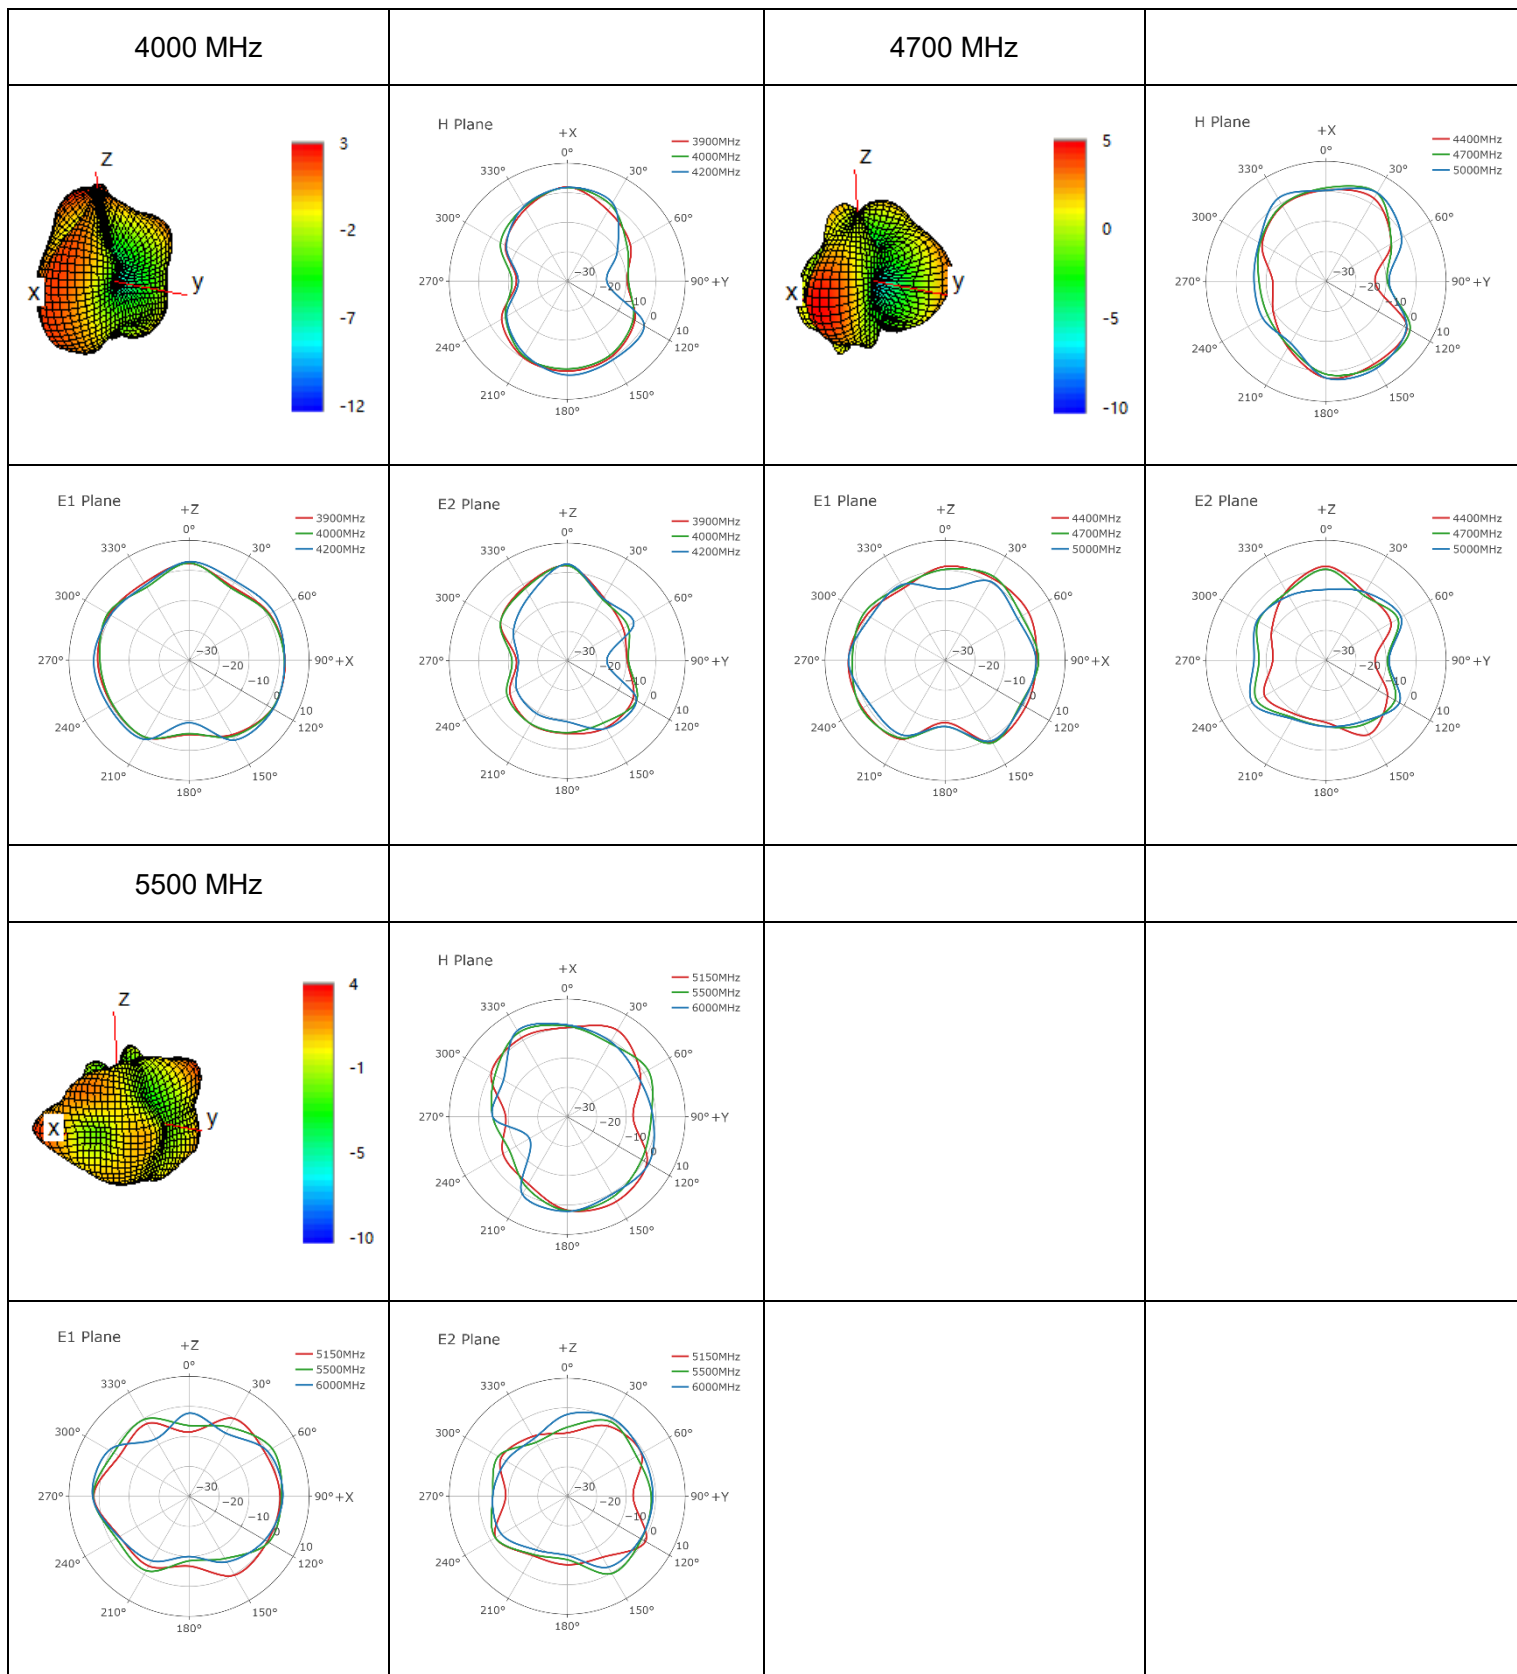


● **ANT-3**

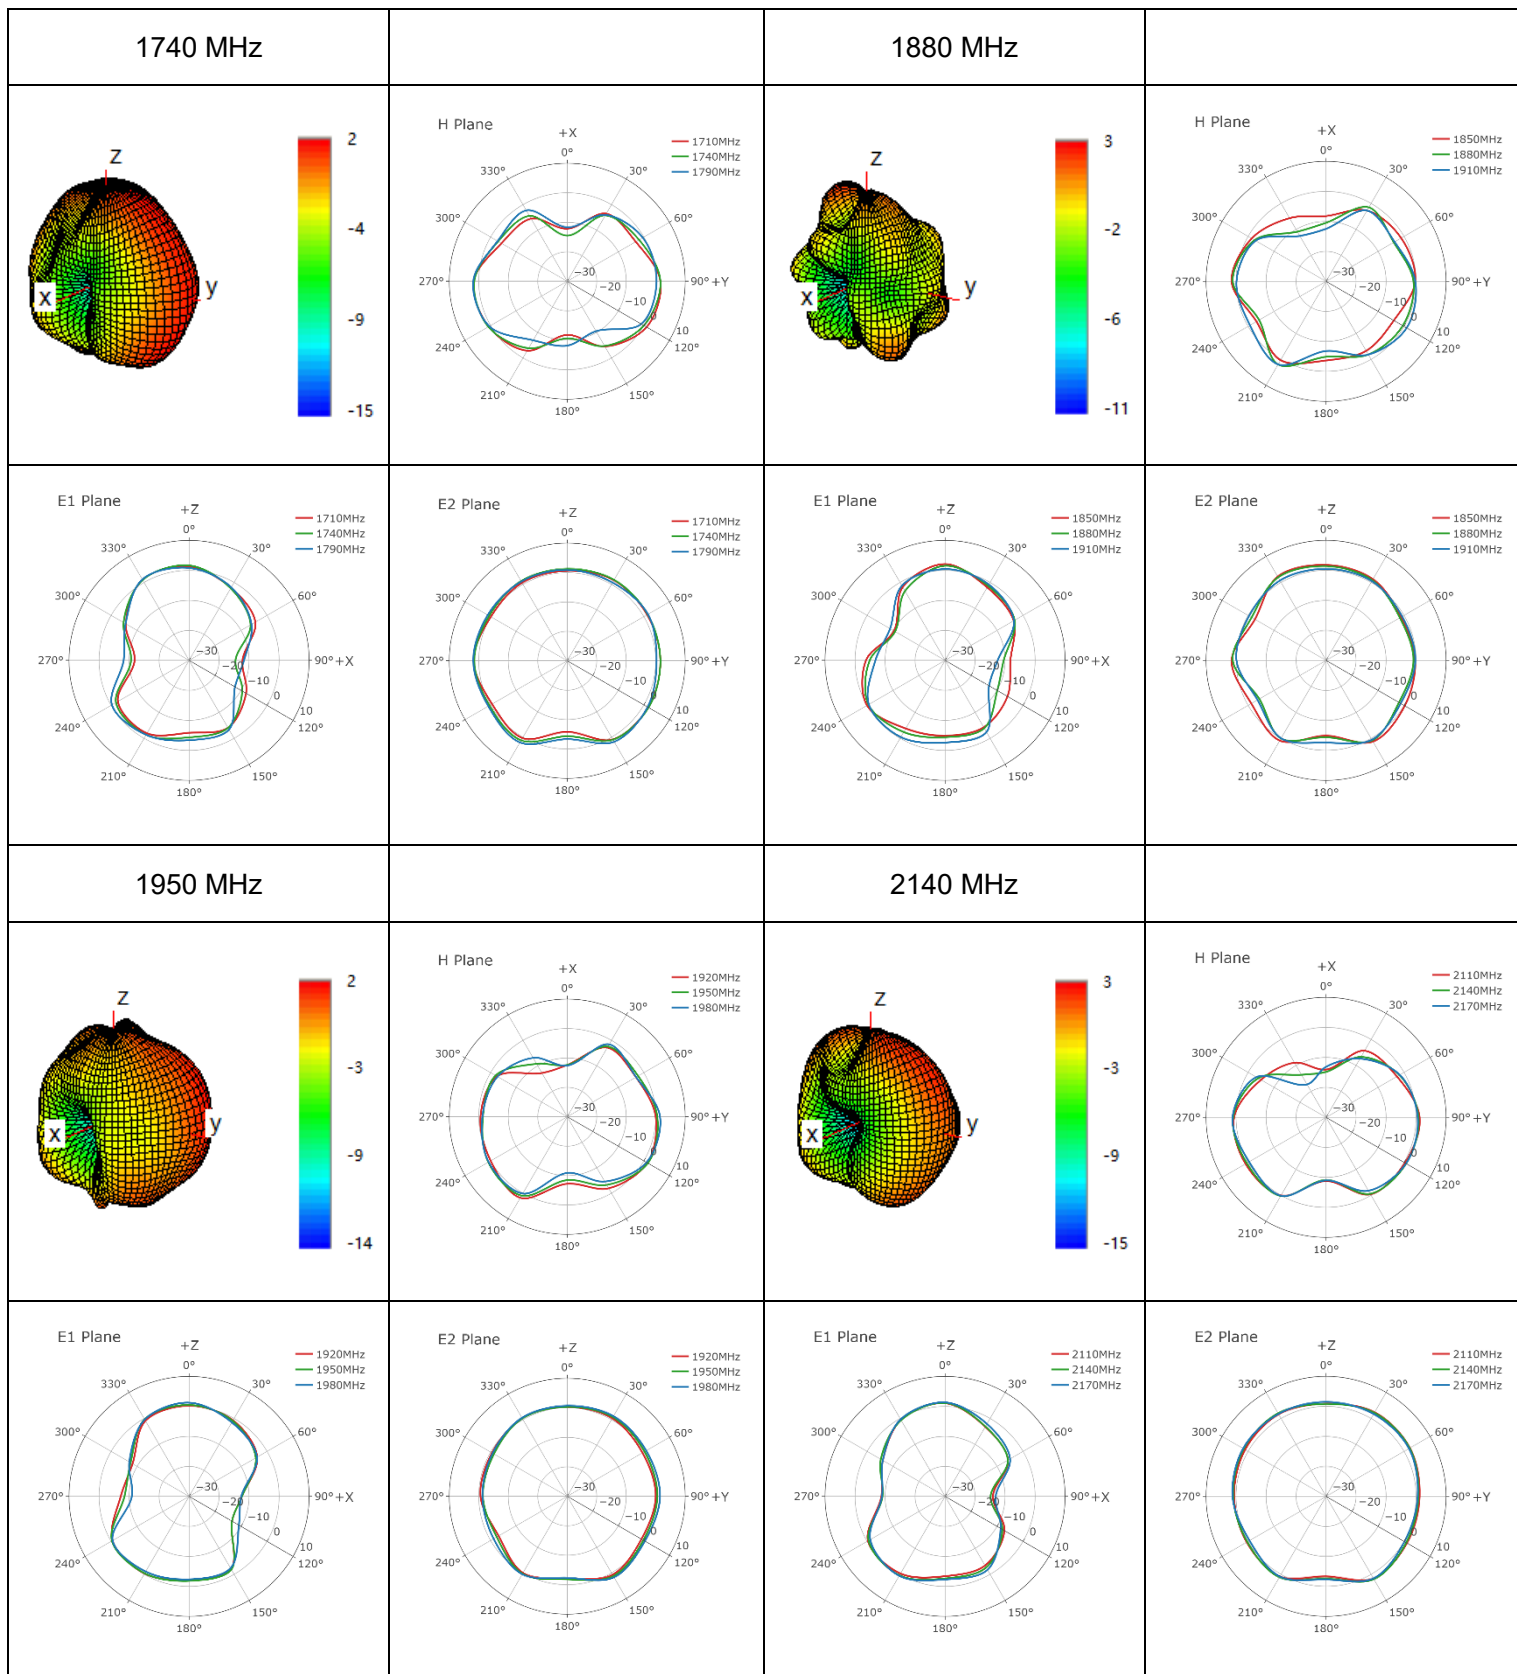


● **ANT-3**

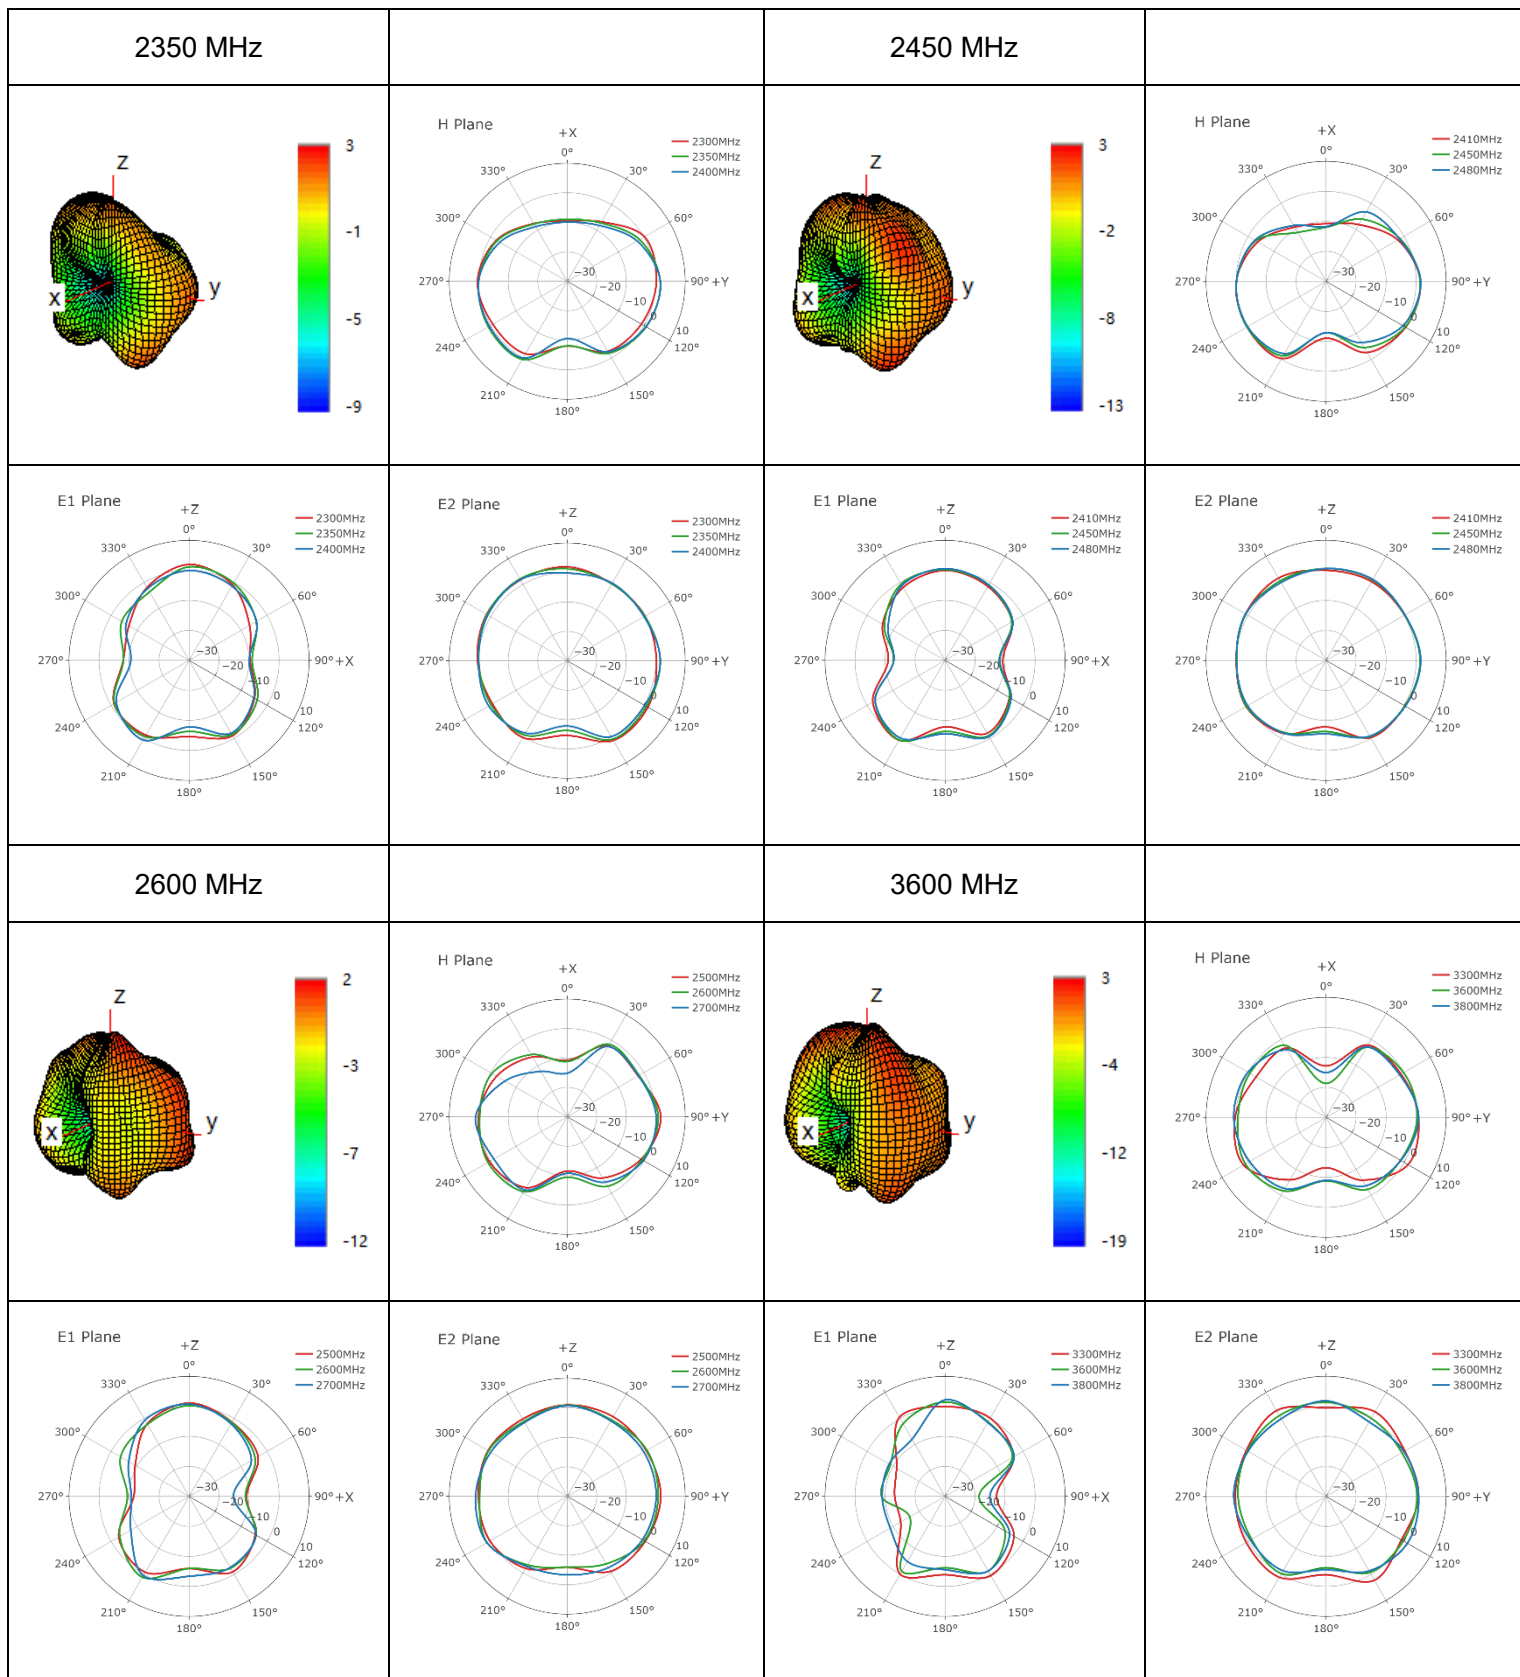


● **ANT-3**

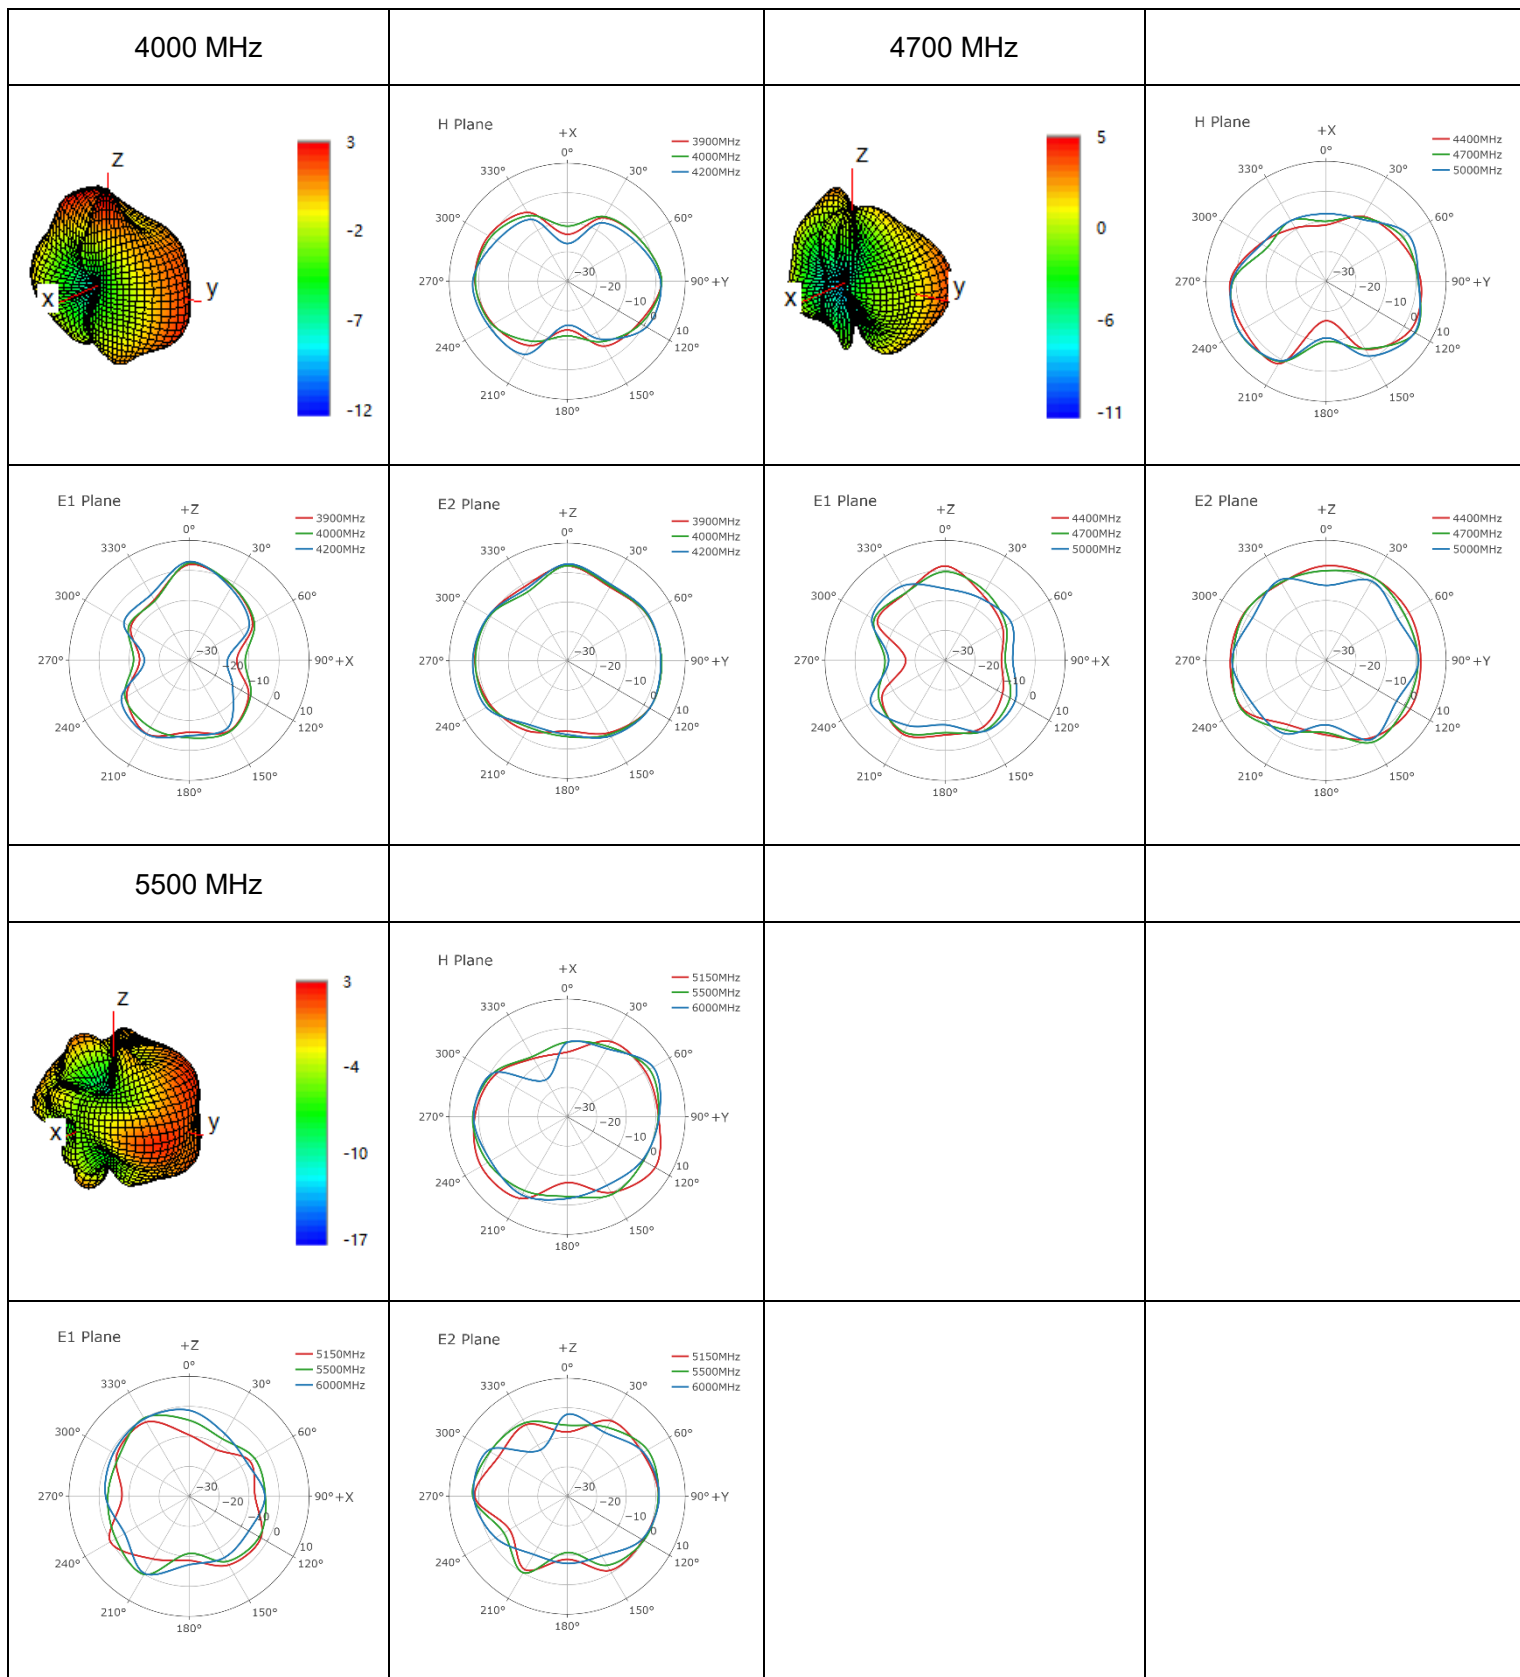


● **ANT-4**

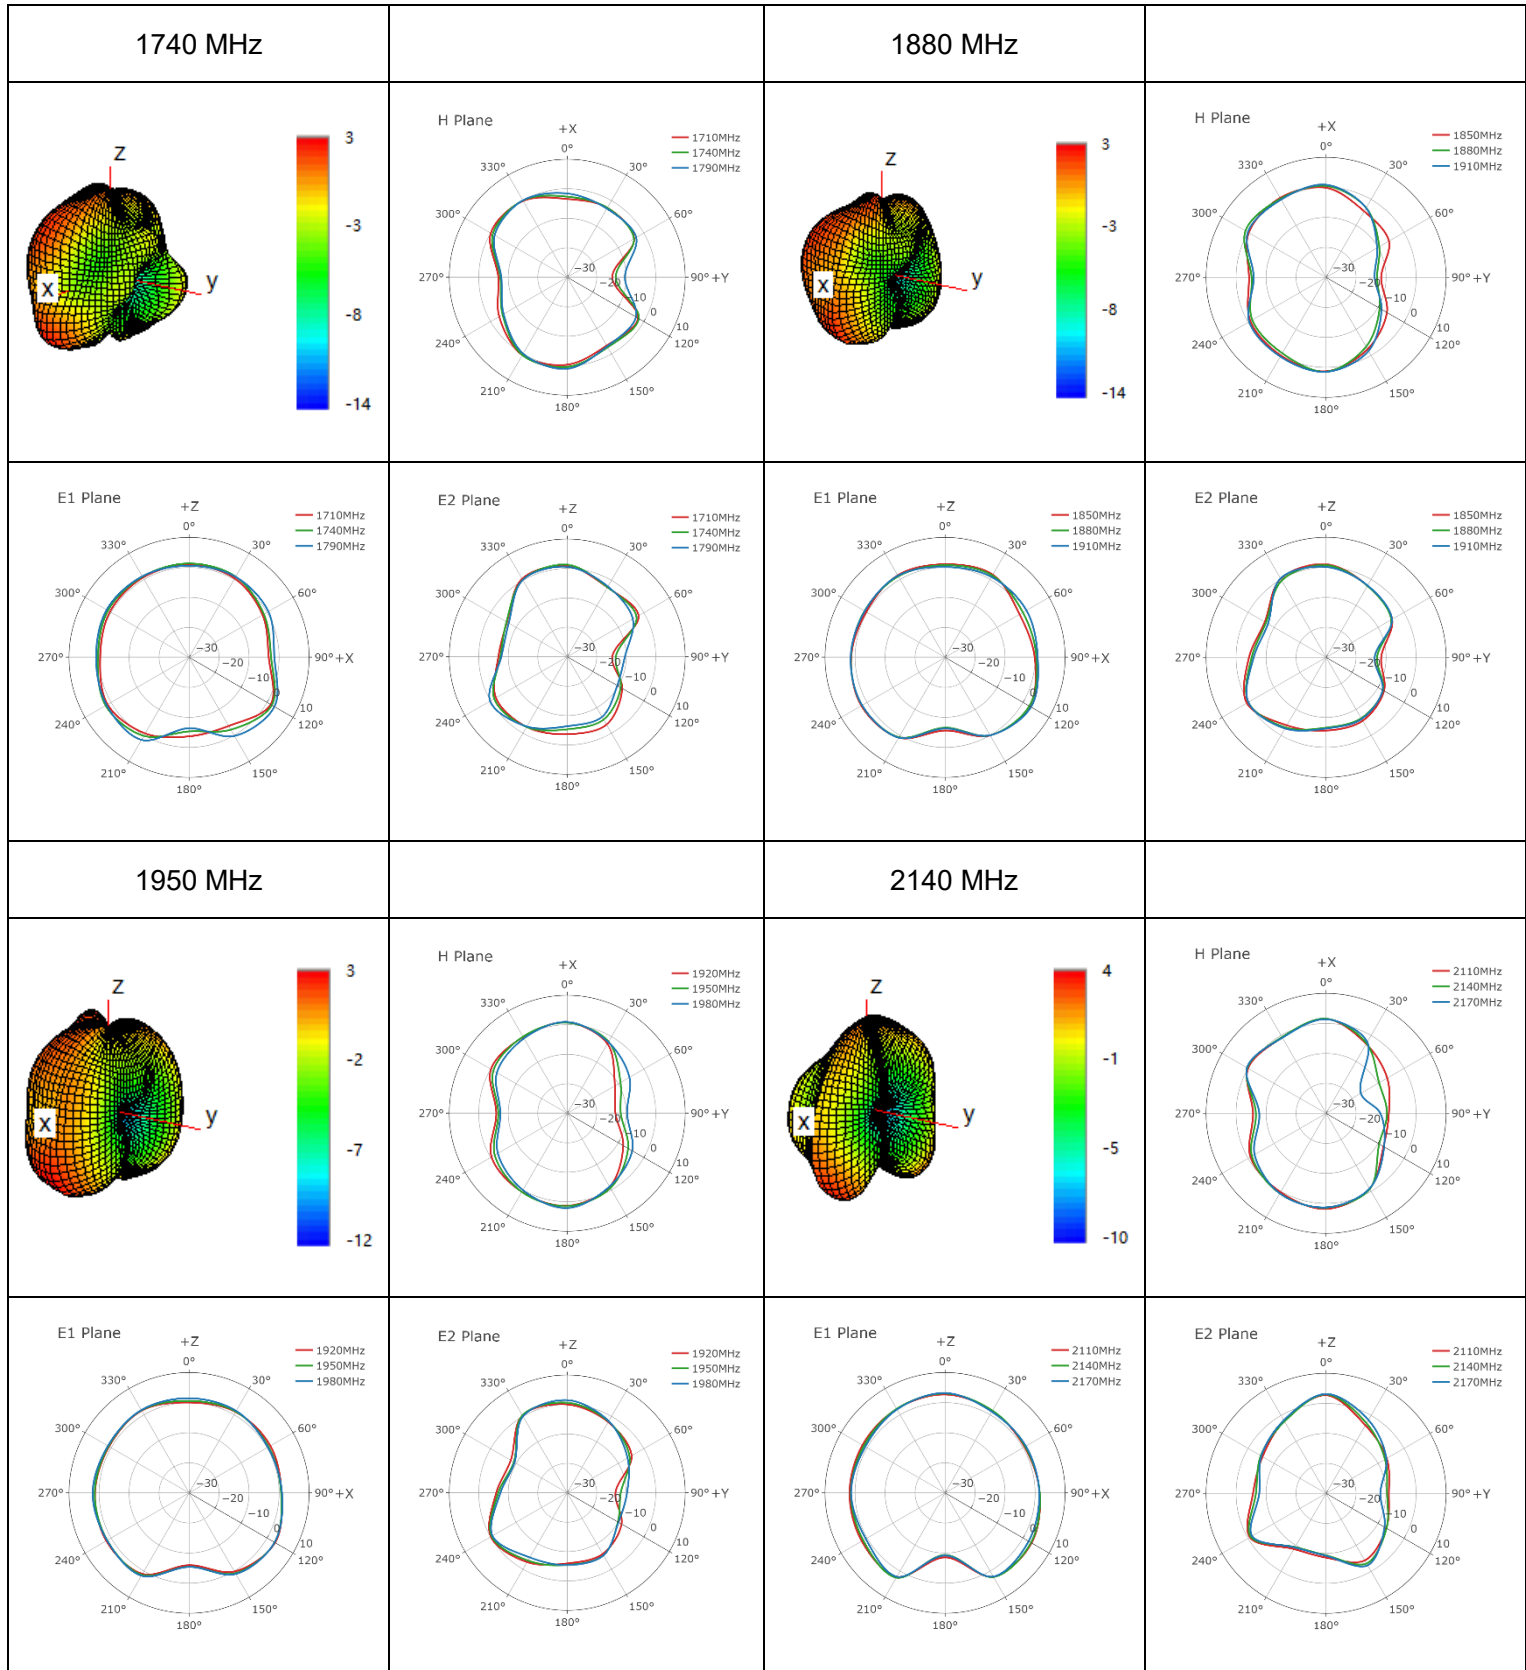


● **ANT-4**


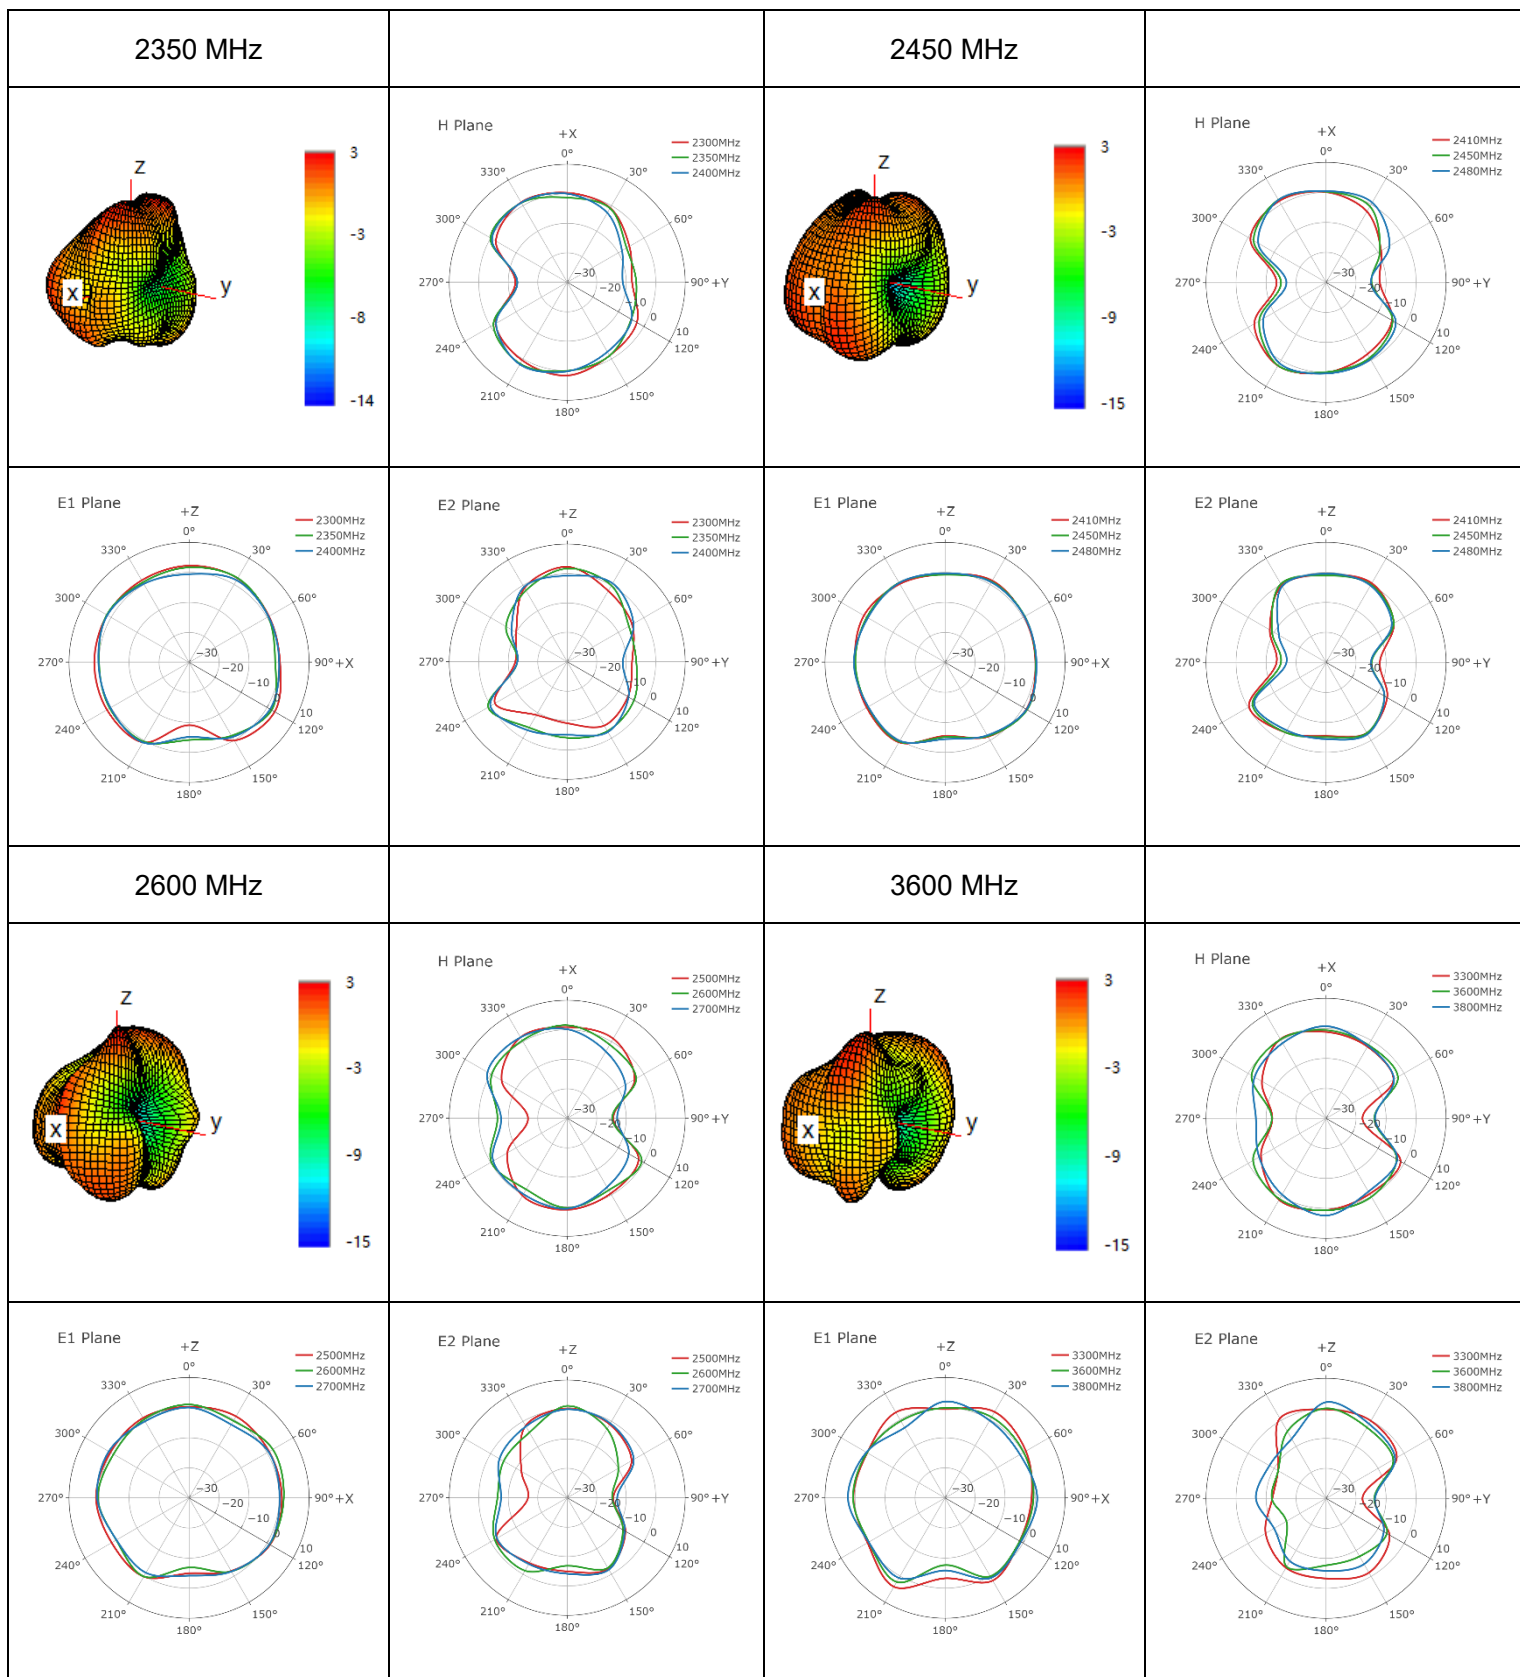


● **ANT-4**

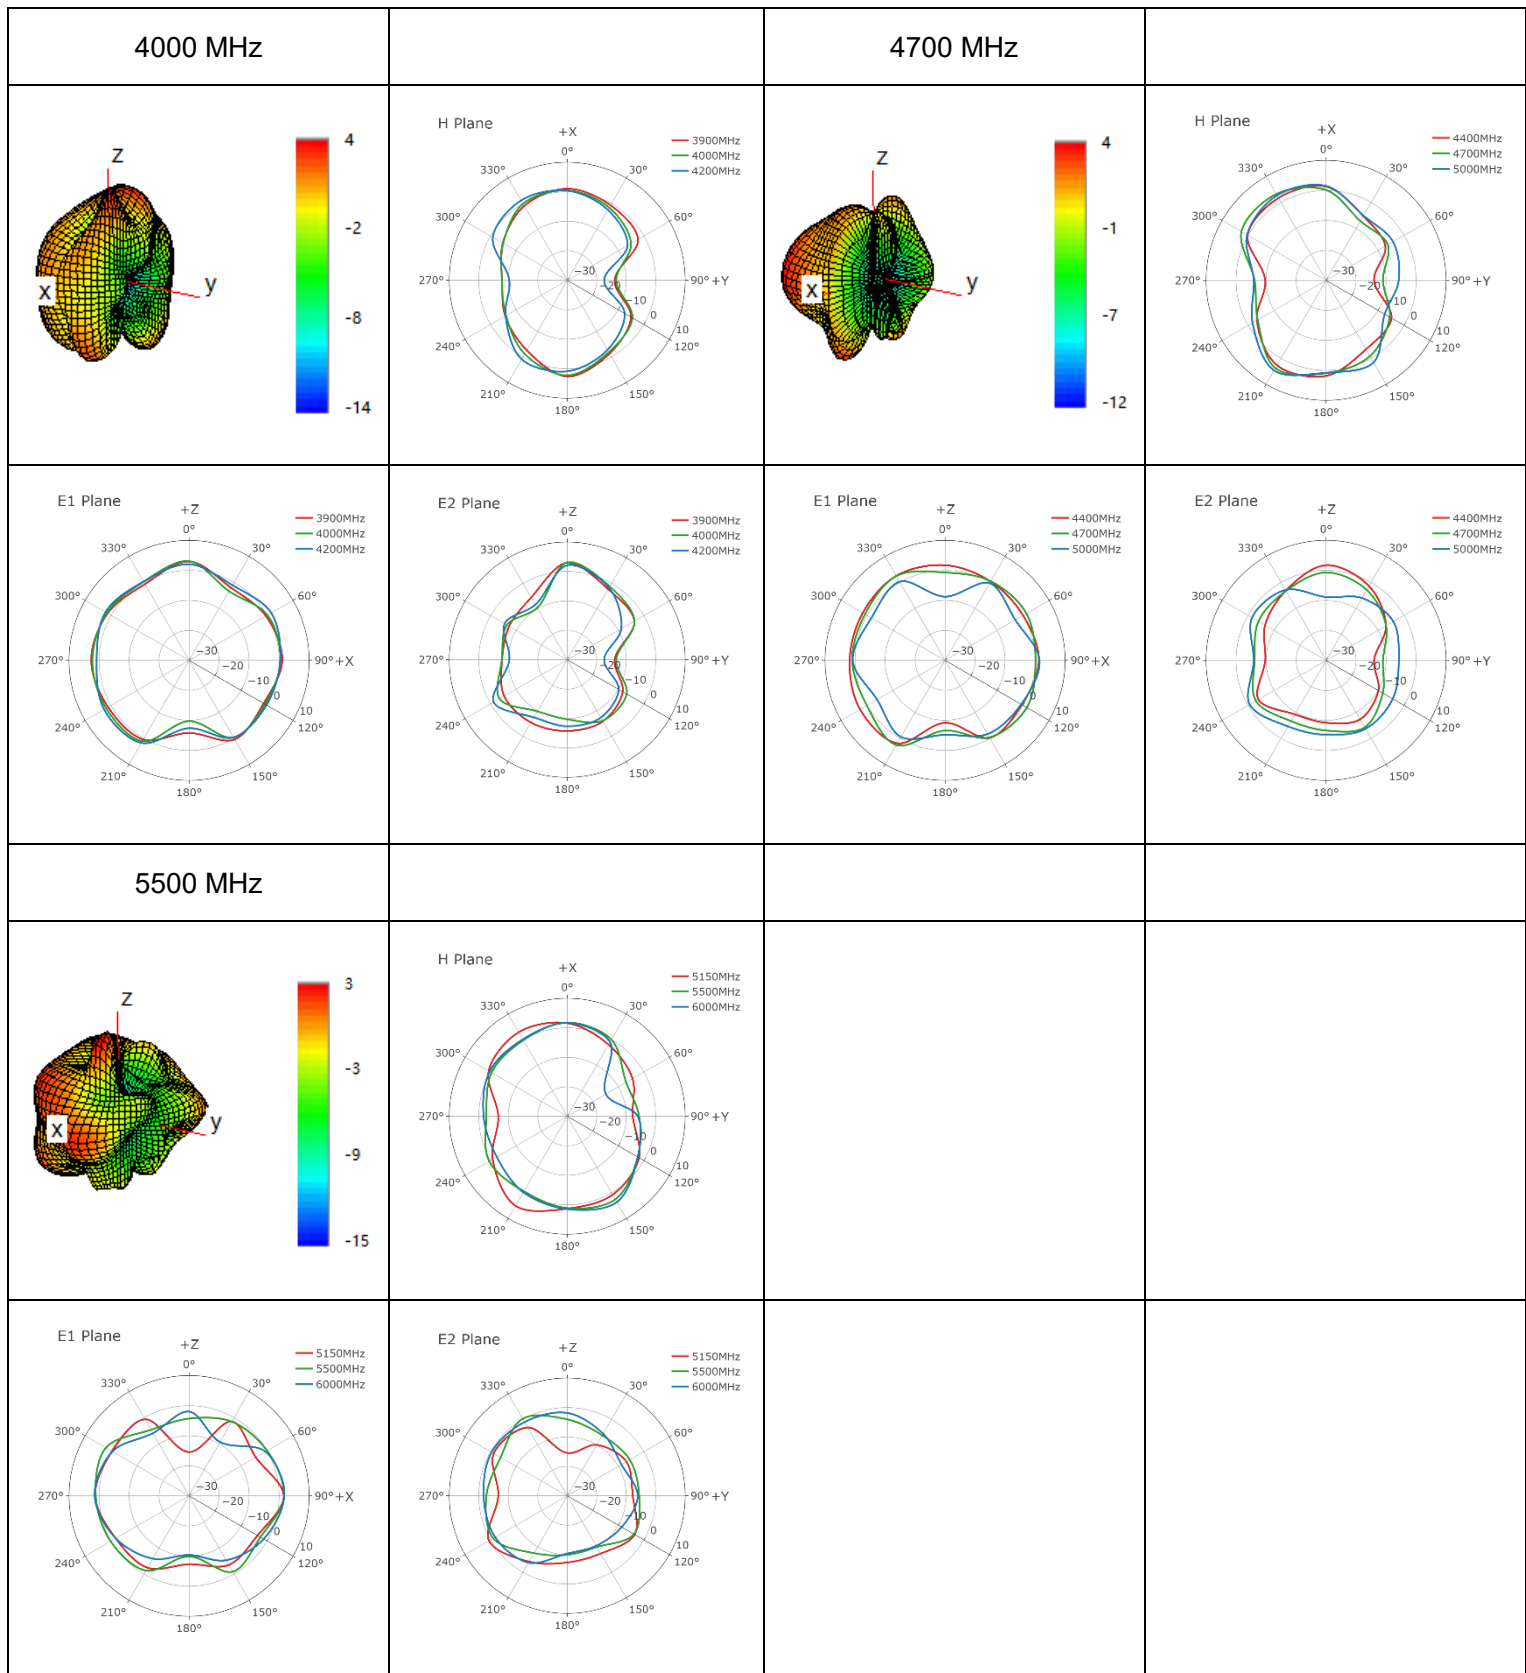

# 4 Packaging
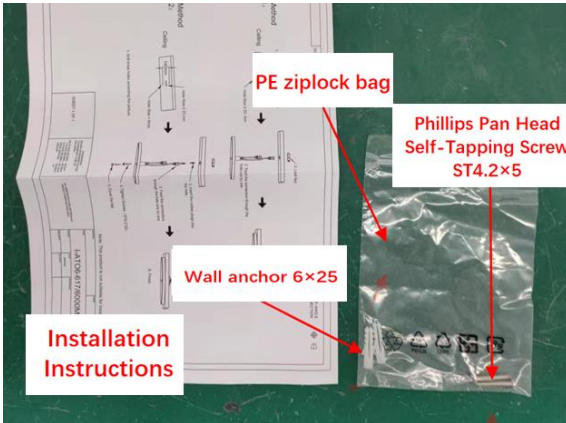
| Step | Packaging Picture / 2D Picture                                                      | Description                                                                                                                                                                |
|------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1    |   | Place the Phillips Pan Head Self-Tapping Screw and Wall anchor into a PE ziplock bag, then fold the installation instructions in half.                                     |
| 2    |  | Put the inner liner into the inner box first, add divider cards and the manual, then place one product and one divider card into the inner box.<br>(1 Antenna / Inner Box) |
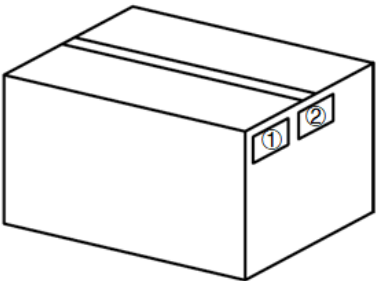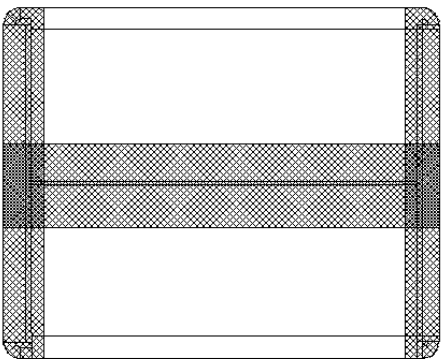
|      |                                                                                                                                                                     |                                                                                                                                                                                                                                                     |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3    |                                                                                    | <p>Each layer contains 10 inner boxes.<br/>Each carton contains 2 layers of products.<br/>(20 Inner Boxes / Carton Box)<br/>(20 Antennas / Carton Box)<br/>Estimated quantity<br/><u>Carton Size:</u><br/><u>L × W × H = 930 × 465 × 480 mm</u></p> |
| 4    |                                                                                   | <p><b>Position for Attaching Labels</b></p> <ul style="list-style-type: none"> <li>① Carton Label</li> <li>② Quality Label</li> </ul>                                                                                                               |
| 5    |                                                                                  | <p><b>Sealing Cartons</b><br/>H-shaped sealing cartons</p>                                                                                                                                                                                          |
| Note | <p>The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.</p> |                                                                                                                                                                                                                                                     |

# Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

**Quectel Wireless Solutions Co., Ltd.**

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

Tel: +86 21 5108 6236

Email: [info@quectel.com](mailto:info@quectel.com)

**Or our local offices. For more information, please visit:**

<https://www.quectel.com/contact/>.

**For technical support, or to report documentation errors, please visit:**

<https://www.quectel.com/tech-support/>.

Or email us at: [support@quectel.com](mailto:support@quectel.com).

# Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

## Use and Disclosure Restrictions

### License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the intended project.

### Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

### Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

## Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

## Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

## Disclaimer

- a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
- b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
- c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
- d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

***Copyright © Quectel Wireless Solutions Co., Ltd. 2026. All rights reserved.***

## Revision History

| Version | Date       | Author                                                     | Note                     |
|---------|------------|------------------------------------------------------------|--------------------------|
| -       | 2026-04-15 | Mordecai Liu/<br>Joye Wang/<br>Kessie Geng/<br>Rainey Liao | Creation of the document |
| 1.0     | 2026-04-15 | Mordecai Liu/<br>Joye Wang/<br>Kessie Geng/<br>Rainey Liao | First official release   |



[www.quectel.com](http://www.quectel.com)