



Antenna Datasheet

Product OC: YEMN308L1AM

Version: 1.2

Date: 2025-10-27

Status: Released

Product Name: 4G & GNSS 3in1 Multiple Mount Combo External Antenna

Key Features:

Frequency Band: 4G × 2: 698–960 MHz, 1710–2690 MHz

GNSS: 1565–1606 MHz

Dimensions: Φ 81 mm × 15.5 mm

Efficiency: Up to 62.6 % (4G DIV-FS), Up to 54.09 % (GNSS)

GNSS LNA Gain: 18 ±3 dB

RoHS Compliant

IP67

Overview

YEMN308L1AM is a 4G & GNSS 3in1 combo antenna measuring Φ 81 mm \times 15.5 mm. This ultra-wide-band 4G & GNSS antenna provides broad coverage from 698–960 MHz, 1710–2690 MHz whilst offering backward-compatibility to support 3G and 2G networks as well as LTE Cat-M and narrowband IoT (NB-IoT). The antenna is available with connection via 3 cable lengths from 300 mm, terminated with SMA Male connectors. Ideal for applications where the antenna is required to be discrete this low profile, adhesive and screw mount omni-directional antenna, is easy to install with maximum durability assured thanks to its IP67 rated enclosure. It is compatible with Quectel's 4G and GNSS Series modules.

YEMN308L1AM has 2 \times 4G LMH antennas and 1 \times GNSS L1 antenna. It allows high efficiency, stable signal transmission and reception for active GNSS from 1565–1606 MHz, and 4G bands from 698–960 MHz, 1710–2690 MHz. In the meantime, this product also offers high isolation between antennas to avoid self-interference. All in all, this unique product is designed to provide stable and high-speed data connection to 4G & GNSS applications.

Typical Applications Include:

- HD Video Streaming over LTE
- Vehicle Tracking and Telematic System
- IoT Applications
- Emergency Service System
- Warehouses & Logistic systems
- Mining Vehicles & Machinery communications, telemetry and automation

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

Overview	1
Contents	2
1 Specification	3
1.1. Electrical.....	3
1.1.1. 4G.....	4
1.1.2. 4G DIV.....	5
1.1.3. GNSS	6
1.2. Mechanical & Environmental	7
1.3. Block Diagram (Active Antenna).....	8
1.4. Supported GNSS Frequency Bands.....	9
2 Drawing	10
3 Detailed Performance	11
3.1. S-Parameter Test	11
3.1.1. VSWR.....	11
3.1.2. Return Loss	14
3.1.3. Isolation	17
3.1.4. GNSS LNA Gain.....	20
3.1.5. GNSS Noise Figure.....	21
3.2. Radiation Performance Test.....	22
3.2.1. Efficiency	22
3.2.2. Average Gain	25
3.2.3. Peak Gain.....	27
3.2.4. 3D & 2D Radiation Pattern.....	30
3.2.4.1. Test Condition: In Free Space	30
3.2.4.2. Test Condition: On 300 mm × 300 mm Metal Plane	42
4 Packaging	53
Contact Us	55
Legal Notices	56
Revision History	58

1 Specification

Test Condition: On 300 mm × 300 mm Metal Plane & In Free Space

1.1. Electrical

Electrical Specifications			
Frequency Range	4G	698–960 MHz, 1710–2690 MHz	
	4G DIV	698–960 MHz, 1710–2690 MHz	
	GNSS	1565–1606 MHz	
Radiation Pattern	4G	Omni-directional	
	4G DIV	Omni-directional	
	GNSS	Directional	
Polarization	4G	Linear	
	4G DIV	Linear	
	GNSS	RHCP	
Impedance		50 Ω	
Isolation	4G-4G DIV	FS	≤ -7.6 dB
		MP	≤ -7.8 dB
	4G-GNSS	FS	≤ -47.2 dB
		MP	≤ -43.4 dB
	4G DIV-GNSS	FS	≤ -40.9 dB
		MP	≤ -45.0 dB

- MP: On 300 mm × 300 mm Metal Plane
- FS: In Free Space

1.1.1. 4G

Electrical – Detail									
SPEC	Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41
	Freq. (MHz)	600– 700	700– 810	820– 960	1700– 2170	2300– 2400	2400– 2500	2500– 2690	
Max. VSWR	FS	-	3.4	3.3	2.5	3.0	2.9	5.2	
	MP	-	3.2	4.7	6.7	3.4	2.5	4.5	
Max. Return Loss (dB)	FS	-	-5.2	-5.5	-7.5	-5.9	-6.2	-3.4	
	MP	-	-5.7	-3.8	-2.6	-5.2	-7.4	-3.9	
AVG Eff. (%)	FS	-	37.6	35.2	53.8	48.1	45.2	32.4	
	MP	-	44.9	38.5	22.3	41.1	49.9	34.3	
AVG Gain (dB)	FS	-	-4.3	-4.5	-2.7	-3.2	-3.5	-4.9	
	MP	-	-3.5	-4.3	-6.7	-3.9	-3.0	-4.9	
Max. Peak Gain (dBi)	FS	-	0.4 (810)	0.8 (850)	3.0 (1770)	2.5 (2300)	1.4 (2400)	0.8 (2500)	
	MP	-	0.9 (730)	1.6 (890)	1.2 (1710)	4.1 (2390)	6.0 (2470)	5.8 (2500)	
VSWR	FS	≤ 5.2							
	MP	≤ 6.7							
Return Loss	FS	≤ -3.4 dB							
	MP	≤ -2.6 dB							
Peak Gain	FS	≤ 3.0 dBi							
	MP	≤ 6.0 dBi							

1.1.2. 4G DIV

Electrical – Detail									
SPEC	Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41
	Freq. (MHz)	600– 700	700– 810	820– 960	1700– 2170	2300– 2400	2400– 2500	2500– 2690	
Max. VSWR	FS	-	3.4	3.0	2.5	3.1	3.0	5.0	
	MP	-	3.4	3.5	5.6	4.8	5.0	4.7	
Max. Return Loss (dB)	FS	-	-5.2	-6.1	-7.4	-5.7	-6.0	-3.6	
	MP	-	-5.2	-5.1	-3.1	-3.7	-3.5	-3.8	
AVG Eff. (%)	FS	-	30.2	38.5	45.0	56.1	49.9	49.8	
	MP	-	39.1	44.8	33.9	25.1	24.8	29.3	
AVG Gain (dB)	FS	-	-5.2	-4.2	-3.5	-2.5	-3.0	-3.0	
	MP	-	-4.1	-3.5	-4.7	-6.0	-6.1	-5.3	
Max. Peak Gain (dBi)	FS	-	-0.7 (810)	1.2 (950)	3.1 (2070)	2.0 (2300)	1.0 (2490)	1.3 (2540)	
	MP	-	1.3 (810)	1.9 (880)	2.4 (1870)	0.7 (2370)	3.4 (2490)	4.1 (2690)	
VSWR	FS	≤ 5.0							
	MP	≤ 5.6							
Return Loss	FS	≤ -3.6 dB							
	MP	≤ -3.1 dB							
Peak Gain	FS	≤ 3.1 dBi							
	MP	≤ 4.1 dBi							


1.1.3. GNSS

Frequency (MHz)	Band	GPS L5 GALILEO E5a BDS B2a- B2I QZSS L5 IRNSS L5	GALILEO E5b BDS B2b	GPS L2 QZSS L2C	GLONASS G2	BDS B3	BDS B1I	GPS L1 GALILEO E1 BDS B1C QZSS L1	GLONASS G1
		1176	1207	1227	1248	1268	1561	1575	1602
VSWR	-	-	-	-	-	-	-	1.7	1.5
Return Loss (dB)	-	-	-	-	-	-	-	-11.46	-13.63
Efficiency (%)	-	-	-	-	-	-	-	48.79	48.24
Peak Gain (dBi)	-	-	-	-	-	-	-	1.32	0.86
LNA Electrical									
LNA Gain	18 ±3 dB @ 3 V 17 ±3 dB @ 1.8 V								
Noise Figure	≤ 2.5 dB								
Output VSWR	≤ 2.0								
Input VSWR	≤ 2.0								
Filter Out-of-Band Attenuation	60 dB f0 ±100 MHz f0 (1588 MHz)								
Working Voltage	1.8–3.3 V								
Working Current	8.7 ±2 mA								
Impedance	50 Ω								

1.2. Mechanical & Environmental

Mechanical		
Antenna Dimensions		Φ 81 mm × 15.5 mm
Antenna Material & Color		ABS & Black
Cable Type & Color & Length	4G	RG174 & Black & 300 mm
	4G-DIV	RG174 & Black & 300 mm
	GNSS L1&G1	RG174 & Black & 300 mm
Connector Type		SMA Male
Mounting Type		Adhesive & Screw
Weight		Typ. 72.55 g
Environmental		
Operation Temperature		-20 °C to +70 °C
Storage Temperature		-20 °C to +70 °C
Ingress Protection (IP) Rating		IP67
RoHS Compliant		Yes


1.3. Block Diagram (Active Antenna)

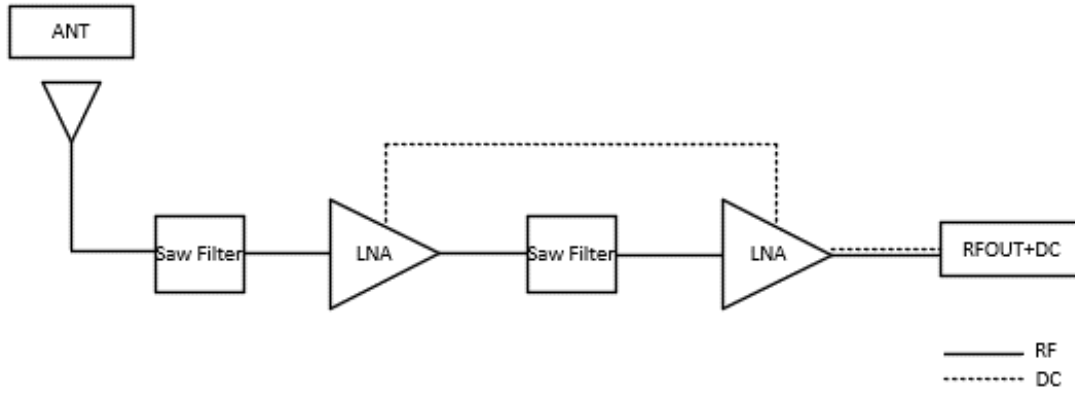

1.4. Supported GNSS Frequency Bands

GNSS Frequency Bands (MHz)					
GPS	L1 Centre 1575.42 (1565–1586)	L2 Centre 1227.6 (1217–1238)	L5 Centre 1176.45 (1164–1189)		
	√	-	-		
GLONASS	G1-L10C-L10F Centre 1601 (1595–1606)	G2-L20C-L20F Centre 1248.06 (1241–1255)	G3-L30C Centre 1202.025 (1189–1213)		
	√	-	-		
GALILEO	E1 Centre 1575.42 (1563–1588)	E5a Centre 1176.45 (1166–1187)	E5b Centre 1207.14 (1197–1218)	E6 Centre 1278.75 (1258–1300)	
	√	-	-	-	
BDS	B1I Centre 1561.098 (1559–1564)	B1C (BDS-3) Centre 1575.42 (1559–1592)	B2a-B2I Centre 1176.45 (1166–1187)	B2b Centre 1207.14 (1197–1217)	B3 Centre 1268.52 (1258–1279)
	-	√	-	-	-
QZSS	L1 Centre 1575.42 (1573–1578)	L2C Centre 1227.6 (1226–1229)	L5 Centre 1176.45 (1166–1187)	L6 Centre 1278.75 (1257–1300)	
	√	-	-	-	
IRNSS	L5 Centre 1176.45 (1164–1189)				
	-				


2 Drawing

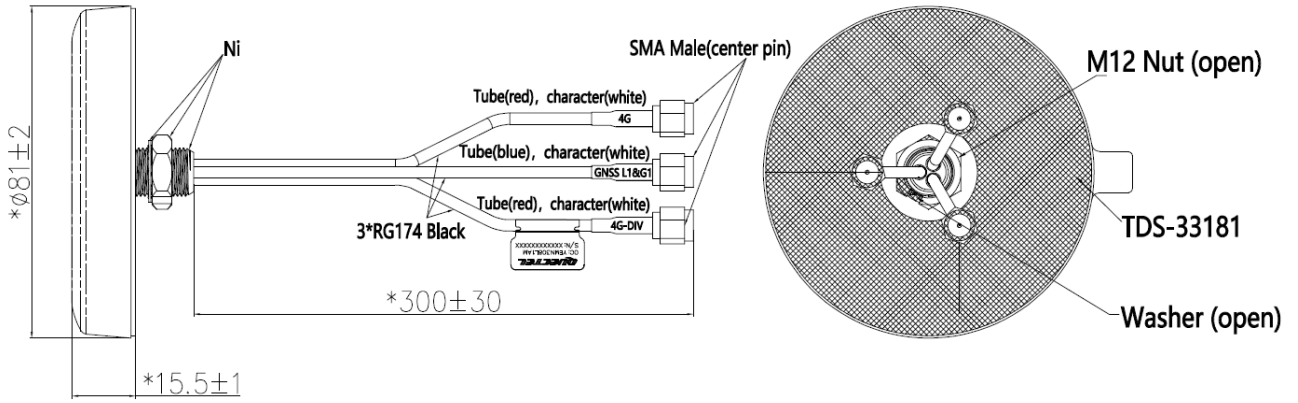

3 Detailed Performance


3.1. S-Parameter Test

3.1.1. VSWR

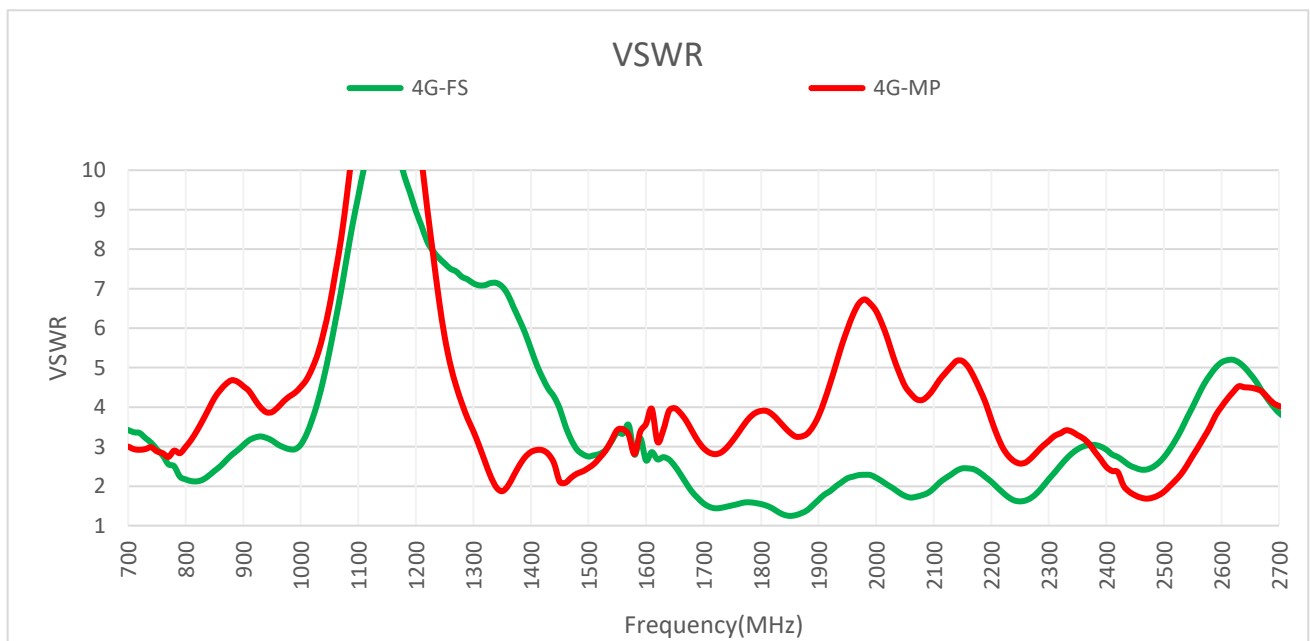


VSWR – 4G

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
VSWR	FS	-	-	3.4	2.2	3.0	3.1	-	1.5	1.5	1.4
	MP	-	-	2.9	3.7	4.5	4.0	-	2.9	3.0	3.3
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
VSWR	FS	2.2	2.4	2.9	2.5	5.1	4.0	-	-	-	-
	MP	6.0	5.2	3.3	1.8	4.0	4.1	-	-	-	-

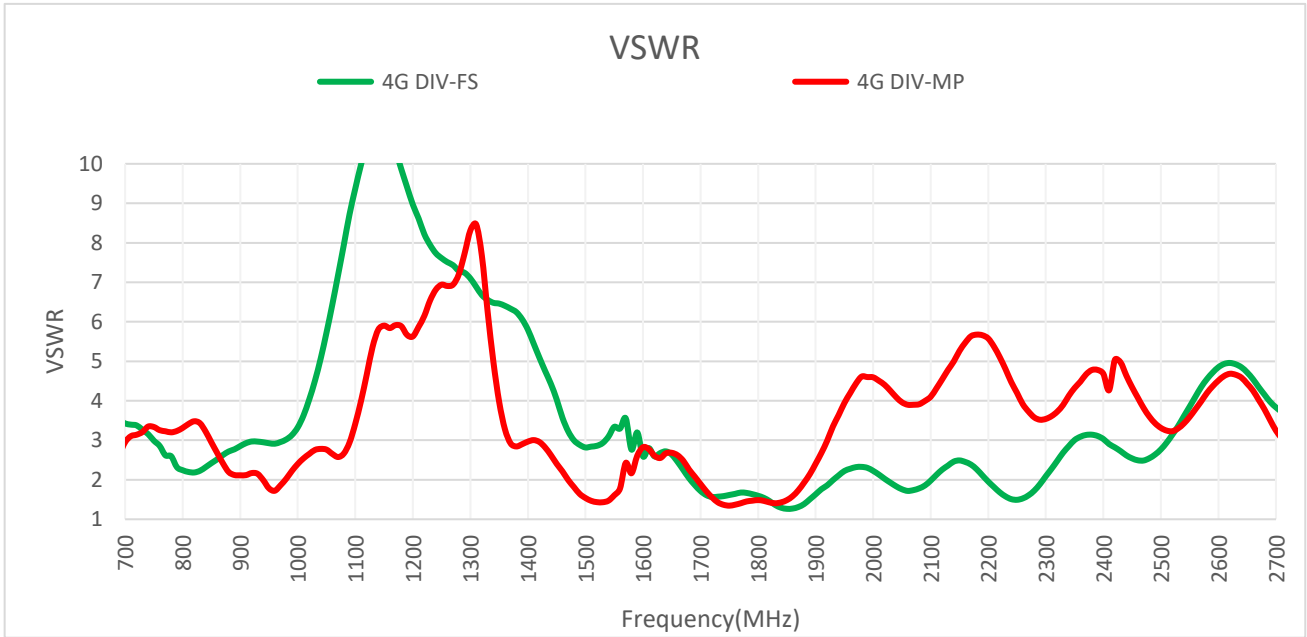

VSWR – 4G DIV


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
VSWR	FS	-	-	3.4	2.2	2.9	2.9	-	1.6	1.6	1.4
	MP	-	-	3.1	3.4	2.1	1.7	2.6	1.7	1.4	1.9
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
VSWR	FS	2.2	2.5	3.0	2.5	4.9	4.0	-	-	-	-
	MP	3.9	5.0	4.3	4.3	4.5	3.5	-	-	-	-

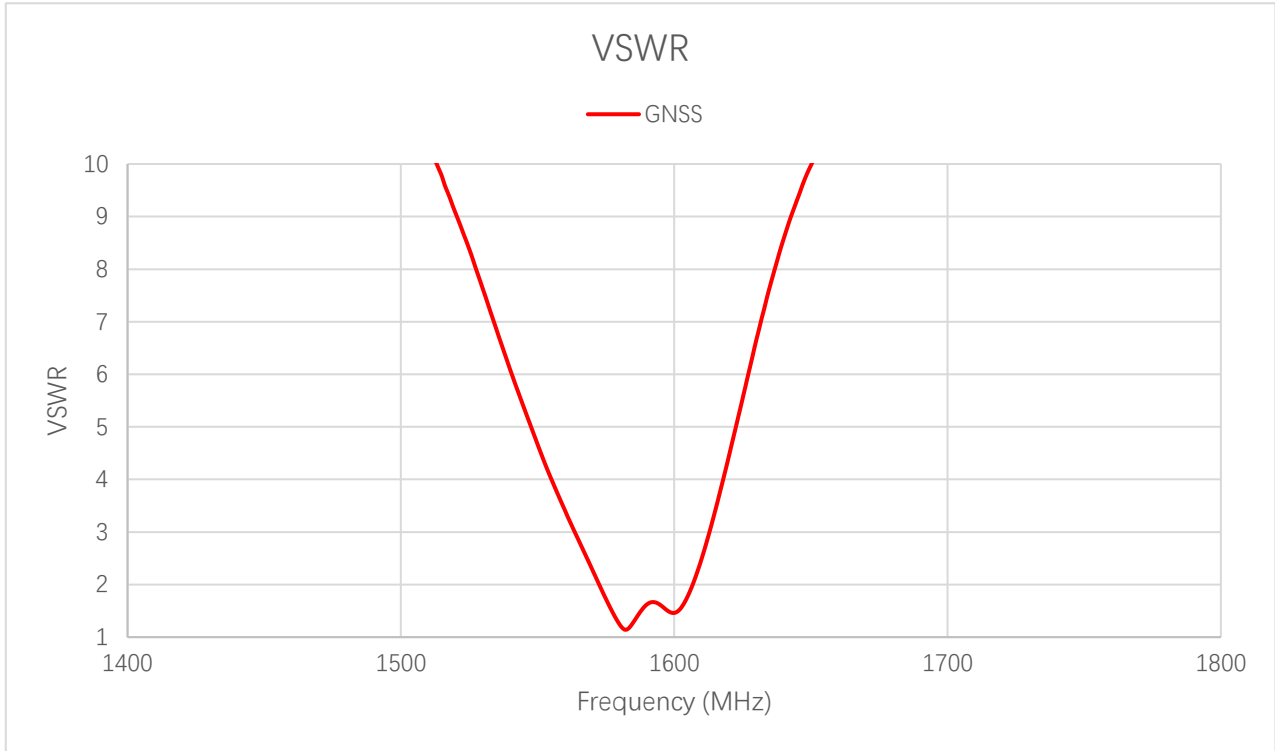

VSWR – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
VSWR	-	-	-	-	-	-	1.7	1.5

3.1.2. Return Loss

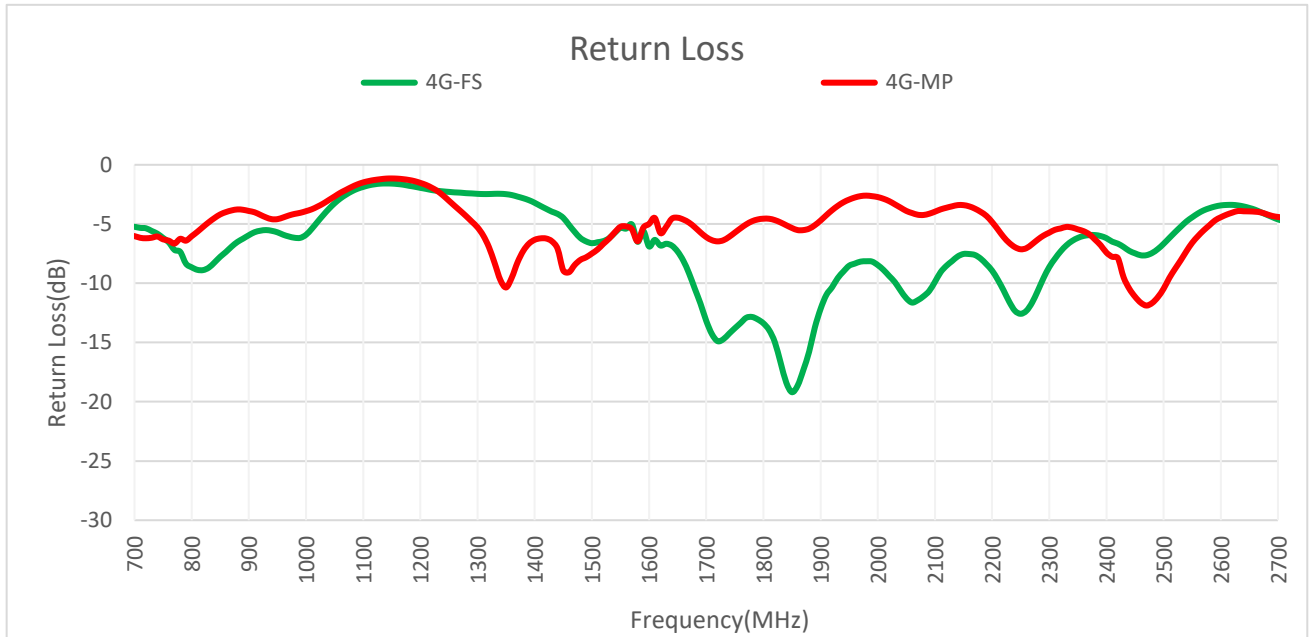


Return Loss (dB) – 4G

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880	
Return Loss (dB)	FS	-	-	-5.3	-8.7	-5.9	-5.9	-	-14.3	-14.3	-15.8
	MP	-	-	-6.2	-4.8	-3.9	-4.4	-	-6.4	-6.1	-5.4
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000	
Return Loss (dB)	FS	-8.5	-7.7	-6.2	-7.5	-3.4	-4.4	-	-	-	-
	MP	-2.9	-3.4	-5.4	-11.1	-4.4	-4.3	-	-	-	-

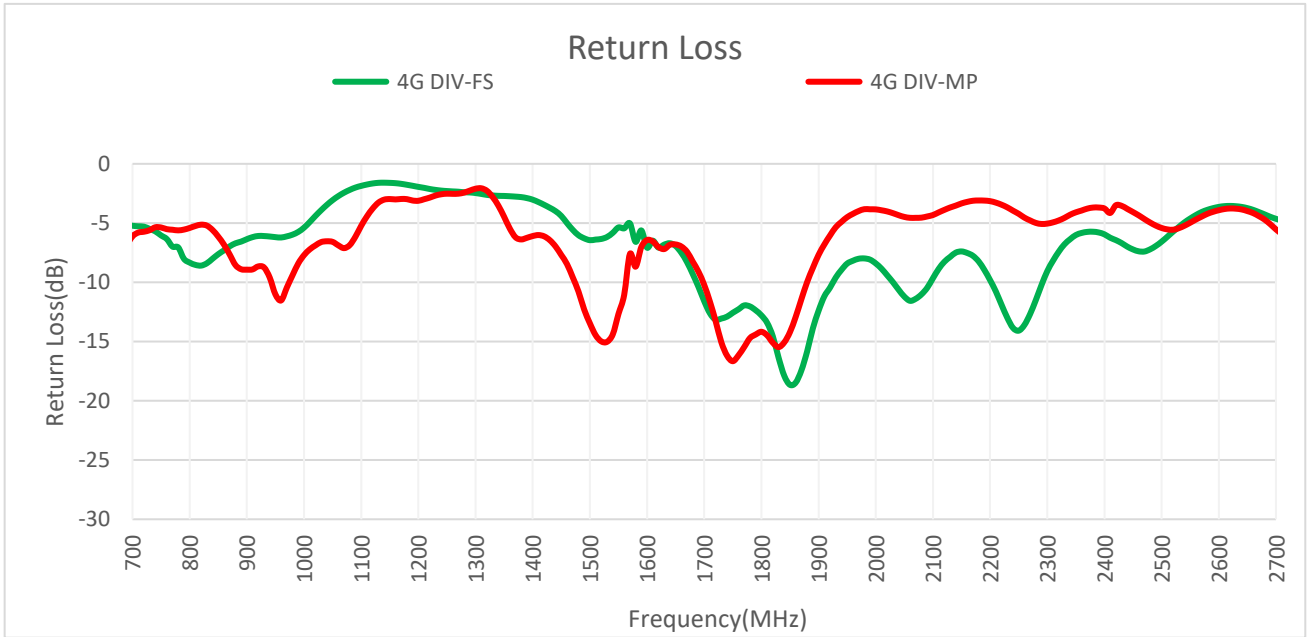

Return Loss (dB) – 4G DIV


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Return Loss (dB)	FS	-	-	-5.3	-8.4	-6.4	-6.2	-	-12.6	-12.9	-15.8
	MP	-	-	-5.8	-5.2	-8.9	-11.5	-	-11.6	-16.2	-10.0
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Return Loss (dB)	FS	-8.4	-7.5	-6.0	-7.2	-3.6	-4.5	-	-	-	-
	MP	-4.5	-3.5	-4.1	-4.1	-3.9	-5.1	-	-	-	-

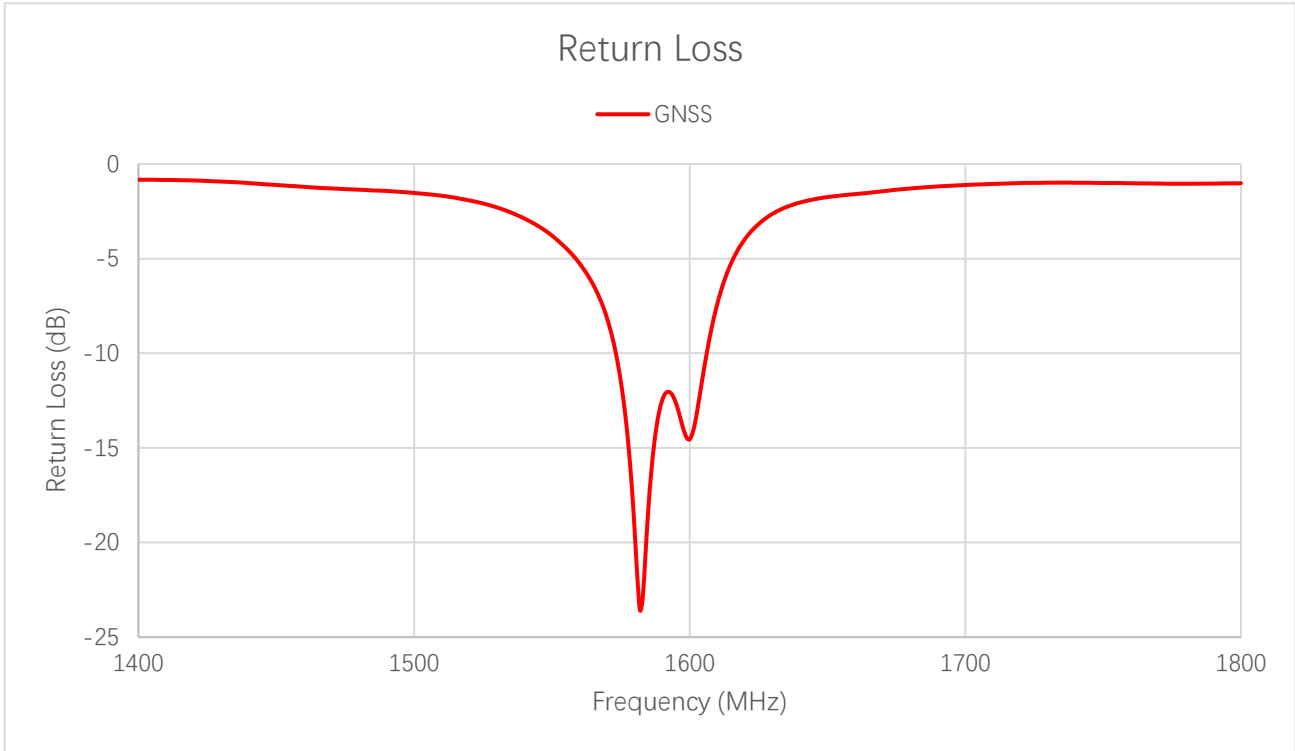

Return Loss (dB) – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Return Loss (dB)	-	-	-	-	-	-	-11.46	-13.63

3.1.3. Isolation

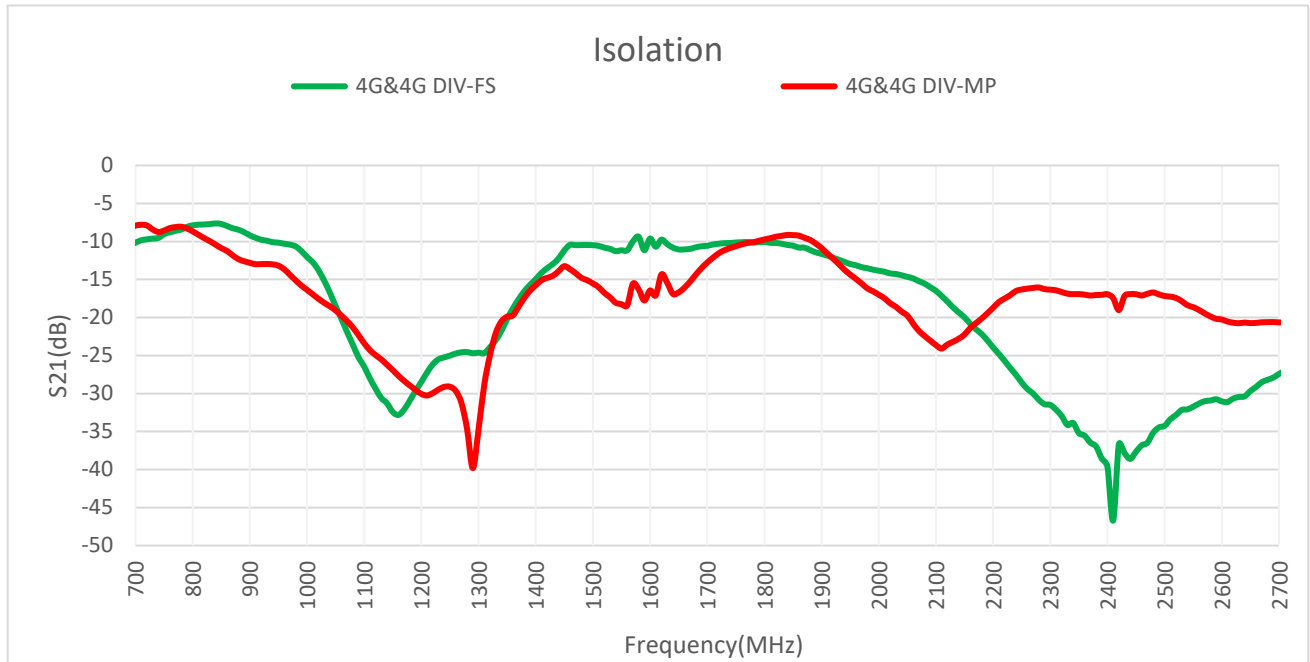


Max Isolation (dB) – 4G & 4G DIV

Band	B71	B12/ B13/ B28	B5/ B8/ B26	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	BDS B1I	GPS L1
Freq. (MHz)	600– 700	700– 810	820– 960	1700– 2170	2300– 2400	2400– 2500	2500– 2690	1559– 1564	1565– 1586
FS	-	-7.8	-7.6	-10.1	-31.5	-34.3	-27.9	-11.2	-9.4
MP	-	-7.8	-9.5	-9.1	-16.3	-16.7	-17.2	-18.4	-15.6

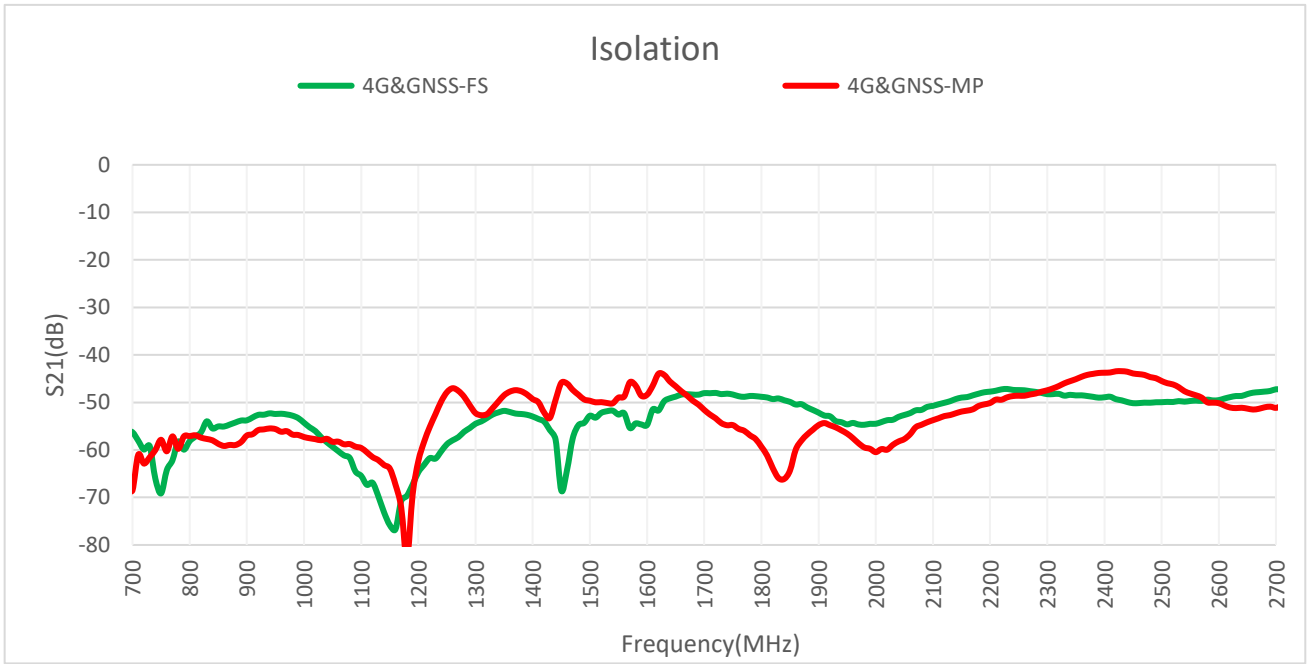

Max Isolation (dB) – 4G & GNSS


Band	B71	B12/ B13/ B28	B5/ B8/ B26	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	BDS B1I	GPS L1
Freq. (MHz)	600– 700	700– 810	820– 960	1700– 2170	2300– 2400	2400– 2500	2500– 2690	1559– 1564	1565– 1586
FS	-	-56.3	-52.3	-48.0	-48.2	-48.8	-47.6	-52.3	-54.4
MP	-	-56.9	-55.5	-51.5	-43.8	-43.4	-45.5	-48.8	-45.8

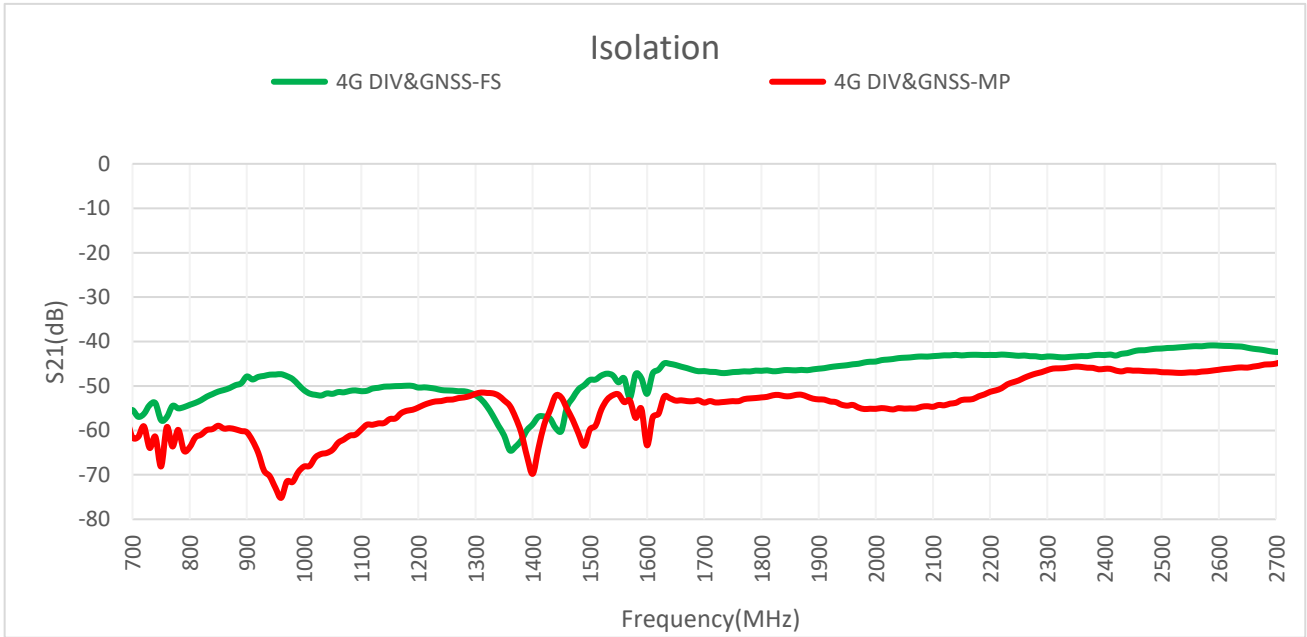

Max Isolation (dB) – 4G DIV & GNSS

Band	B71	B12/ B13/ B28	B5/ B8/ B26	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	BDS B1I	GPS L1
Freq. (MHz)	600– 700	700– 810	820– 960	1700– 2170	2300– 2400	2400– 2500	2500– 2690	1559– 1564	1565– 1586
MP	-		-53.8	-47.3	-43.0	-43.0	-41.6	-40.9	-48.3
FS	-		-59.1	-59.0	-52.0	-45.6	-46.1	-45.1	-53.6


3.1.4. GNSS LNA Gain

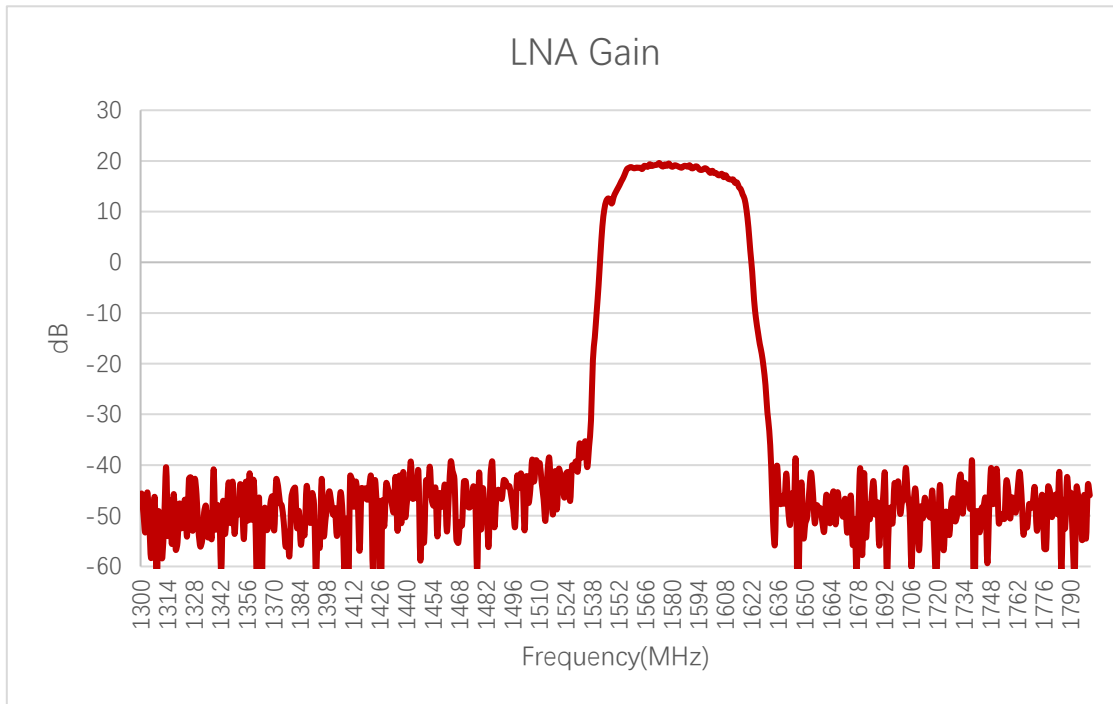

LNA Gain (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
LNA Gain (dB)	-	-	-	-	-	-	18.8	17.5

3.1.5. GNSS Noise Figure

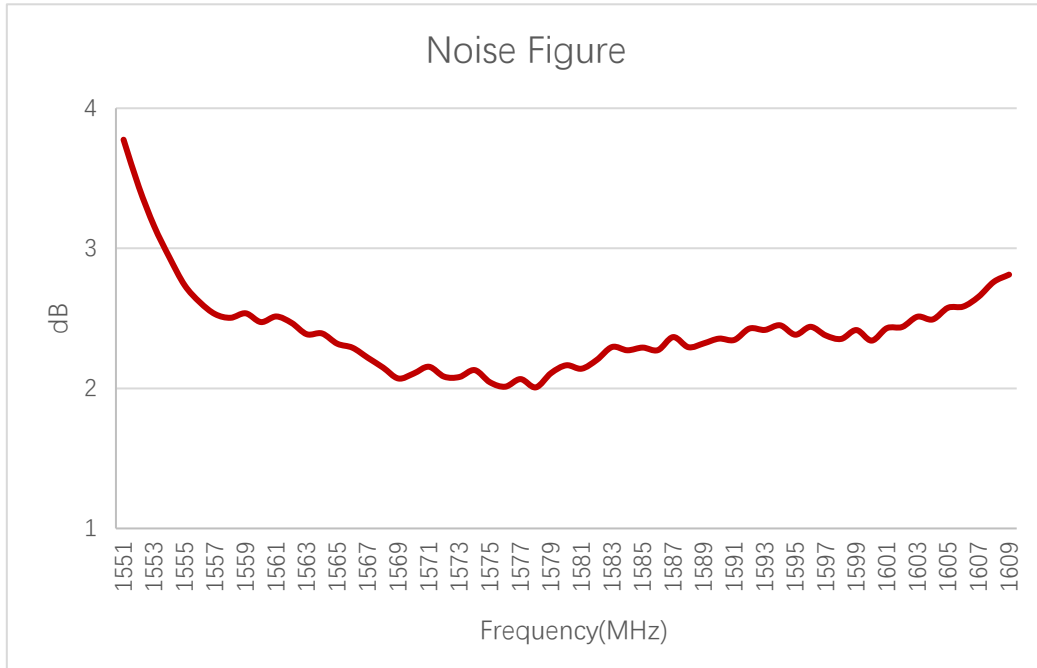


Noise Figure (dB) – GNSS

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Noise Figure (dB)	-	-	-	-	-	-	2.04	2.43


3.2. Radiation Performance Test

3.2.1. Efficiency

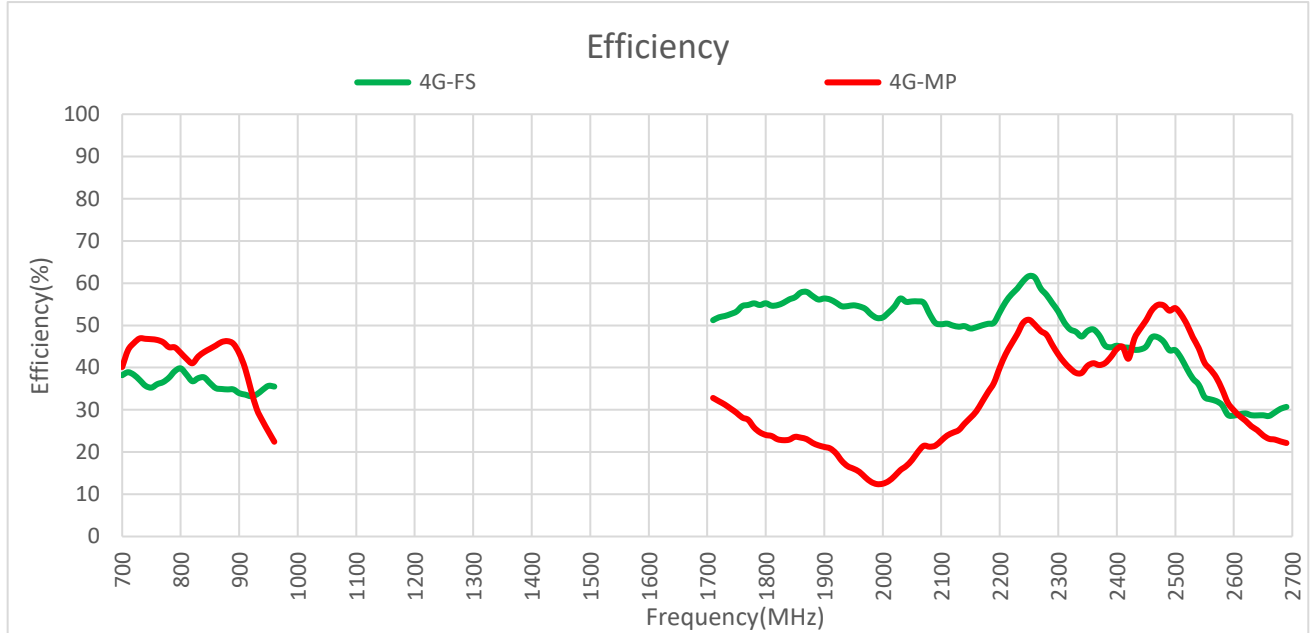


Efficiency (%) – 4G

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880	
Efficiency (%)	FS	-	-	38.9	37.5	33.9	35.5	-	51.2	52.7	56.9
	MP	-	-	44.1	42.6	43.4	22.4	-	32.8	30.3	22.2
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000	
Efficiency (%)	FS	54.8	49.8	48.7	45.0	28.6	30.7	-	-	-	
	MP	16.1	26.8	40.4	51.2	29.9	22.1	-	-	-	

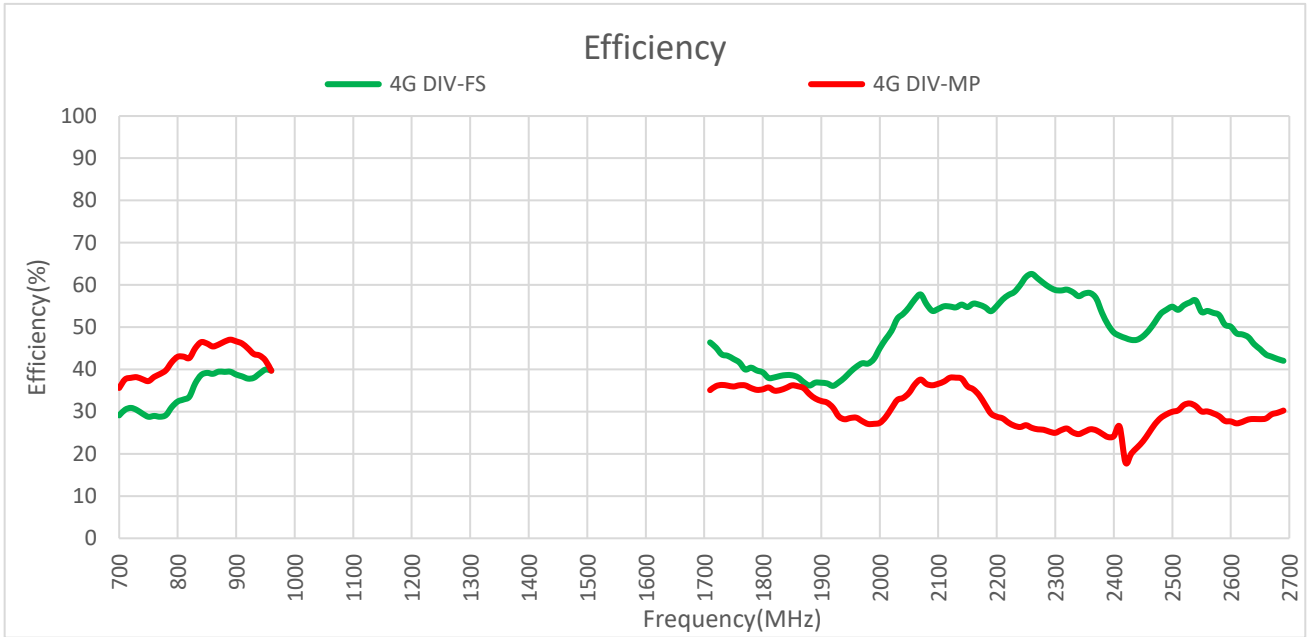

Efficiency (%) – 4G DIV


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Efficiency (%)	FS	-	-	30.4	36.7	38.8	39.7	-	46.4	43.2	36.2
	MP	-	-	37.6	45.0	46.6	39.7	-	35.1	36.2	34.1
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Efficiency (%)	FS	39.5	55.3	58.0	47.9	50.1	42.0	-	-	-	-
	MP	28.5	37.8	25.2	23.0	27.7	30.3	-	-	-	-

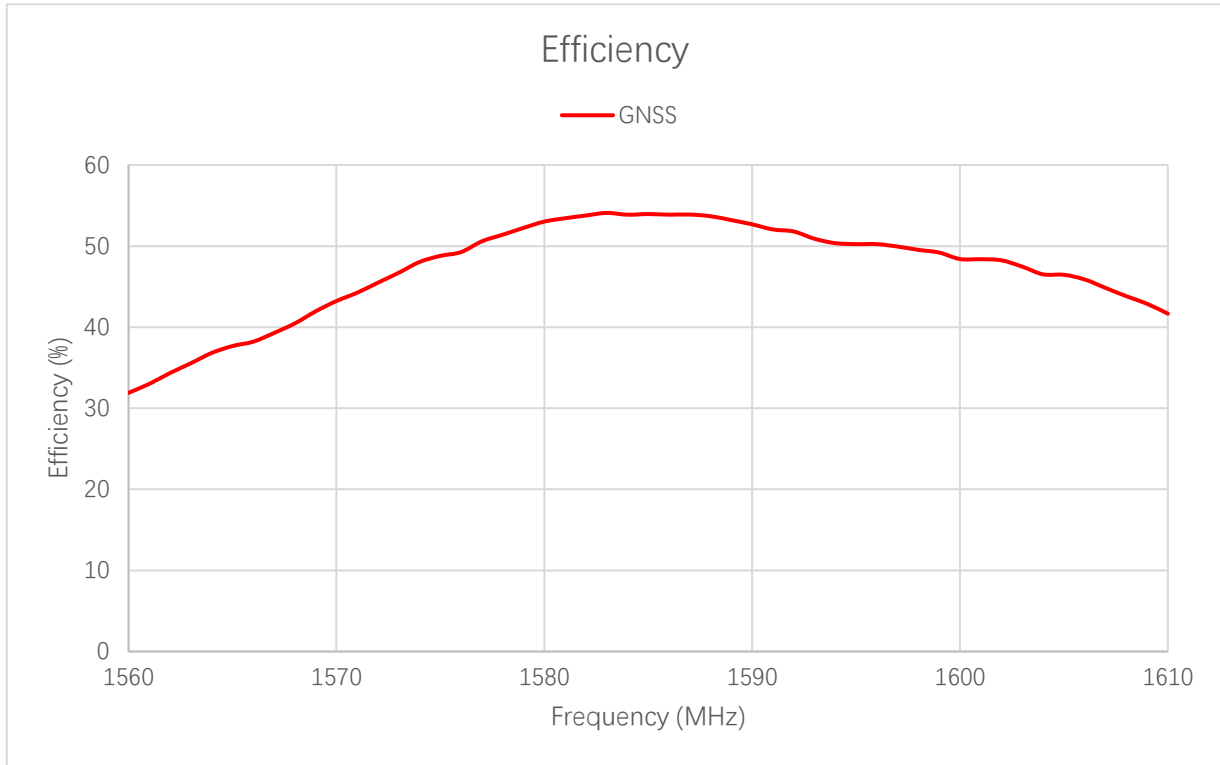

Efficiency (%) – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Efficiency (%)	-	-	-	-	-	-	48.79	48.24

3.2.2. Average Gain

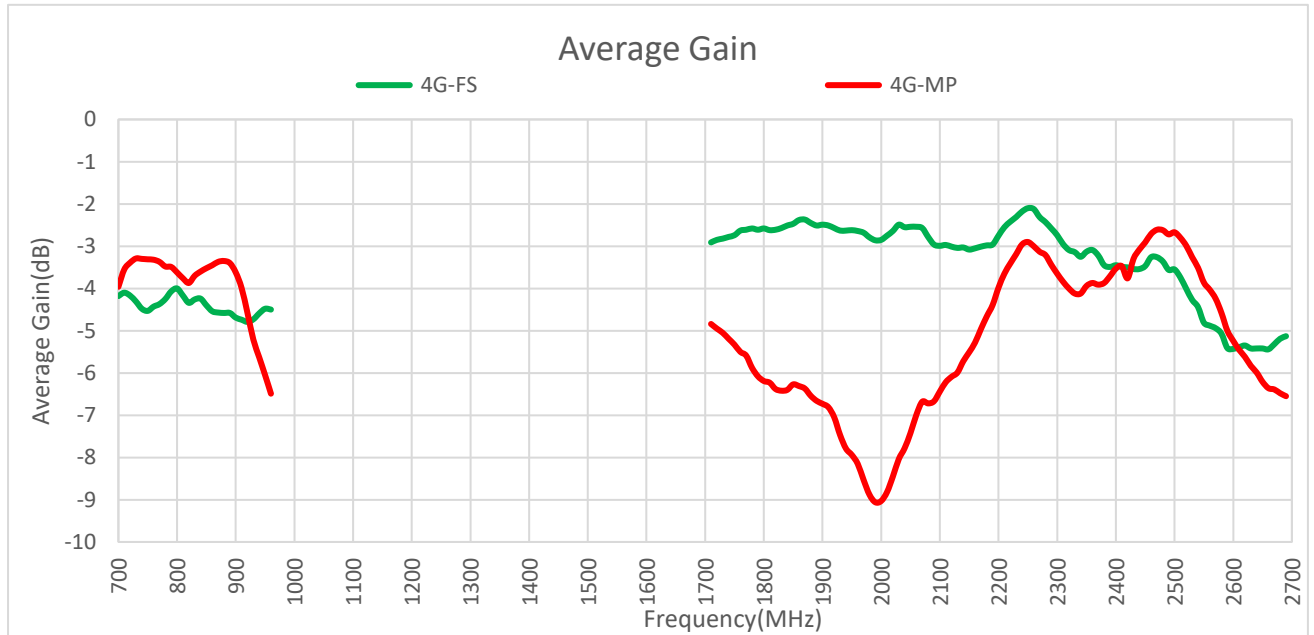

Average Gain (dB) – 4G


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Average Gain (dB)	FS	-	-	-4.1	-4.3	-4.7	-4.5	-	-2.9	-2.8	-2.5
	MP	-	-	-3.6	-3.7	-3.6	-6.5	-	-4.8	-5.2	-6.5
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Average Gain (dB)	FS	-2.6	-3.0	-3.1	-3.5	-5.4	-5.1	-	-	-	-
	MP	-7.9	-5.7	-3.9	-2.9	-5.2	-6.6	-	-	-	-

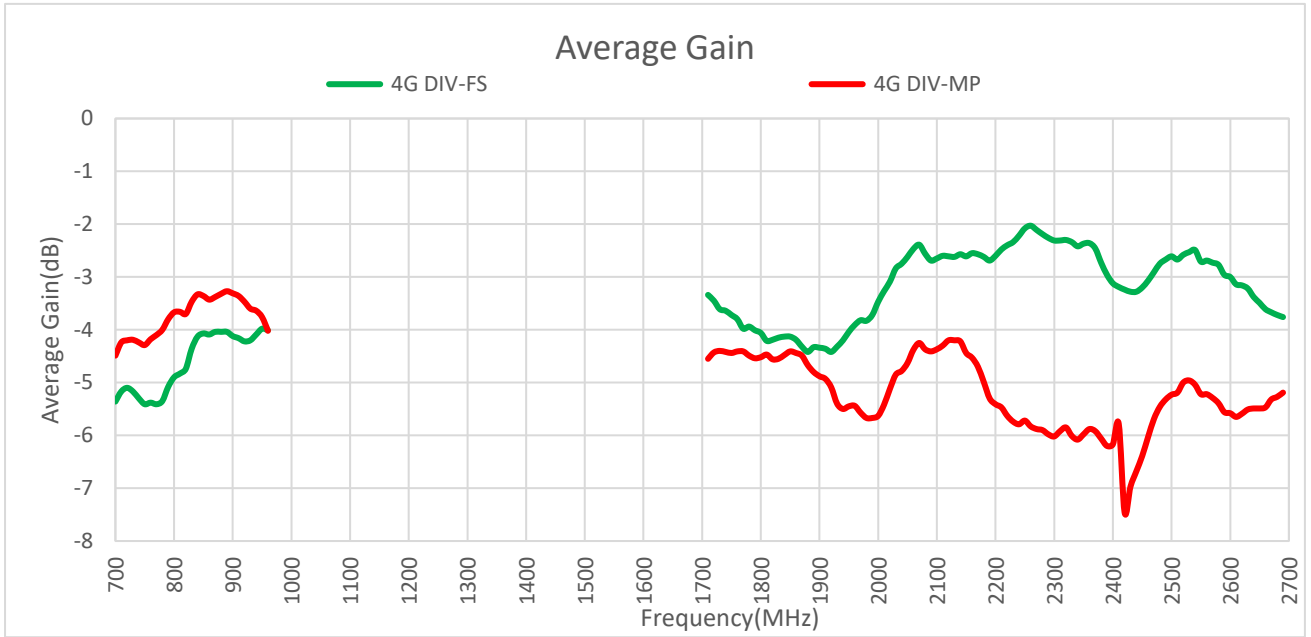

Average Gain (dB) – 4G DIV


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880	
Average Gain (dB)	FS	-	-	-5.2	-4.4	-4.1	-4.0	-	-3.3	-3.6	-4.4
	MP	-	-	-4.2	-3.5	-3.3	-4.0	-	-4.6	-4.4	-4.7
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000	
Average Gain (dB)	FS	-4.0	-2.6	-2.4	-3.2	-3.0	-3.8	-	-	-	
	MP	-5.5	-4.2	-6.0	-6.4	-5.6	-5.2	-	-	-	

3.2.3. Peak Gain

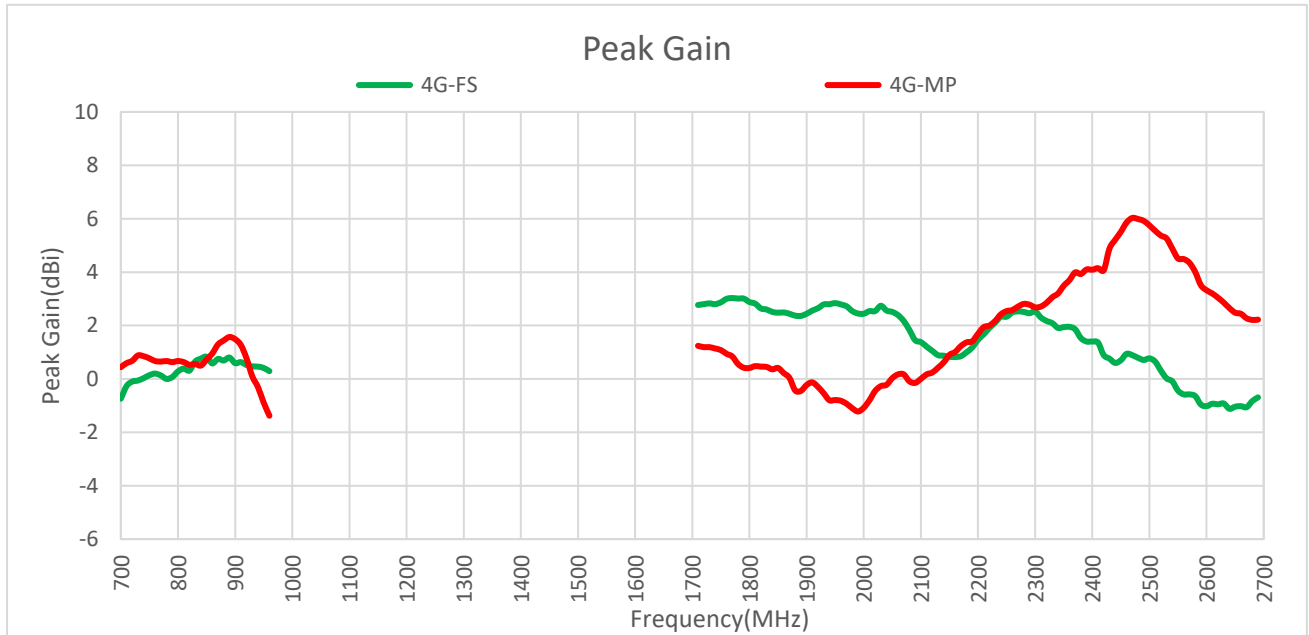


Peak Gain (dBi) – 4G

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Peak Gain (dBi)	FS	-	-	-0.3	0.7	0.6	0.3	-	2.8	2.8	2.4
	MP	-	-	0.6	0.6	1.5	-1.4	-	1.2	1.1	-0.4
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Peak Gain (dBi)	FS	2.8	0.9	1.9	0.7	-1.0	-0.7	-	-	-	-
	MP	-0.8	0.6	3.5	5.5	3.3	2.2	-	-	-	-

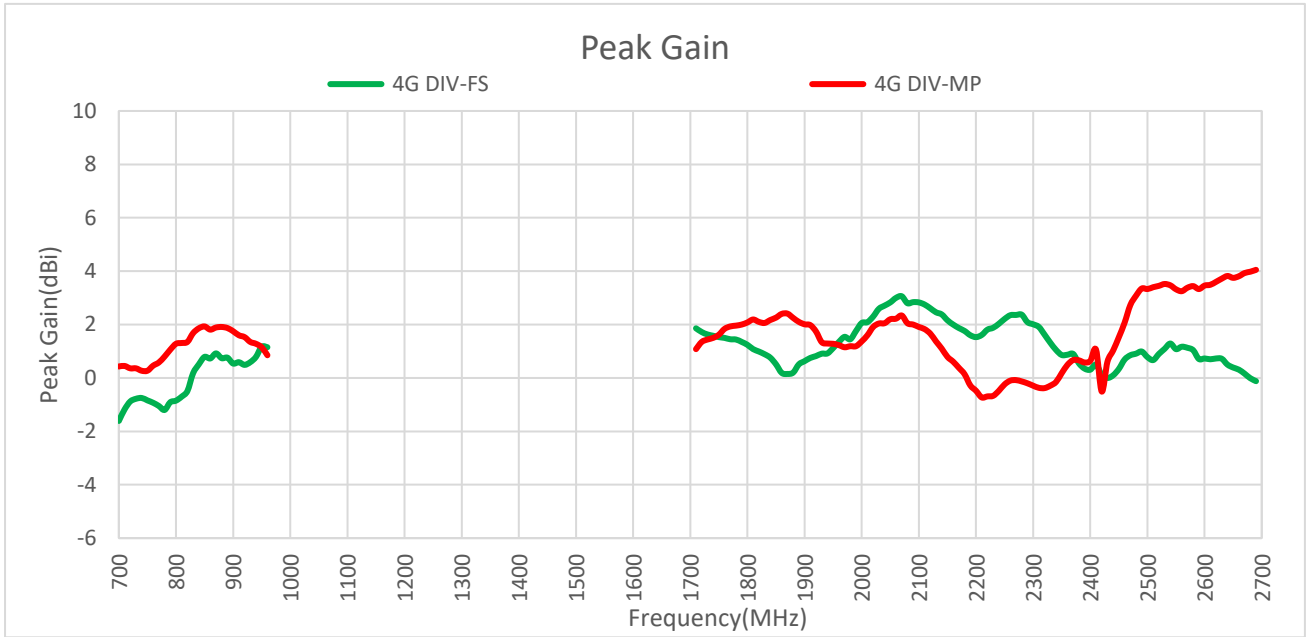

Peak Gain (dBi) – 4G DIV

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
Peak Gain (dBi)	FS	-	-	-1.2	0.2	0.5	1.2	-	1.9	1.6	0.2
	MP	-	-	0.5	1.7	1.8	0.9	-	1.1	1.5	2.3
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
Peak Gain (dBi)	FS	1.1	2.4	0.9	0.3	0.7	-0.1	-	-	-	-
	MP	1.3	1.1	0.2	1.5	3.5	4.1	-	-	-	-

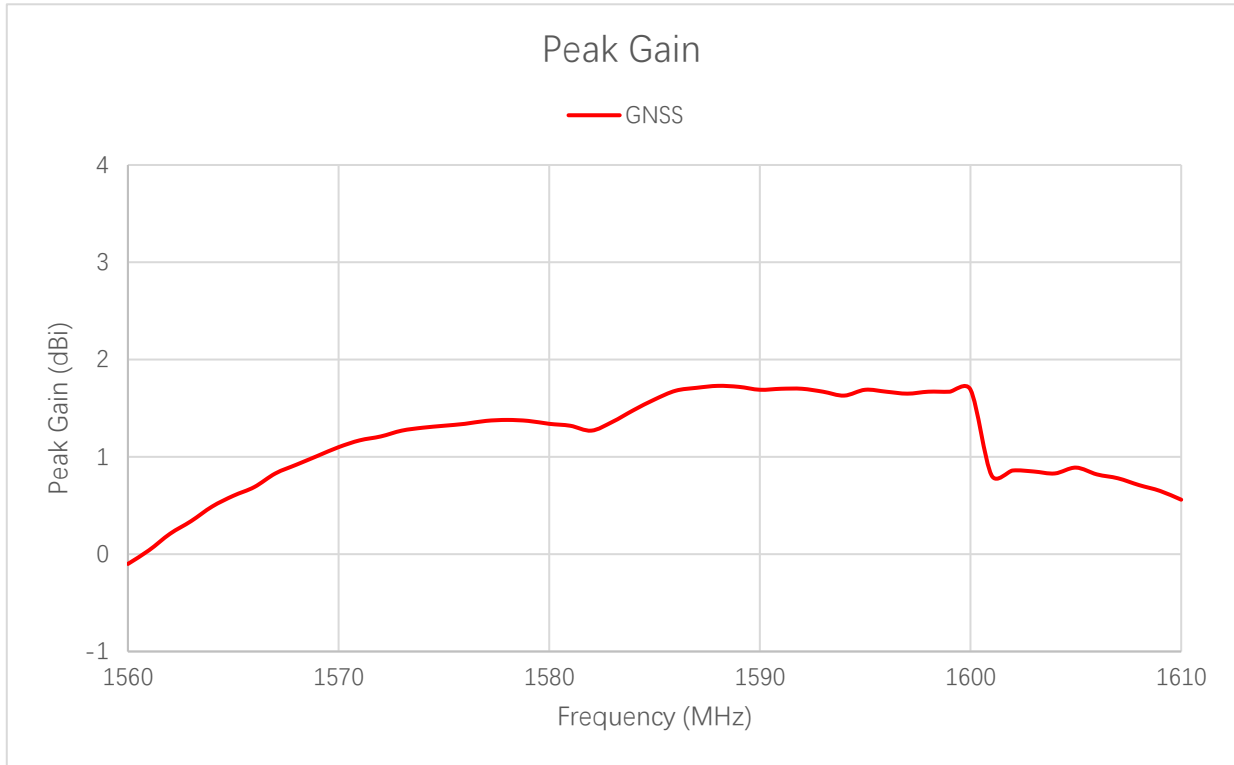


Peak Gain (dBi) – GNSS

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Peak Gain (dBi)	-	-	-	-	-	-	1.32	0.86


3.2.4. 3D & 2D Radiation Pattern


3.2.4.1. Test Condition: In Free Space


- Test Chamber: HF-G-1

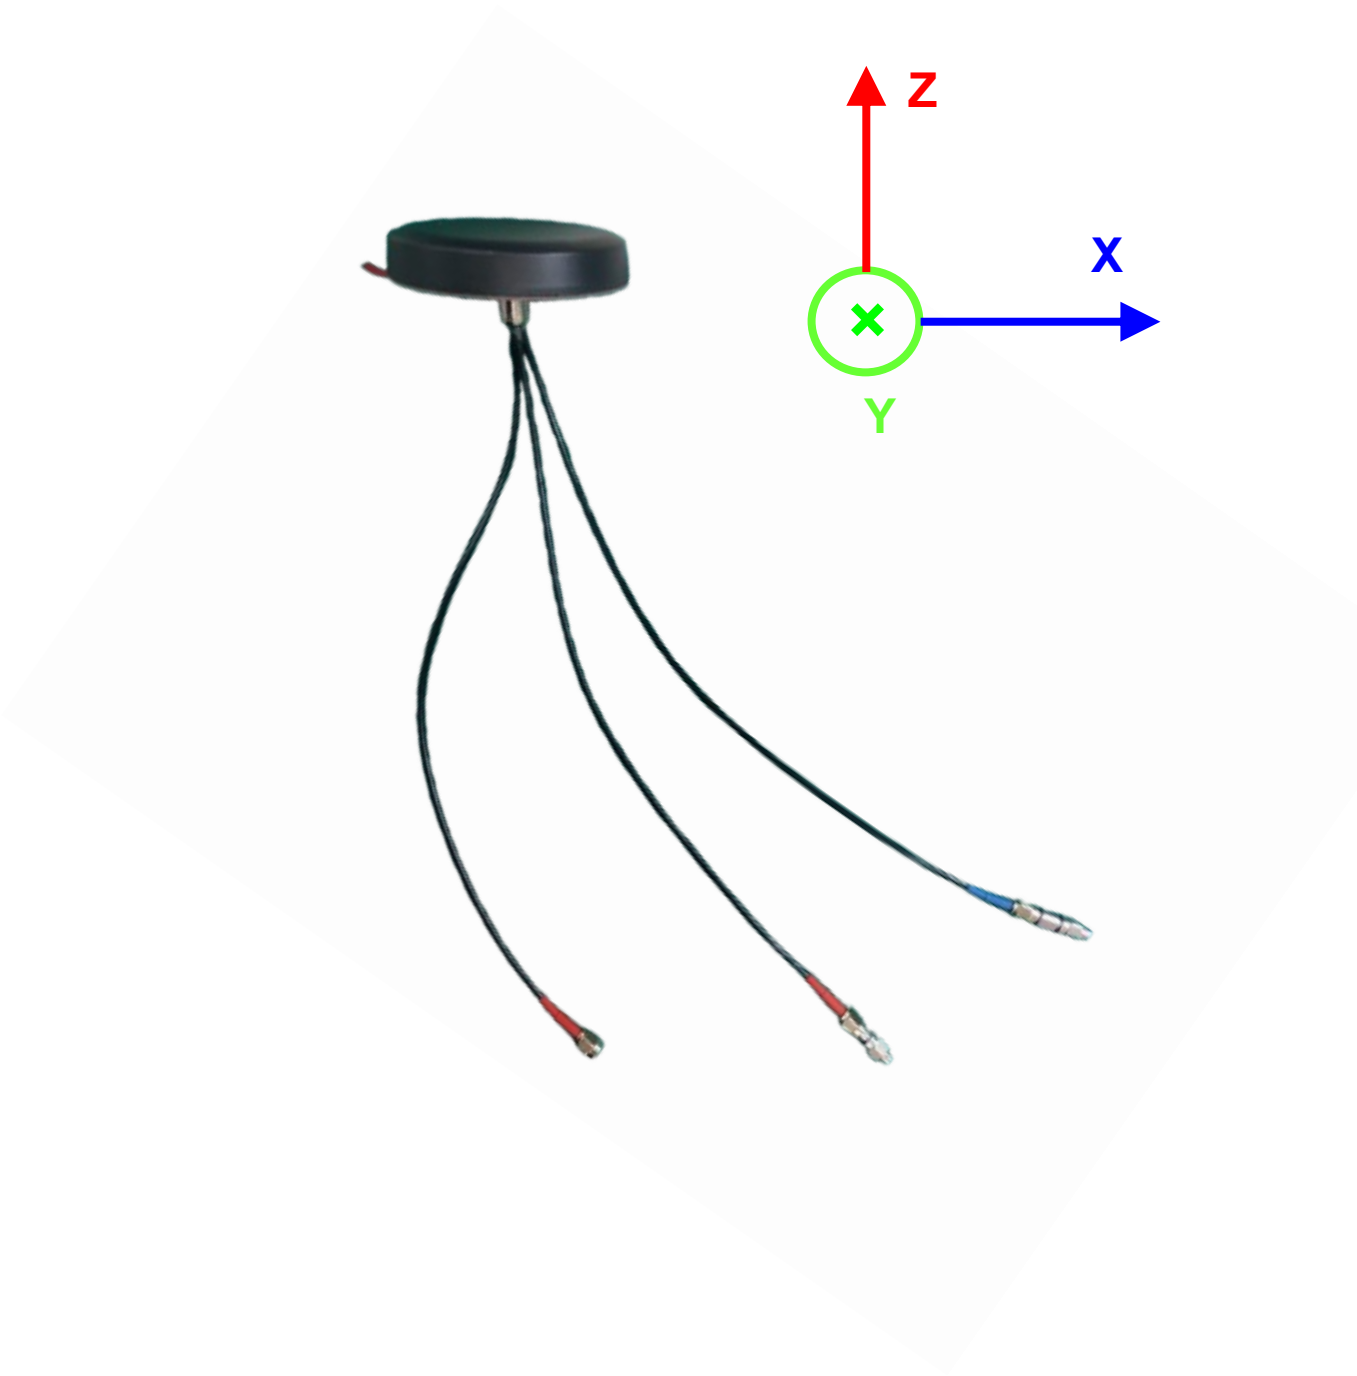


● 4G

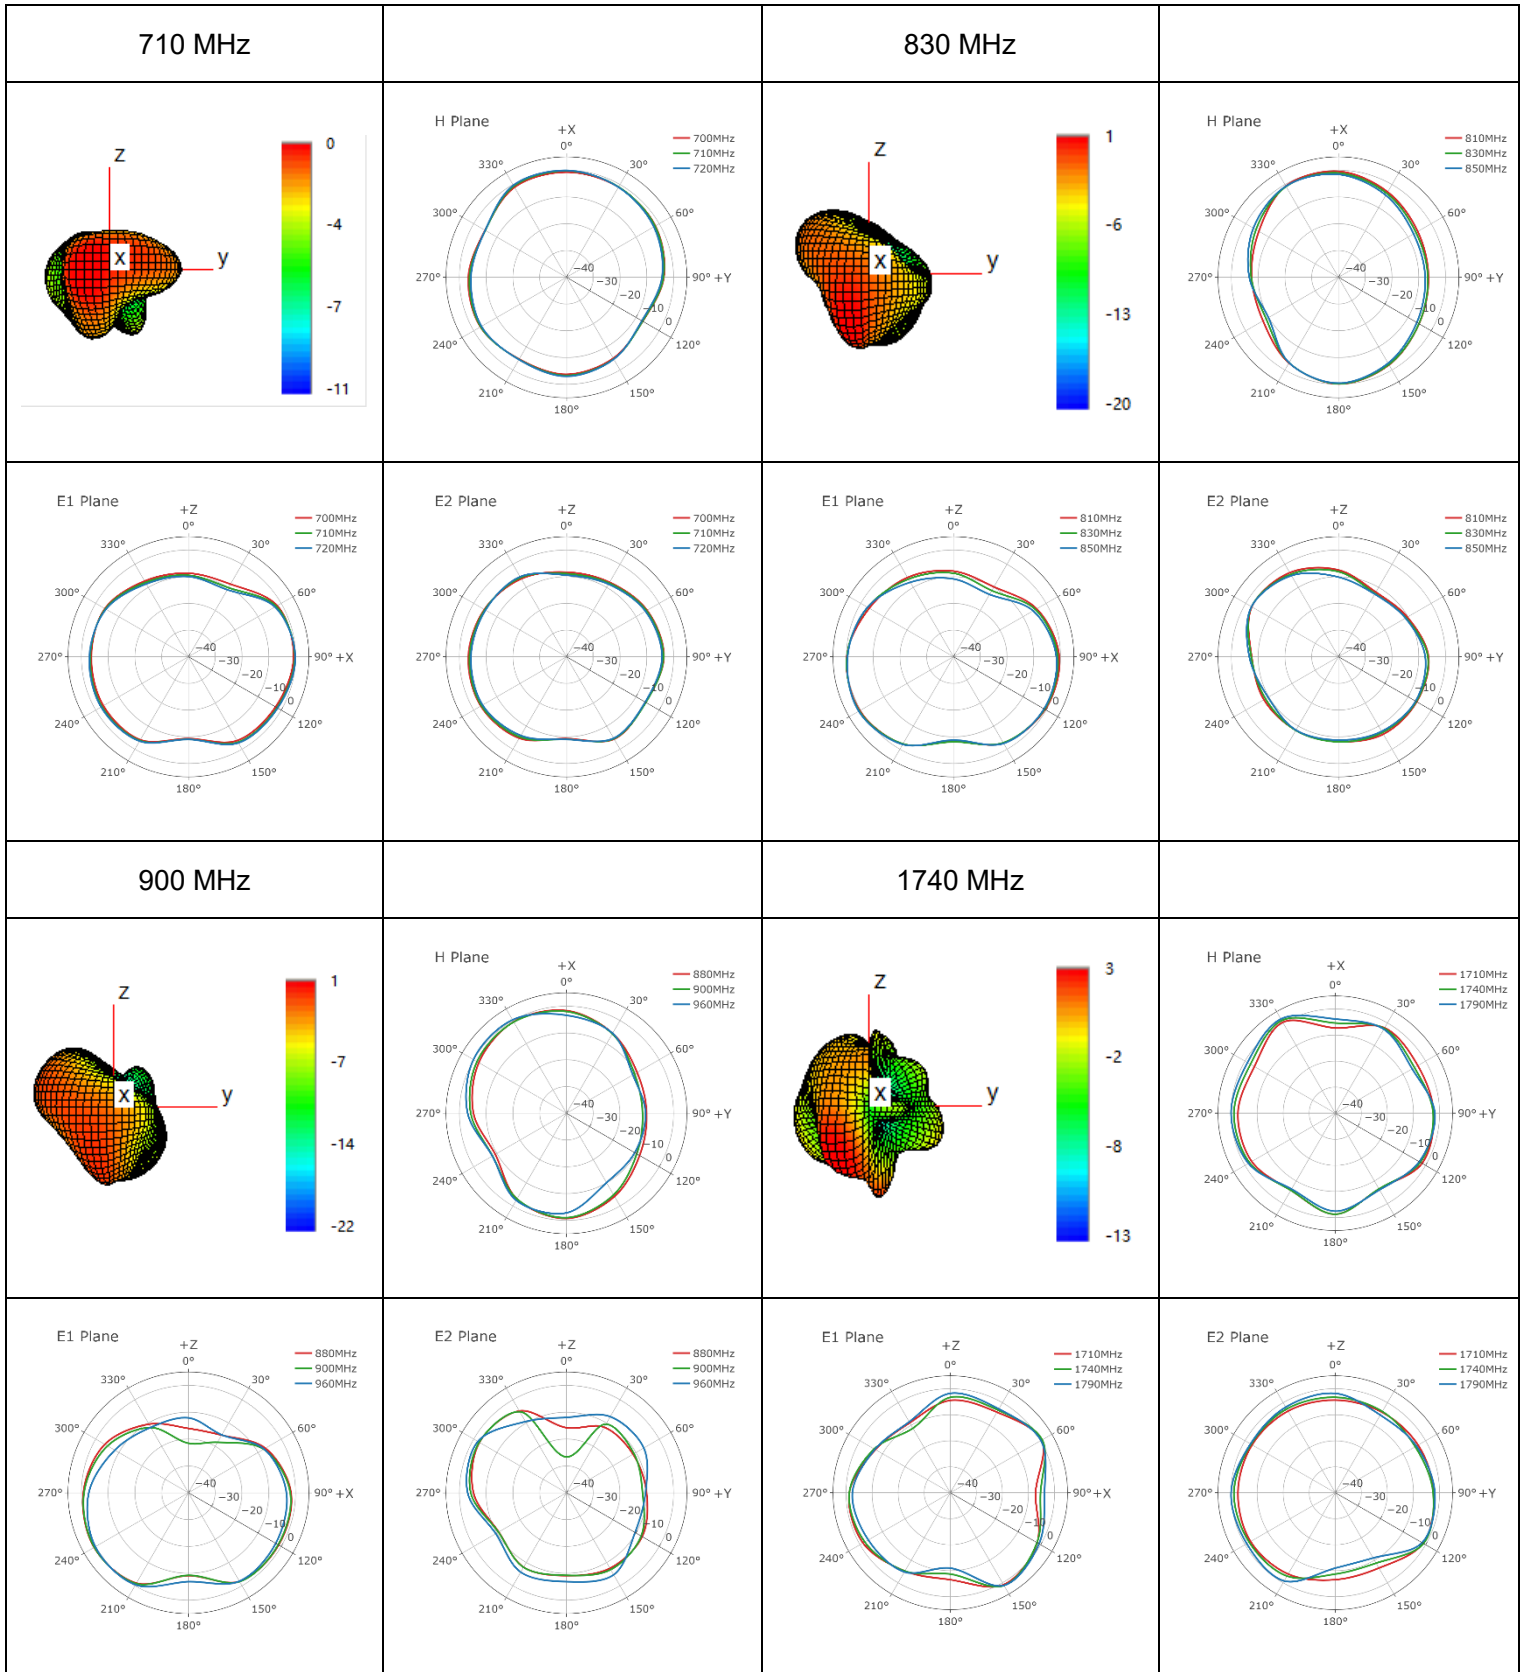


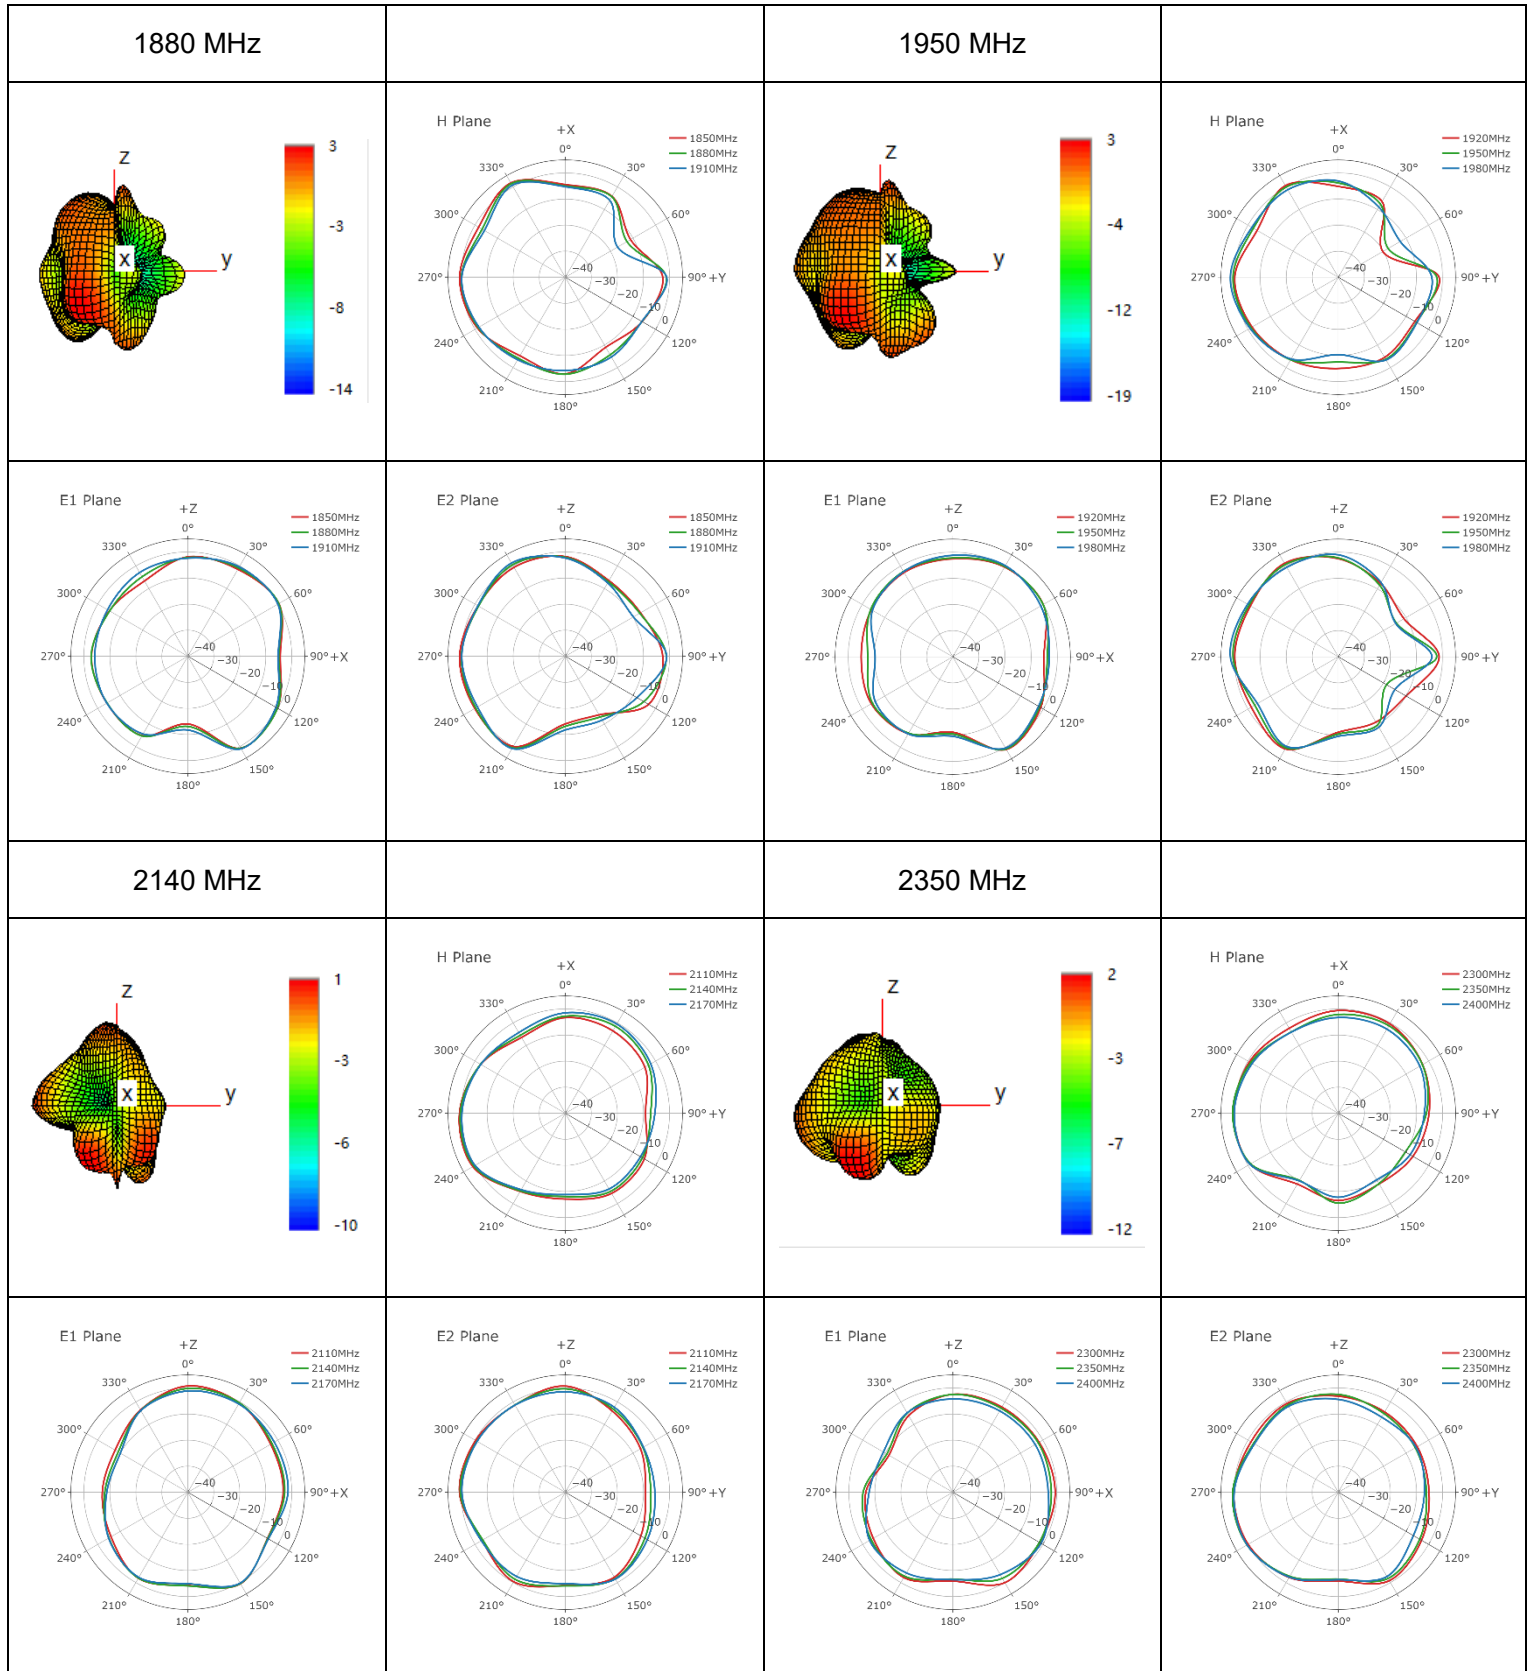

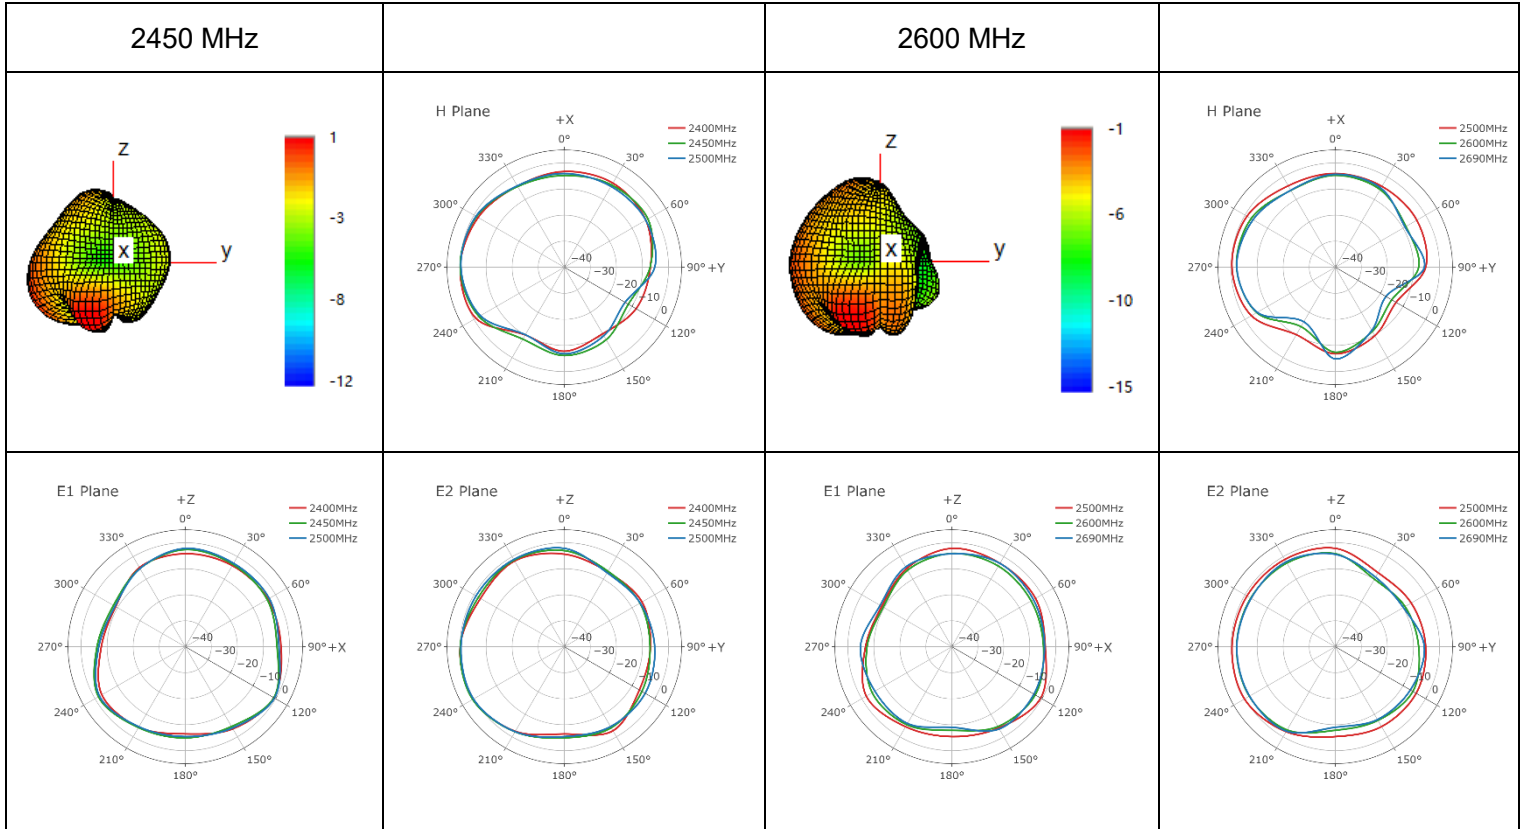



● **4G-Peak Gain**

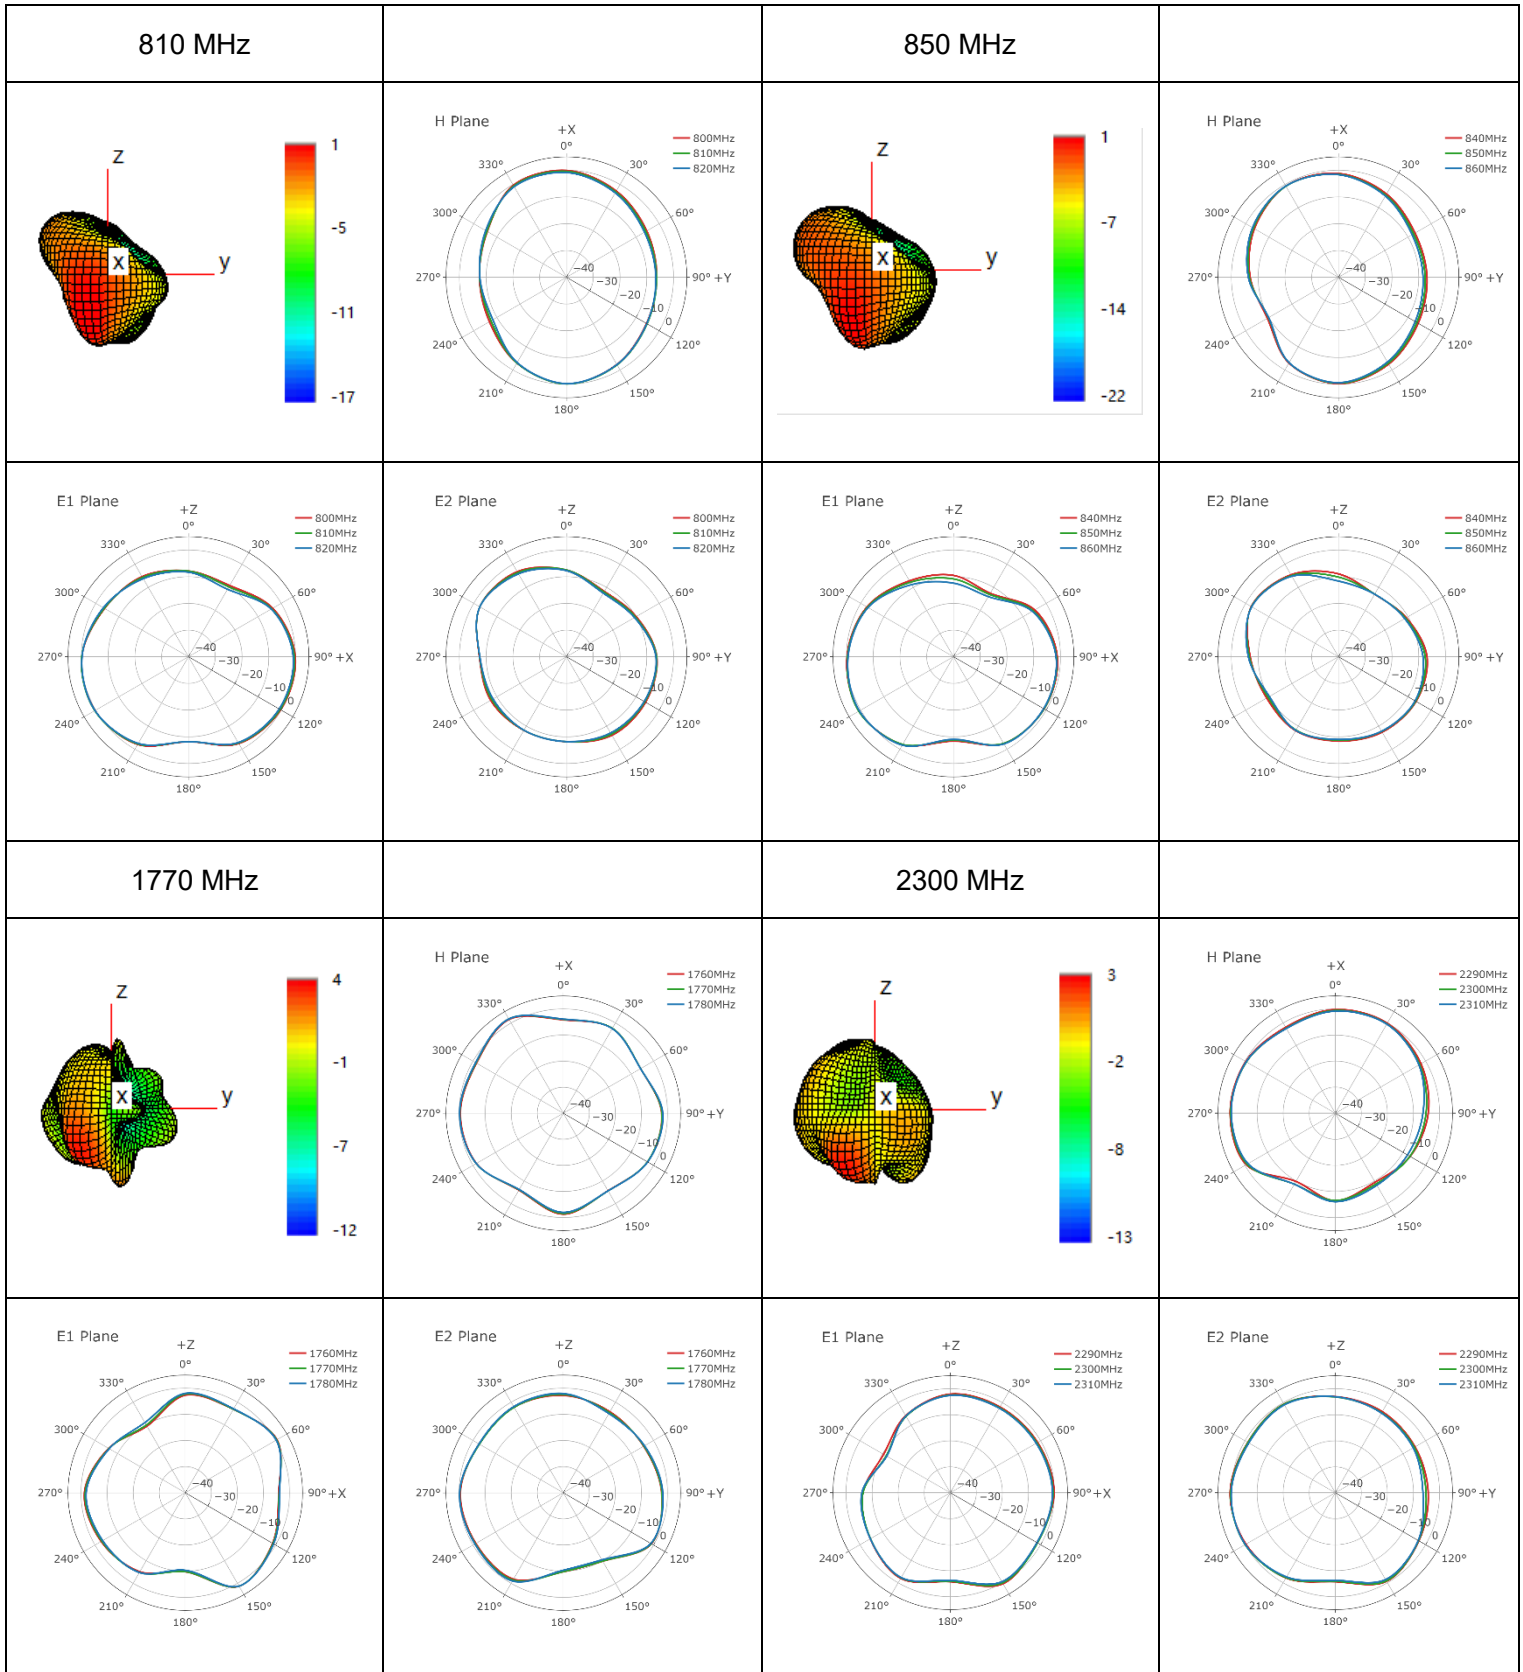


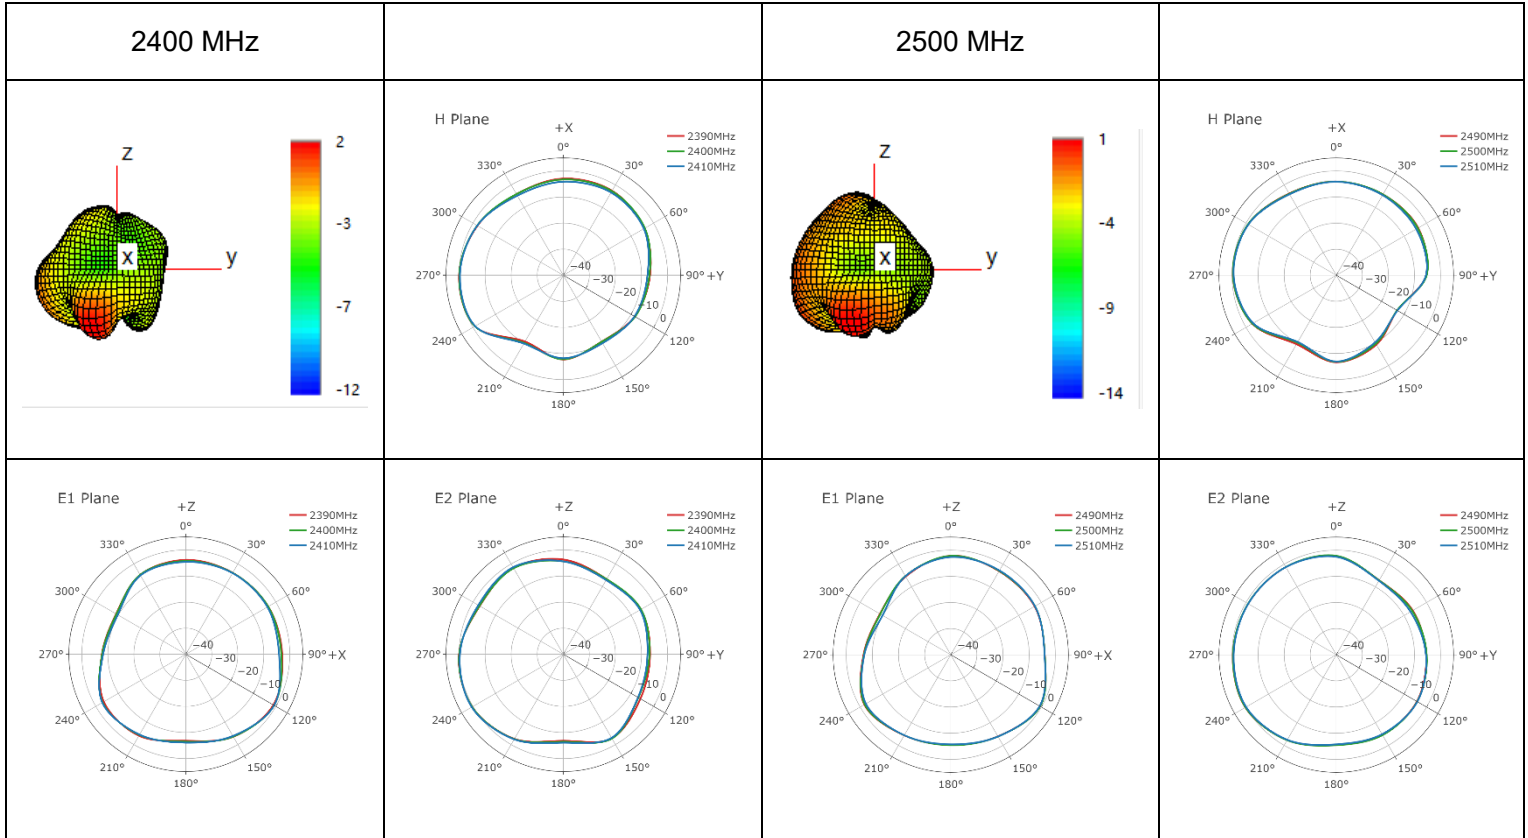


● **4G DIV**

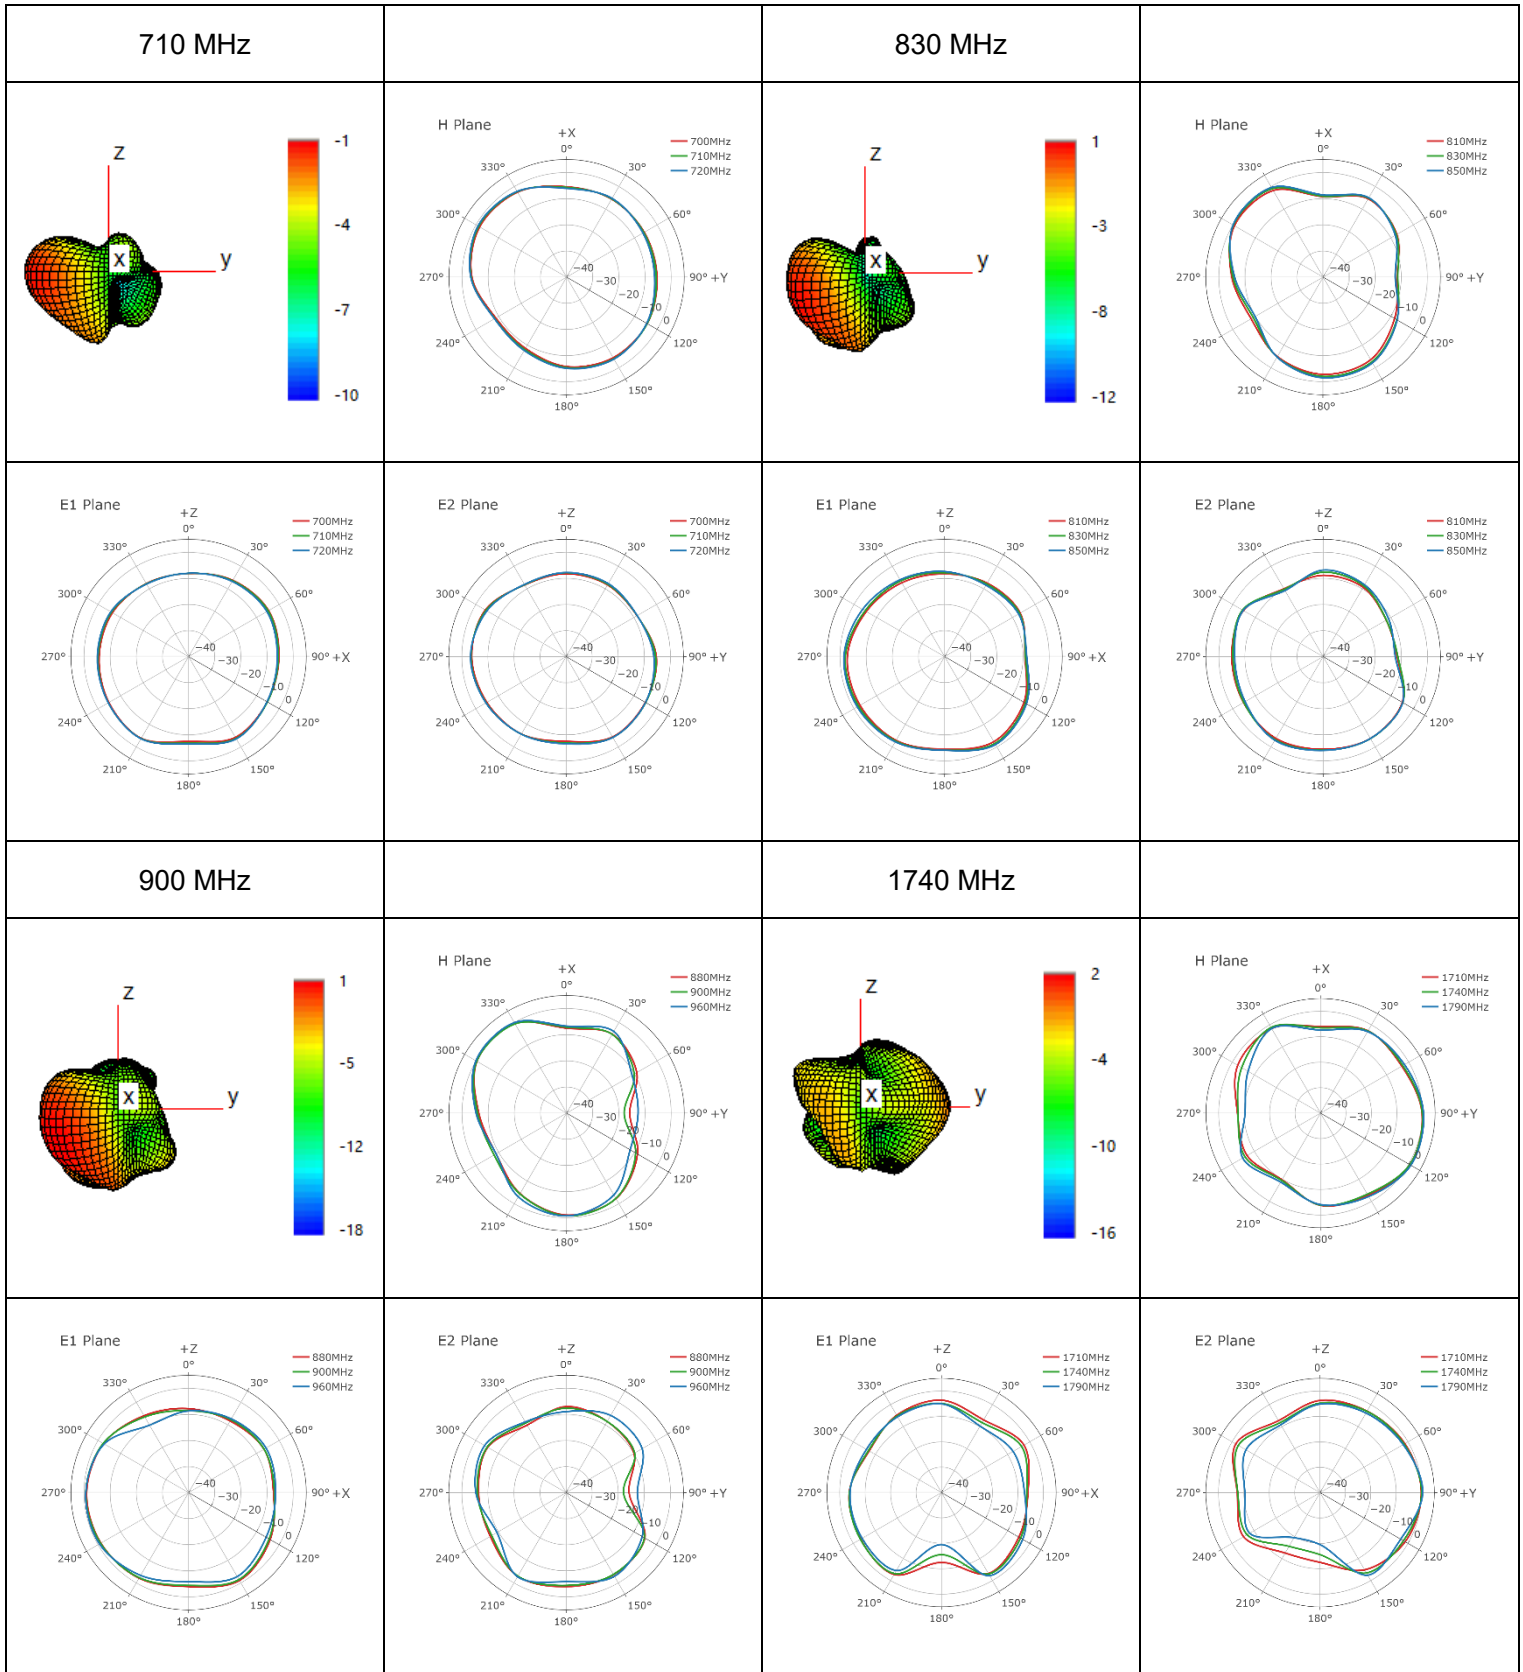


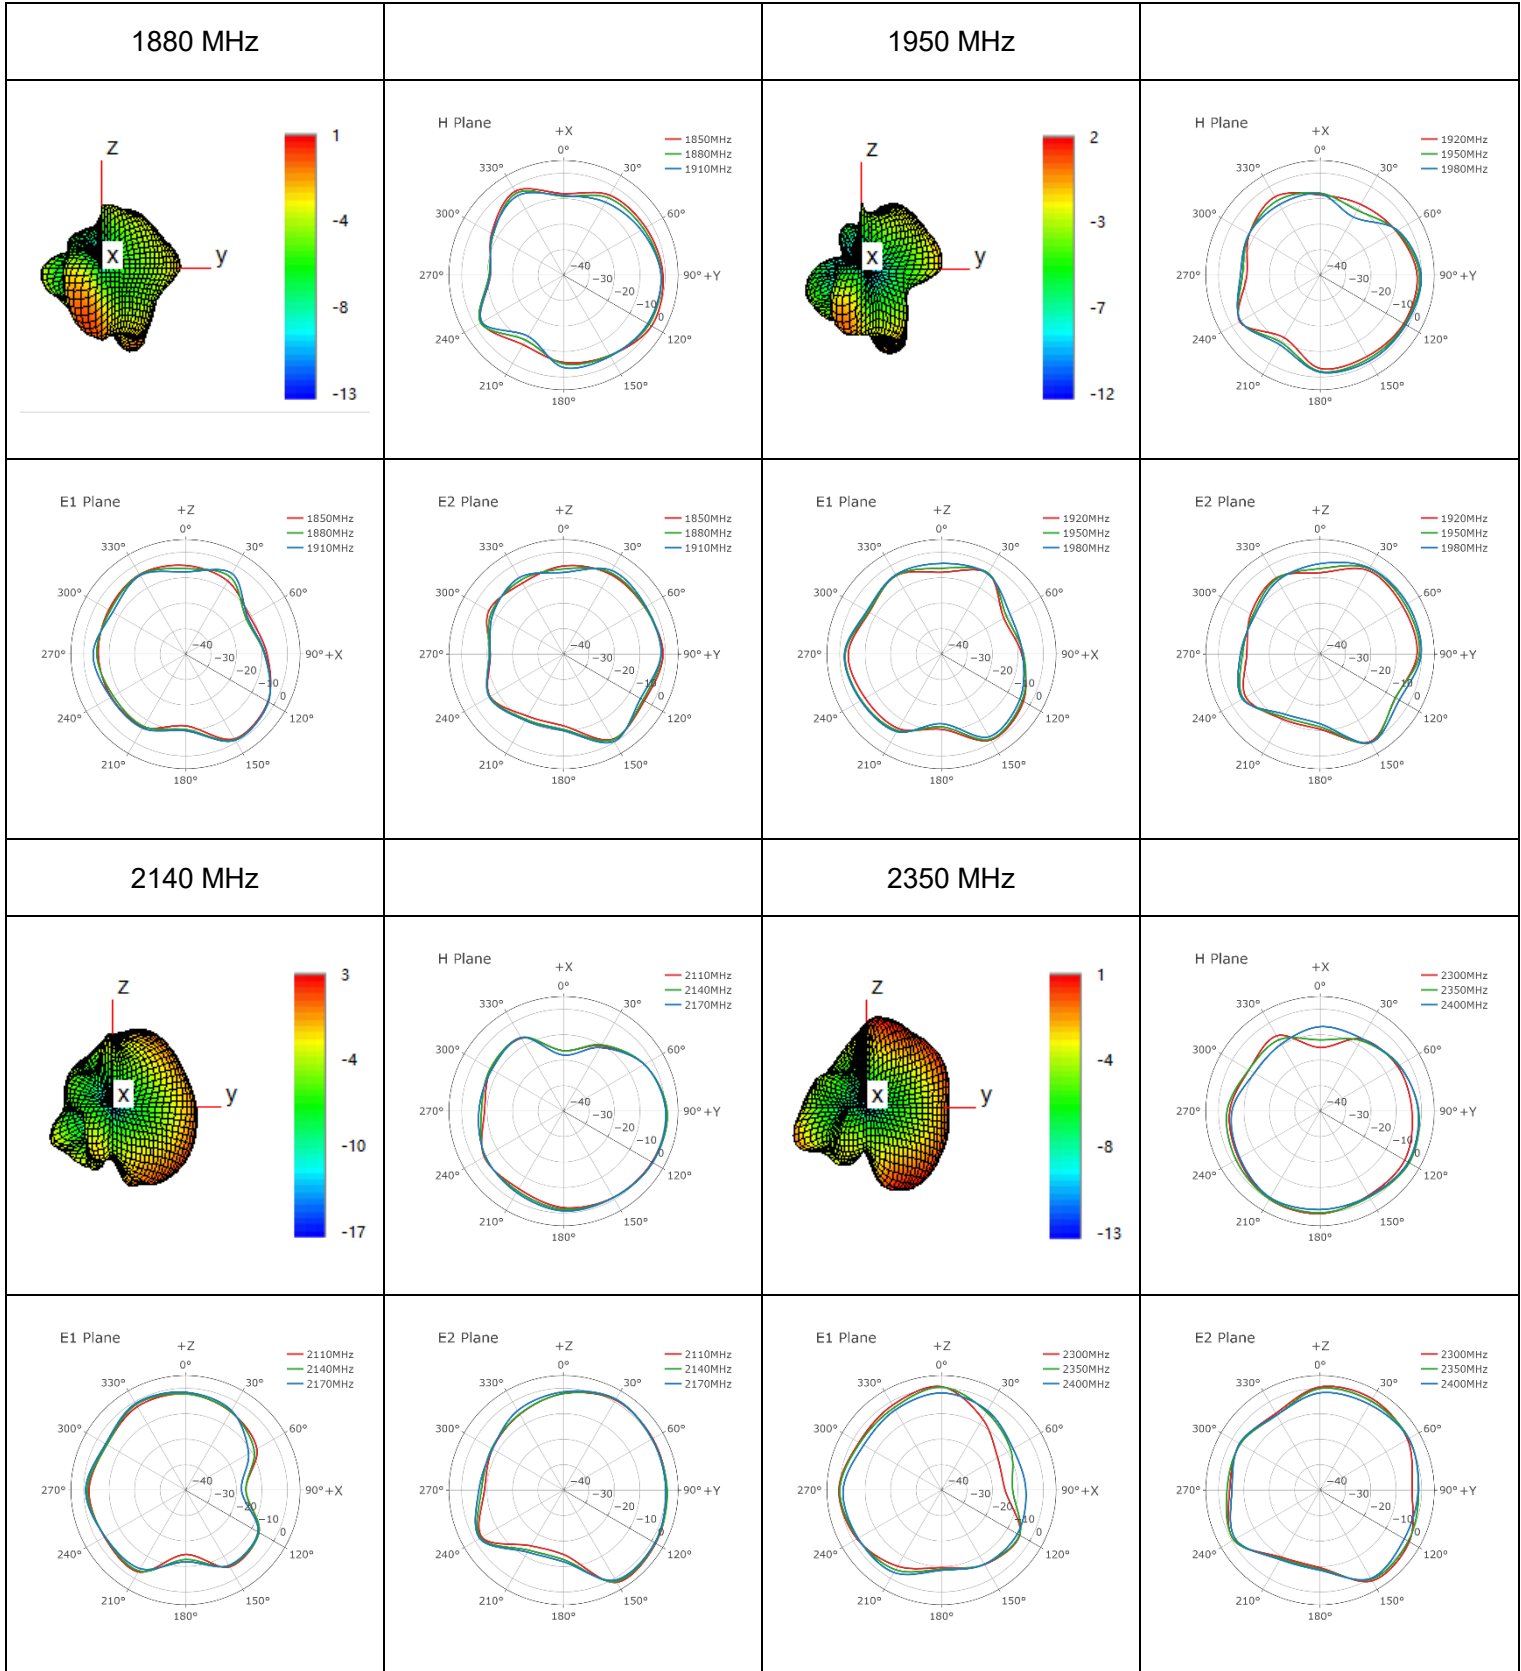

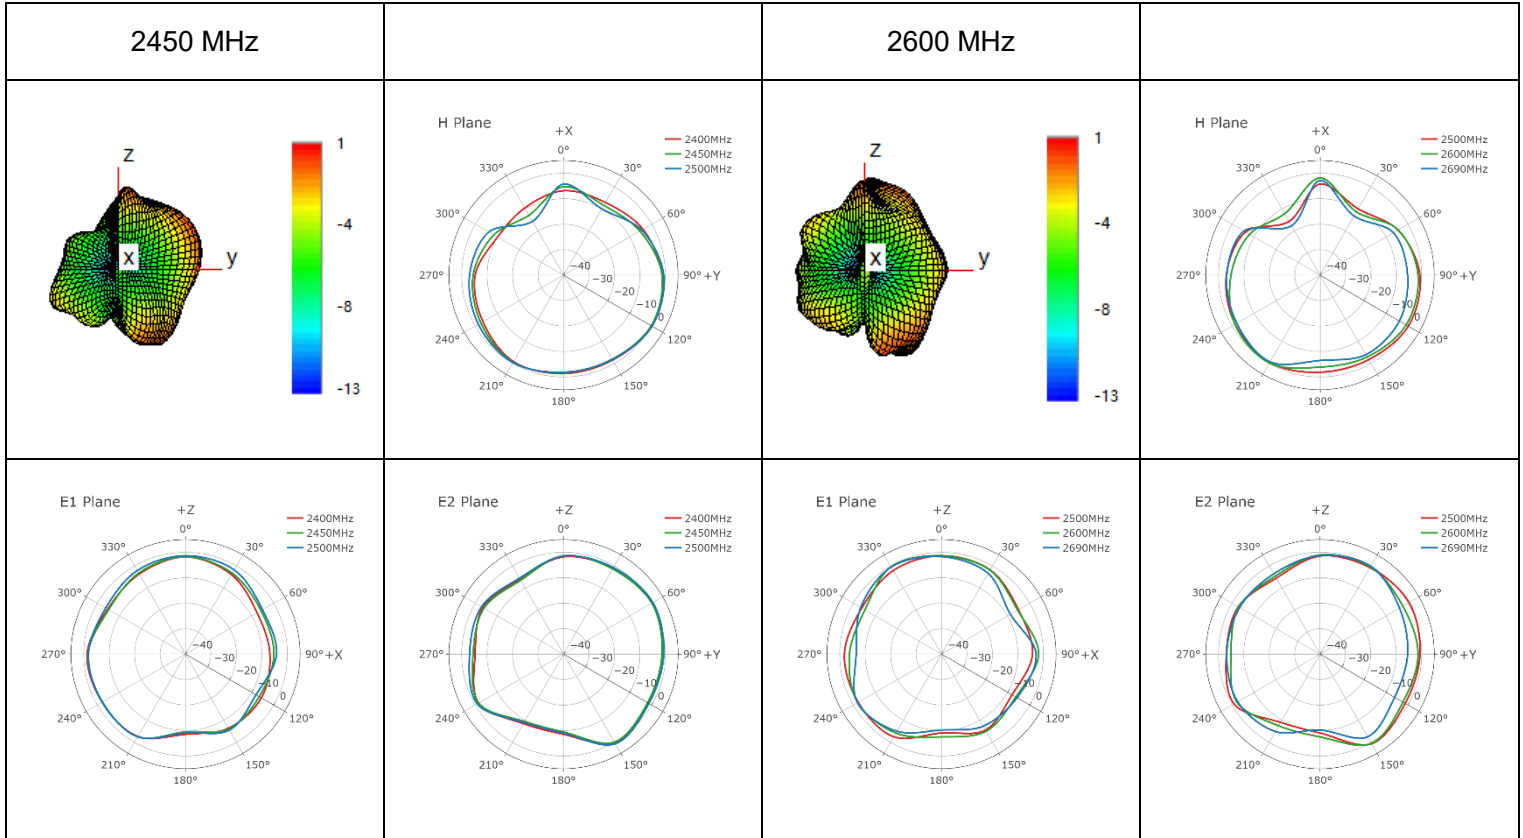


● **4G DIV-Peak Gain**

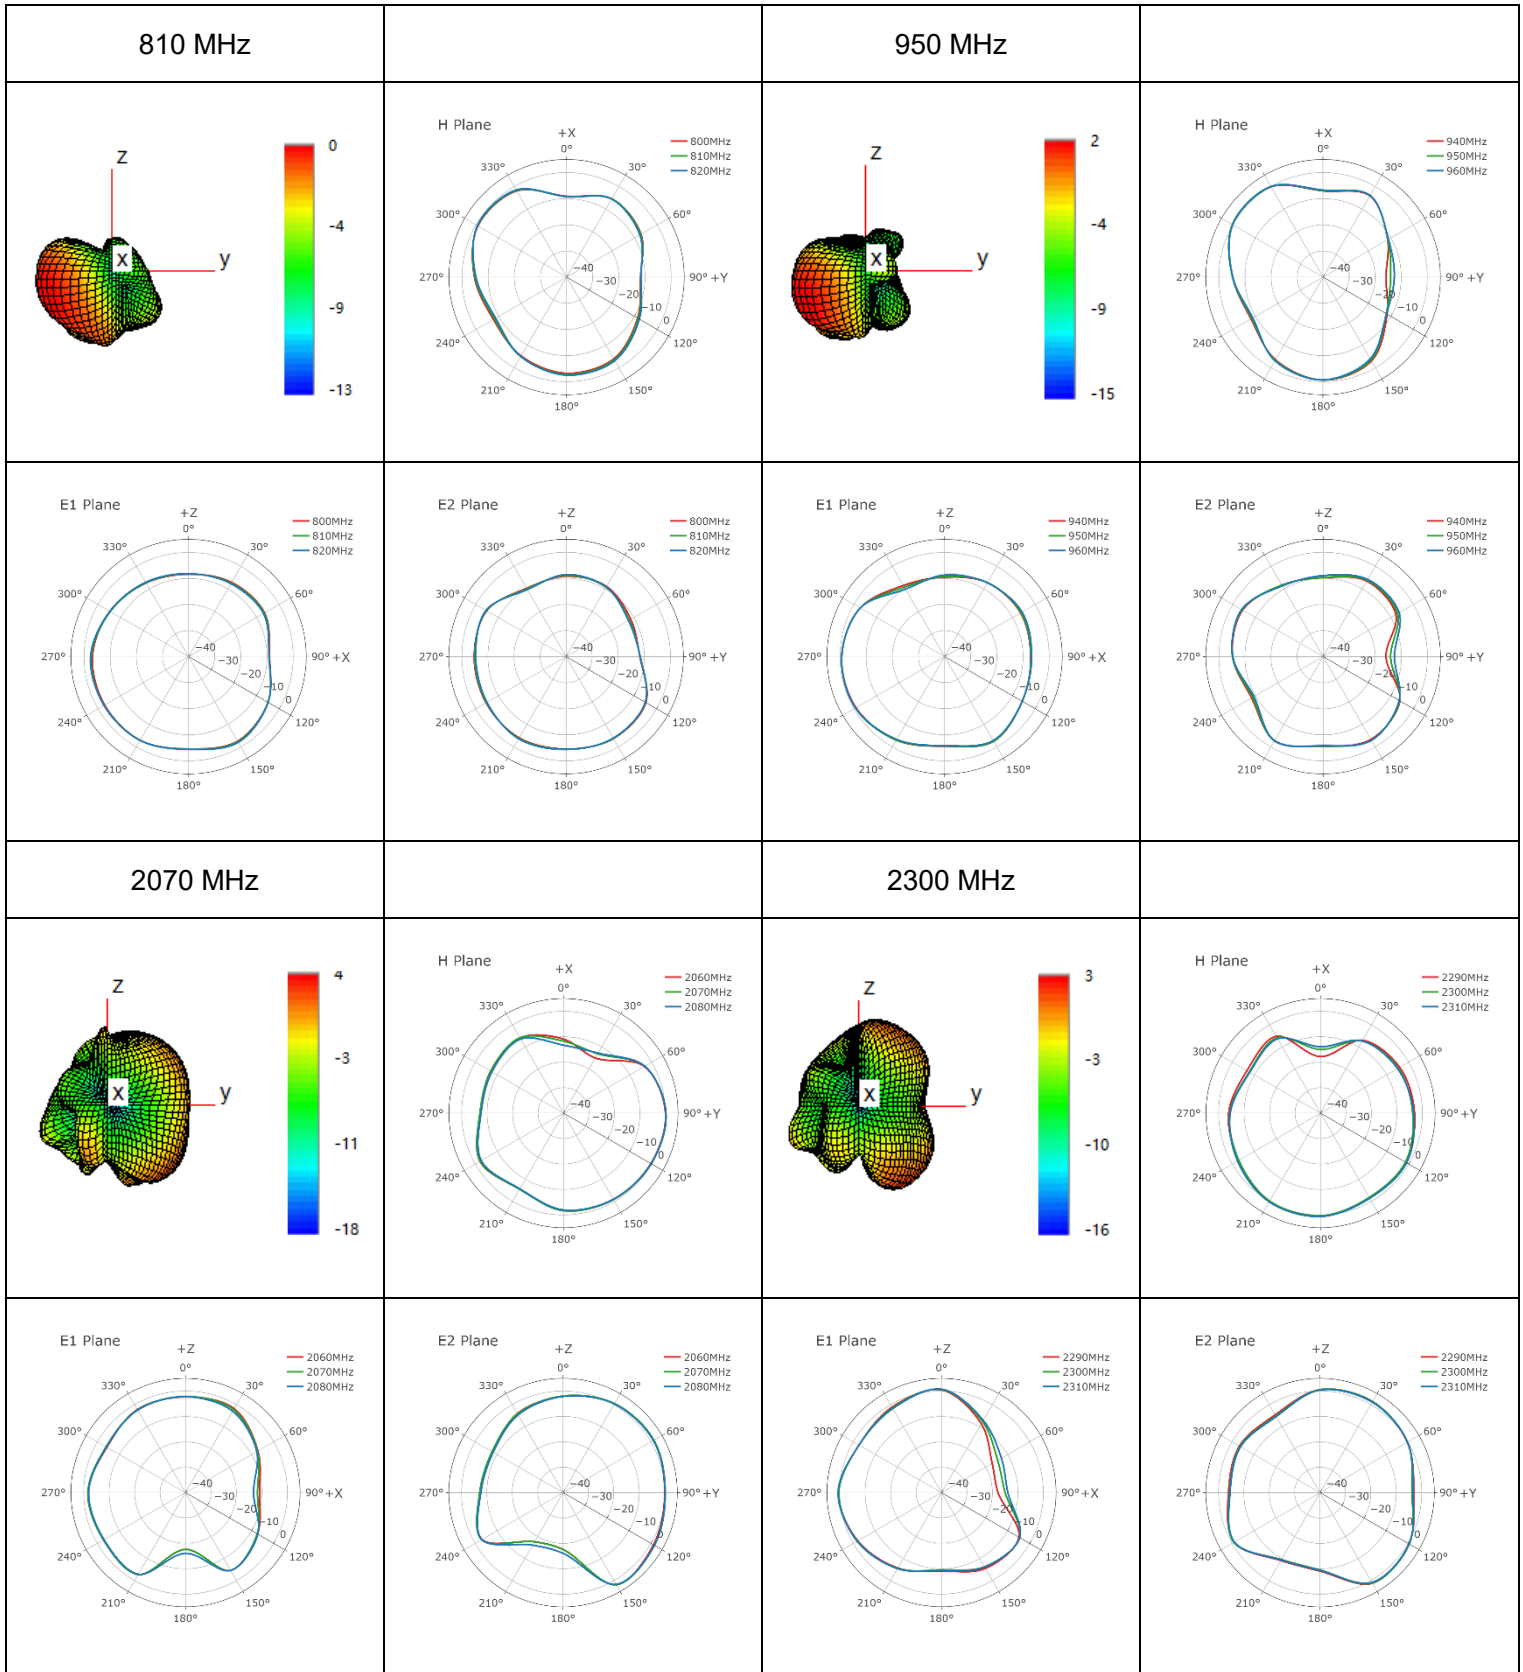

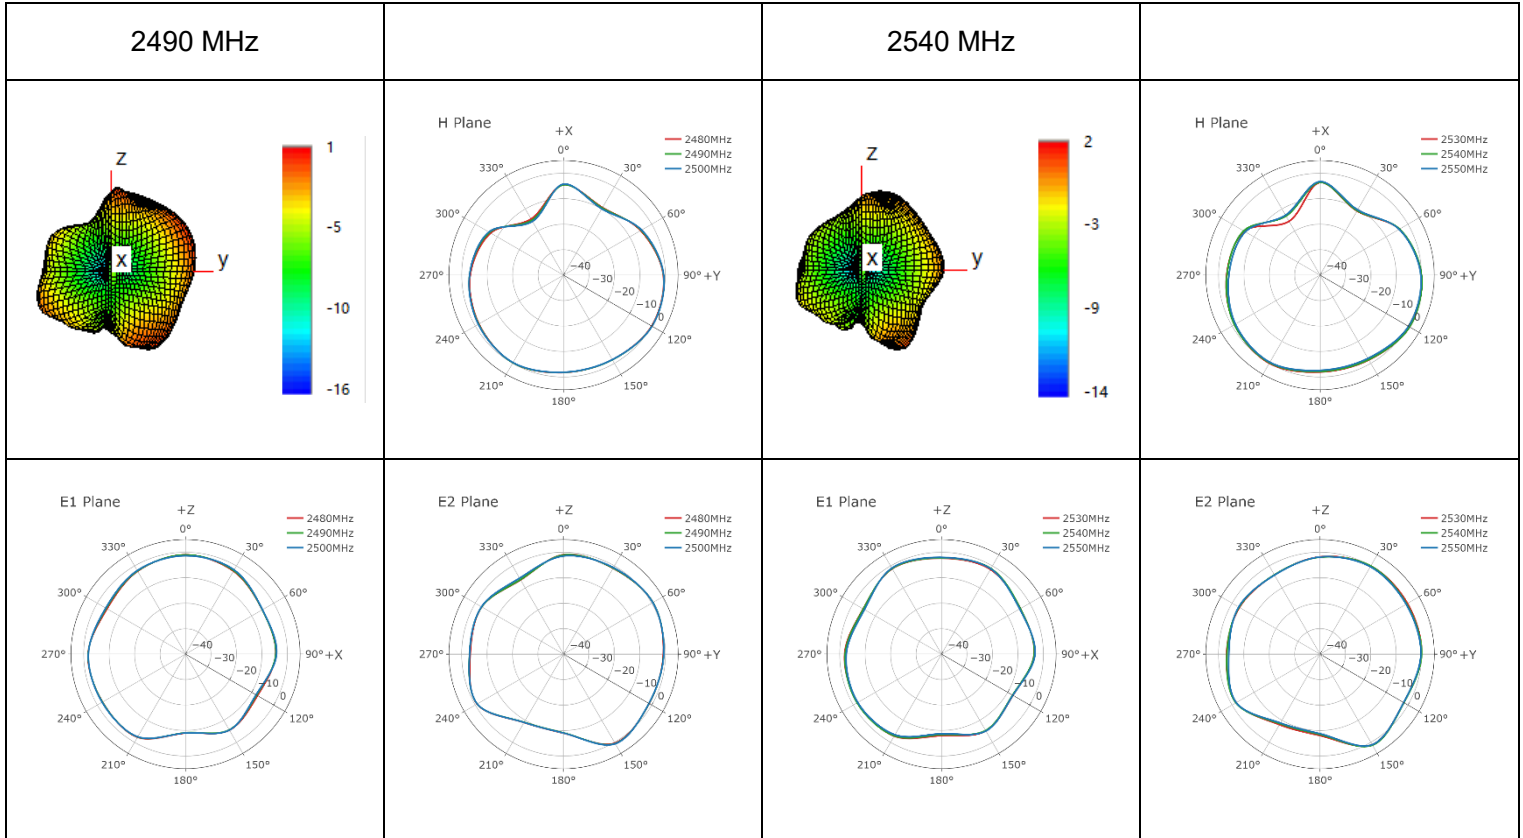


● **GNSS**

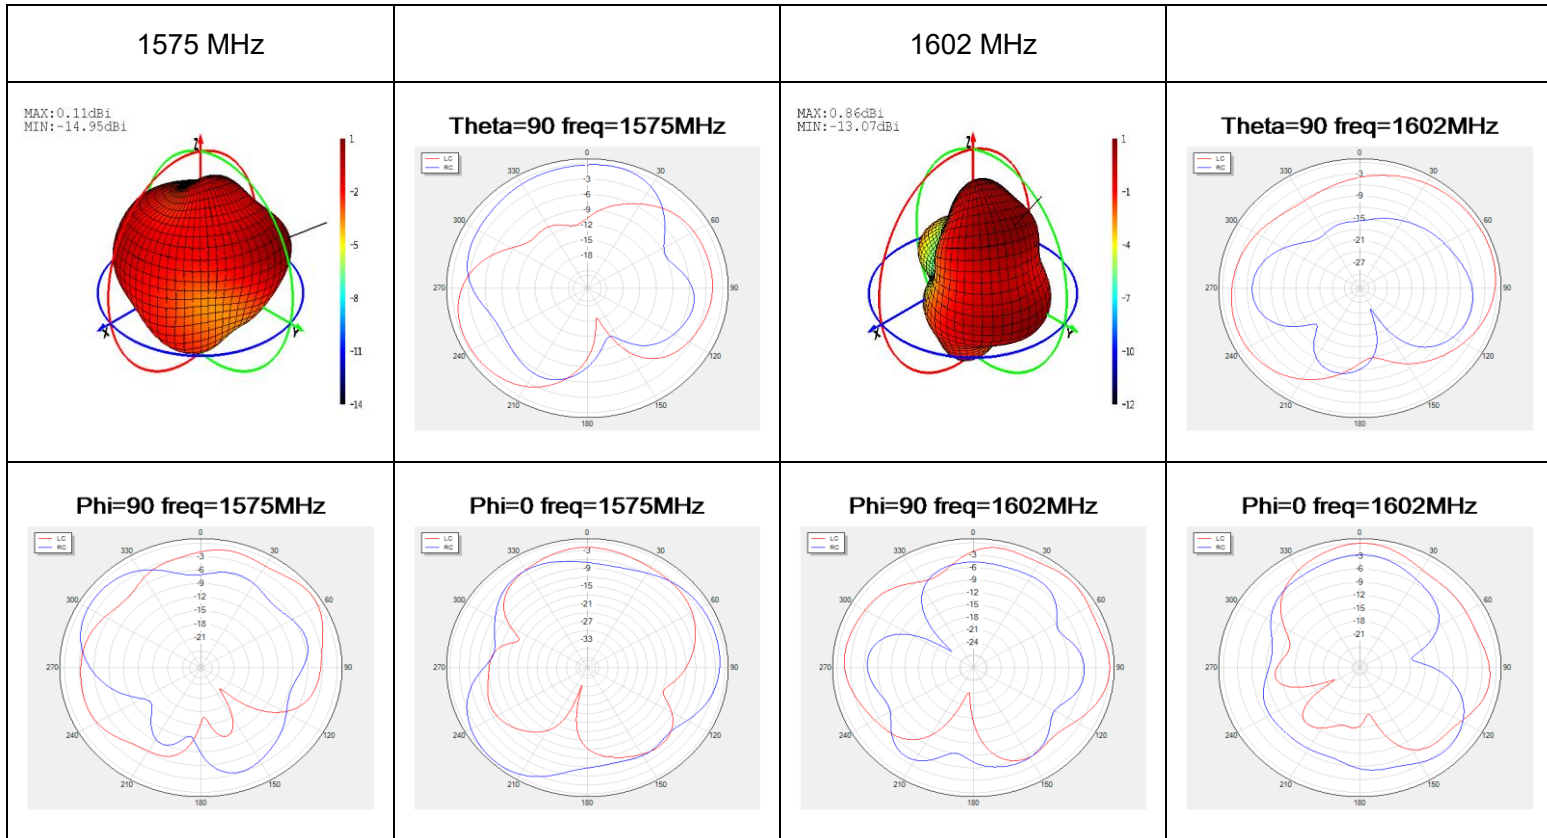



3.2.4.2. Test Condition: On 300 mm × 300 mm Metal Plane


- Test Chamber: HF-G-1

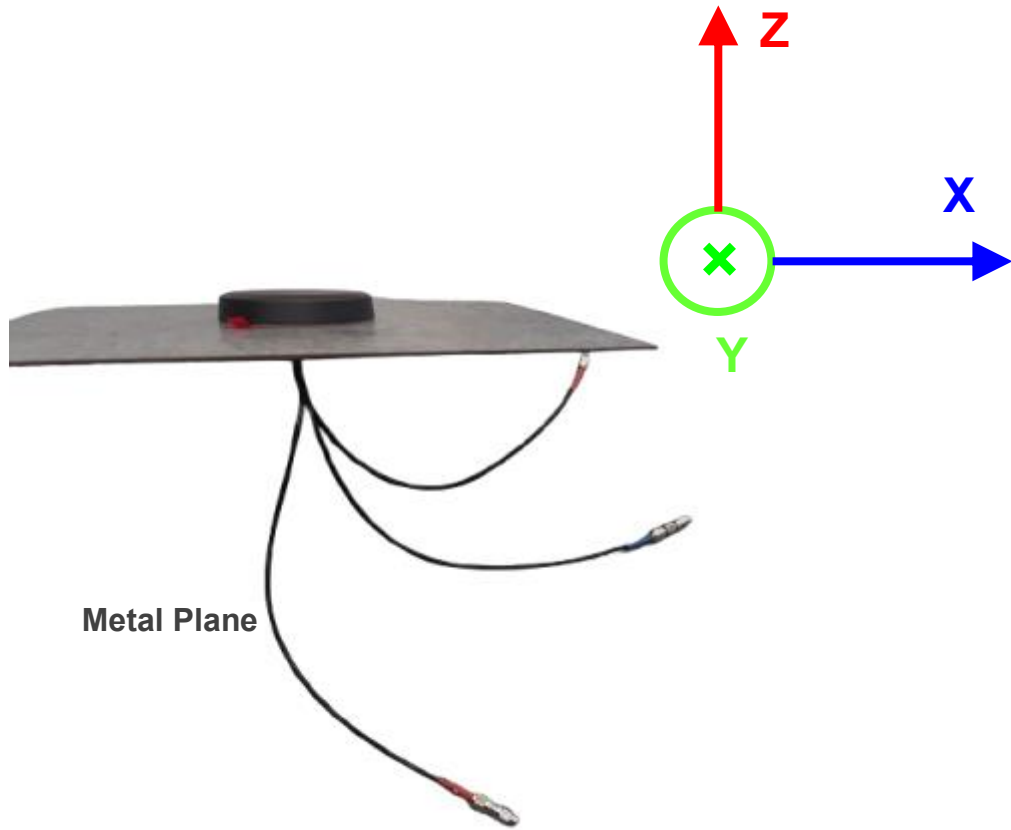


● 4G

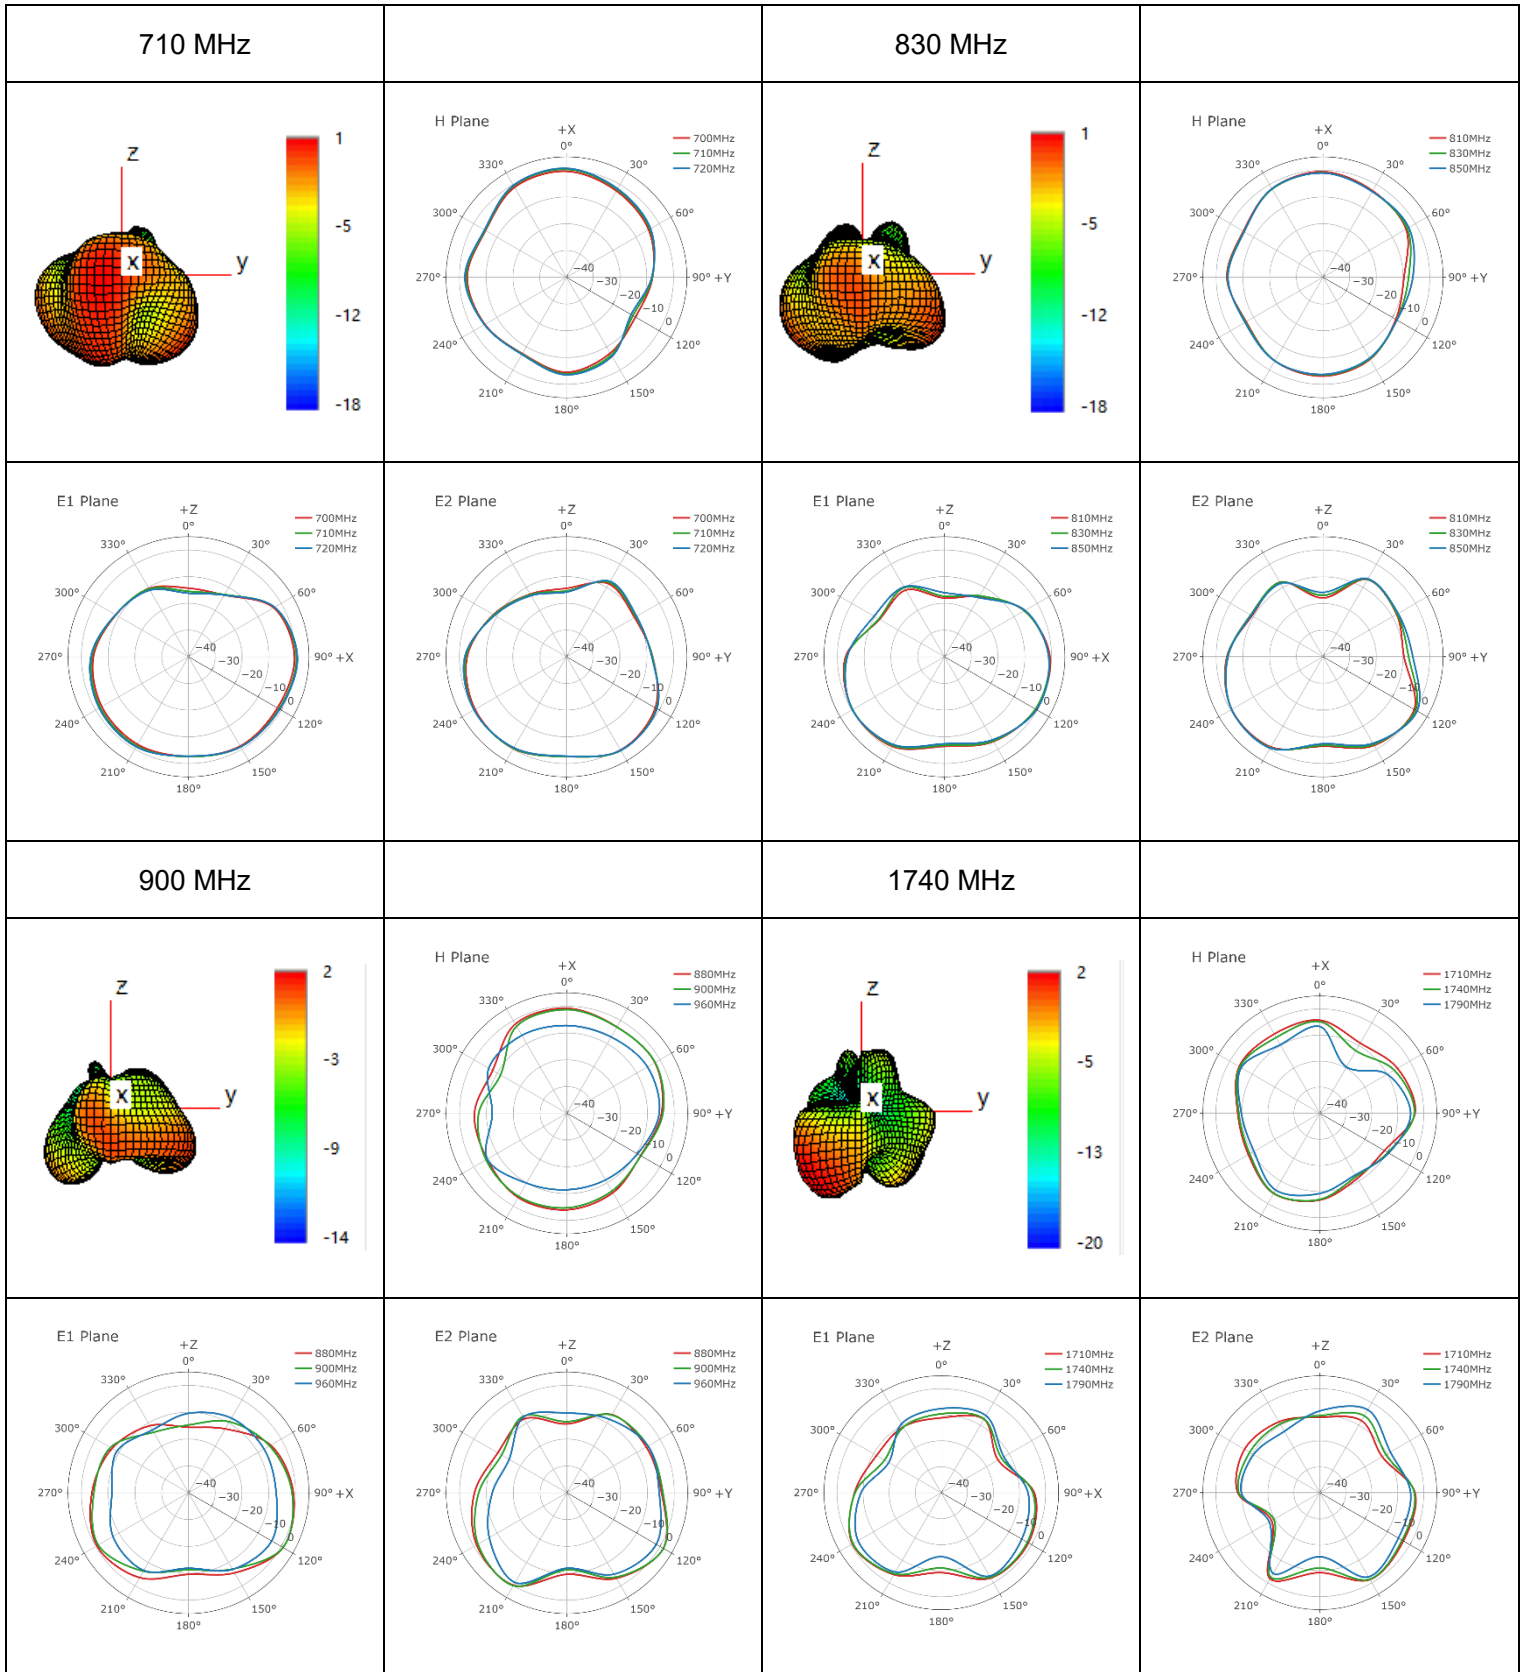


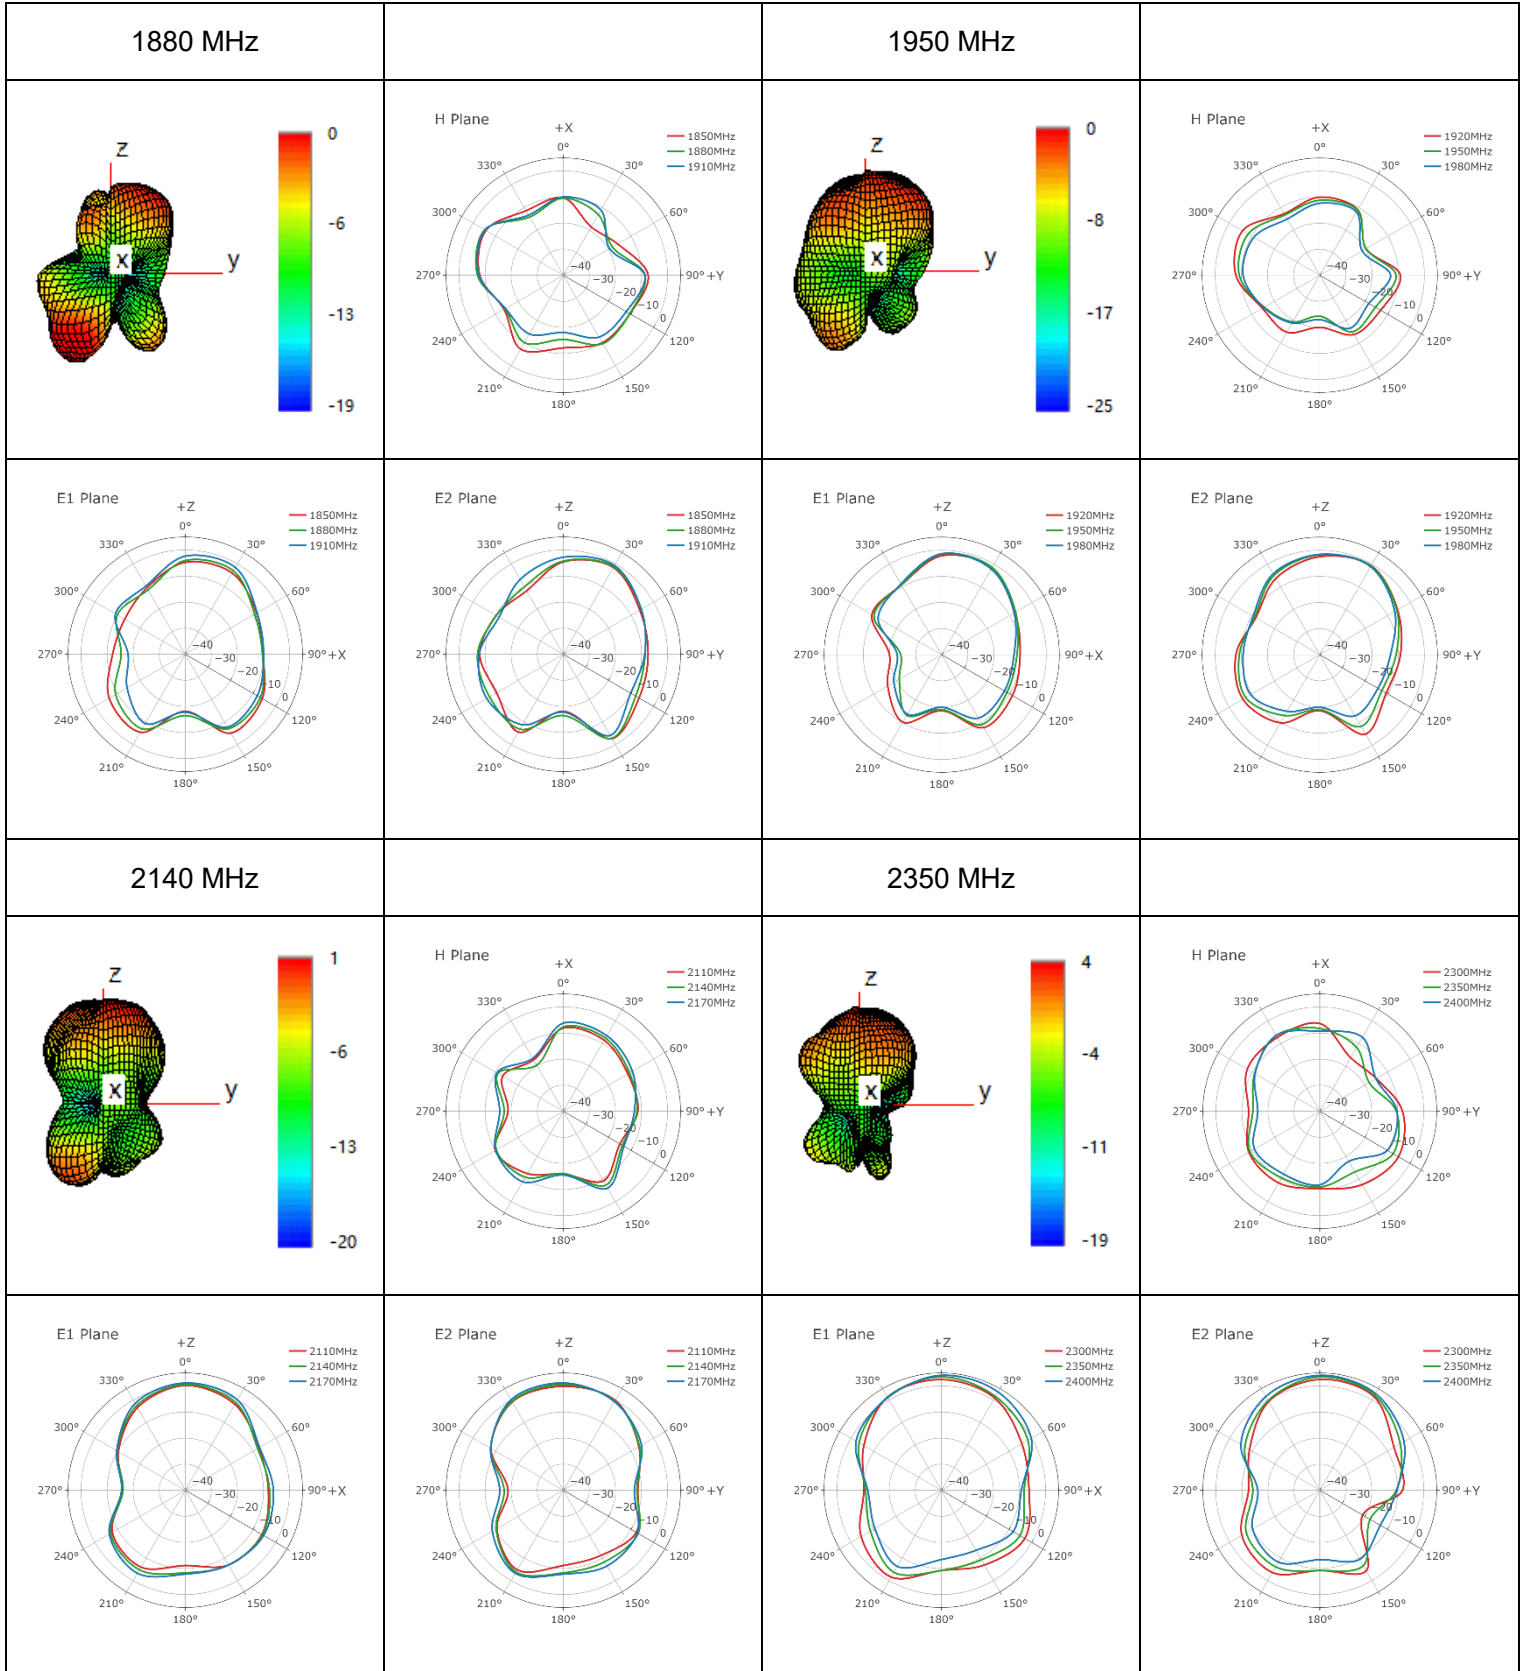

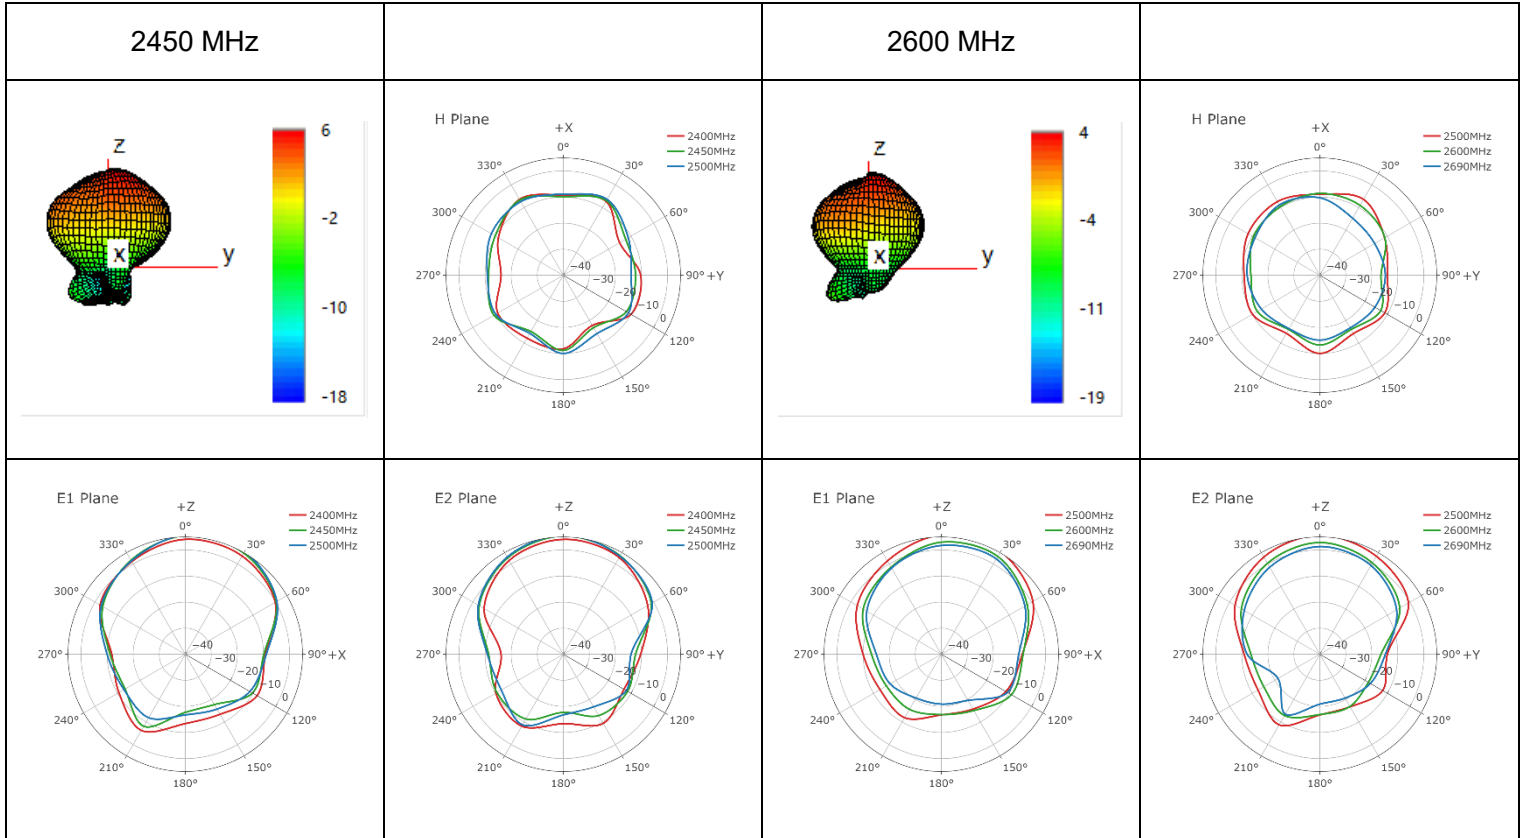



● **4G-Peak Gain**

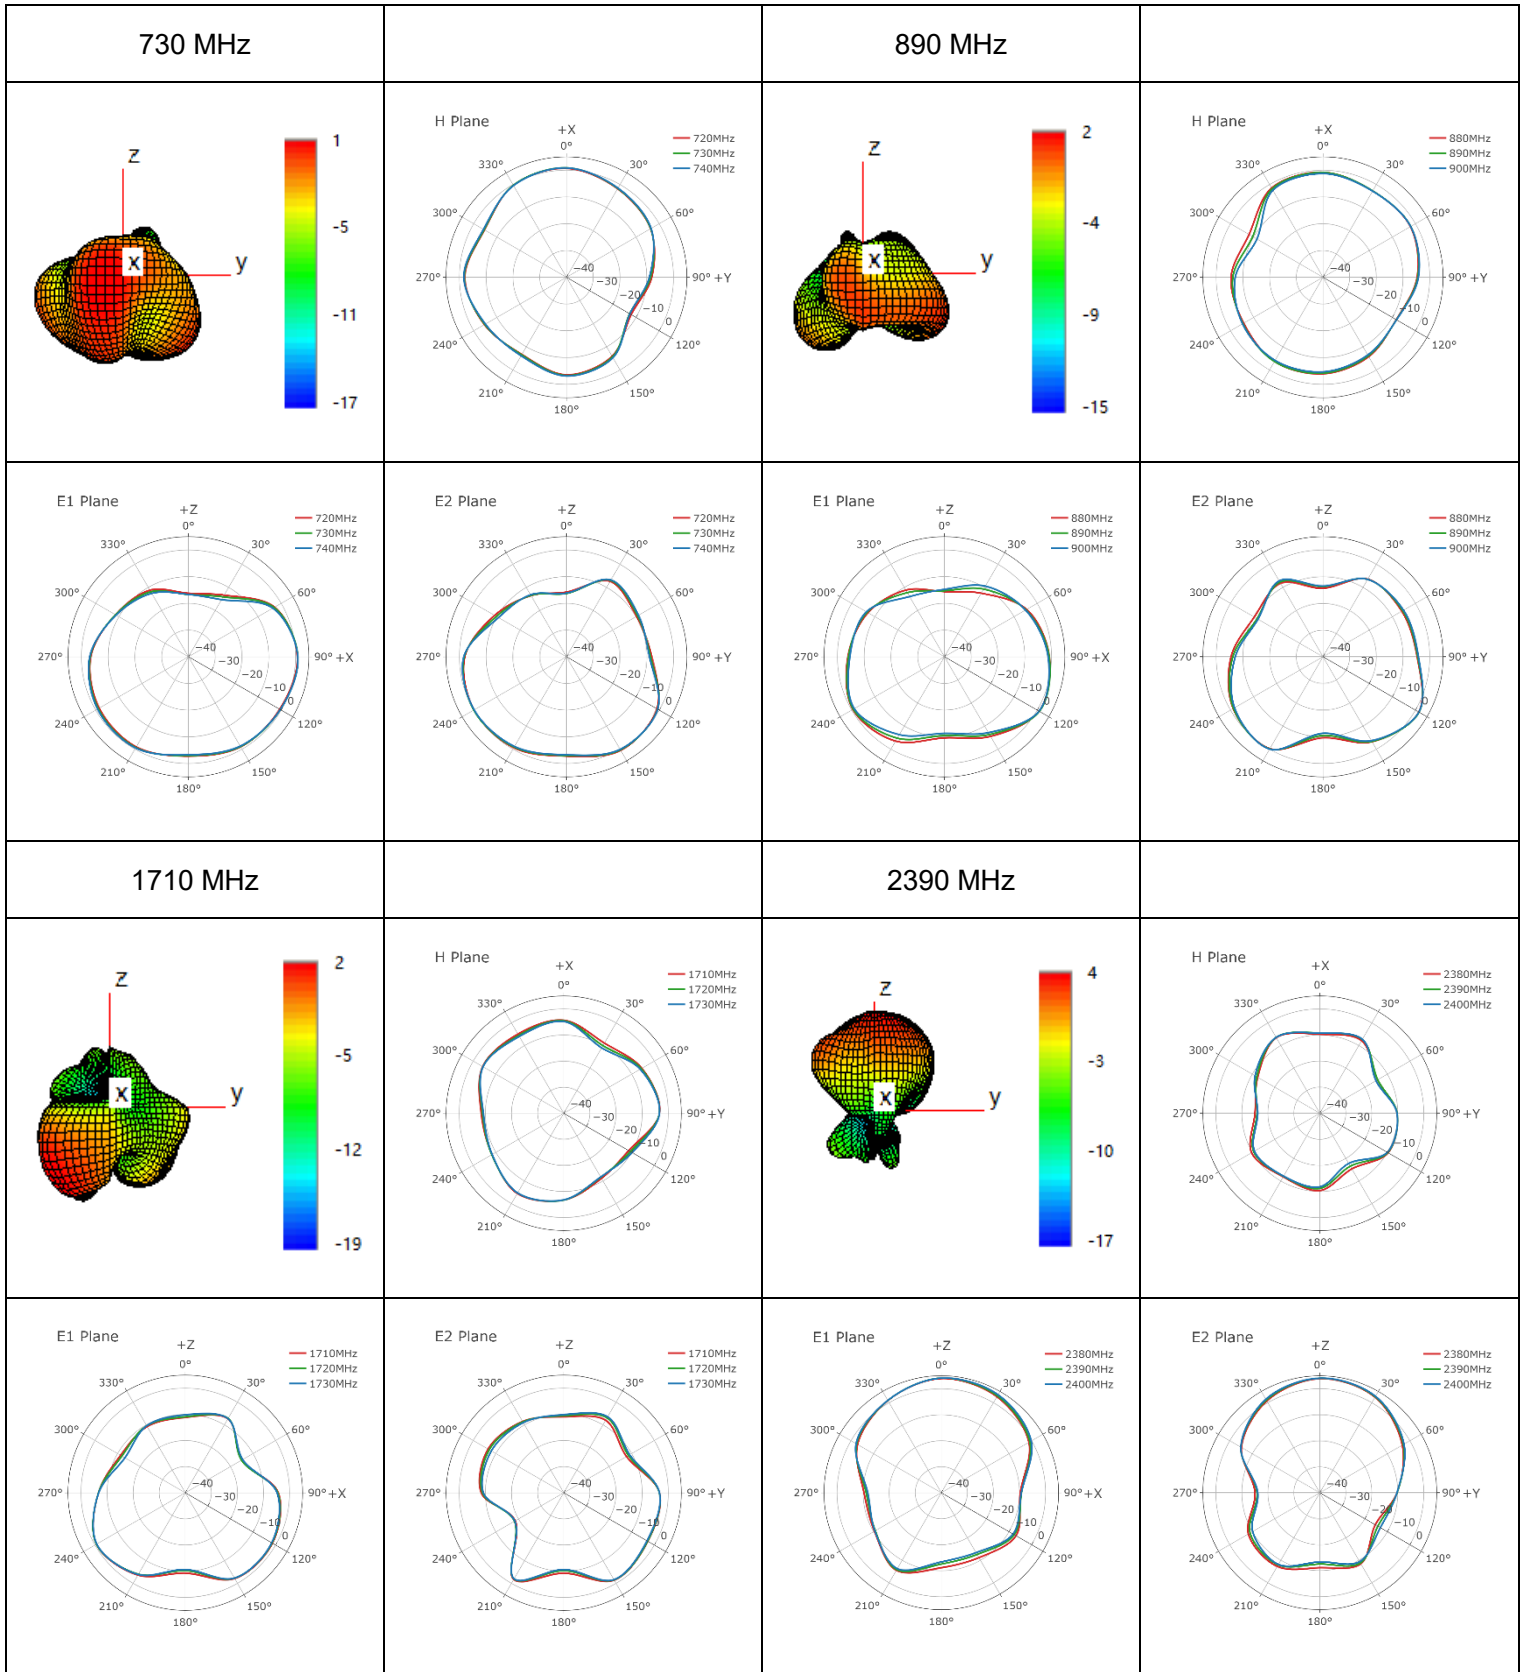


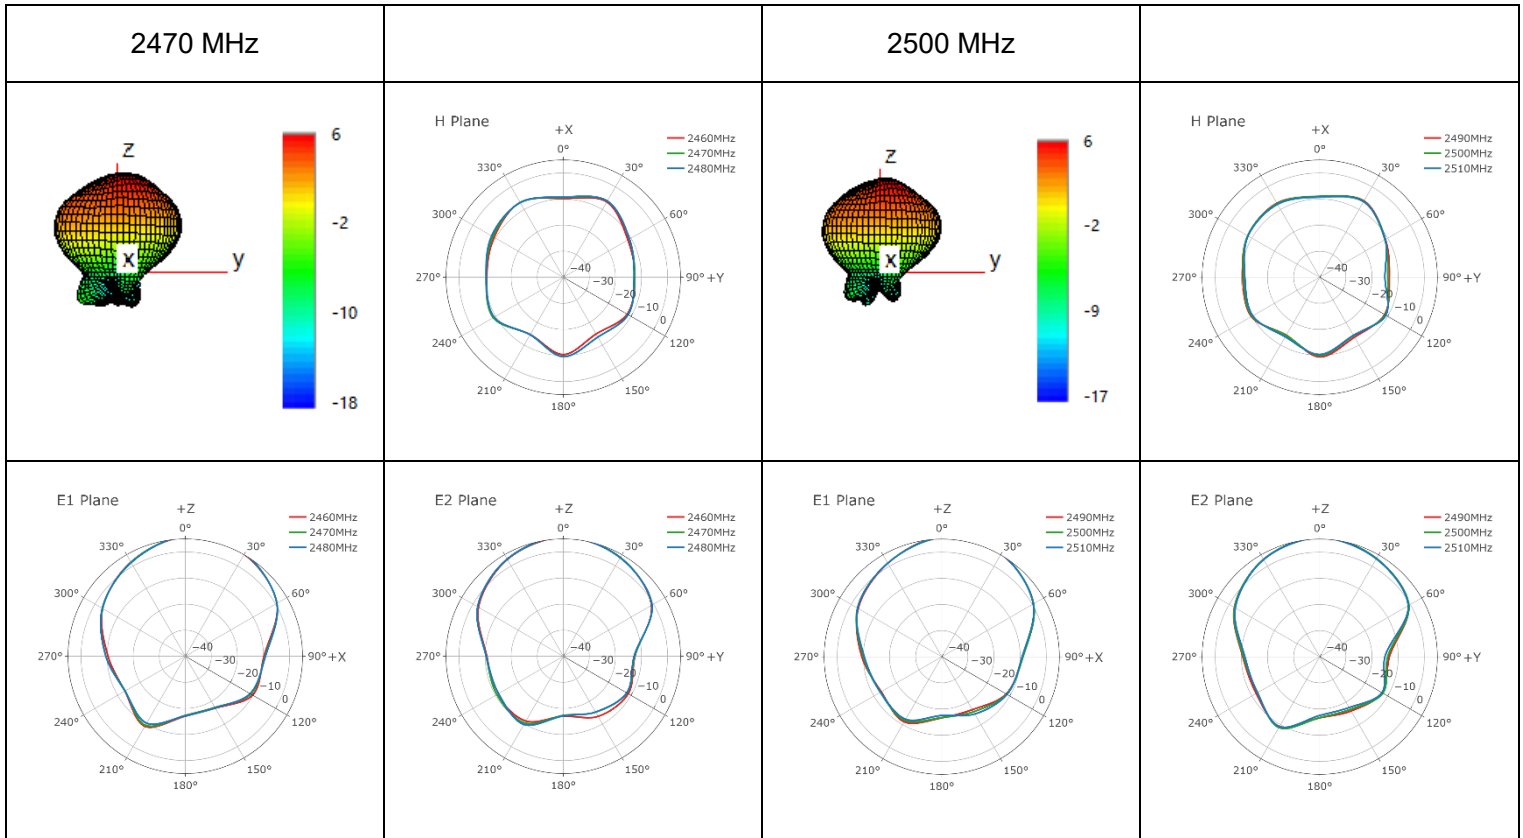


● **4G DIV**

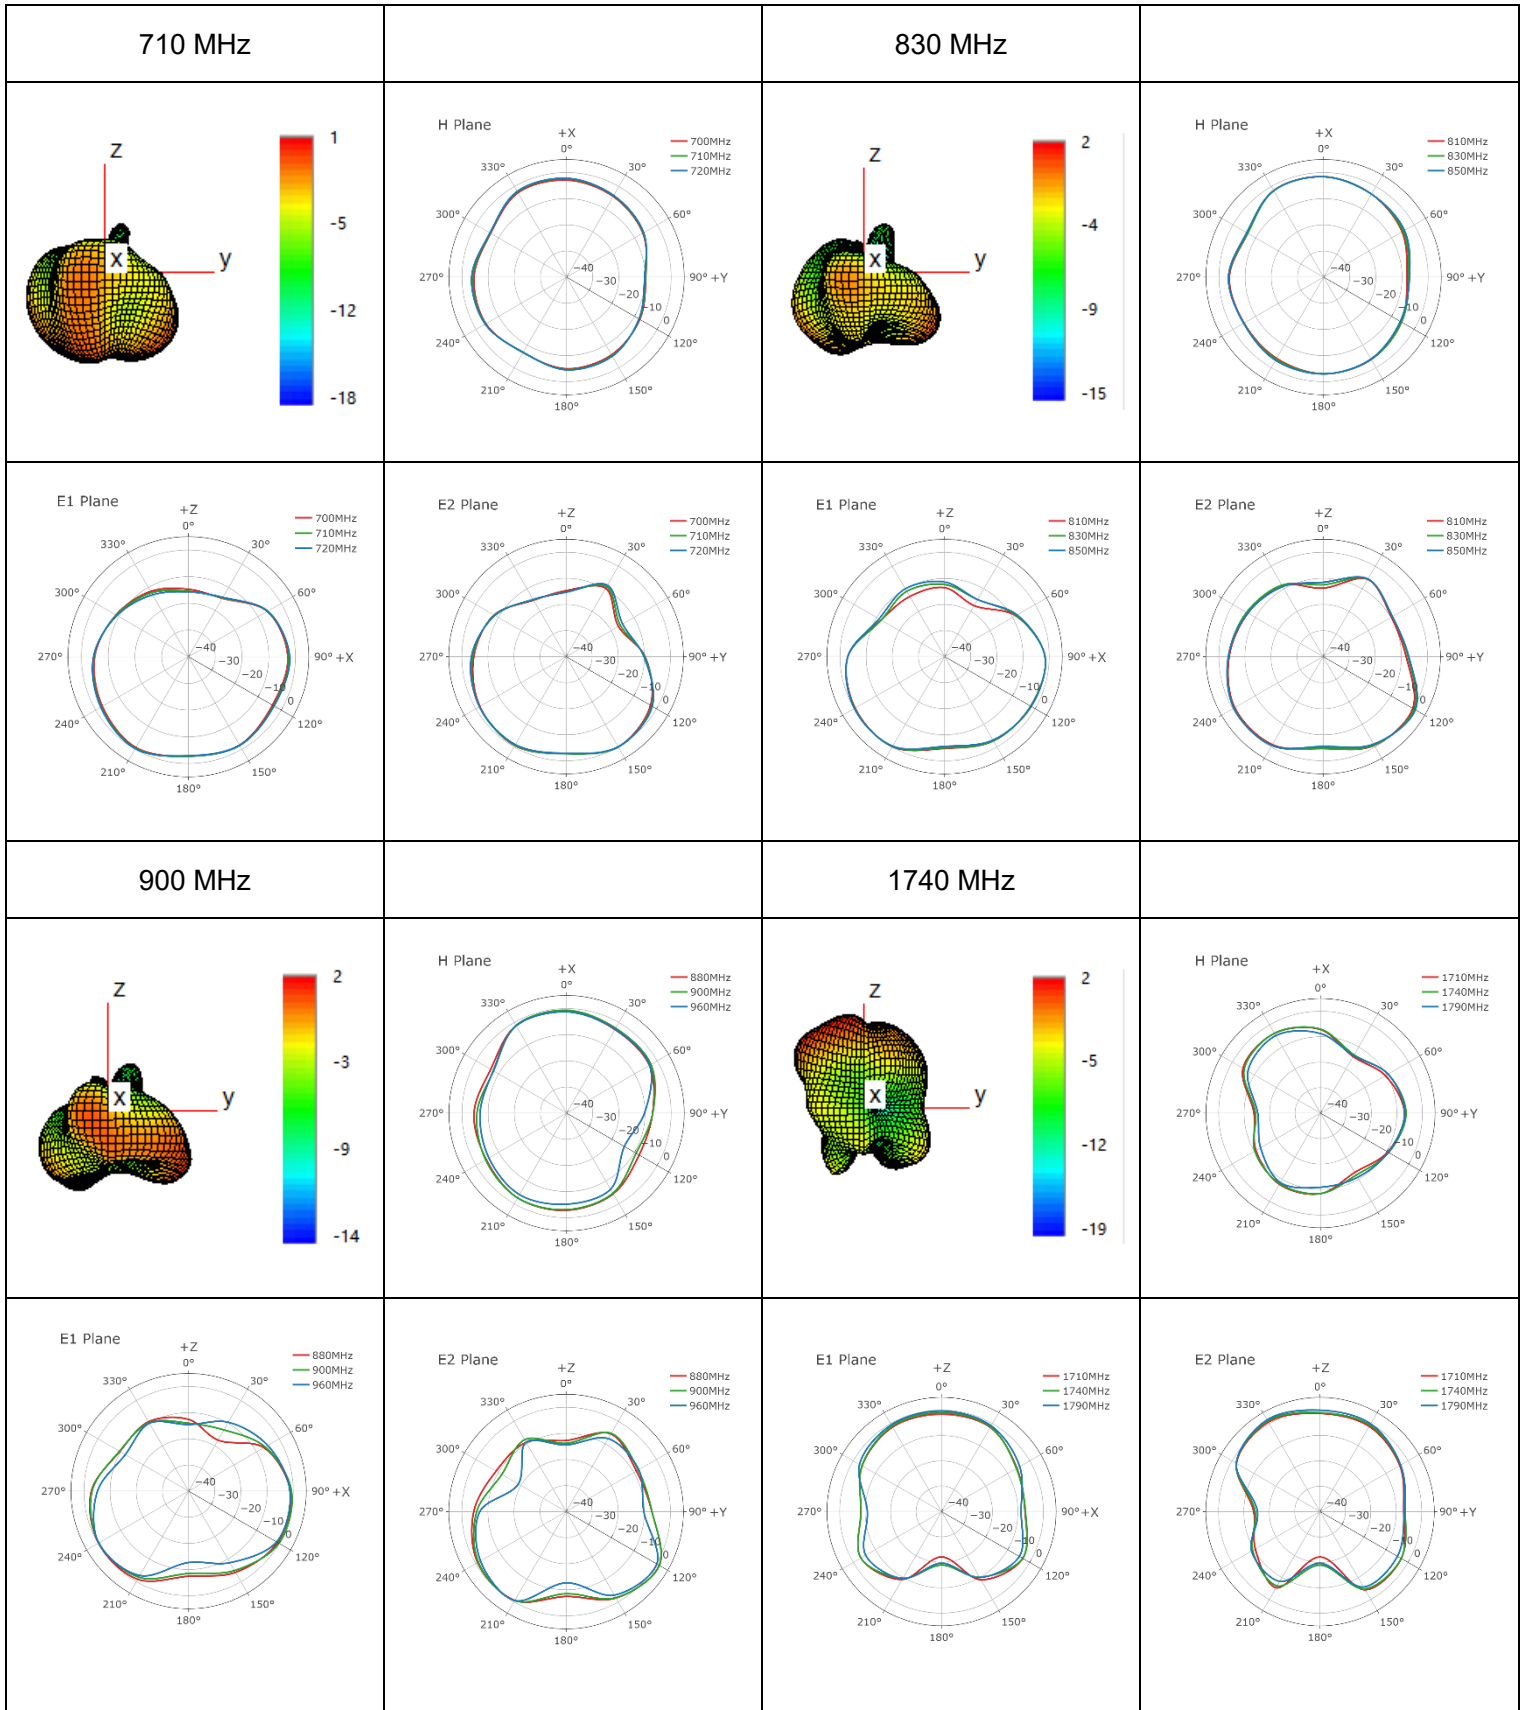


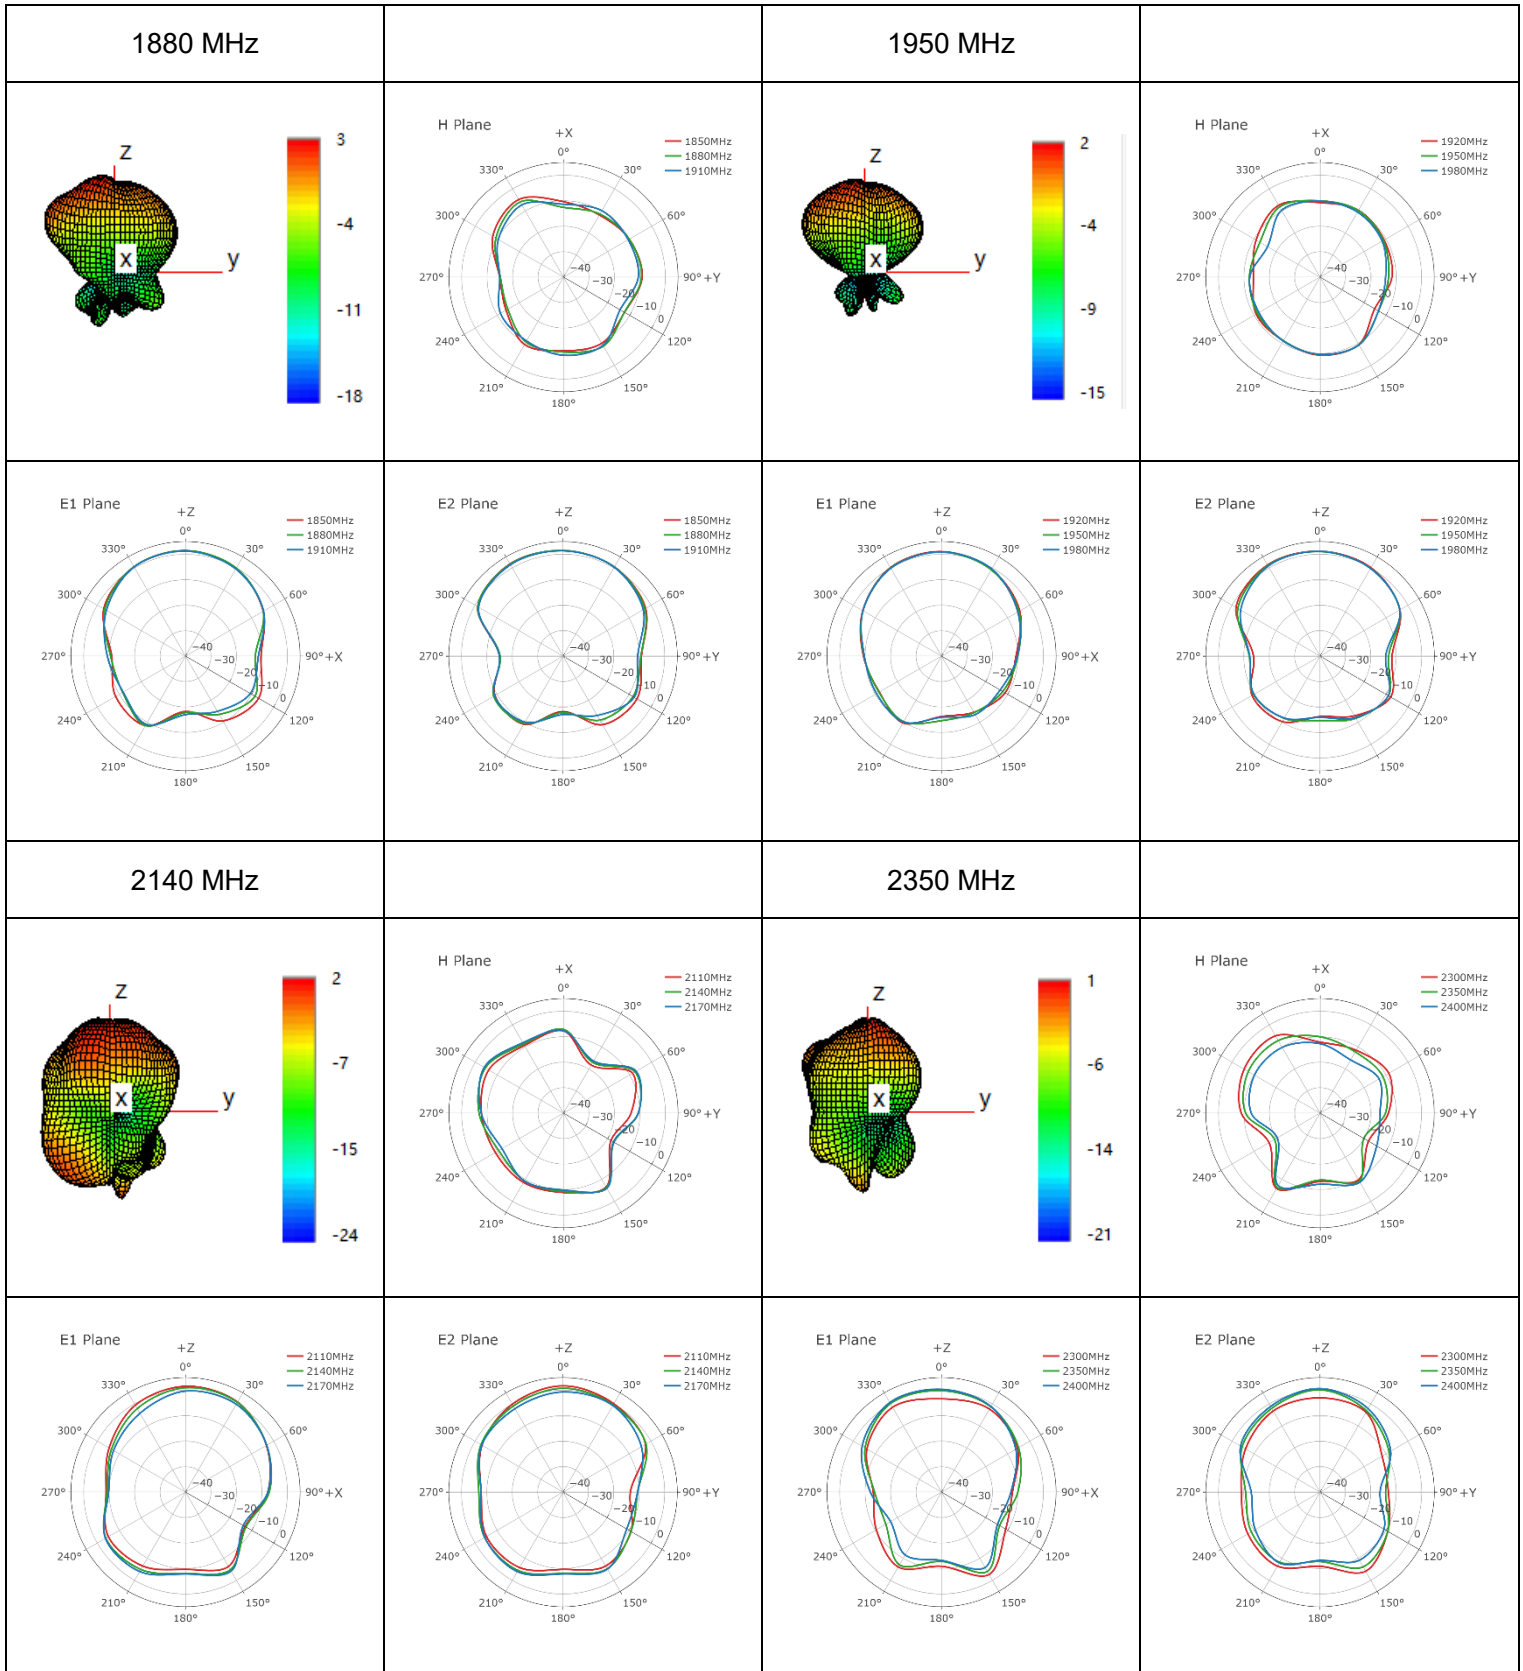



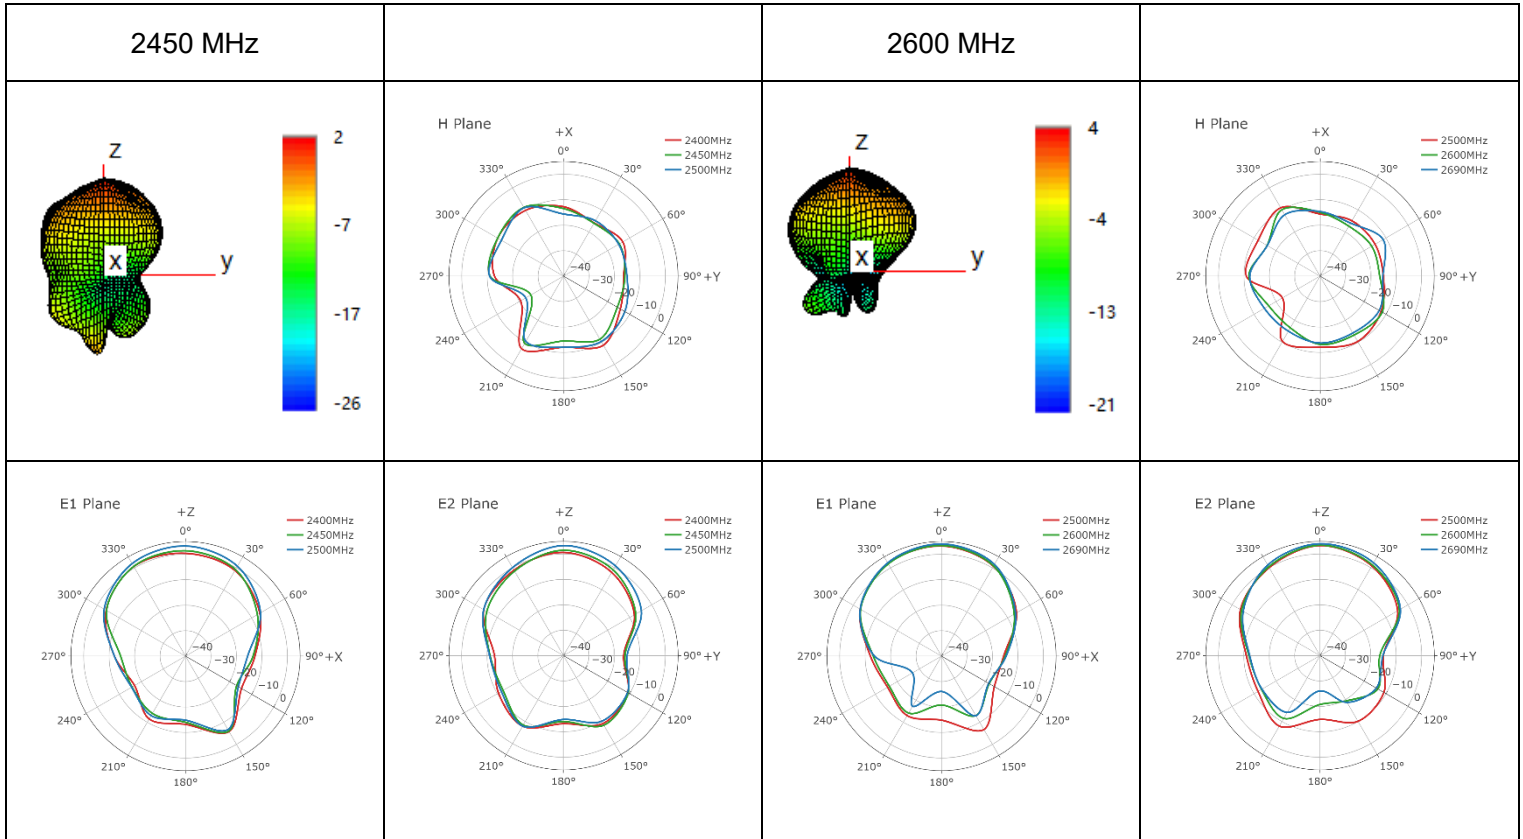




● **4G DIV-Peak Gain**

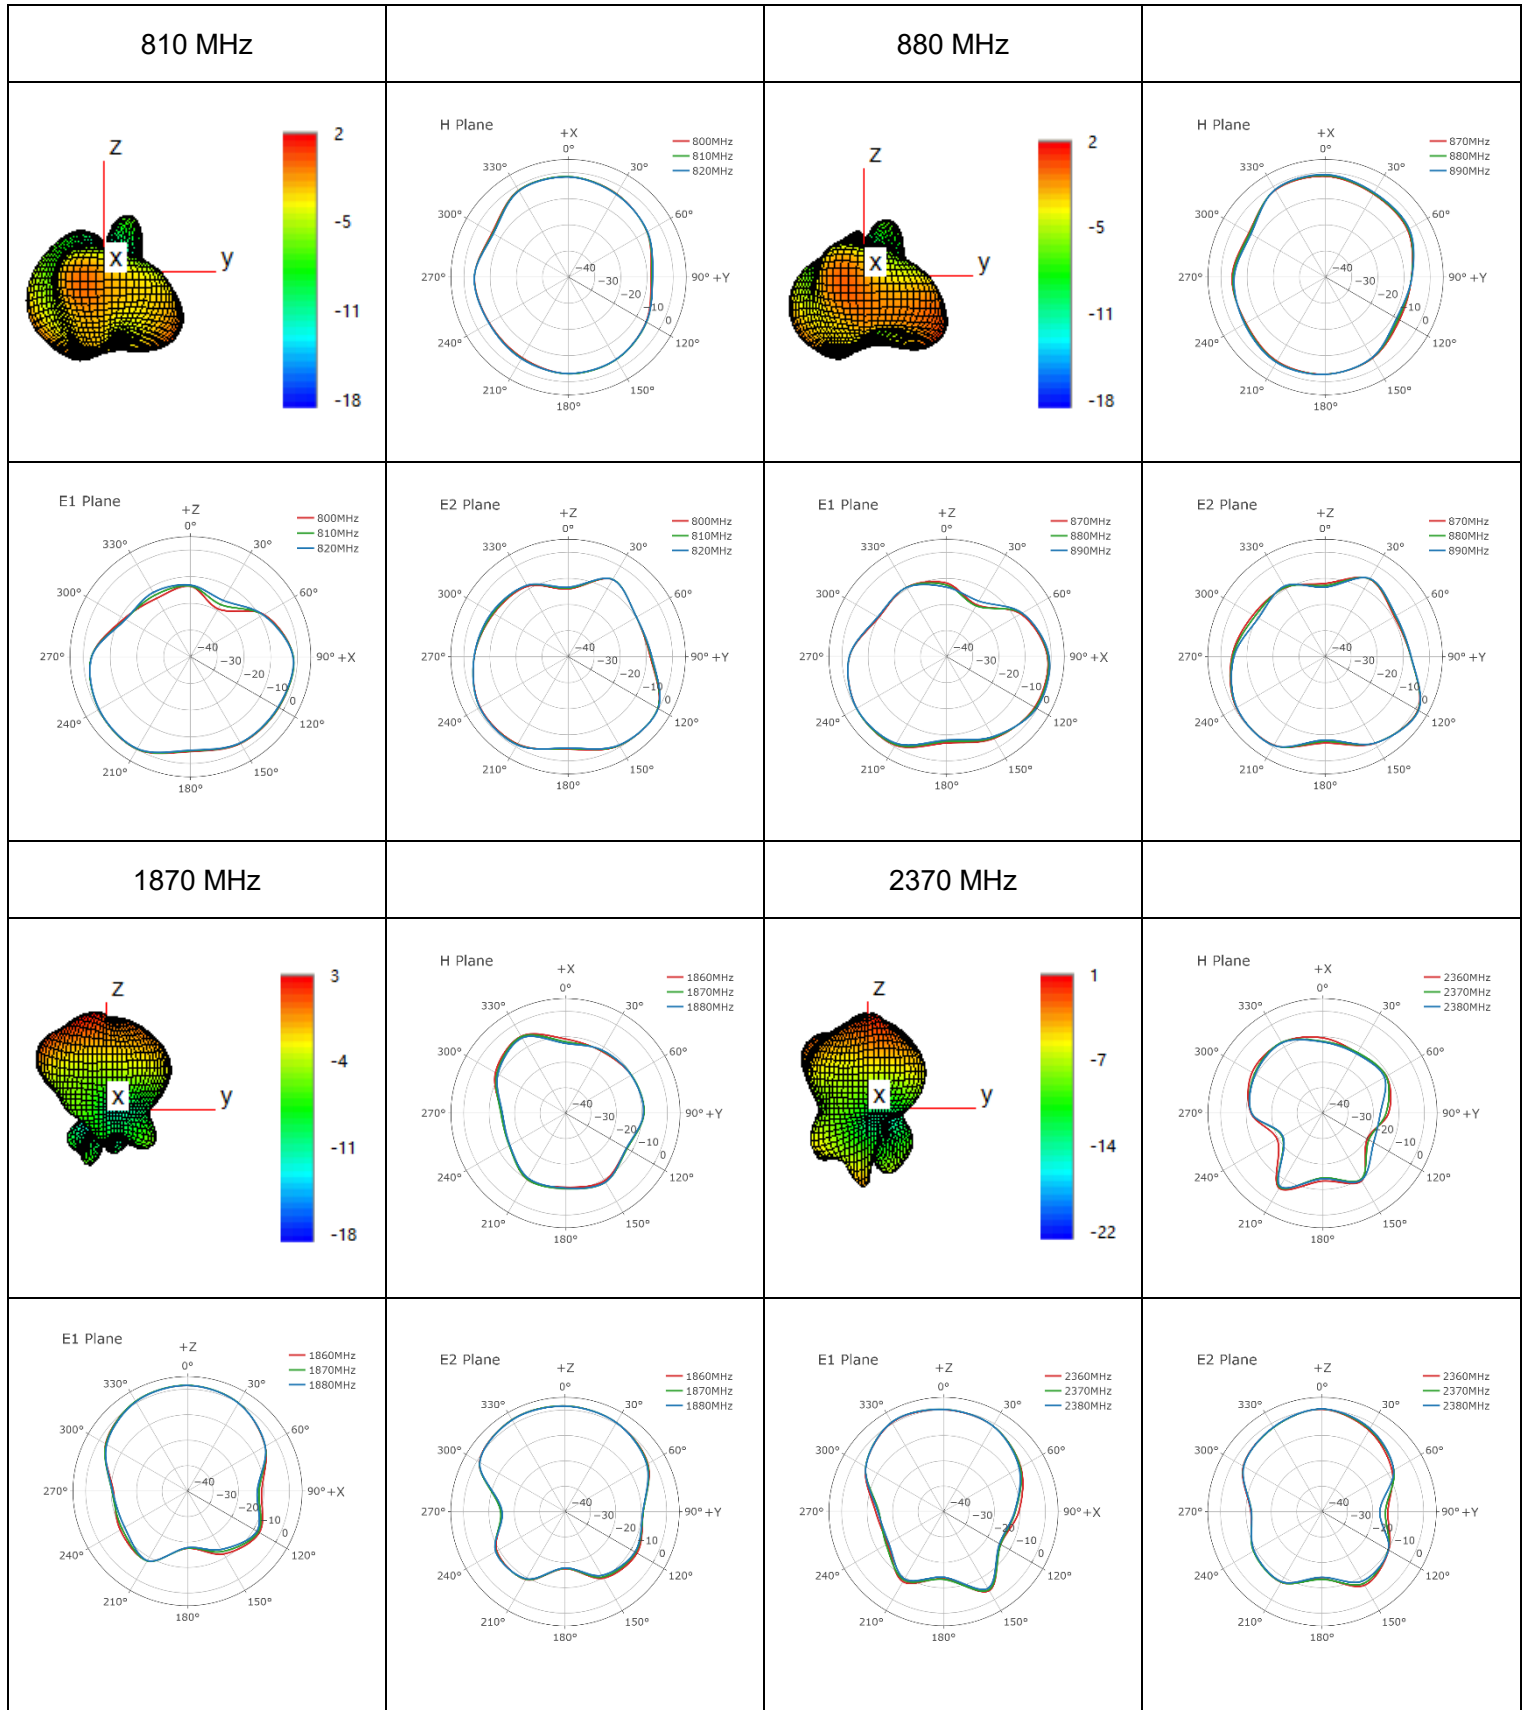

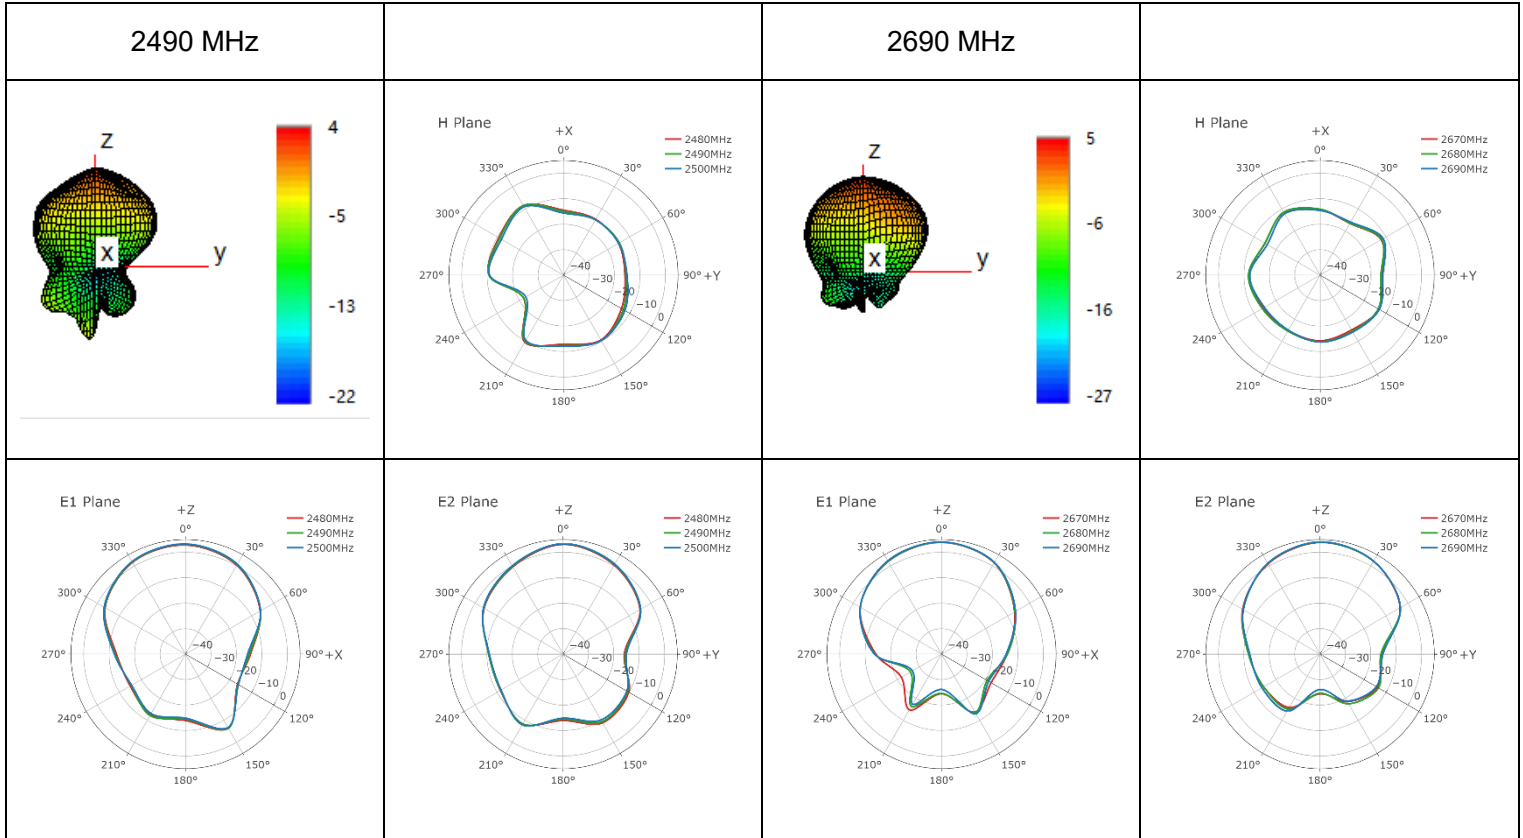

4 Packaging

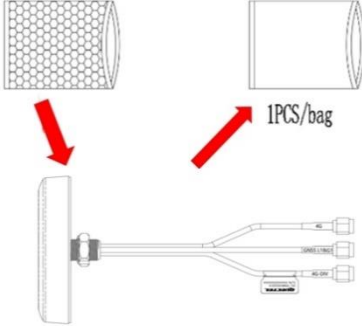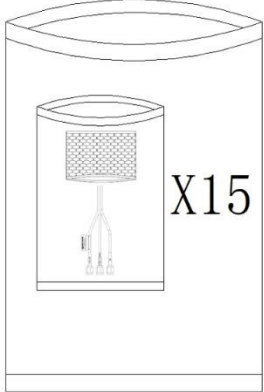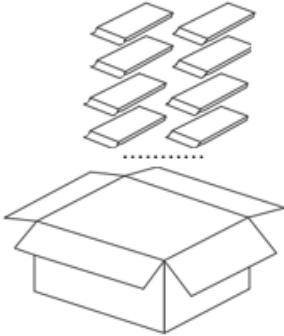Step	Packaging Picture / 2D Picture	Description
1		<p>The top of the antenna product is wrapped with a bubble bag. (1 Antenna / Bubble Bag)</p> <p>The antenna product is wrapped with a PE bag. (1 Antenna / PE Bag)</p>
2		<p>15 antennas products in a PE bag. (15 Antennas / PE Bag)</p>
3		<p>(8 PE Bags / Carton Box) (120 Antennas / Carton Box)</p> <p>Estimated quantity</p> <p>Products that cannot fill the entire carton box are packed in a suitable size carton box.</p> <p><u>Carton Size:</u> <u>L x W x H = 470 x 310 x 310 mm</u></p>
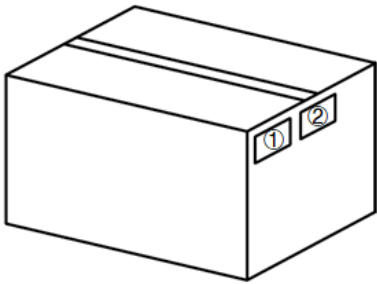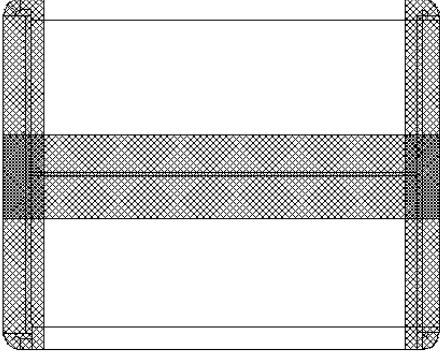
<p>4</p>		<p>Position for Attaching Labels</p> <ul style="list-style-type: none"> ① Carton Label ② Quality Label
<p>5</p>		<p>Sealing Cartons H-shaped sealing cartons</p>
<p>Note</p>	<p>The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.</p>	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2025. All rights reserved.

Revision History

Version	Date	Author	Note
-	2025-07-28	Morrie Du/ Charming Yang/ Blake Xiang/ Strong Qiang/ Rainey Liao	Creation of the document
1.0	2025-07-28	Morrie Du/ Charming Yang/ Blake Xiang/ Strong Qiang/ Rainey Liao	First official release
1.1	2025-09-15	Blake Xiang	Updated the drawing (Chapter 2).
1.2	2025-10-27	Junsen Li	Added LNA gains according to different supply voltages (Chapter 1.1.3).

QUECTEL

www.quectel.com