


# Quectel EG915U Series

## IoT/ M2M-optimized LTE Cat 1bis Module

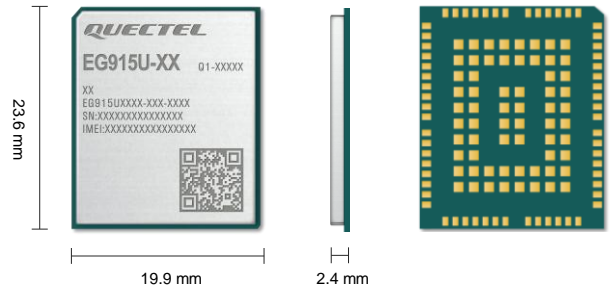

Quectel EG915U is a series of the LTE Cat 1bis module optimized specially for M2M and IoT applications. The module is fully compliant with the 3GPP Rel-13 specification. It delivers maximum data rates up to 10 Mbps downlink and 5 Mbps uplink. Designed in the compact and unified form factor, EG915U series is compatible with Quectel multi-mode EG91 series, EG95 series, BG95 series and BG96 modules, ensuring that it can easily migrate between 2G and 4G network to meet the needs of different industry applications.

EG915U series contains three variants: EG915U-CN, EG915U-EU and EG915U-LA, covering the frequency band of different countries and regions. Adopting laser engraving process, EG915U series features a more fashionable appearance, strong metallic texture, better heat dissipation capability and durable label information, which makes it ideally suited for automation requirement.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB drivers for Windows 10/ 11, Linux and Android) extend the applicability of the module to a wide range of M2M and IoT applications such as POS, PoC, ETC, shared equipment, data card, energy control and monitoring, smart safety and industrial PDA.



### Key Features

- ✓ LTE Cat 1bis module optimized for M2M and IoT applications
- ✓ Worldwide LTE and GSM/ GPRS coverage
- ✓ Abundant functional interfaces
- ✓ Analog audio
- ✓ Bluetooth (Optional)
- ✓ Wi-Fi Scan (Optional)
- ✓ DFOTA
- ✓ Super cost-effective

 LTE Cat 1bis Max. 10 Mbps (DL) Max. 5 Mbps (UL)	 Embedded Abundant Protocols	 LGA Package
 Wi-Fi Scan (Optional)	 Bluetooth (Optional)	 DFOTA
 USB 2.0 High Speed Interface	 USB Driver	 Quectel Enhanced AT Commands

# Quectel EG915U Series

LTE Cat 1bis	EG915U-CN	EG915U-EU	EG915U-LA
<b>Region/ Operator</b>	China/ India	EMEA/ Brazil/ Australia/ New Zealand	Latin America
<b>Dimensions (mm)</b>	23.6 × 19.9 × 2.4	23.6 × 19.9 × 2.4	23.6 × 19.9 × 2.4
<b>Temperature Range</b>			
<b>Operating Temperature Range</b>	-35 °C to +75 °C	-35 °C to +75 °C	-35 °C to +75 °C
<b>Extended Temperature Range</b>	-40 °C to +85 °C	-40 °C to +85 °C	-40 °C to +85 °C
<b>Frequency Bands</b>			
<b>LTE-FDD</b>	B1/ 3/ 5/ 8	B1/ 3/ 5/ 7/ 8/ 20/ 28	B2/ 3/ 4/ 5/ 7/ 8/ 28/ 66
<b>LTE-TDD</b>	B34/ 38/ 39/ 40/ 41	-	-
<b>GSM</b>	B3/ 8	B2/ 3/ 5/ 8	B2/ 3/ 5/ 8
<b>Bluetooth (Optional)</b>	Bluetooth 4.2 (LE + BR/ EDR)	Bluetooth 4.2 (LE + BR/ EDR)	Bluetooth 4.2 (LE + BR/ EDR)
<b>Wi-Fi Scan (Optional)</b>	2.4 GHz 802.11b (Rx)	2.4 GHz 802.11b (Rx)	2.4 GHz 802.11b (Rx)
<b>Certifications</b>			
<b>Carrier</b>	-	<b>Europe:</b> Deutsche Telekom <b>South Korea:</b> KT/ LGU+ * <b>Global:</b> GCF <b>Europe:</b> CE <b>Brazil:</b> Anatel <b>South Korea:</b> KC <b>Taiwan, China:</b> NCC <b>Australia/ New Zealand:</b> RCM	-
<b>Regulatory/ Conformance</b>	China: SRRC/ NAL/ CCC		<b>America:</b> FCC <b>Brazil:</b> Anatel
<b>Others</b>	WHQL	WHQL	WHQL
<b>Max. Data Rates</b>			
<b>LTE-FDD (Mbps)</b>	10 (DL)/ 5 (UL)	10 (DL)/ 5 (UL)	10 (DL)/ 5 (UL)
<b>LTE-TDD (Mbps)</b>	8.96 (DL)/ 3.1 (UL)	-	-
<b>GSM (kbps)</b>	85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)	85.6 (DL)/ 85.6 (UL)
<b>Interfaces</b>			
<b>(U)SIM</b>	× 2 (Optional for (U)SIM2)	× 2 (Optional for (U)SIM2)	× 2 (Optional for (U)SIM2)
<b>UART</b>	× 3	× 3	× 3
<b>USB 2.0</b>	× 1	× 1	× 1
<b>Digital Audio (PCM)</b>	× 1	× 1	× 1
<b>Analog Audio</b>	Input: × 1 (Microphone) Output: × 2 (Earpiece, Headphone)	Input: × 1 (Microphone) Output: × 2 (Earpiece, Headphone)	Input: × 1 (Microphone) Output: × 2 (Earpiece, Headphone)
<b>SPI</b>	× 1 (QuecOpen®)	× 1 (QuecOpen®)	× 1 (QuecOpen®)
<b>ADC</b>	× 2	× 2	× 2
<b>I2C</b>	× 1	× 1	× 1
<b>LCM</b>	× 1 (QuecOpen®)	× 1 (QuecOpen®)	× 1 (QuecOpen®)
<b>Camera</b>	× 1 (QuecOpen®)	× 1 (QuecOpen®)	× 1 (QuecOpen®)
<b>SD Card</b>	× 1 (QuecOpen®)	× 1 (QuecOpen®)	× 1 (QuecOpen®)
<b>RESET_N</b>	× 1	× 1	× 1
<b>PWRKEY</b>	× 1	× 1	× 1
<b>Antenna</b>	× 2 (at most), Main Antenna, Wi-Fi Scan/ Bluetooth Antenna (Optional)	× 2 (at most), Main Antenna, Wi-Fi Scan/ Bluetooth Antenna (Optional)	× 2 (at most), Main Antenna, Wi-Fi Scan/ Bluetooth Antenna (Optional)
<b>Voice (Optional)</b>			
<b>Speech Codec Modes</b>	HR/ FR/ EFR/ AMR/ AMR-WB	HR/ FR/ EFR/ AMR/ AMR-WB	HR/ FR/ EFR/ AMR/ AMR-WB
<b>VoLTE</b>	VoLTE (Voice over LTE)	VoLTE (Voice over LTE)	VoLTE (Voice over LTE)
<b>Enhanced Features</b>			
<b>DTMF</b>	●	●	●
<b>DFOTA</b>	●	●	●
<b>Audio Playback/ Audio Recording</b>	●	●	●
<b>QuecFile®</b>	●	●	●
<b>(U)SIM Detection</b>	●	●	●
<b>Bluetooth</b>	Optional	Optional	Optional
<b>Wi-Fi Scan</b>	Optional	Optional	Optional
<b>eSIM</b>	●	●	●
<b>Software Features</b>			
<b>Protocols</b>	TCP/ UDP/ PPP/ NITZ/ PING/ FILE/ MQTT/ NTP/ HTTP/ HTTPS/ SSL/ FTP/ FTPS/ CMUX/ MMS/ SMTP/ SMTPS	TCP/ UDP/ PPP/ NITZ/ PING/ FILE/ MQTT/ NTP/ HTTP/ HTTPS/ SSL/ FTP/ FTPS/ CMUX/ MMS/ SMTP/ SMTPS	TCP/ UDP/ PPP/ NITZ/ PING/ FILE/ MQTT/ NTP/ HTTP/ HTTPS/ SSL/ FTP/ FTPS/ CMUX/ MMS/ SMTP/ SMTPS
<b>Drivers</b>			
<b>RIL</b>	Android 4.x–14.x	Android 4.x–14.x	Android 4.x–14.x
<b>USB RNDIS</b>	Windows 10/ 11, Linux 2.6–6.7	Windows 10/ 11, Linux 2.6–6.7	Windows 10/ 11, Linux 2.6–6.7
<b>USB ECM</b>	Linux 2.6–6.7	Linux 2.6–6.7	Linux 2.6–6.7
<b>USB Serial</b>	Windows 10/ 11, Linux 2.6–6.7, Android 4.x–14.x	Windows 10/ 11, Linux 2.6–6.7, Android 4.x–14.x	Windows 10/ 11, Linux 2.6–6.7, Android 4.x–14.x
<b>Electrical Features</b>			
<b>Supply Voltage Range</b>	3.3–4.3 V, typ. 3.8 V	3.3–4.3 V, typ. 3.8 V	3.3–4.3 V, typ. 3.8 V
<b>Power Consumption (Typ.)</b>	32 µA @ Power off 1.4 mA @ LTE Sleep (PF = 128) 1.2 mA @ LTE Sleep (PF = 256) 29 mA @ Idle (PF = 64, USB Connected) 13 mA @ Idle (PF = 64, USB Disconnected)	32 µA @ Power off 1.6 mA @ LTE Sleep (PF = 128) 1.5 mA @ LTE Sleep (PF = 256) 28.1 mA @ Idle (PF = 64, USB Connected) 12.5 mA @ Idle (PF = 64, USB Disconnected)	36.8 µA @ Power off 1.55 mA @ LTE Sleep (PF = 128) 1.35 mA @ LTE Sleep (PF = 256) 30.6 mA @ Idle (PF = 64, USB Connected) 13.15 mA @ Idle (PF = 64, USB Disconnected)

NOTE:

1. \*: In progress.

2. ●: Supported.

Copyright © 2025 Quectel Wireless Solutions Co., Ltd. All Rights Reserved <http://www.quectel.com>

HQ address: Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 51086236 Email: info@quectel.com

