



Antenna Datasheet

Product OC: YEGT000W1AM

Version: 1.1

Date: 2026-01-12

Status: Released

Product Name: GNSS Terminal Mount External Dipole Antenna

Key Features:

Frequency Band: 1559–1606 MHz

Dimensions: 135 mm × 15.6 mm × 13 mm

Efficiency: Up to 78.2 %

RoHS and REACH Compliant

IP67

Compatible with FAKRA, TNC and Type-N connectors

Overview

This Quectel GNSS antenna adopts a diversity of forms to guarantee the most suitable polarization type. Quectel's positioning products support single-band or multi-band operation modes to meet various high-precision positioning requirements of customers' products. Quectel provides both passive and active antennas to satisfy the customer demand for high gain. Such antenna supports different installation or connection methods such as pin mount, surface mount, magnetic mount, internal cable, and external SMA. Customized connector type and cable length are provided according to requirements.

Contents

Overview	1
Contents	2
1 Specification	3
1.1. Electrical	3
1.2. Mechanical & Environmental	6
1.3. Supported GNSS Frequency Bands	6
2 Drawing	8
3 Detailed Performance	9
3.1. S-Parameter Test	9
3.1.1. VSWR	9
3.1.2. Return Loss	10
3.2. Radiation Performance Test	11
3.2.1. Efficiency	11
3.2.2. Average Gain	12
3.2.3. Peak Gain	13
3.2.4. 3D & 2D Radiation Pattern	14
3.2.4.1. Test Condition: Free Space Straight	14
3.2.4.2. Test Condition: Free Space Bent	16
3.2.4.3. Test Condition: On 130 mm × 70 mm EVB Straight	18
3.2.4.4. Test Condition: On 130 mm × 70 mm EVB Bent	20
4 Packaging	22
Contact Us	24
Legal Notices	25
Revision History	27

1 Specification

Test Condition: Free Space & 130 mm × 70 mm EVB

1.1. Electrical

Electrical	
Frequency Range	1559–1606 MHz
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni-directional

Frequency (MHz)	Band	GPS L5 GALILEO E5a BDS B2a- B2I QZSS L5 IRNSS L5	GALILEO E5b BDS B2b	GPS L2 QZSS L2C	GLONASS G2	BDS B3	BDS B1I	GPS L1 GALILEO E1 BDS B1C QZSS L1	GLONASS G1
		1176	1207	1227	1248	1268	1561	1575	1602
VSWR	FS Straight	-	-	-	-	-	1.2	1.1	1.2
	FS Bent	-	-	-	-	-	1.2	1.1	1.2
	EVB Straight	-	-	-	-	-	1.2	1.2	1.2
	EVB Bent	-	-	-	-	-	1.4	1.4	1.3
Return Loss (dB)	FS Straight	-	-	-	-	-	-21.5	-23.5	-19.6
	FS Bent	-	-	-	-	-	-19.7	-23.1	-20.4

	EVB Straight	-	-	-	-	-	-20.4	-20.2	-22.5
	EVB Bent	-	-	-	-	-	-14.7	-14.9	-16.8
Efficiency (%)	FS Straight	-	-	-	-	-	77.5	75.9	75.1
	FS Bent	-	-	-	-	-	76.2	75.3	70.4
	EVB Straight	-	-	-	-	-	74.9	74.0	71.6
	EVB Bent	-	-	-	-	-	71.2	69.5	69.9
AVG Gain (dB)	FS Straight	-	-	-	-	-	-1.1	-1.2	-1.2
	FS Bent	-	-	-	-	-	-1.2	-1.2	-1.5
	EVB Straight	-	-	-	-	-	-1.3	-1.3	-1.5
	EVB Bent	-	-	-	-	-	-1.5	-1.6	-1.6
Peak Gain (dBi)	FS Straight	-	-	-	-	-	2.9	2.7	2.5
	FS Bent	-	-	-	-	-	2.2	2.1	2.0
	EVB Straight	-	-	-	-	-	3.0	2.9	2.5
	EVB Bent	-	-	-	-	-	1.3	1.1	1.3
VSWR		FS Straight			≤ 1.3				
		FS Bent			≤ 1.2				
		EVB Straight			≤ 1.2				
		EVB Bent			≤ 1.5				
Return Loss		FS Straight			≤ -18.8 dB				
		FS Bent			≤ -19.1 dB				
		EVB Straight			≤ -20.1 dB				
		EVB Bent			≤ -14.7 dB				
Peak Gain		FS Straight			≤ 2.9 dBi				

	FS Bent	≤ 2.4 dBi
	EVB Straight	≤ 3.0 dBi
	EVB Bent	≤ 1.4 dBi

- **Straight:** The connector is vertical.
- **Bent:** The connector is bend.
- **FS:** On Free Space.
- **EVB:** On 130 mm × 70 mm EVB.

1.2. Mechanical & Environmental


Mechanical	
Antenna Dimensions	135 mm × 15.6 mm × 13 mm
Material & Color	PC + ABS & Black
Connector Type	SMA Male
Mounting Type	Terminal
Weight	Typ. 17 g
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
Ingress Protection (IP) Rating	IP67 (After Installation)
RoHS and REACH Compliant	Yes

1.3. Supported GNSS Frequency Bands


GNSS Frequency Bands (MHz)					
GPS	L1 Centre 1575.42 (1565–1586)	L2 Centre 1227.6 (1217–1238)	L5 Centre 1176.45 (1164–1189)		
	√	-	-		
GLONASS	G1-L10C-L10F Centre 1601 (1595–1606)	G2-L20C-L20F Centre 1248.06 (1241–1255)	G3-L30C Centre 1202.025 (1189–1213)		
	√	-	-		
GALILEO	E1 Centre 1575.42 (1563–1588)	E5a Centre 1176.45 (1166–1187)	E5b Centre 1207.14 (1197–1218)	E6 Centre 1278.75 (1258–1300)	
	√	-	-	-	
BDS	B1I	B1C (BDS-3)	B2a-B2I	B2b	B3

	Centre 1561.098 (1559–1564)	Centre 1575.42 (1559–1592)	Centre 1176.45 (1166–1187)	Centre 1207.14 (1197–1217)	Centre 1268.52 (1258–1279)
	√	√	-	-	-
QZSS	L1 Centre 1575.42 (1573–1578)	L2C Centre 1227.6 (1226–1229)	L5 Centre 1176.45 (1166–1187)	L6 Centre 1278.75 (1257–1300)	
	√	-	-	-	
IRNSS	L5 Centre 1176.45 (1164–1189)				
	-				

GNSS Bands and Constellations

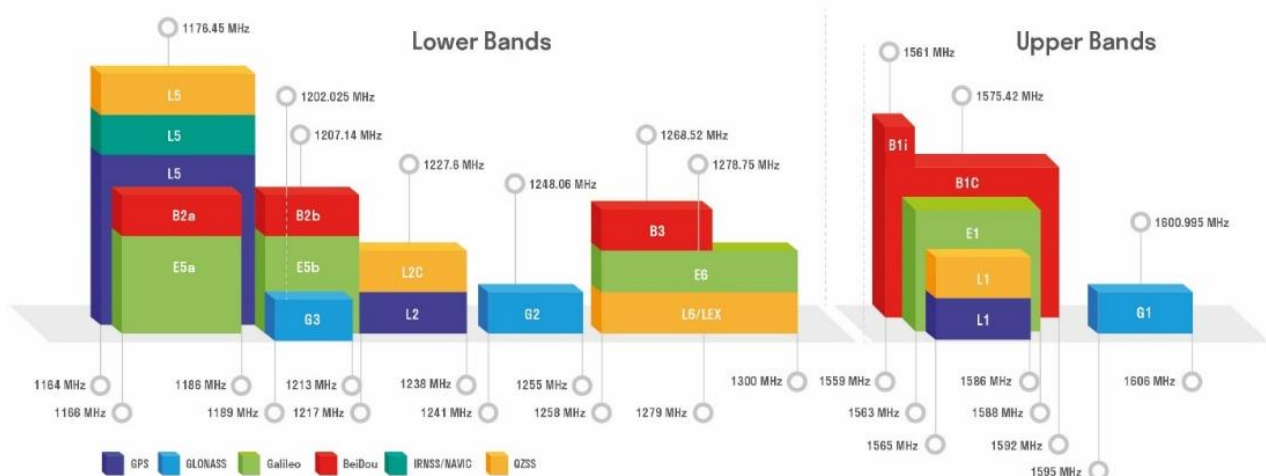

2 Drawing

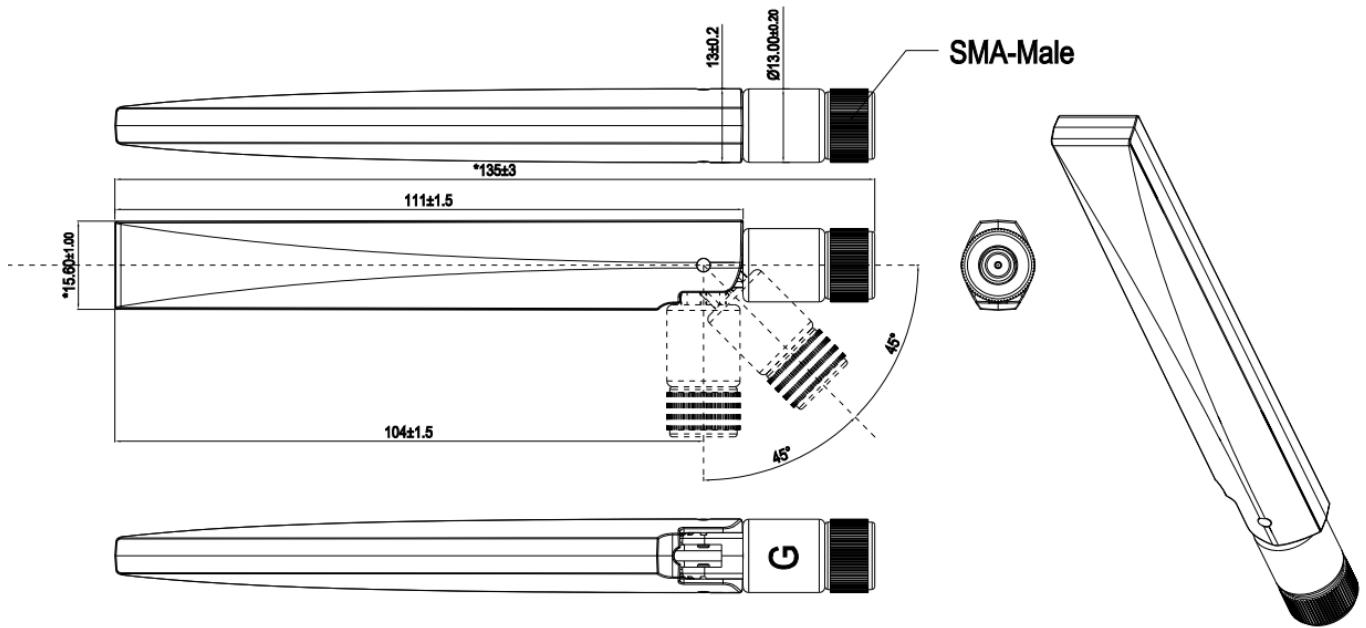


UNIT:mm

Note: If you use a torque wrench, the recommended force for mounting the antenna is 0.9Nm and the maximum torque to prevent antenna damage is 1.17Nm.

3 Detailed Performance

3.1. S-Parameter Test


3.1.1. VSWR

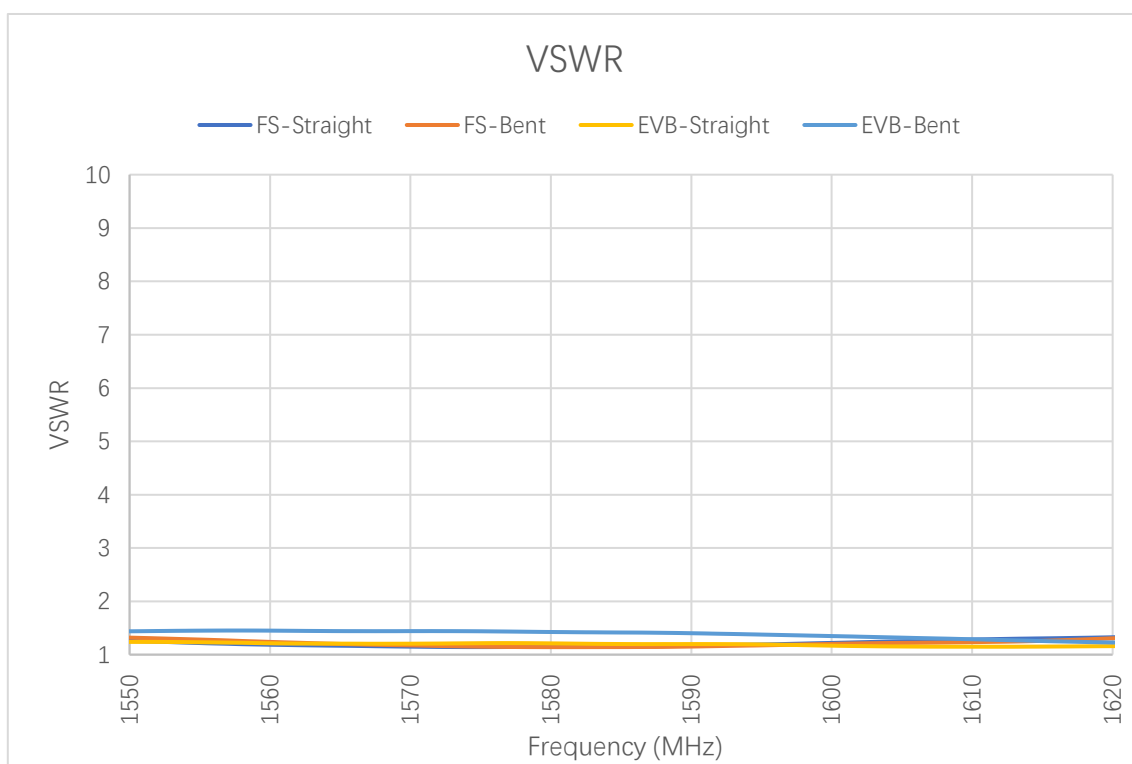

VSWR

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
FS Straight	-	-	-	-	-	1.2	1.1	1.2
FS Bent	-	-	-	-	-	1.2	1.1	1.2
EVB Straight	-	-	-	-	-	1.2	1.2	1.2
EVB Bent	-	-	-	-	-	1.4	1.4	1.3

3.1.2. Return Loss

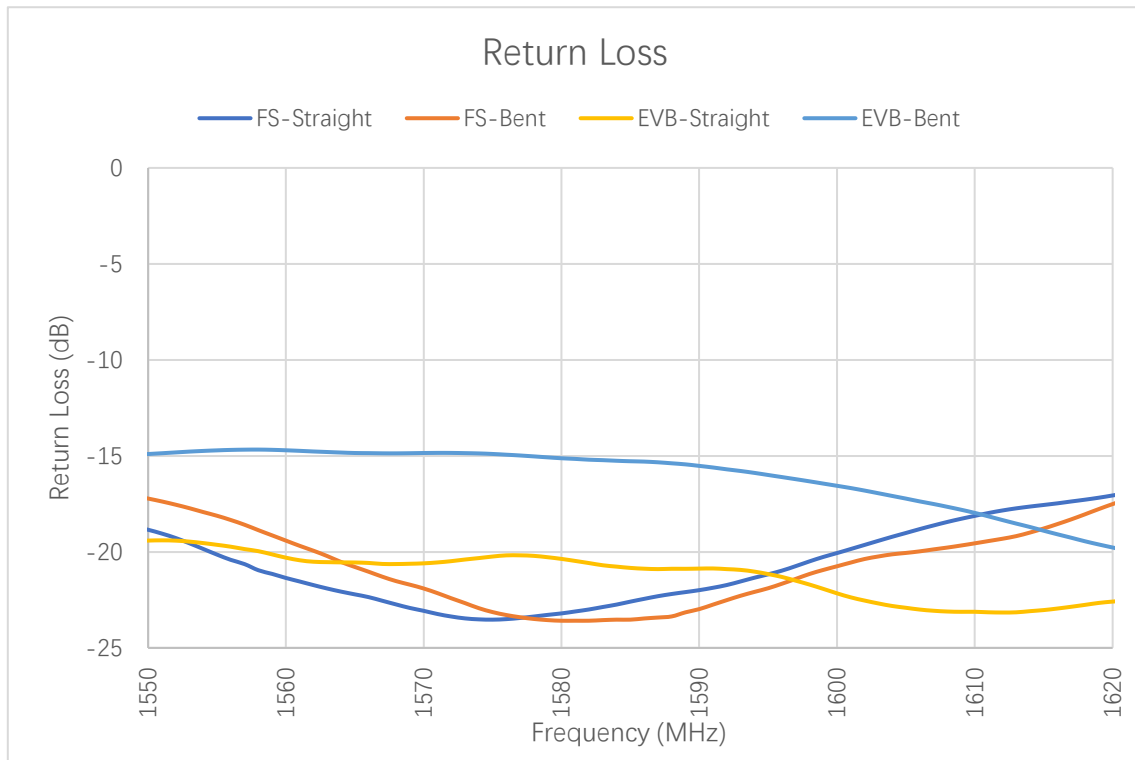


Return Loss (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
FS Straight	-	-	-	-	-	-21.5	-23.5	-19.6
FS Bent	-	-	-	-	-	-19.7	-23.1	-20.4
EVB Straight	-	-	-	-	-	-20.4	-20.2	-22.5
EVB Bent	-	-	-	-	-	-14.7	-14.9	-16.8

3.2. Radiation Performance Test


3.2.1. Efficiency

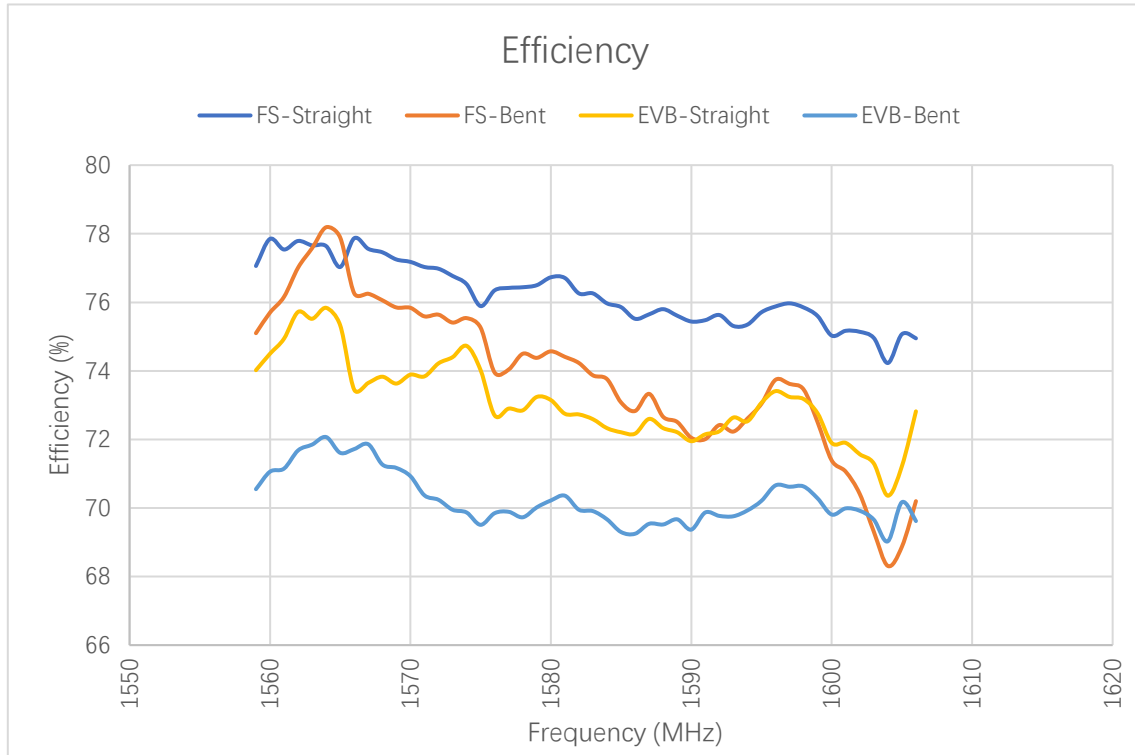

Efficiency (%)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
FS Straight	-	-	-	-	-	77.5	75.9	75.1
FS Bent	-	-	-	-	-	76.2	75.3	70.4
EVB Straight	-	-	-	-	-	74.9	74.0	71.6
EVB Bent	-	-	-	-	-	71.2	69.5	69.9


3.2.2. Average Gain

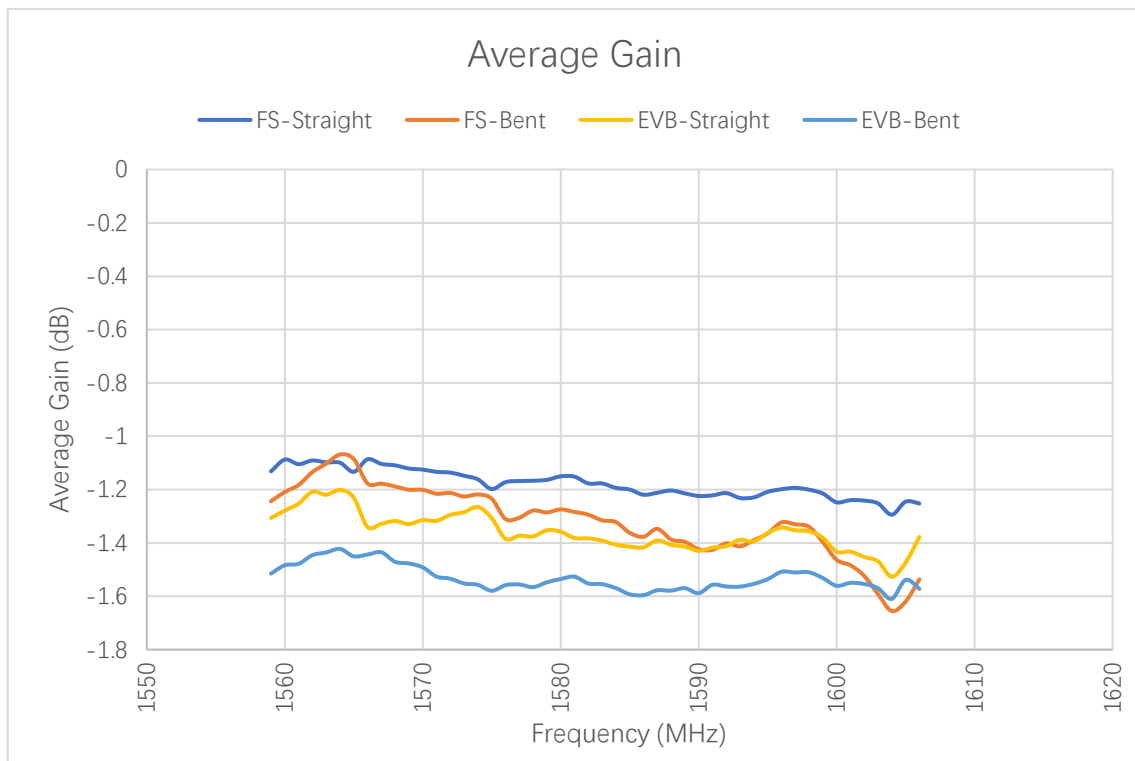

Average Gain (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
FS Straight	-	-	-	-	-	-1.1	-1.2	-1.2
FS Bent	-	-	-	-	-	-1.2	-1.2	-1.5
EVB Straight	-	-	-	-	-	-1.3	-1.3	-1.5
EVB Bent	-	-	-	-	-	-1.5	-1.6	-1.6

3.2.3. Peak Gain

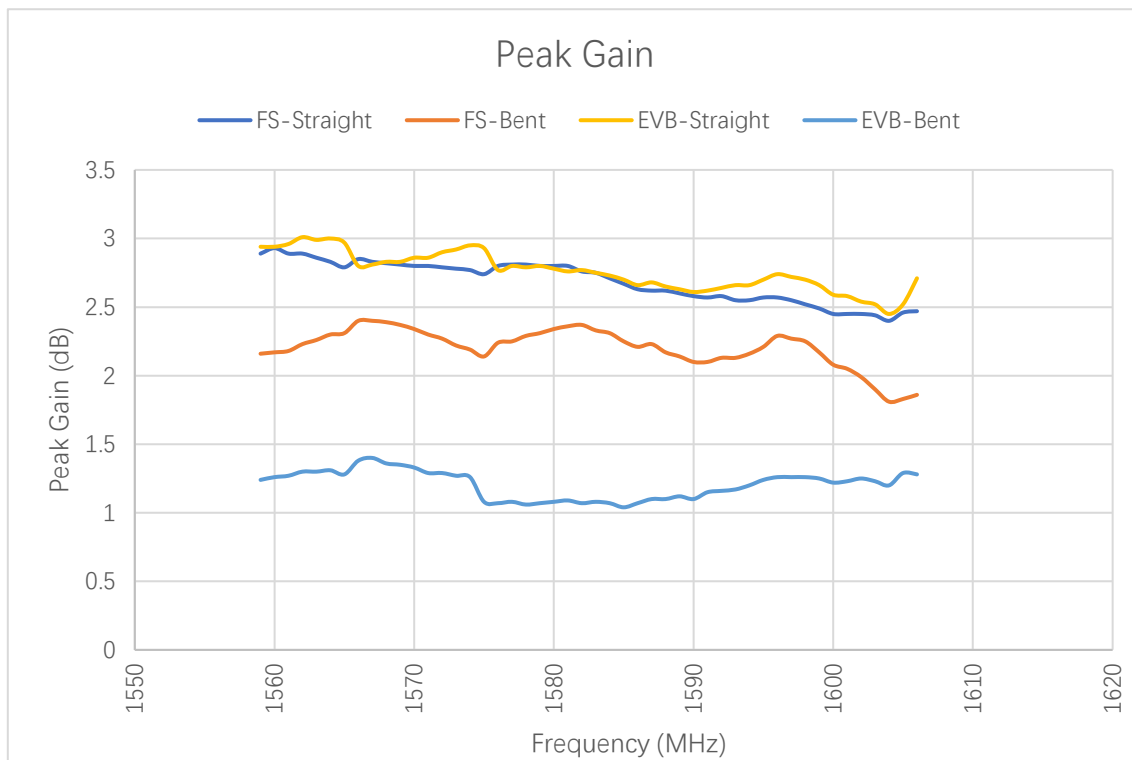


Peak Gain (dBi)


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
FS Straight	-	-	-	-	-	2.9	2.7	2.5
FS Bent	-	-	-	-	-	2.2	2.1	2.0
EVB Straight	-	-	-	-	-	3.0	2.9	2.5
EVB Bent	-	-	-	-	-	1.3	1.1	1.3

3.2.4. 3D & 2D Radiation Pattern

3.2.4.1. Test Condition: Free Space Straight


- Test Chamber: FS-S-1

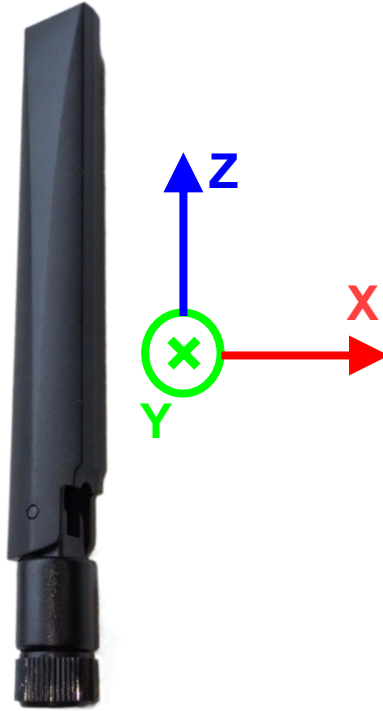


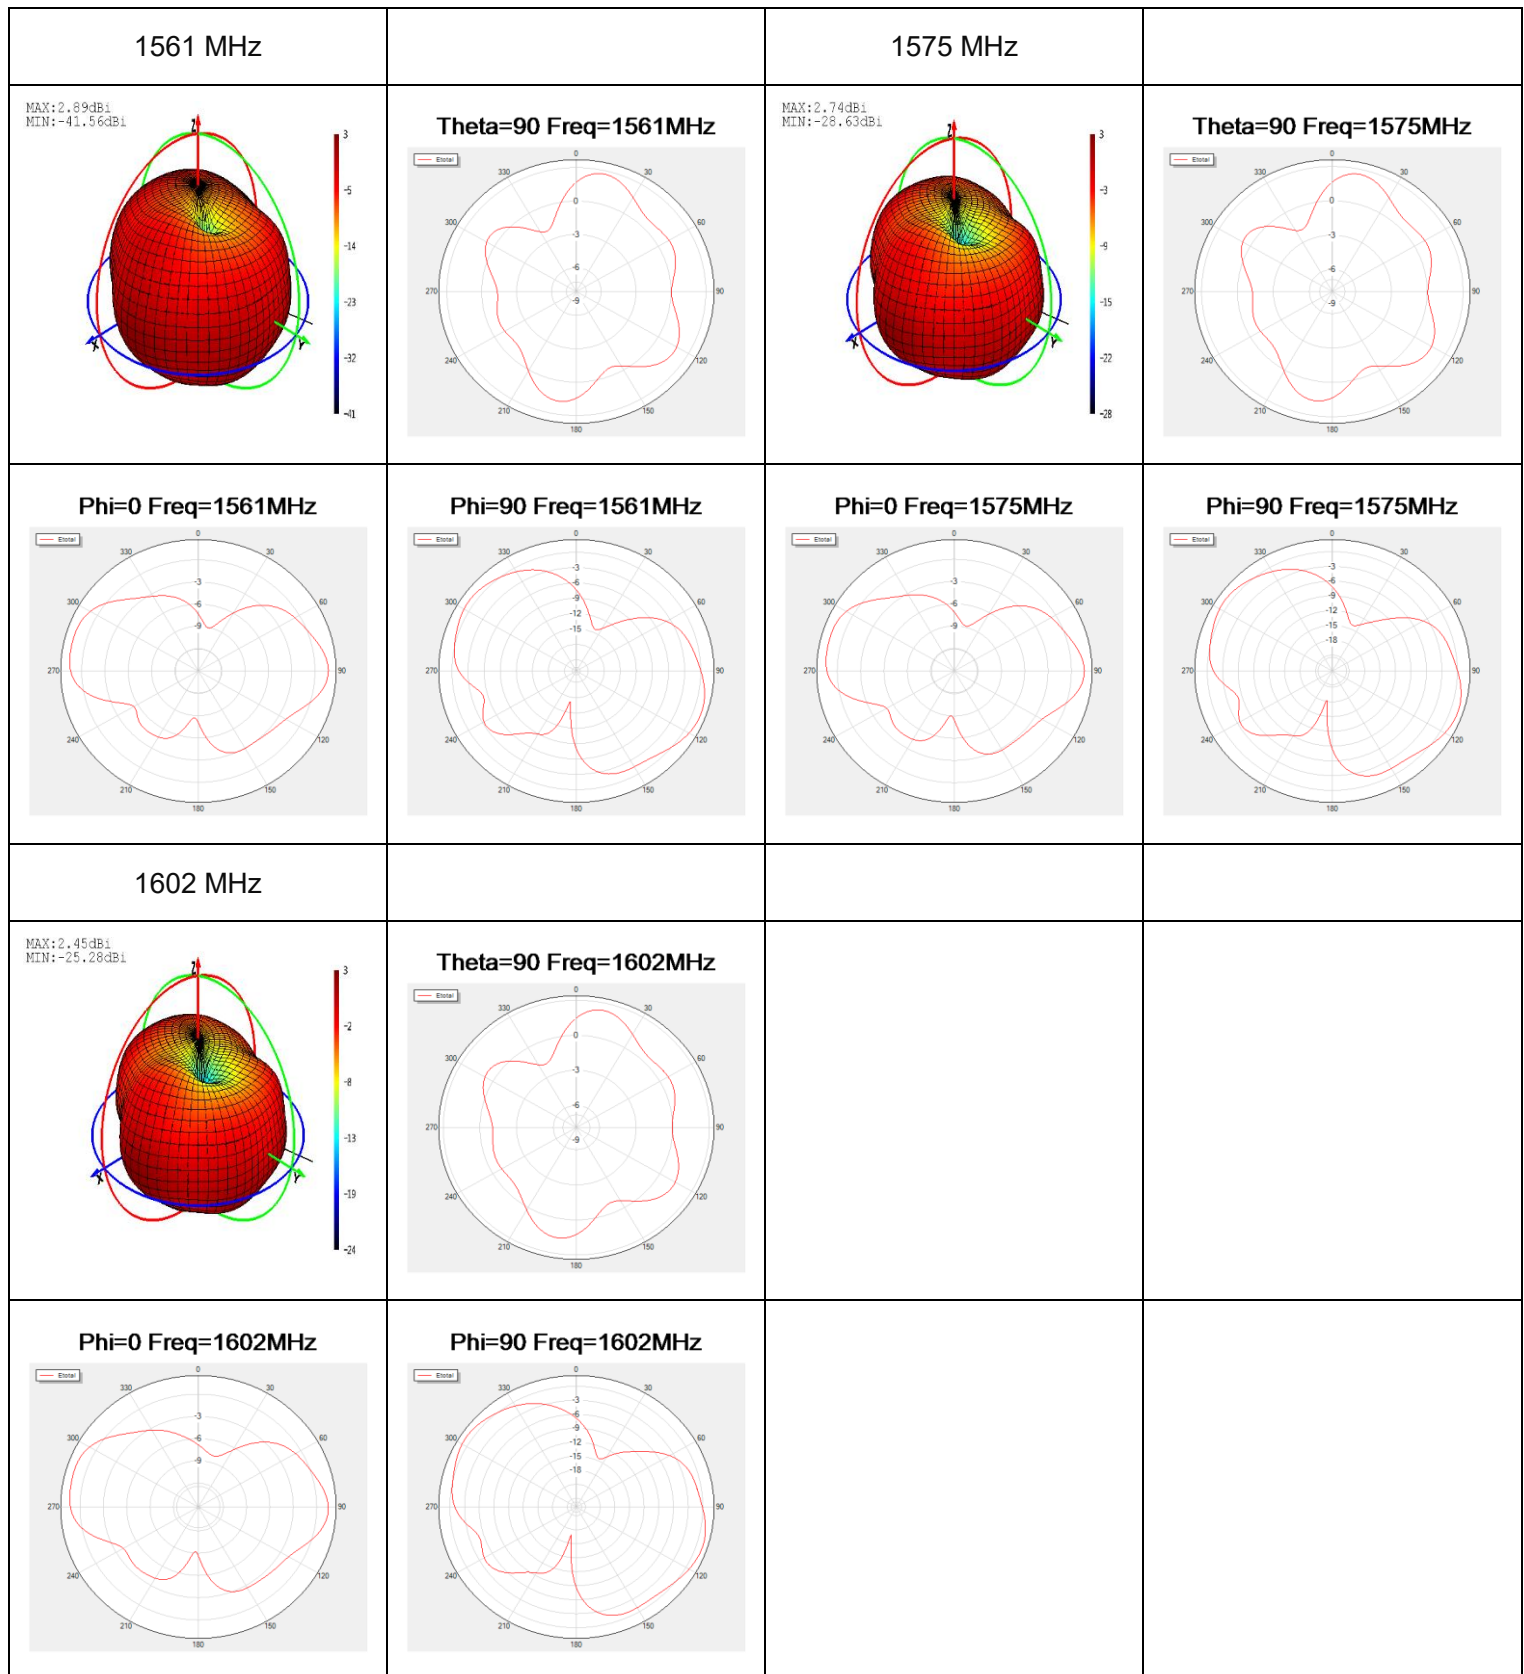

3.2.4.2. Test Condition: Free Space Bent


- Test Chamber: FS-S-1

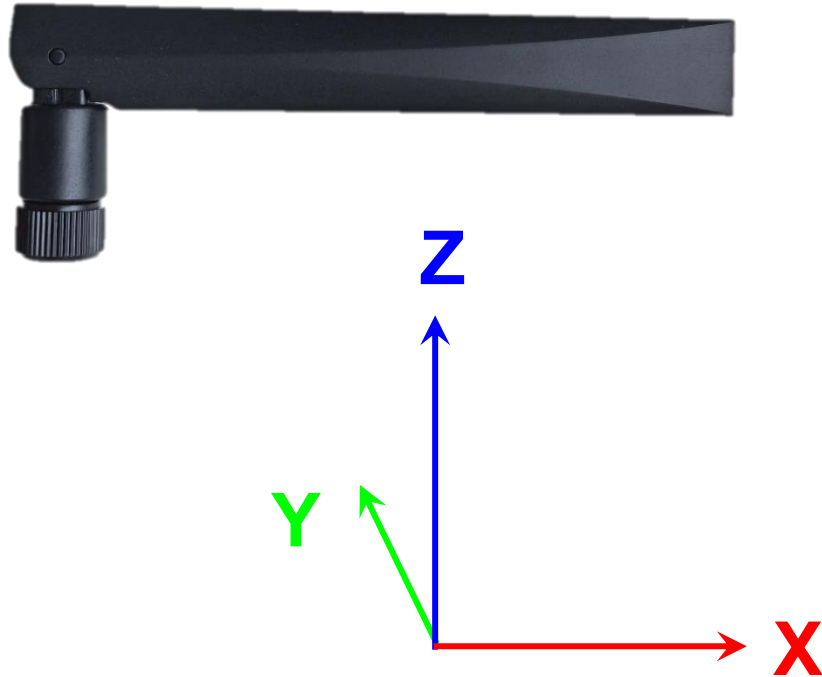


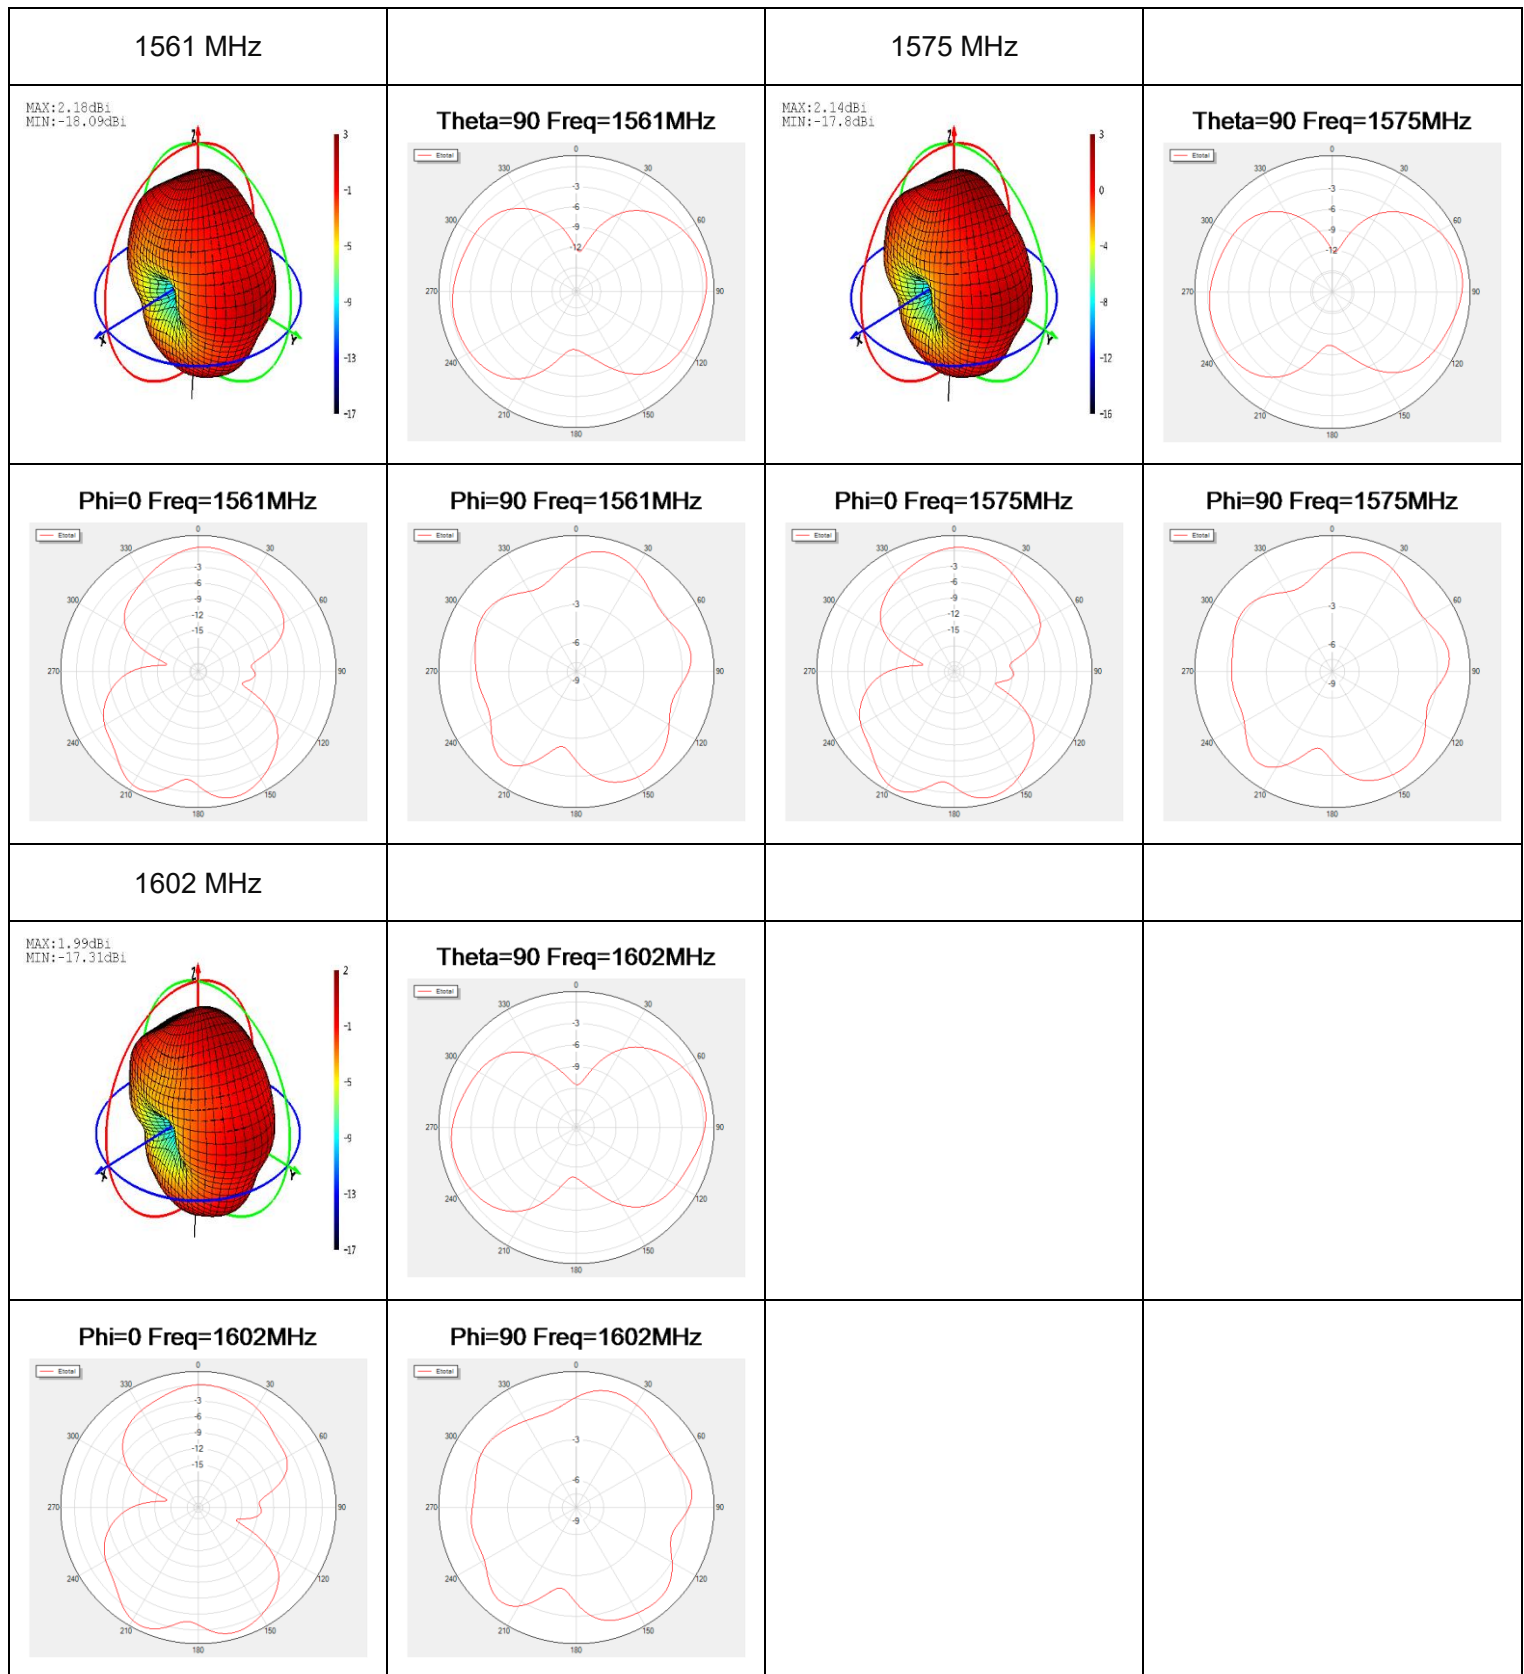

3.2.4.3. Test Condition: On 130 mm × 70 mm EVB Straight


- Test Chamber: FS-S-1

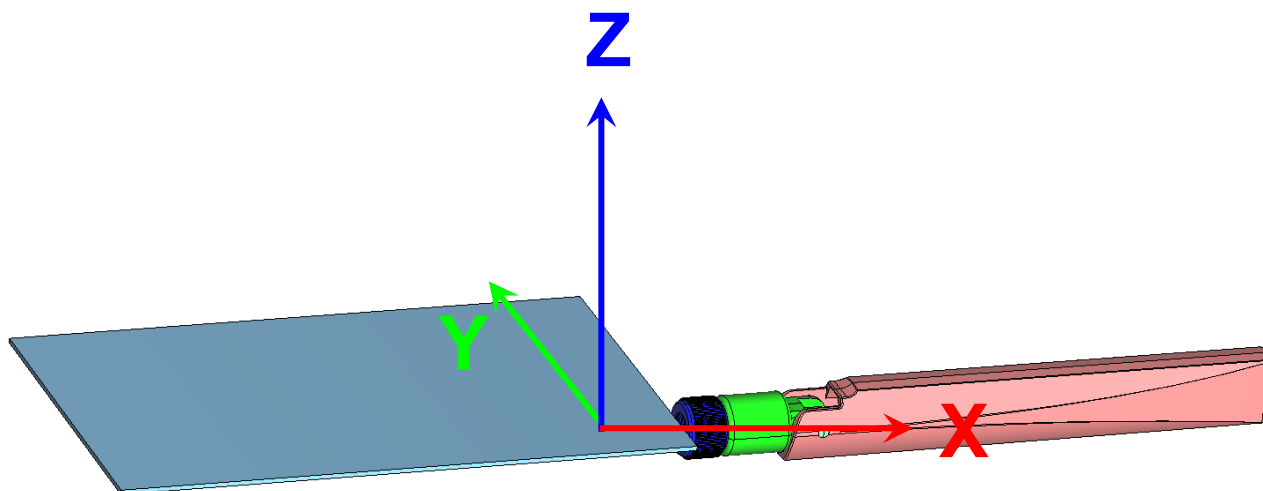

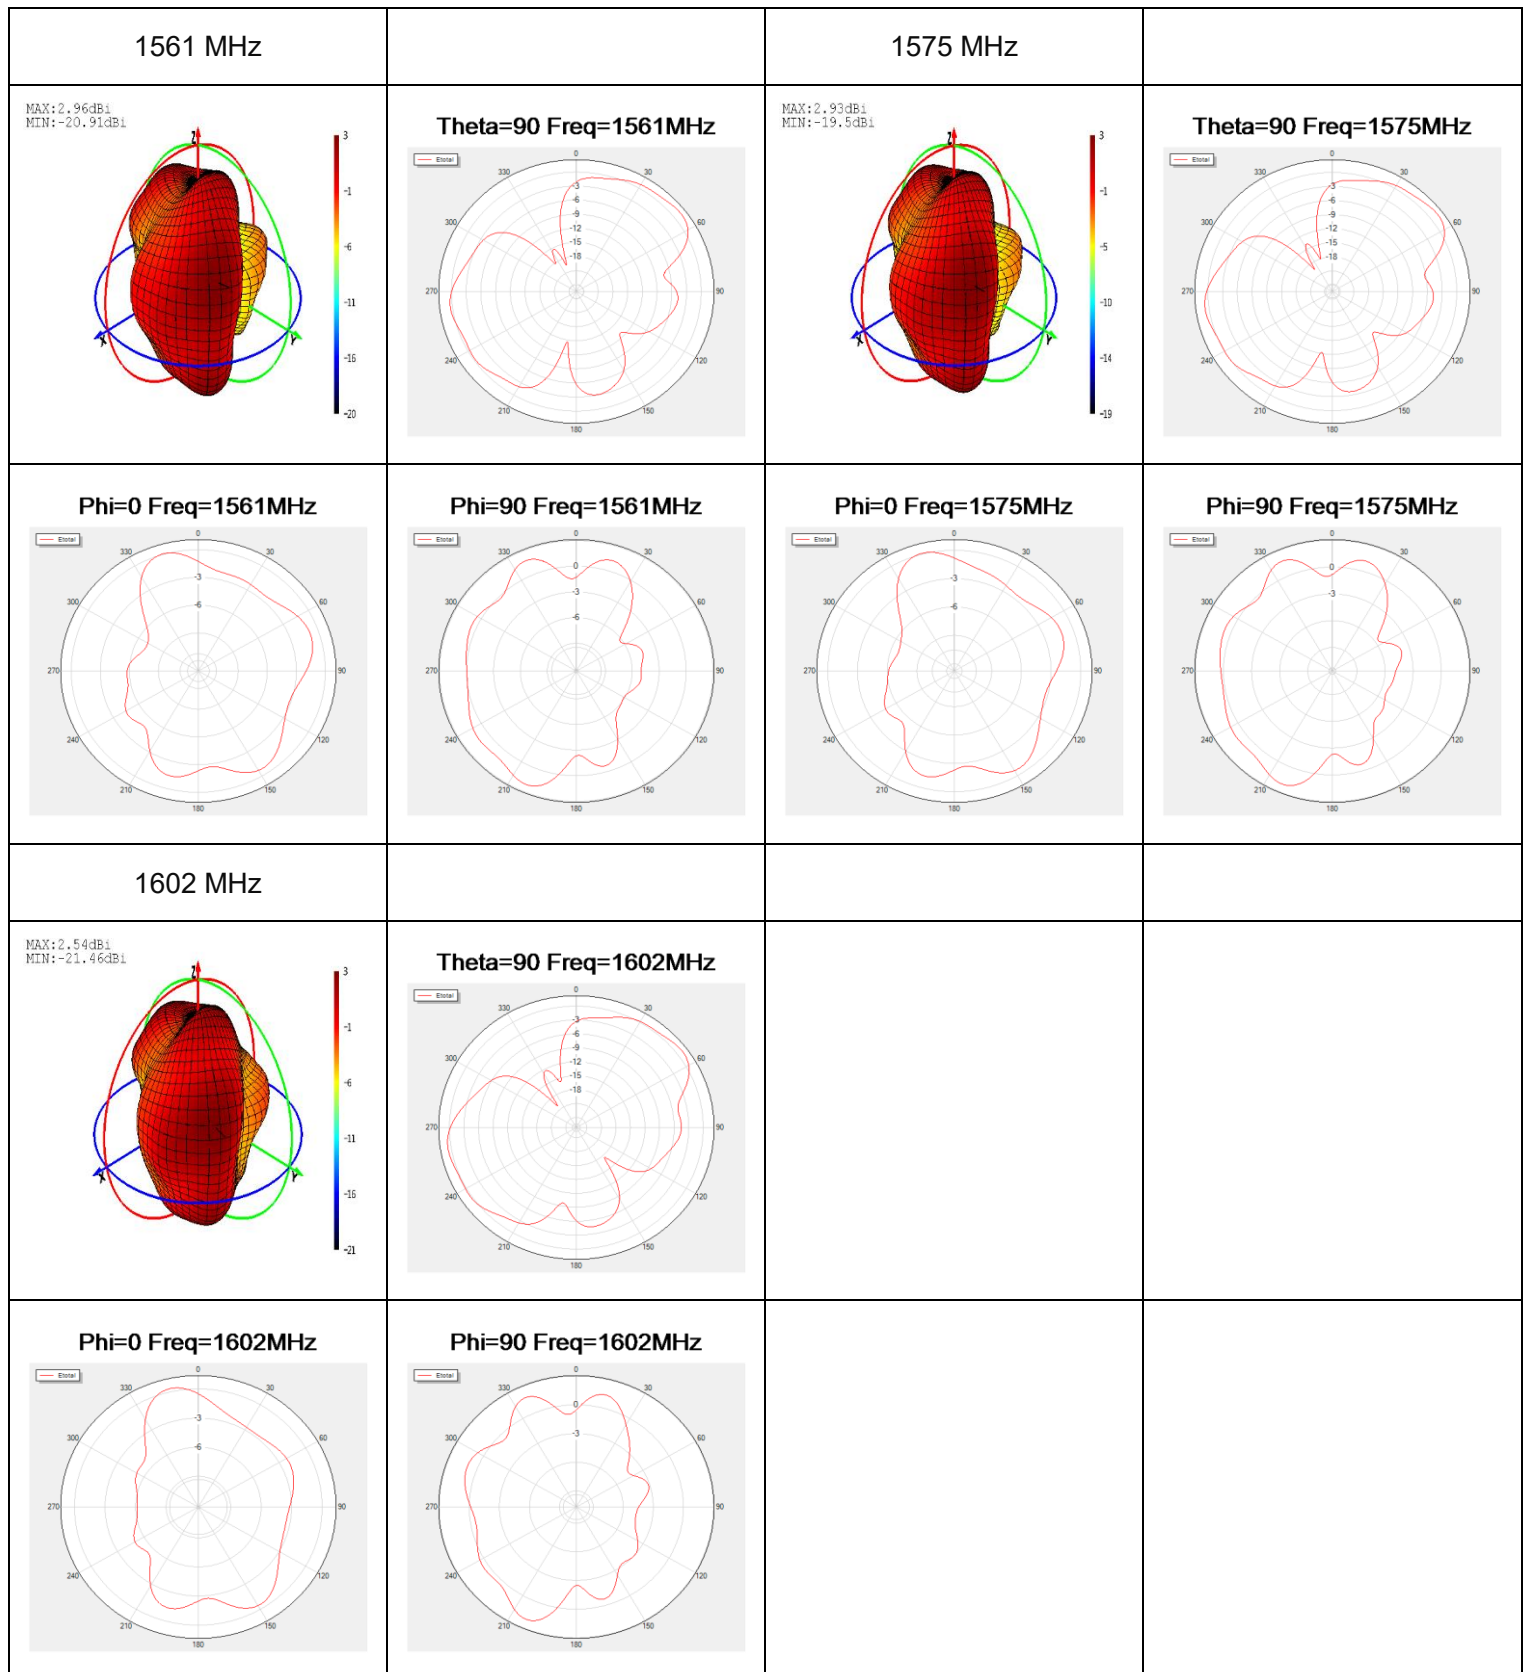


3.2.4.4. Test Condition: On 130 mm × 70 mm EVB Bent

- Test Chamber: FS-S-1

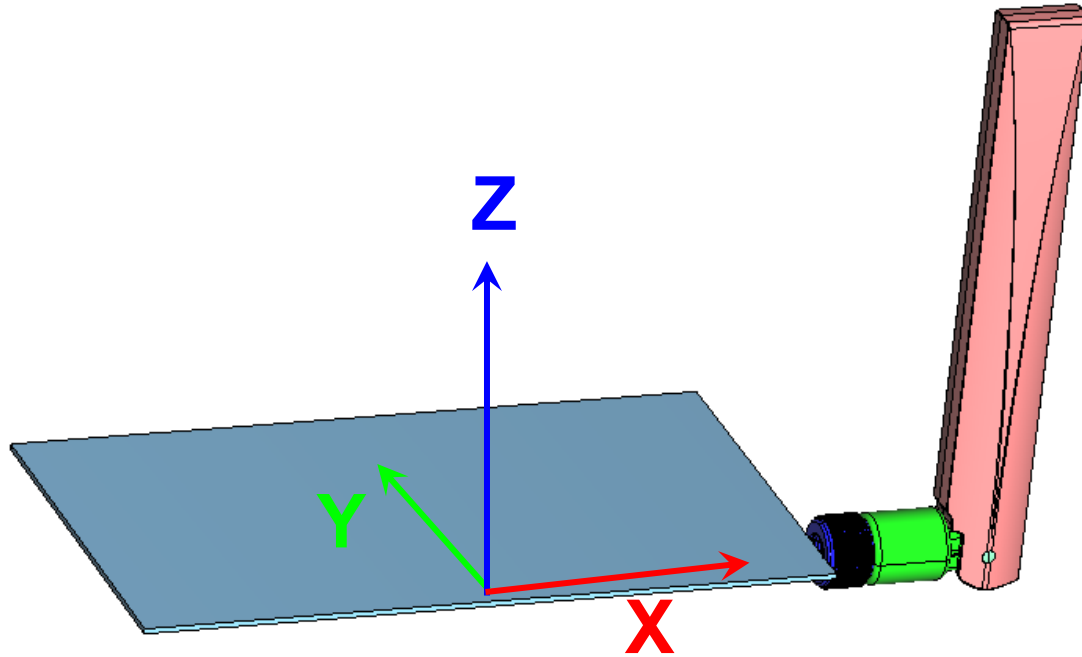


1561 MHz

MAX:1.27dB1
MIN:-23.09dB1




Theta=90 Freq=1561MHz




1575 MHz


MAX:1.08dB1
MIN:-23.72dB1




Theta=90 Freq=1575MHz

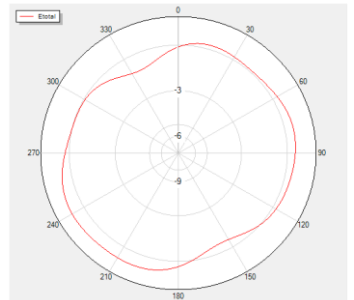


Phi=0 Freq=1561MHz




Phi=90 Freq=1561MHz



Phi=0 Freq=1575MHz




Phi=90 Freq=1575MHz

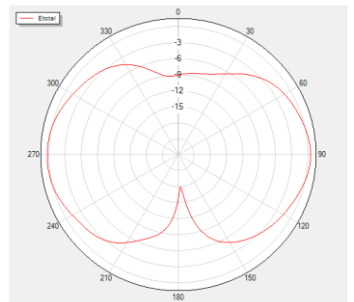


1602 MHz


MAX:1.25dB1
MIN:-22.49dB1




Theta=90 Freq=1602MHz







Phi=0 Freq=1602MHz




Phi=90 Freq=1602MHz



4 Packaging

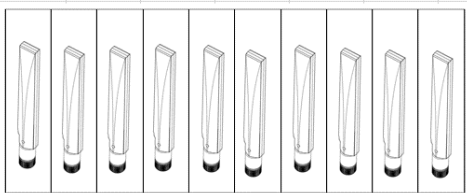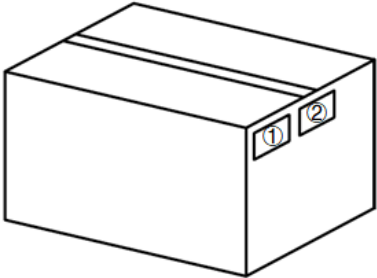Step	Packaging Picture / 2D Picture	Description
1		10 antenna products in a one-piece bag. (10 Antennas / One-piece Bag)
2		40 antenna products in a PE bag. (40 Antennas / PE Bag)
3		(18 PE Bags / Carton Box) (720 Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. <u>Carton Size:</u> <u>L × W × H = 370 × 370 × 295 mm</u>
4		Position for Attaching Labels ① Carton Label ② Quality Label

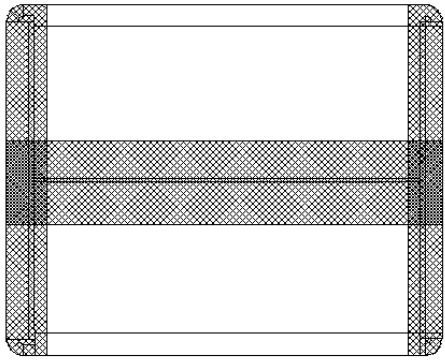5		Sealing Cartons H-shaped sealing cartons
Note	The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<https://www.quectel.com/contact/>.

For technical support, or to report documentation errors, please visit:

<https://www.quectel.com/tech-support/>.

Or email us at: support@quectel.com.

Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

Use and Disclosure Restrictions

License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the intended project.

Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

Disclaimer

- a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
- b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
- c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
- d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2026. All rights reserved.

Revision History

Version	Date	Author	Note
-	2025-01-02	Mordecai Liu/ Lance Sun/ Riva Ren/ Rainey Liao	Creation of the document
1.0	2025-01-02	Mordecai Liu/ Lance Sun/ Riva Ren/ Rainey Liao	First official release
1.1	2026-01-12	Strong Qiang	Updated the packaging (Chapter 4).



www.quectel.com

