


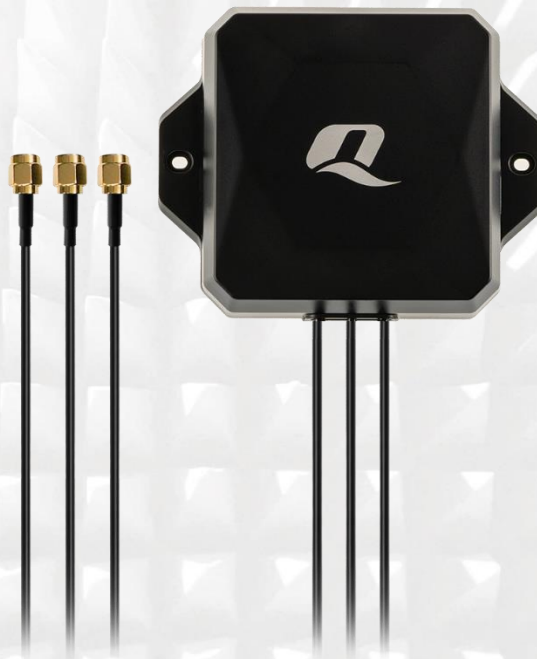

Antenna Datasheet

Product OC: YEMD302L1A

Version: 1.4

Date: 2026-04-13

Status: Released

Product Name: 4G & Wi-Fi & GNSS 3in1 Multiple Mount Combo External Antenna

Key Features:

Frequency Band: 4G: 698–960 MHz, 1710–2690 MHz & Wi-Fi: 2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz & GNSS: 1559–1606 MHz

Dimensions: 109.28 mm × 89 mm × 25.8 mm

Efficiency: Up to 75.6 %

GNSS LNA Gain: 18 ±3 dB

RoHS & REACH & POPS Compliant

IP67

Overview

YEMD302L1A is a 4G & Wi-Fi & GNSS 3in1 measuring 109.28 mm × 89 mm × 25.8 mm. This ultra-wide-band 4G & Wi-Fi & GNSS antenna provides broad coverage from 698–960 MHz, 1710–2690 MHz, 2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz, 1559–1606 MHz whilst offering backward-compatibility to support 3G and 2G networks as well as LTE Cat-M and narrowband IoT (NB-IoT). The antenna is available magnet & adhesive & screw mount omni-directional antenna, ideal for applications where the antenna is required to be discrete, is easy to install with maximum durability assured and suitable for use in harsh outdoor environments thanks to its IP67 rated, UV-resistant and UL 94 V-0 Flame Rating enclosure. It is compatible with Quectel's RM520x Series modules.

YEMD302L1A has 1 × 4G antenna, 1 × Wi-Fi antenna and 1 × GNSS L1 antenna. It allows high efficiency, stable signal transmission and reception for active GNSS from 1559–1606 MHz, and 4G bands from 698–960 MHz, 1710–2690 MHz, Wi-Fi bands from 2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz. In the meantime, this product also offers high isolation between antennas to avoid self-interference. All in all, this unique product is designed to provide stable and high-speed data connection to 4G & Wi-Fi & GNSS applications. YEMD302L1A can be used in harsh environments thanks to its robust UV resistant (UL 746c f1) and flame resistant (UL 94 V-0) enclosure.

- **Typical applications include:**

- ✓ Public safety
- ✓ HD Video Streaming
- ✓ Utilities and Smart Cities
- ✓ Fleet Management
- ✓ Automotive vehicle tracking

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

Overview	1
Contents	2
1 Specification	3
1.1. Electrical	3
1.1.1. LTE	4
1.1.2. Wi-Fi	5
1.1.3. GNSS	6
1.2. Mechanical & Environmental	7
1.3. Block Diagram (Active Antenna)	8
1.4. Supported GNSS Frequency Bands	9
2 Drawing	11
3 Detailed Performance	12
3.1. S-Parameter Test	12
3.1.1. VSWR	12
3.1.2. Return Loss	15
3.1.3. Isolation	18
3.1.4. GNSS LNA Gain	21
3.1.5. GNSS Noise Figure	22
3.2. Radiation Performance Test	23
3.2.1. Efficiency	23
3.2.2. Average Gain	26
3.2.3. Peak Gain	28
3.2.4. 3D & 2D Radiation Pattern	31
4 Installation	42
5 Packaging	44
Contact Us	46
Legal Notices	47
Revision History	49

1 Specification

Test Condition: Free Space & On 300 mm × 300 mm Metal Plane

1.1. Electrical

Electrical Specifications			
Frequency Range	LTE	698–960 MHz, 1710–2690 MHz	
	Wi-Fi	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz	
	GNSS	1559–1606 MHz	
Radiation Pattern	LTE	Omni-directional	
	Wi-Fi	Omni-directional	
	GNSS	Directional	
Polarization	LTE	Linear	
	Wi-Fi	Linear	
	GNSS	RHCP	
Impedance		50 Ω	
Isolation	LTE – Wi-Fi	FS	≤ -12.0 dB
		MP	≤ -12.4 dB
	LTE – GNSS	FS	≤ -42.5 dB
		MP	≤ -42.9 dB
	Wi-Fi – GNSS	FS	≤ -46.8 dB
		MP	≤ -52.4 dB

1.1.1. LTE

Electrical – Detail													
SPEC	Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850	
Max. VSWR	FS	-	2.6	3.0	-	1.7	1.9	2.9	3.6	-	-	-	
	MP	-	1.7	3.7	-	2.5	1.8	2.2	2.4	-	-	-	
Max. Return Loss (dB)	FS	-	-7.1	-6.0	-	-11.5	-10.5	-6.3	-5.0	-	-	-	
	MP	-	-12.0	-4.9	-	-7.4	-10.7	-8.6	-7.8	-	-	-	
AVG Eff. (%)	FS	-	51.0	40.8	-	62.9	51.6	42.8	32.6	-	-	-	
	MP	-	51.4	32.0	-	57.7	53.9	48.1	42.0	-	-	-	
AVG AVG Gain (dB)	FS	-	-2.9	-3.9	-	-2.0	-2.9	-3.7	-4.9	-	-	-	
	MP	-	-2.9	-4.9	-	-2.4	-2.7	-3.2	-3.8	-	-	-	
Max. Peak Gain (dBi)	FS	-	3.9	1.6	-	5.1	4.0	3.7	1.5	-	-	-	
	MP	-	4.9	4.4	-	5.9	4.7	4.9	4.9	-	-	-	
VSWR			FS				≤ 3.6						
			MP				≤ 3.7						
Return Loss			FS				≤ -5.0 dB						
			MP				≤ -4.9 dB						
Gain			FS				≤ 5.1 dBi						
			MP				≤ 5.9 dBi						

- FS: In Free Space
- MP: On 300 mm × 300 mm Metal Plane

1.1.2. Wi-Fi

Electrical – Detail				
Band Specification	Band	Wi-Fi 2G	Wi-Fi 5G	Wi-Fi 6G
	Freq. (MHz)	2400–2500	5150–5850	5925–7125
Max. VSWR	FS	1.3	1.3	1.4
	MP	1.8	1.4	1.5
Max. Return Loss (dB)	FS	-17.6	-17.3	-14.8
	MP	-11.1	-15.7	-13.5
AVG Eff. (%)	FS	59.5	53.0	39.8
	MP	58.1	51.1	38.2
AVG. AVG Gain (dB)	FS	-2.3	-2.8	-4.0
	MP	-2.4	-2.9	-4.2
Max. Peak Gain (dBi)	FS	2.6	5.8	4.0
	MP	6.5	4.9	3.0
VSWR	FS	≤ 1.4		
	MP	≤ 1.8		
Return Loss	FS	≤ -14.8 dB		
	MP	≤ -11.1 dB		
Peak Gain	FS	≤ 5.8 dBi		
	MP	≤ 6.5 dBi		

- FS: In Free Space
- MP: On 300 mm × 300 mm Metal Plane

1.1.3. GNSS


Band Frequency (MHz)	GPS L5 GALILEO E5a BDS B2a- B2I QZSS L5 IRNSS L5	GALILEO E5b BDS B2b	GPS L2 QZSS L2C	GLONASS G2	BDS B3	BDS B1I	GPS L1 GALILEO E1 BDS B1C QZSS L1	GLONASS G1
	1176	1207	1227	1248	1268	1561	1575	1602
VSWR	-	-	-	-	-	4.73	1.63	1.54
Return Loss (dB)	-	-	-	-	-	-3.7	-12.3	-13.2
Efficiency (%)	-	-	-	-	-	42	79	76
Peak Gain (dBi)	-	-	-	-	-	-0.91	1.95	2.18

LNA Electrical	
LNA Gain	18 ±3 dB @ 3 V 17 ±3 dB @ 1.8 V
Noise Figure	≤ 2.5 dB
Output VSWR	< 2.0
Input VSWR	< 2.0
Filter Out-of-Band Attenuation	60 dB f0 ±100 MHz f0 (1580 MHz)
Working Voltage	1.8–3.3 V
Working Current	8.3 ±2 mA
Impedance	50 Ω

1.2. Mechanical & Environmental

Mechanical		
Antenna Dimensions		109.28 mm × 89 mm × 25.8 mm
Antenna Material & Color		PC & Black
Cable Type & Color & Length	LTE	ALS302 & Black & 1025 ±25 mm
	Wi-Fi	ALS302 & Black & 1025 ±25 mm
	GNSS	RG174 & Black & 1025 ±25 mm
Connector Type	LTE	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
	Wi-Fi	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
	GNSS	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
Weight		Typ. 154 g
Mounting Type		Magnet & Adhesive & Screw
Environmental		
Operation Temperature		-40 °C to +85 °C
Storage Temperature		-40 °C to +85 °C
Ingress Protection (IP) Rating		IP67
RoHS & REACH & POPS Compliant		Yes
Housing Flame Rating		UL 94 V-0
Housing UV Resistant		UL 746c f1


1.3. Block Diagram (Active Antenna)

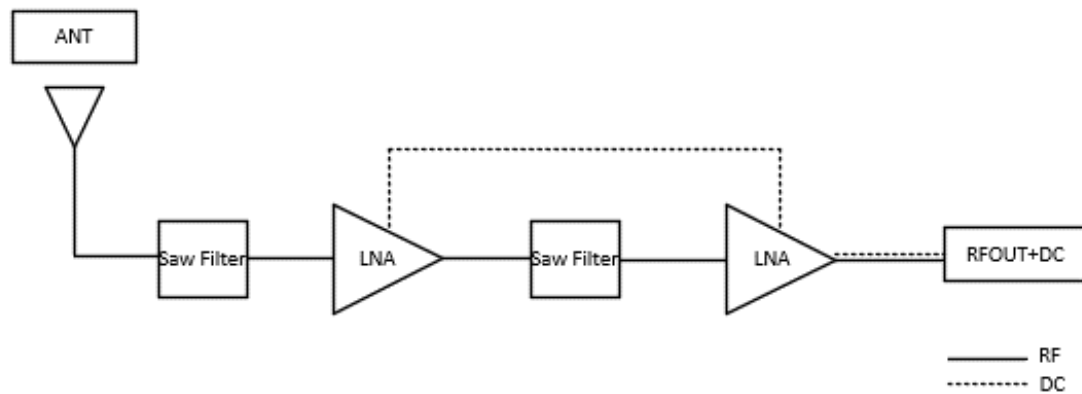


1.4. Supported GNSS Frequency Bands

GNSS Frequency Bands (MHz)					
GPS	L1 Centre 1575.42 (1565–1586)	L2 Centre 1227.6 (1217–1238)	L5 Centre 1176.45 (1164–1189)		
	√	-	-		
GLONASS	G1-L10C-L10F Centre 1601 (1595–1606)	G2-L20C-L20F Centre 1248.06 (1241–1255)	G3-L30C Centre 1202.025 (1189–1213)		
	√	-	-		
GALILEO	E1 Centre 1575.42 (1563–1588)	E5a Centre 1176.45 (1166–1187)	E5b Centre 1207.14 (1197–1218)	E6 Centre 1278.75 (1258–1300)	
	√	-	-	-	
BDS	B1I Centre 1561.098 (1559–1564)	B1C (BDS-3) Centre 1575.42 (1559–1592)	B2a-B2I Centre 1176.45 (1166–1187)	B2b Centre 1207.14 (1197–1217)	B3 Centre 1268.52 (1258–1279)
	√	√	-	-	-
QZSS	L1 Centre 1575.42 (1573–1578)	L2C Centre 1227.6 (1226–1229)	L5 Centre 1176.45 (1166–1187)	L6 Centre 1278.75 (1257–1300)	
	√	-	-	-	
IRNSS	L5 Centre 1176.45 (1164–1189)				
	-				

GNSS Bands and Constellations

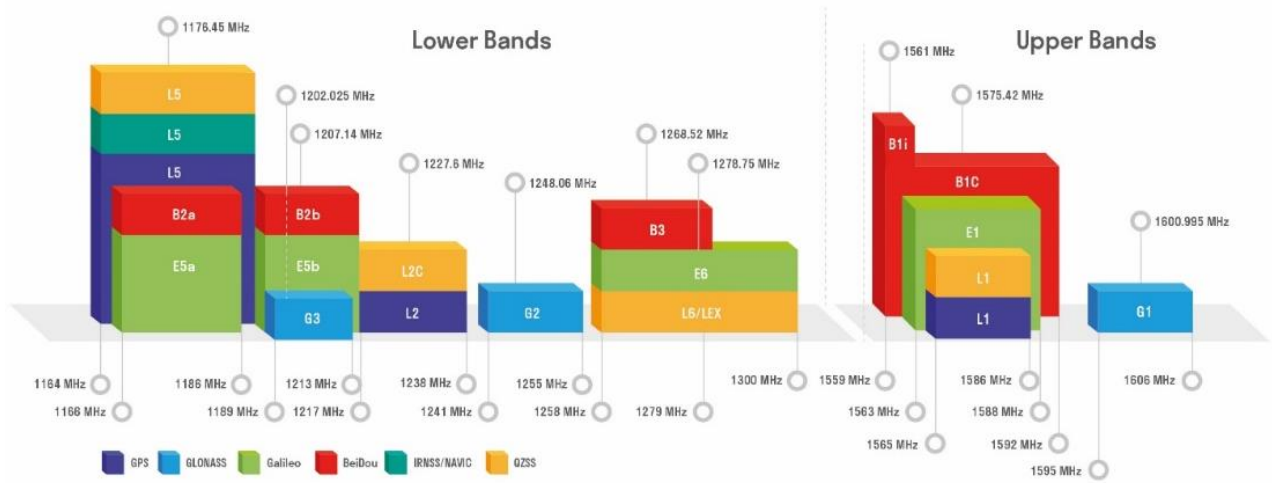


2 Drawing

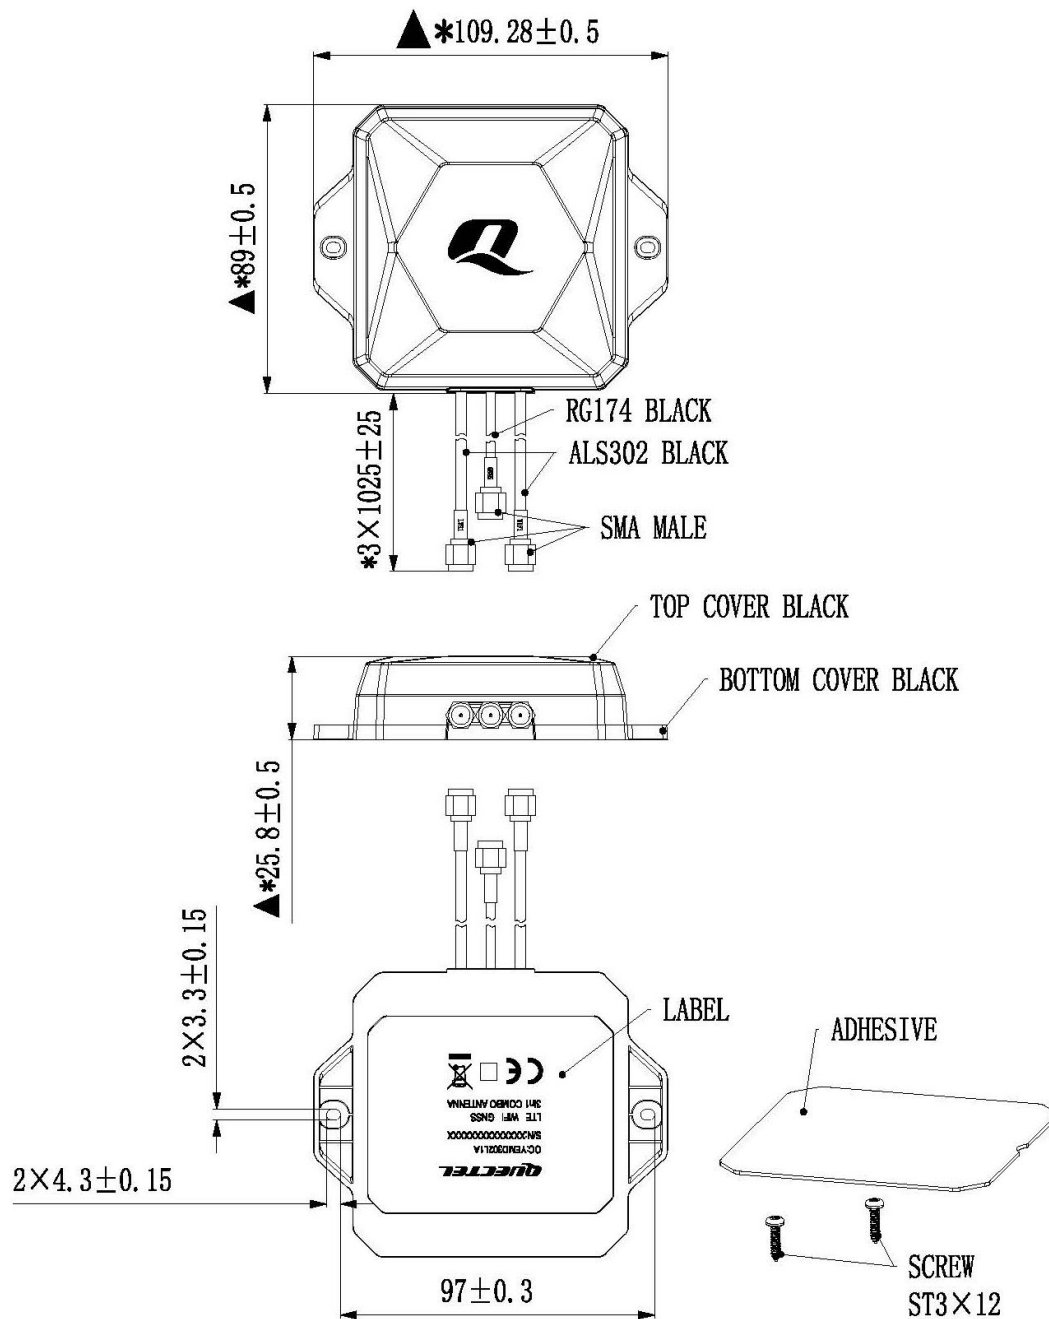

3 Detailed Performance


3.1. S-Parameter Test

3.1.1. VSWR

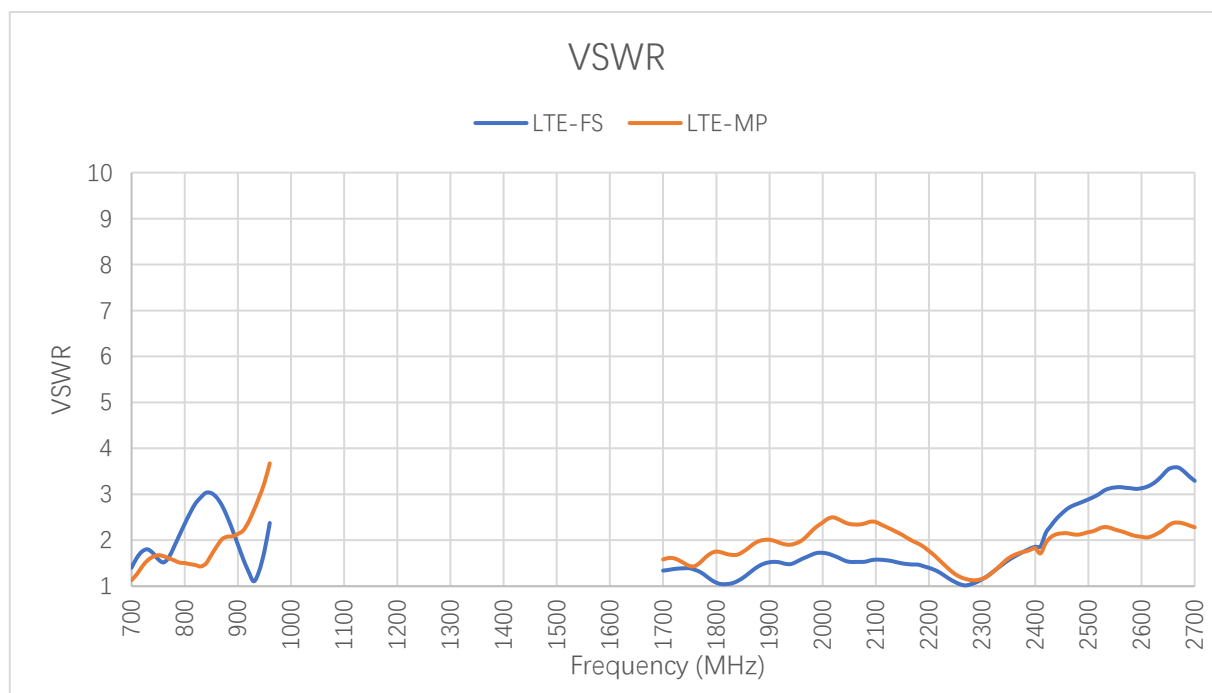


VSWR – LTE

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE	FS	-	-	1.6	2.9	1.9	2.4	-	1.4	1.4	1.4
	MP	-	-	1.3	1.4	2.1	3.7	-	1.6	1.5	2.0
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE	FS	1.5	1.5	1.6	2.6	3.1	3.4	-	-	-	-
	MP	1.9	2.2	1.6	2.1	2.1	2.3	-	-	-	-

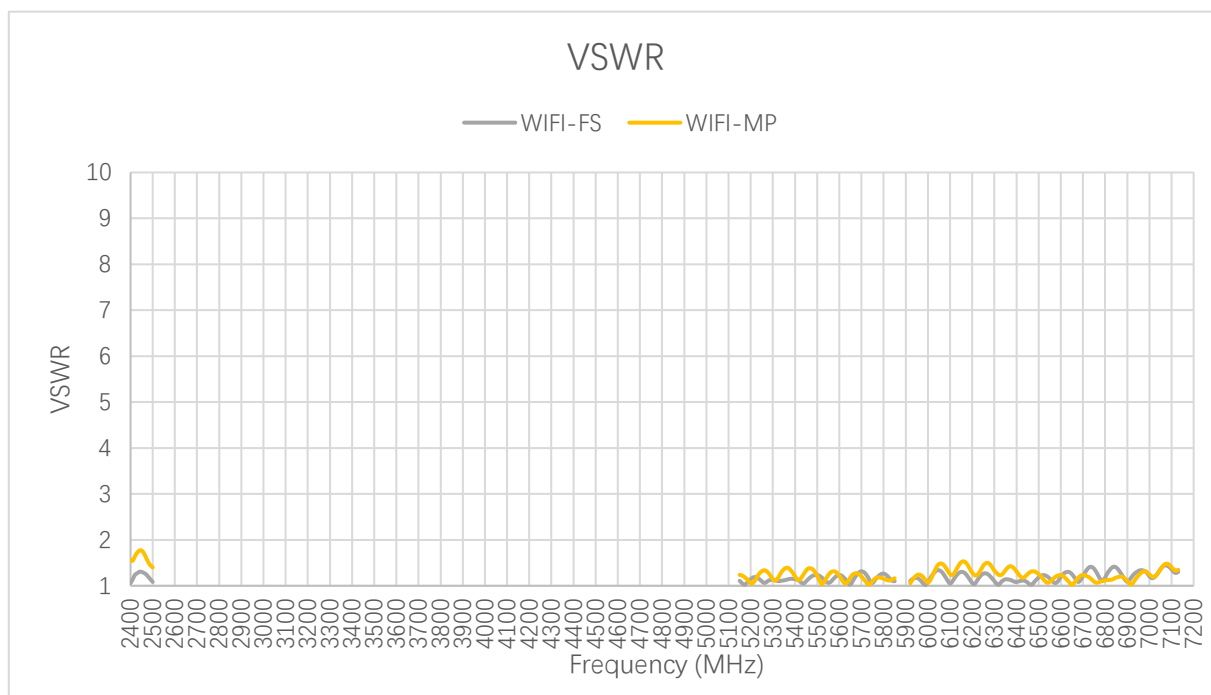

VSWR – Wi-Fi


Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	1.1	1.3	1.1	1.1	1.2	1.1	1.1	1.0	1.4	1.3
	MP	1.6	1.8	1.4	1.2	1.2	1.2	1.1	1.2	1.2	1.3

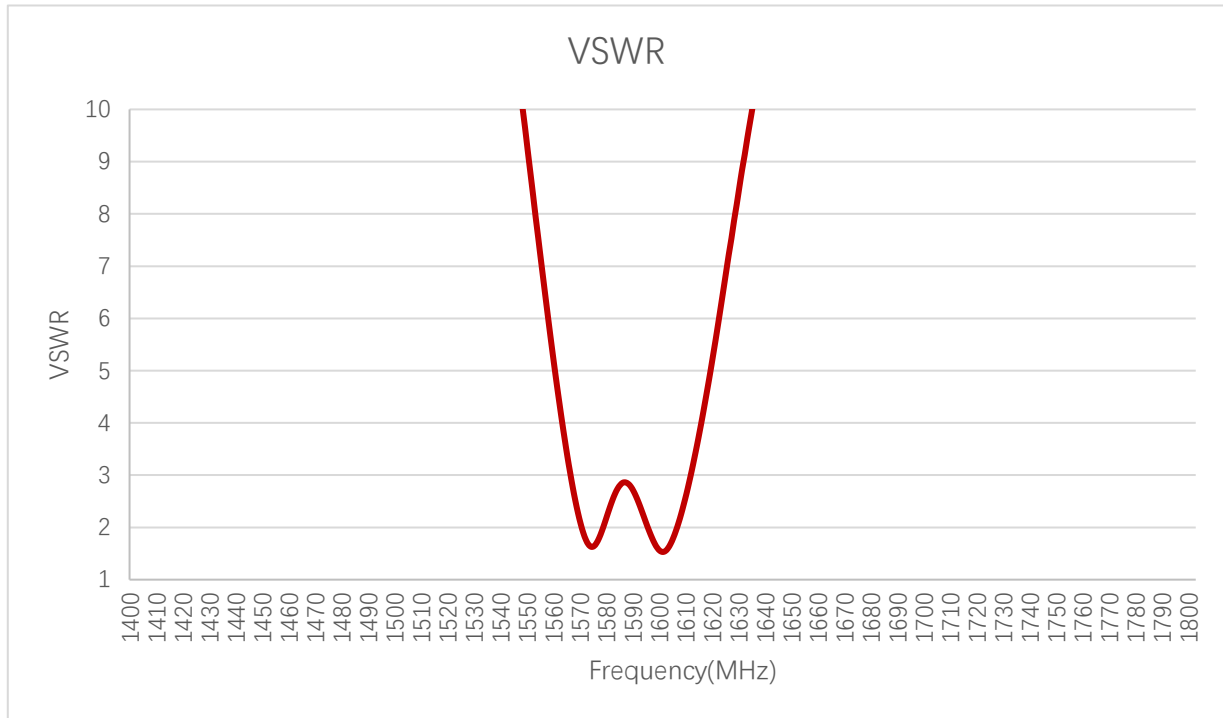

VSWR – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
VSWR	-	-	-	-	-	4.73	1.63	1.54

3.1.2. Return Loss

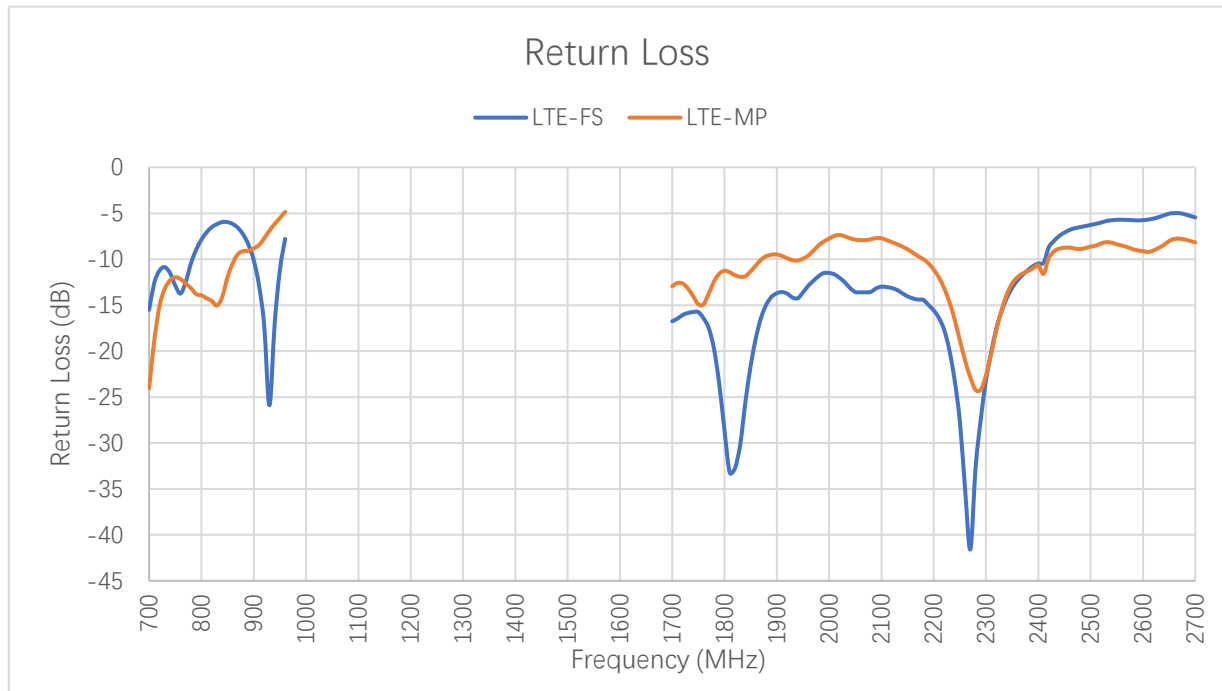


Return Loss (dB) – LTE

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE	FS	-	-	-12.5	-6.2	-10.1	-7.8	-	-16.5	-15.7	-14.9
	MP	-	-	-18.8	-15.0	-8.8	-4.9	-	-12.6	-14.0	-9.7
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE	FS	-13.6	-13.7	-13.1	-7.1	-5.7	-5.3	-	-	-	-
	MP	-9.9	-8.6	-12.6	-8.8	-9.1	-8.0	-	-	-	-

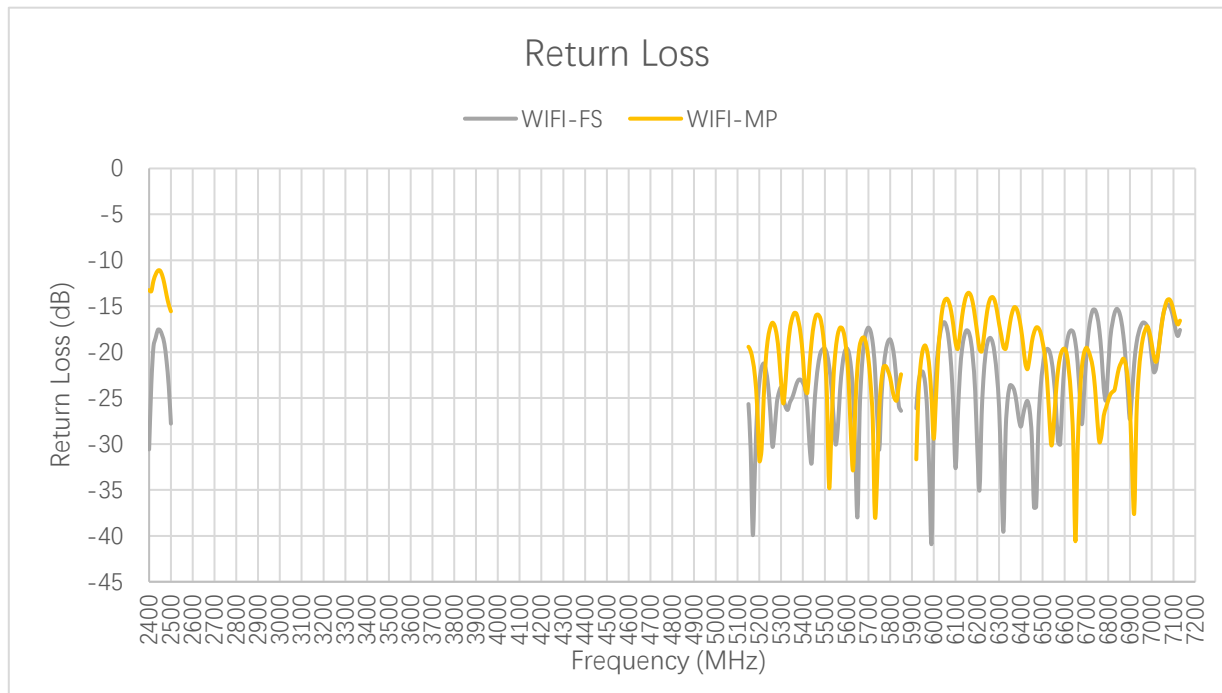

Return Loss (dB) – Wi-Fi


Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	-30.6	-17.6	-27.8	-25.7	-19.6	-26.4	-26.1	-39.5	-16.3	-18.3
	MP	-13.2	-11.1	-15.6	-19.4	-20.1	-22.4	-31.7	-19.5	-20.6	-17.0

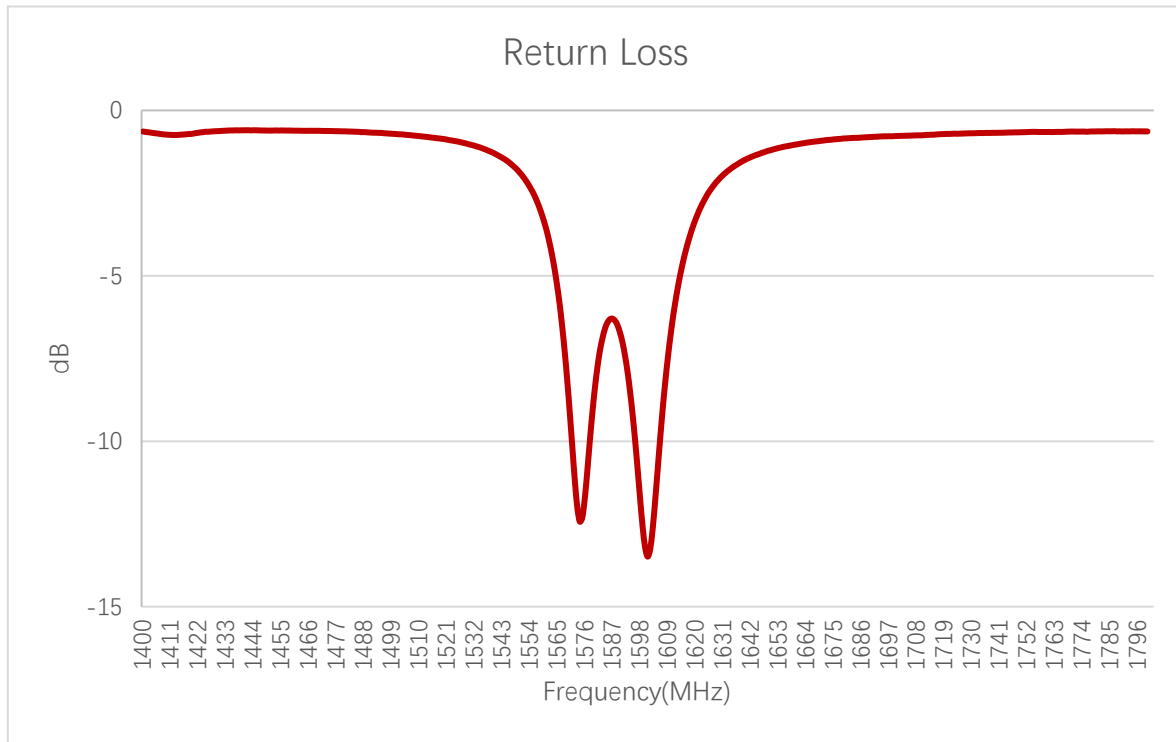

Return Loss (dB) – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Return Loss (dB)	-	-	-	-	-	-3.7	-12.3	-13.2

3.1.3. Isolation

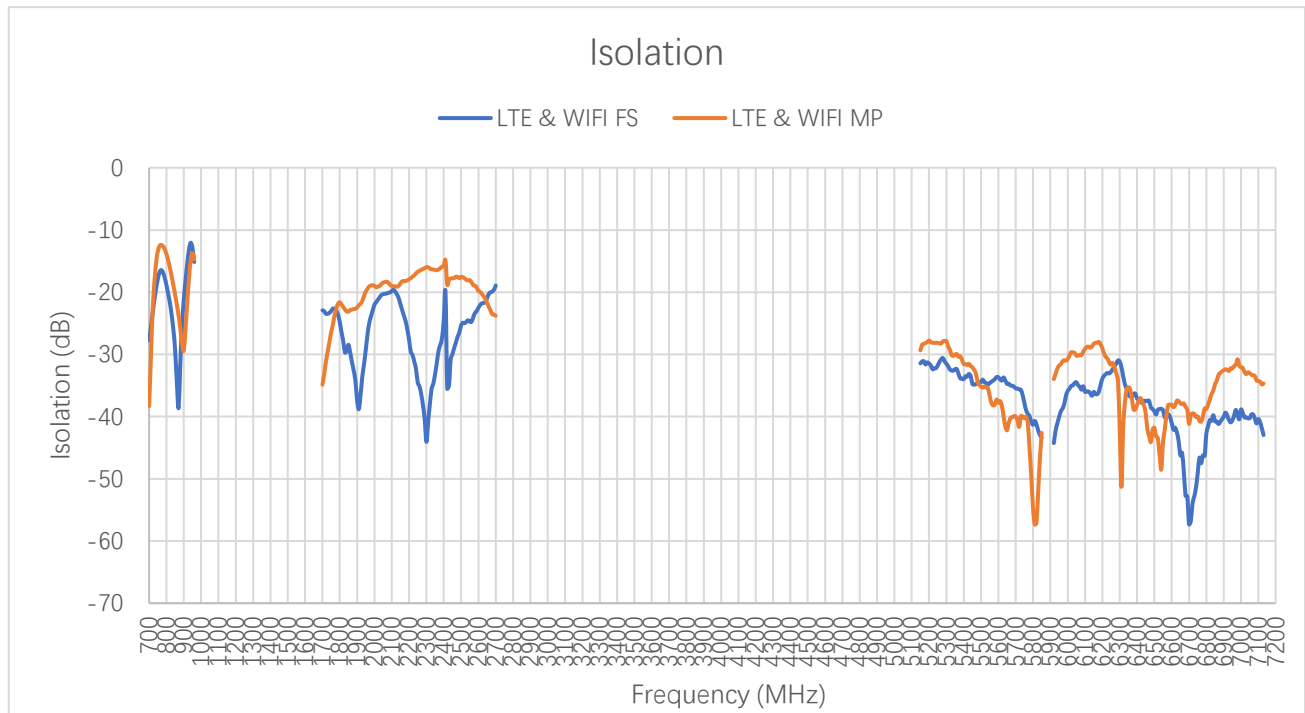


Max Isolation (dB)

Band		B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	Wi-Fi 5G	Wi-Fi 7G
Freq. (MHz)		600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	5150– 5850	5925– 7125
LTE & Wi-Fi	FS	-	-16.4	-12.0	-	-19.6	-24.5	-20.0	-19.6	-30.6	-31.0
	MP	-	-12.4	-23.7	-	-18.2	-15.8	-14.9	-17.5	-27.7	-28.0

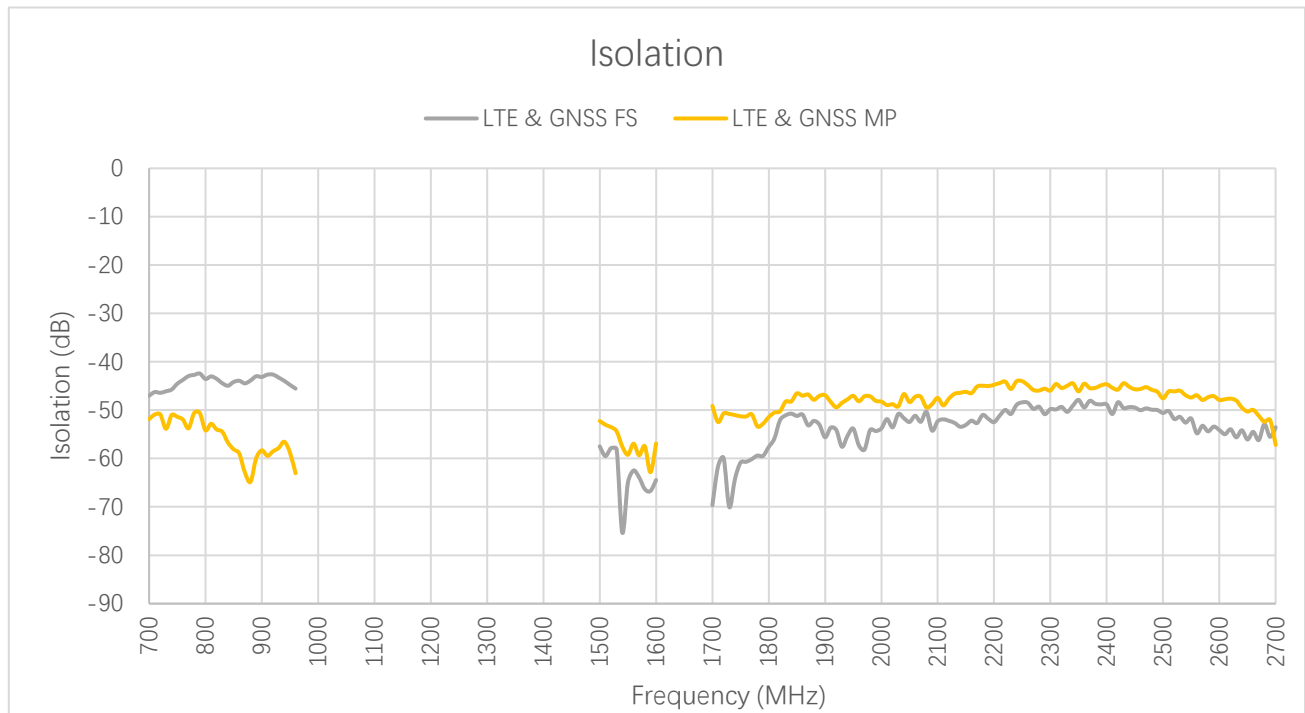

Max Isolation (dB)


Band		B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	B42/ B48/ n77	BDS B1I	GPS L1
Freq. (MHz)		600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	1559– 1564	1565– 1586
LTE & GNSS	FS	-	-42.4	-42.7	-	-50.4	-47.9	-48.4	-50.2	-	-57.5	-62.5
	MP	-	-50.6	-54.0	-	-45.1	-44.5	-44.4	-46.0	-	-52.2	-56.9

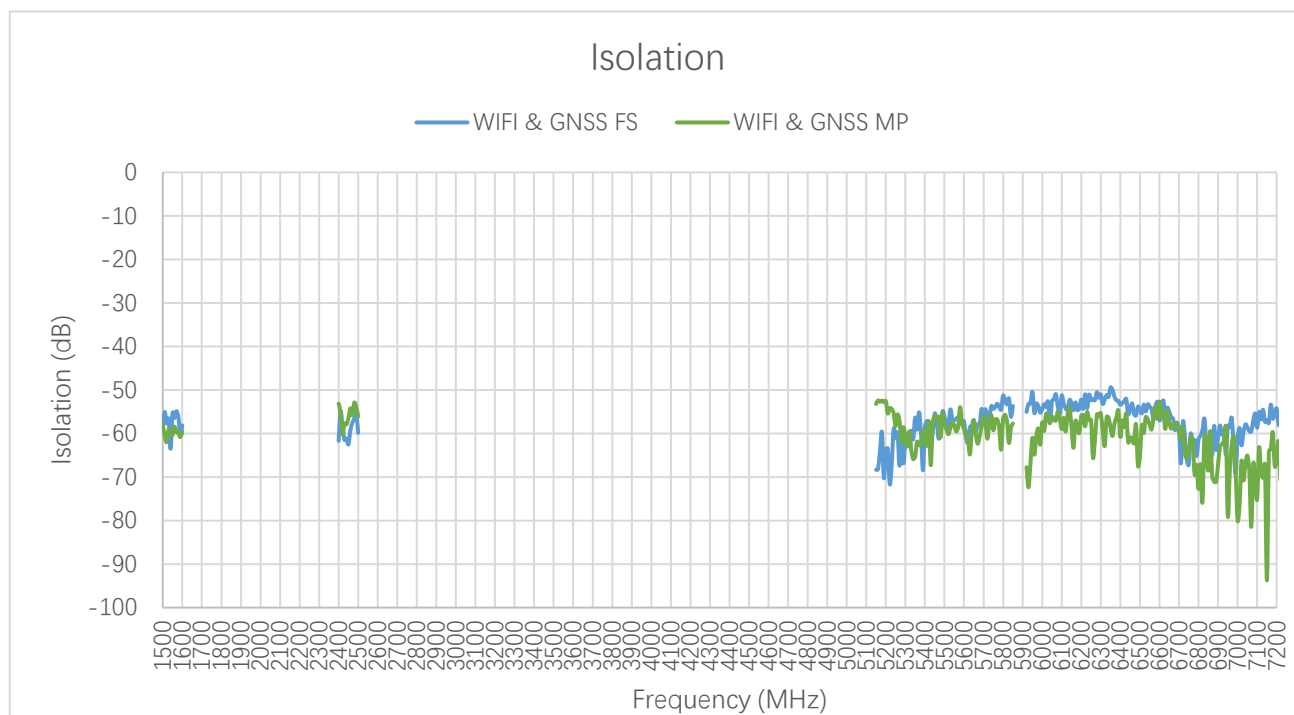

Max Isolation (dB)

Band		Wi-Fi 2G	Wi-Fi 5G	Wi-Fi 7G	BDS B1I	GPS L1
Freq. (MHz)		2400–2500	5150–5850	5925–7125	1559–1564	1565–1586
Wi-Fi & GNSS	FS	-54.8	-51.3	-49.5	-54.9	-54.9
	MP	-52.9	-52.4	-52.7	-58.5	-58.4


3.1.4. GNSS LNA Gain

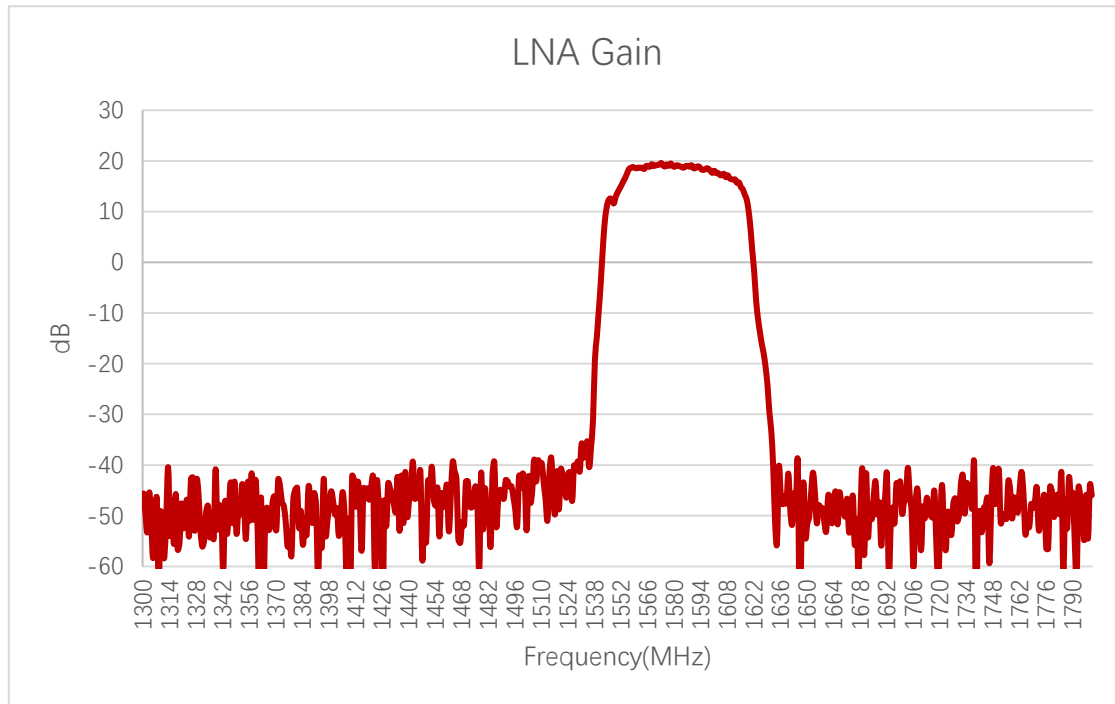

LNA Gain (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
LNA Gain (dB)	-	-	-	-	-	18.7	18.8	17.5

3.1.5. GNSS Noise Figure

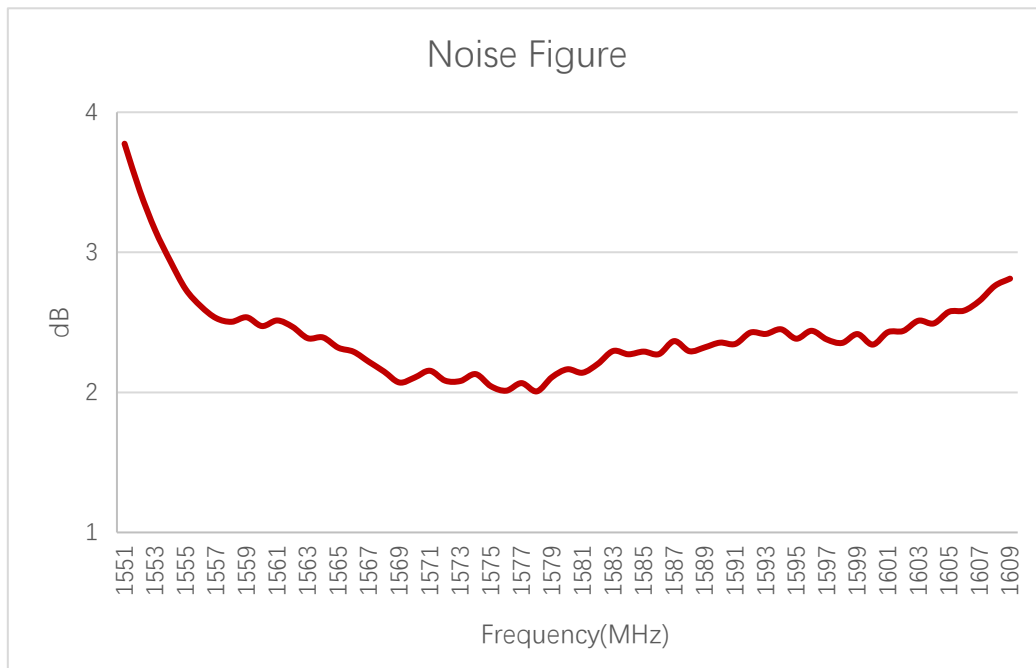


Noise Figure (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Noise Figure (dB)	-	-	-	-	-	2.5	2.04	2.43


3.2. Radiation Performance Test

3.2.1. Efficiency

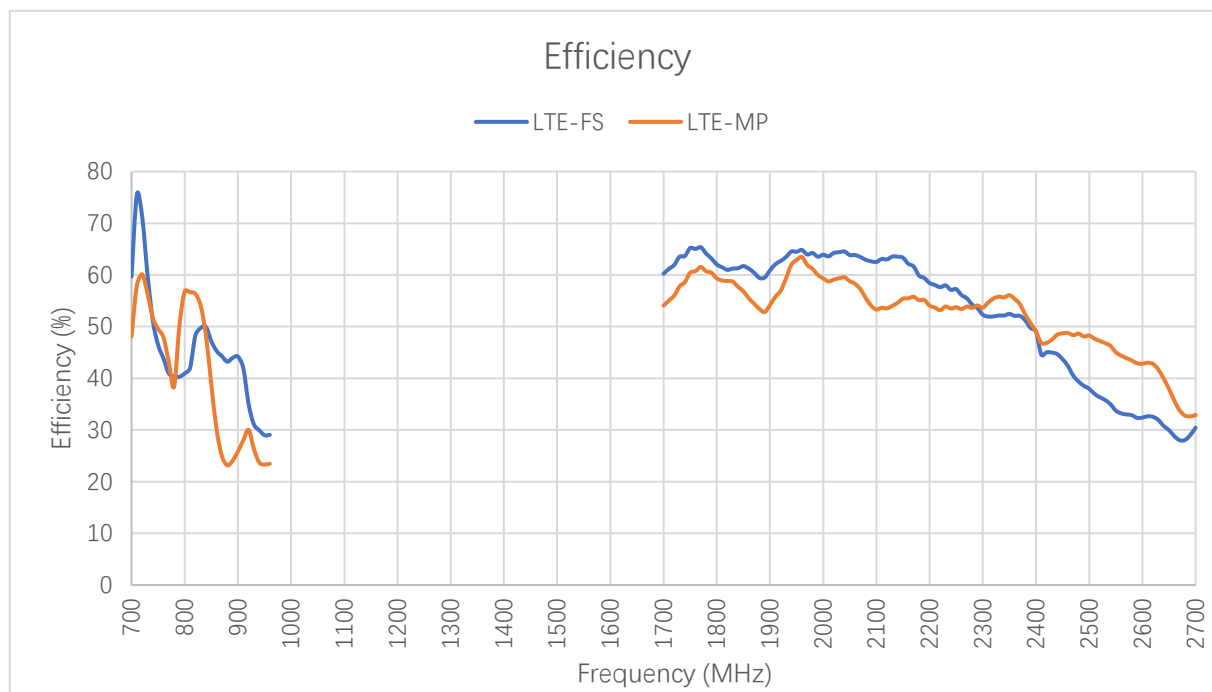


Efficiency (%) – LTE

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE	FS	-	-	75.6	49.7	44.2	29.1	-	61.2	63.7	59.4
	MP	-	-	58.0	54.0	25.8	23.5	-	55.1	58.6	53.4
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE	FS	64.5	63.5	52.5	43.7	32.4	29.0	-	-	-	-
	MP	62.9	54.6	56.1	48.7	42.8	32.6	-	-	-	-

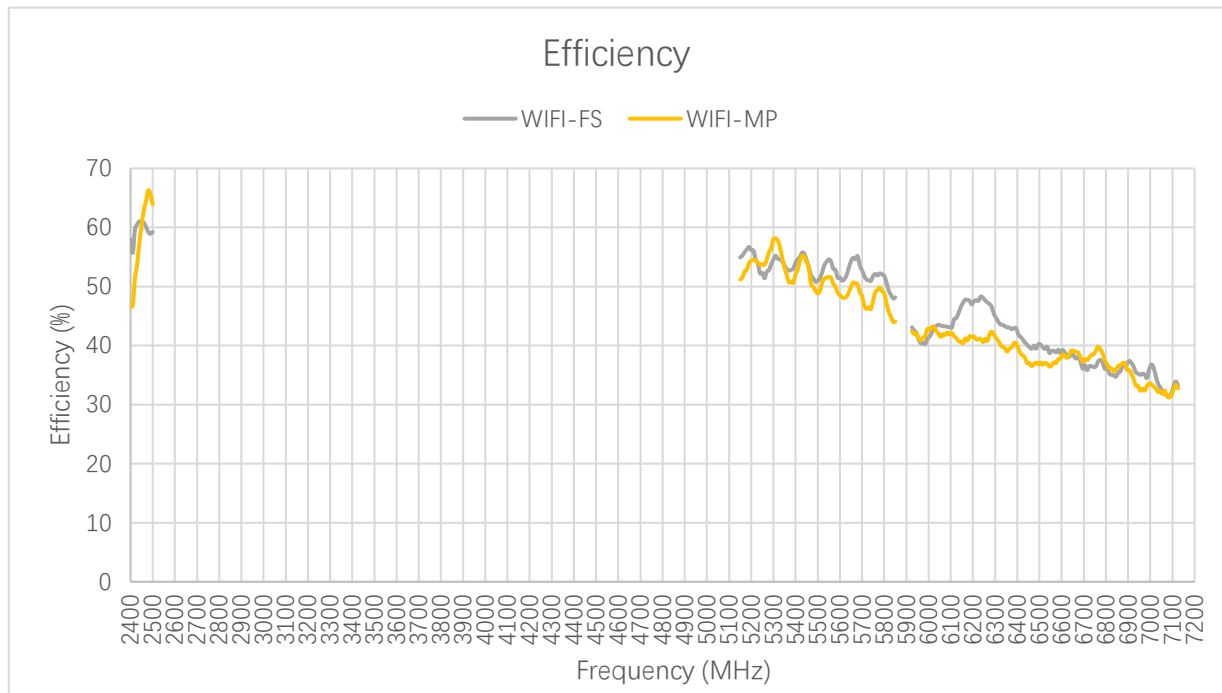

Efficiency (%) – Wi-Fi


Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	58.0	60.9	59.2	54.9	51.0	48.2	43.1	43.6	36.5	33.2
	MP	46.6	60.4	63.9	51.2	48.8	44.1	42.4	40.0	38.1	32.8

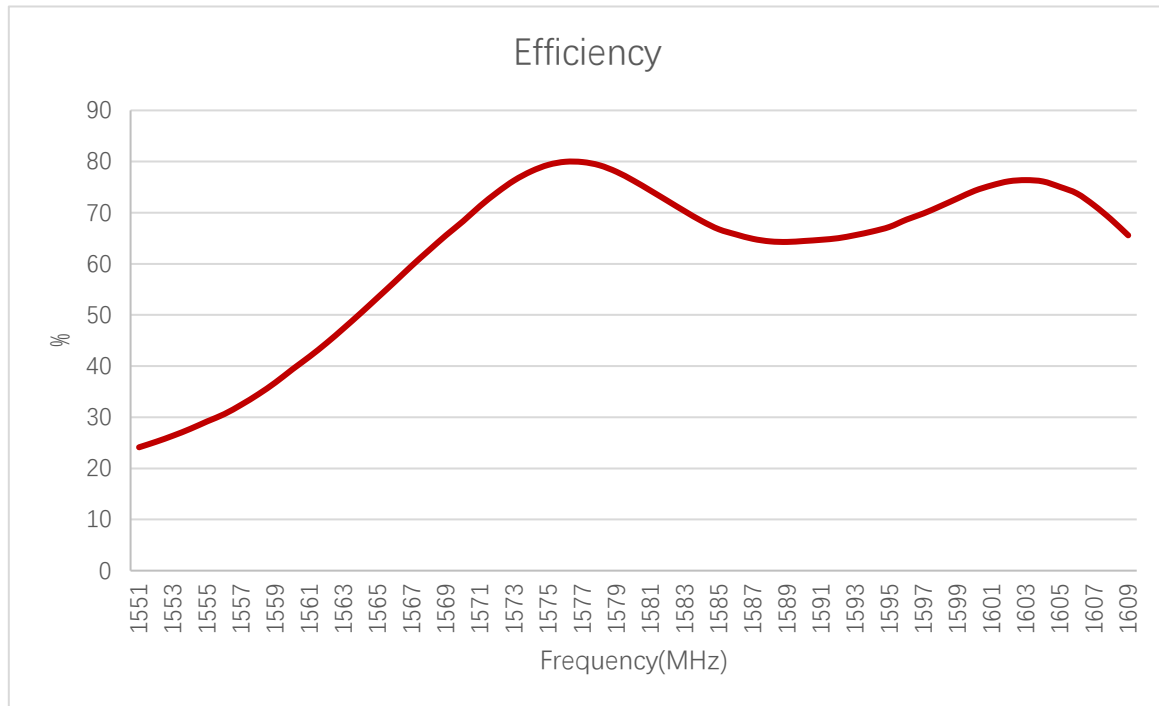

Efficiency (%) – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Efficiency (%)	-	-	-	-	-	42	79	76

3.2.2. Average Gain

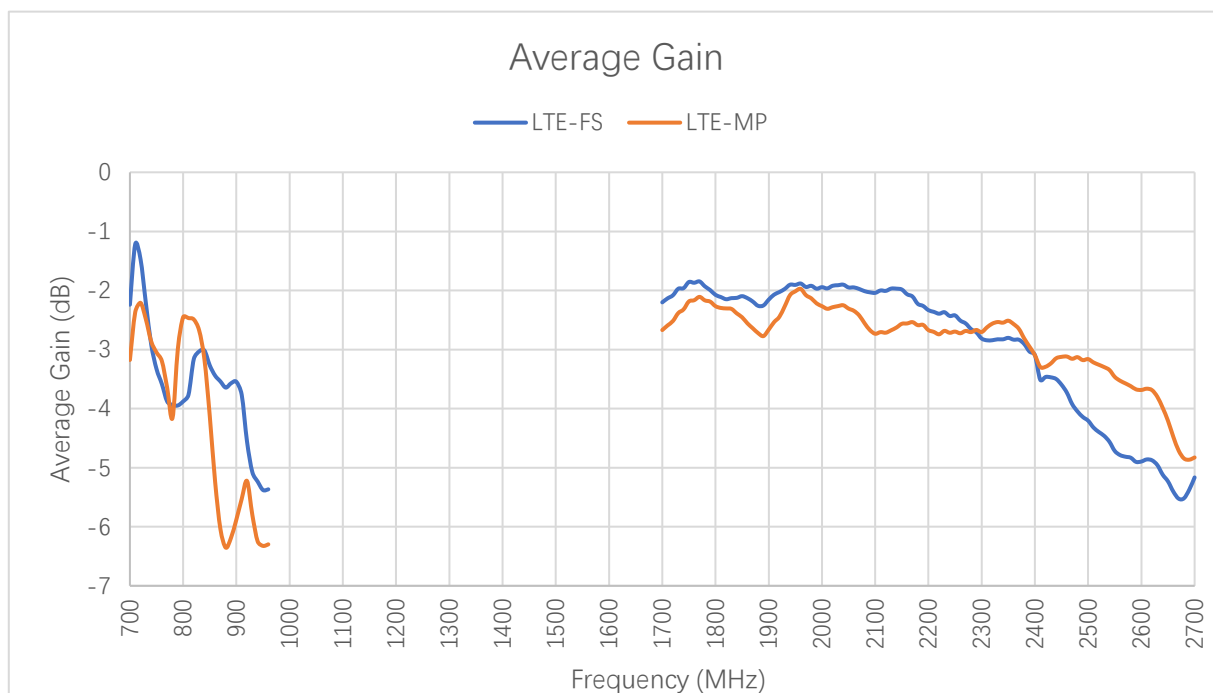

Average Gain (dB) – LTE


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE	FS	-	-	-1.2	-3.0	-3.5	-5.4	-	-2.1	-2.0	-2.3
	MP	-	-	-2.4	-2.7	-5.9	-6.3	-	-2.6	-2.3	-2.7
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE	FS	-1.9	-2.0	-2.8	-3.6	-4.9	-5.4	-	-	-	-
	MP	-2.0	-2.6	-2.5	-3.1	-3.7	-4.9	-	-	-	-

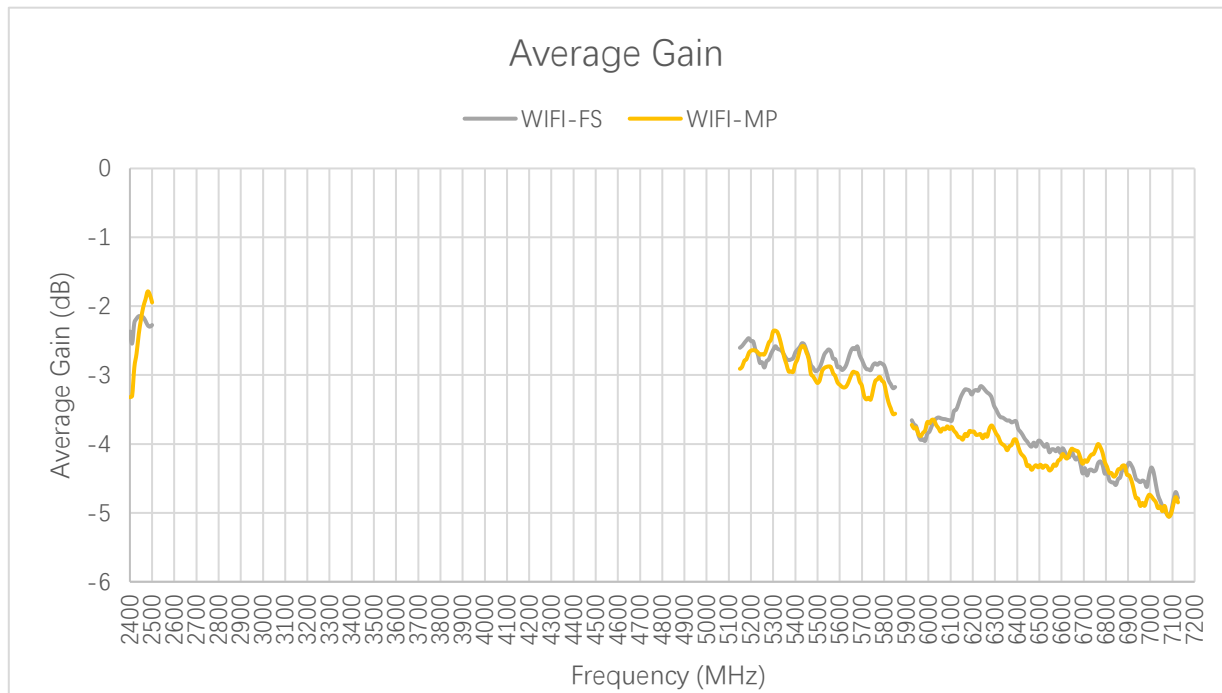

Average Gain (dB) – Wi-Fi


Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	-2.4	-2.2	-2.3	-2.6	-2.9	-3.2	-3.7	-3.6	-4.4	-4.8
	MP	-3.3	-2.2	-1.9	-2.9	-3.1	-3.6	-3.7	-4.0	-4.2	-4.8

3.2.3. Peak Gain

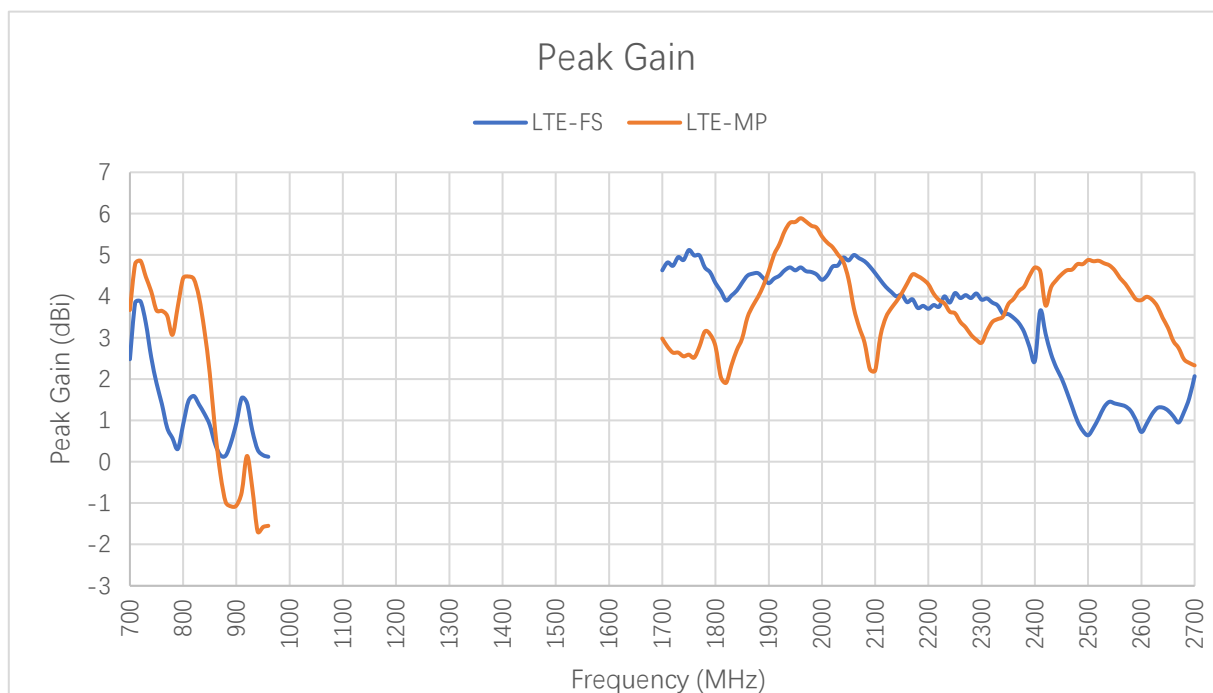


Peak Gain (dBi) – LTE

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE	FS	-	-	3.9	1.4	0.9	0.1	-	4.8	4.9	4.6
	MP	-	-	4.8	4.0	-1.1	-1.6	-	2.8	2.6	4.0
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE	FS	4.6	4.0	3.6	2.0	0.7	1.5	-	-	-	-
	MP	5.8	3.9	3.8	4.5	3.9	2.4	-	-	-	-

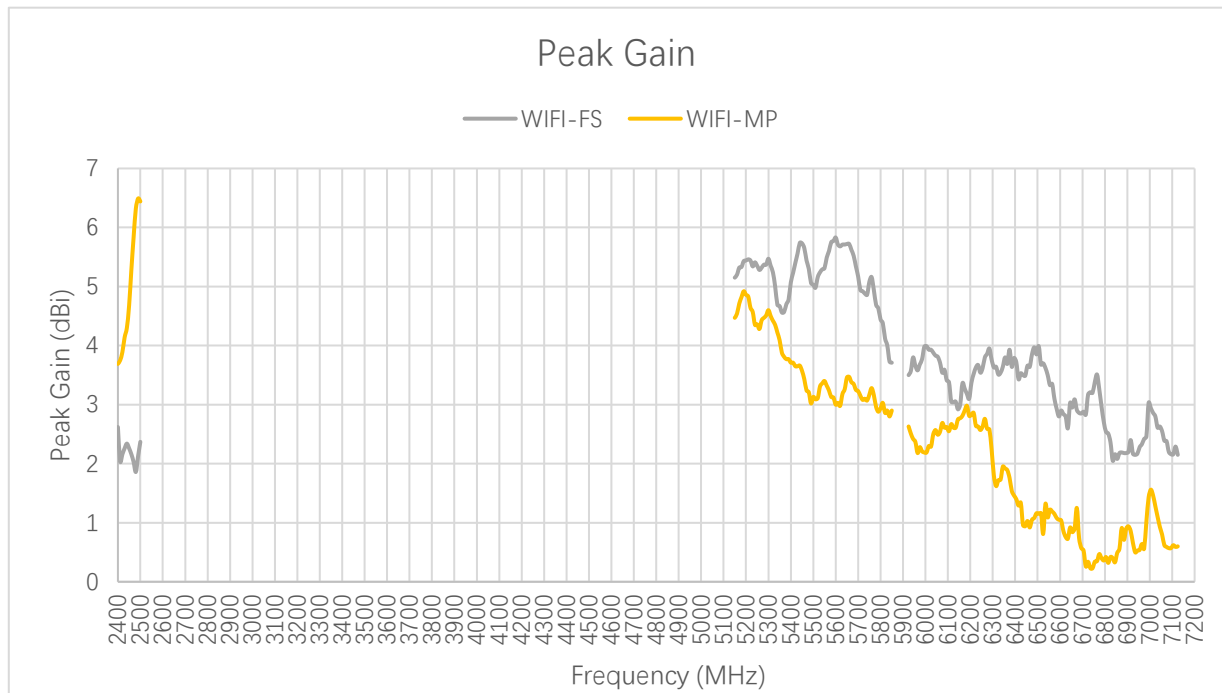

Peak Gain (dBi) – Wi-Fi

Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	2.6	2.3	2.4	5.2	5.0	3.7	3.5	3.5	3.2	2.2
	MP	3.7	4.7	6.4	4.5	3.1	2.9	2.6	1.7	0.3	0.6

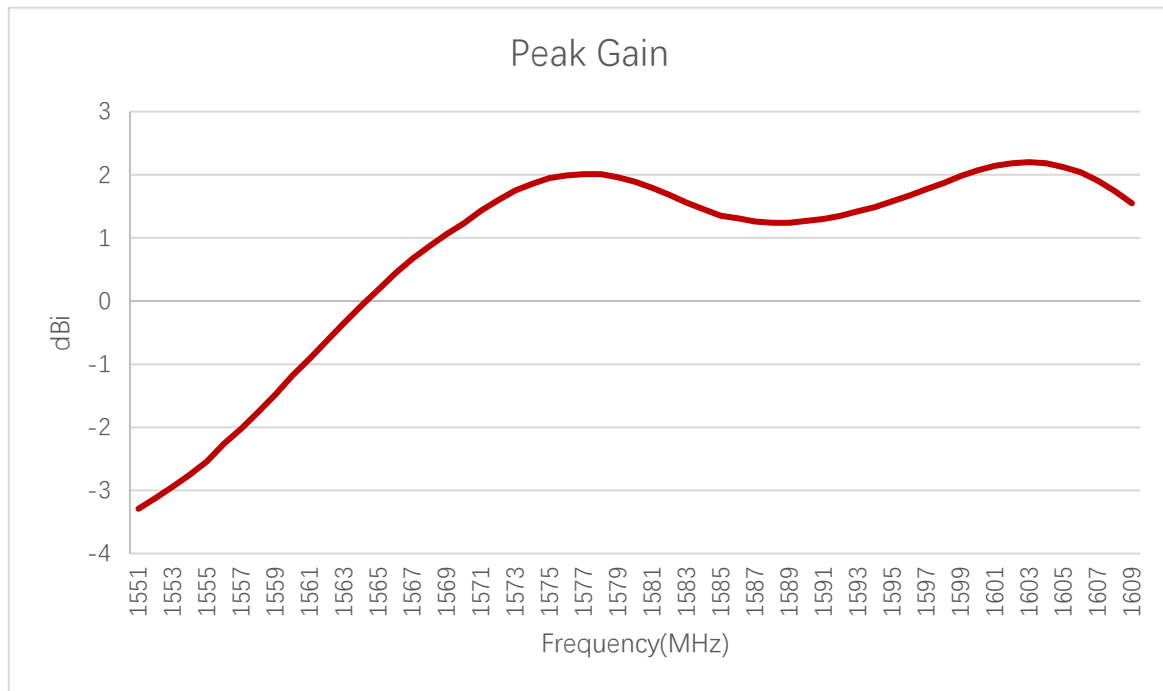


Peak Gain (dBi) – GNSS

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Peak Gain (dBi)	-	-	-	-	-	-0.91	1.95	2.18



3.2.4. 3D & 2D Radiation Pattern

- Test Condition: Free space
- Test Chamber: FS-G-1 (LTE); SH-SY-16 (GNSS)






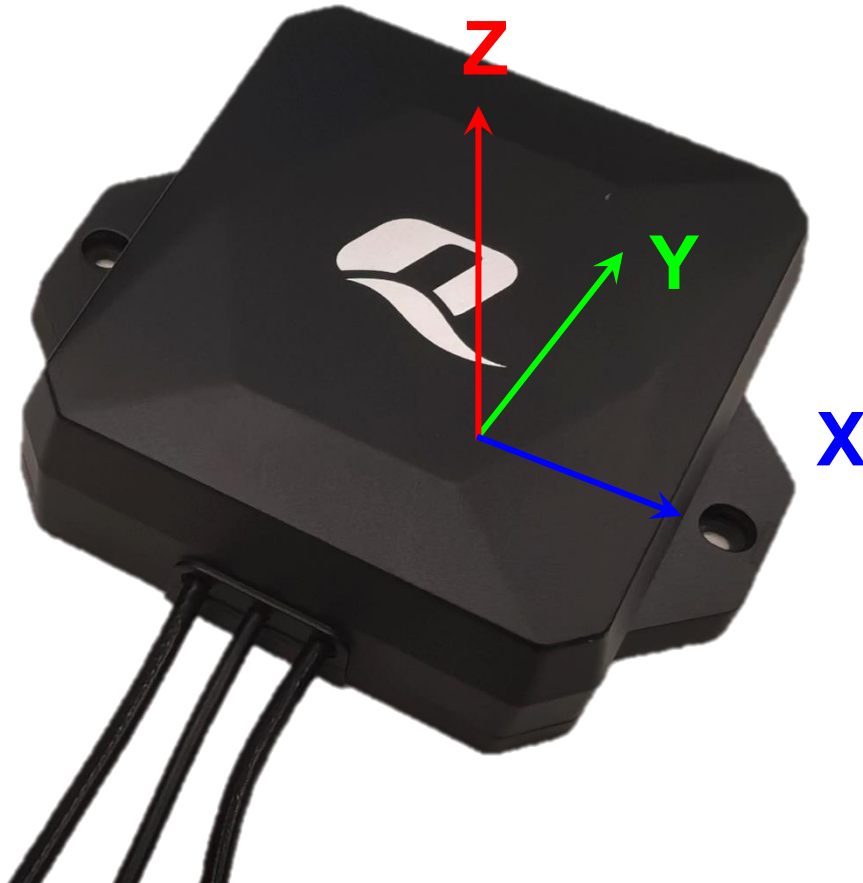


● **LTE**









710 MHz





830 MHz

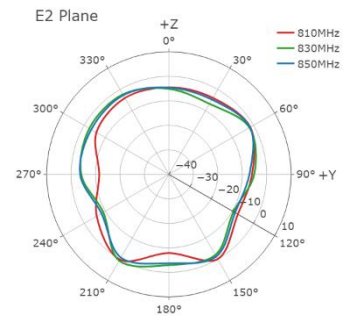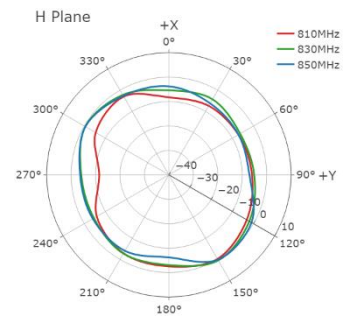


900 MHz

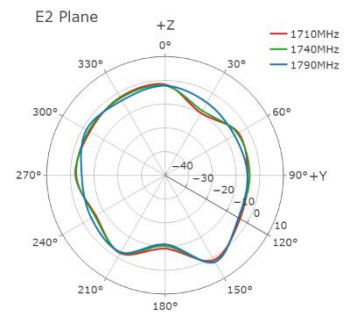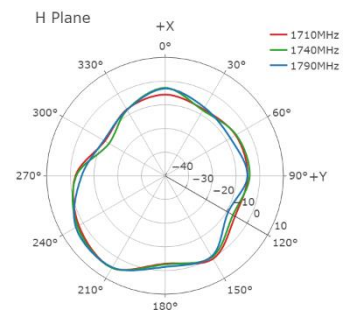


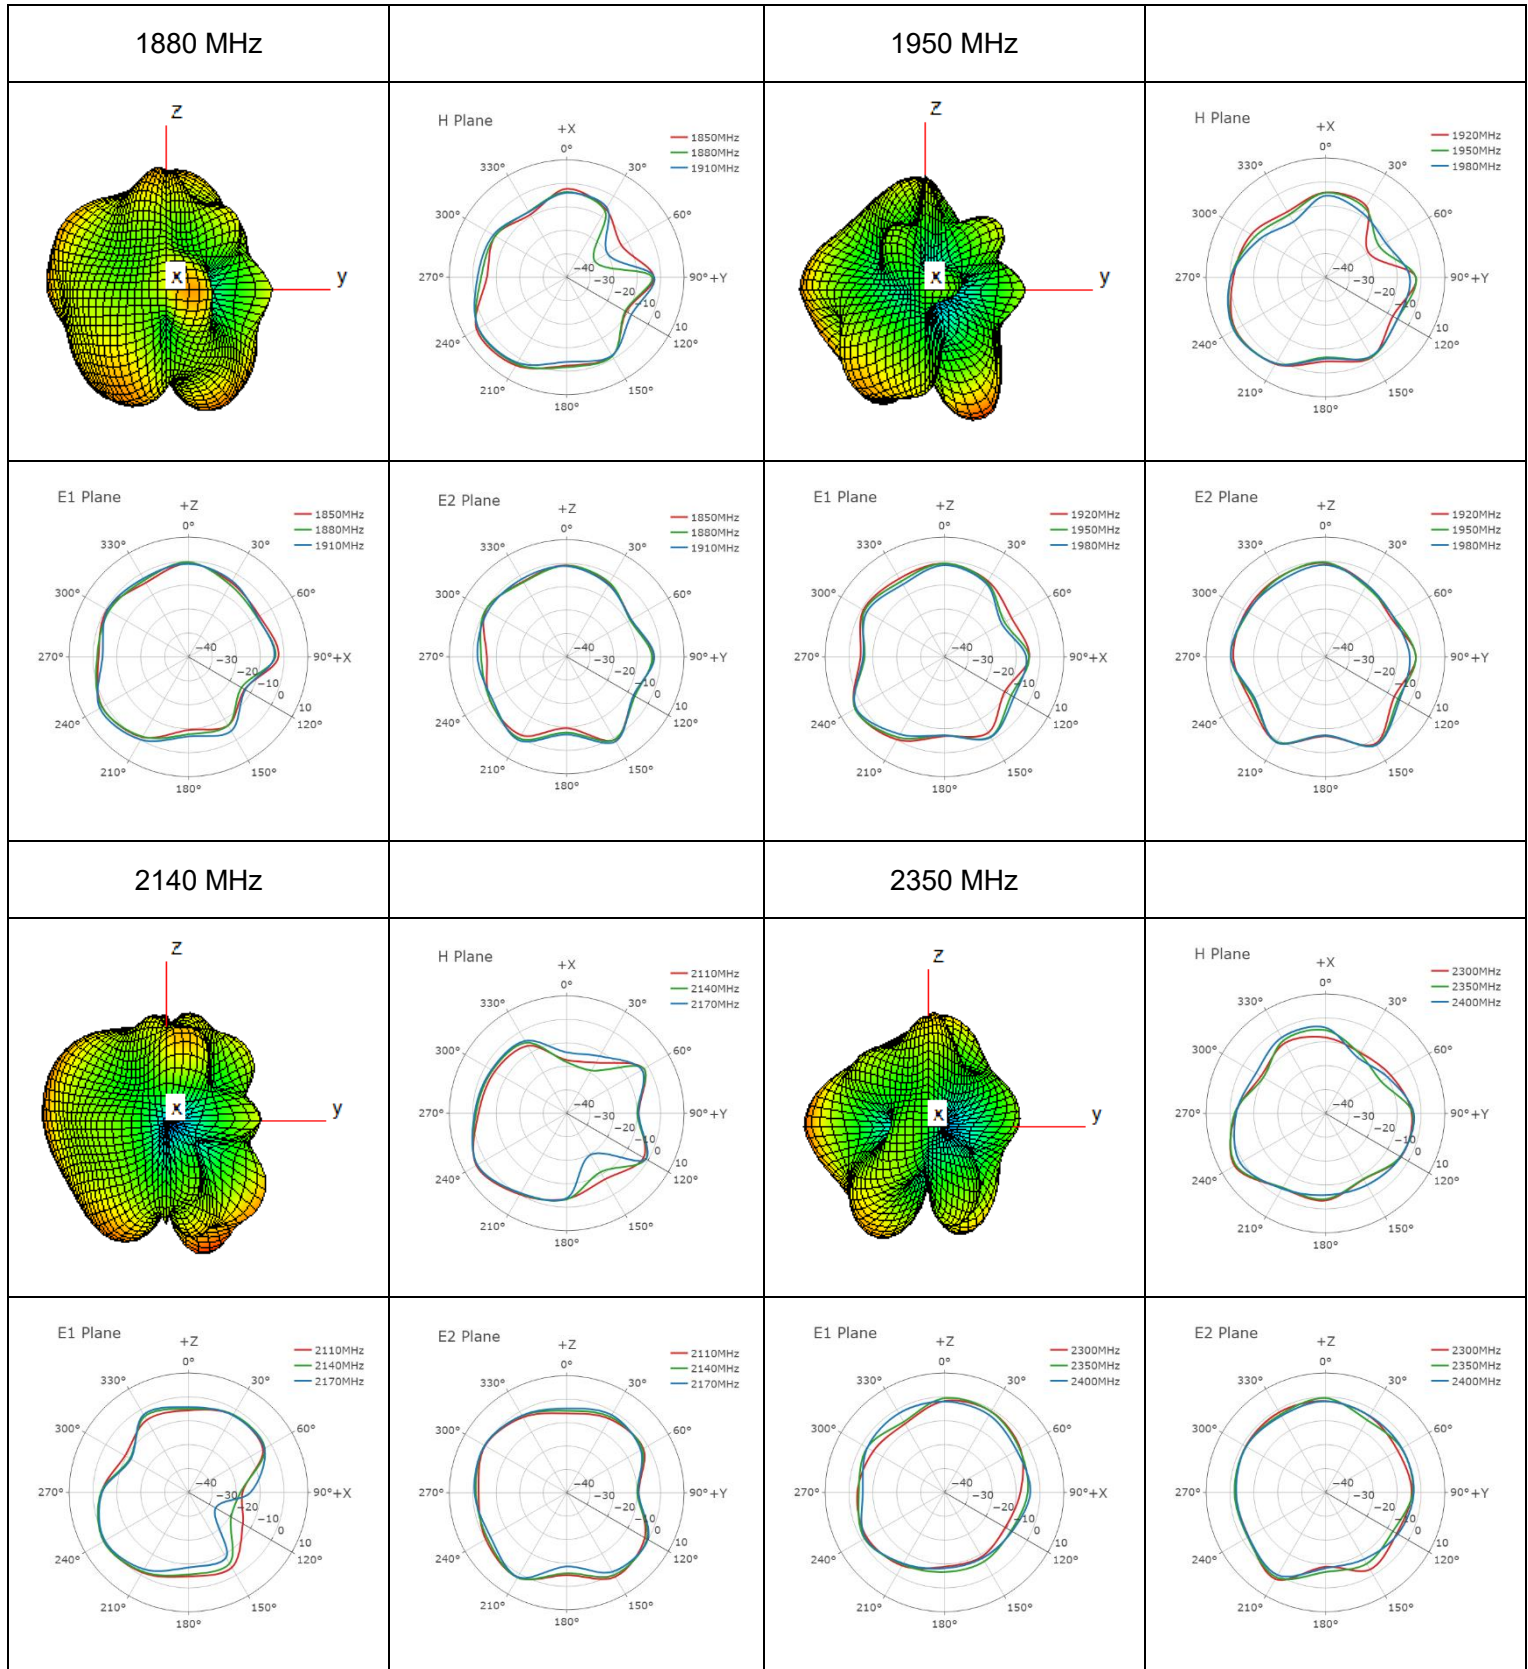

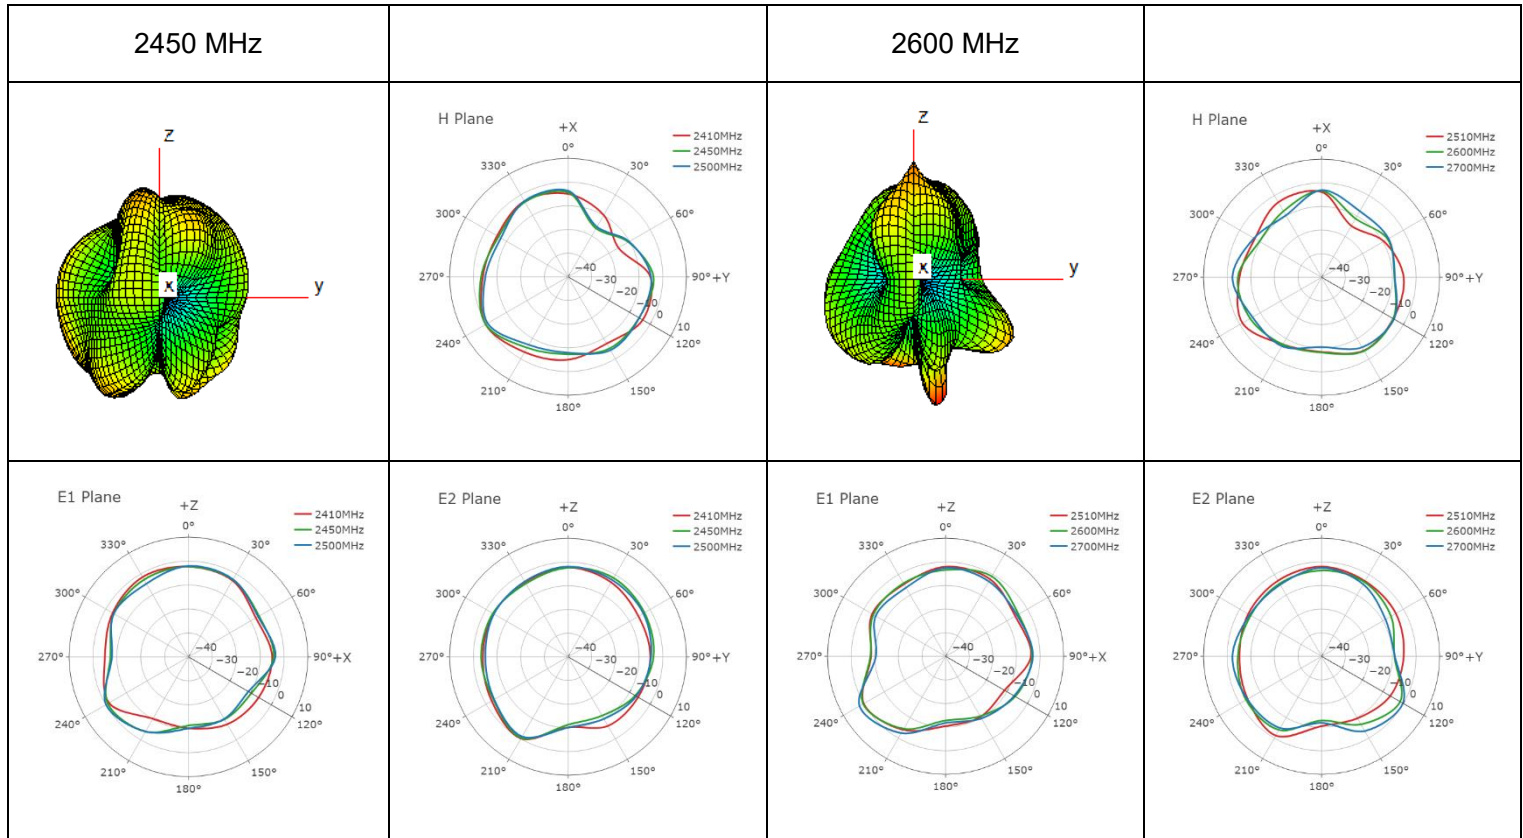


● **Wi-Fi**

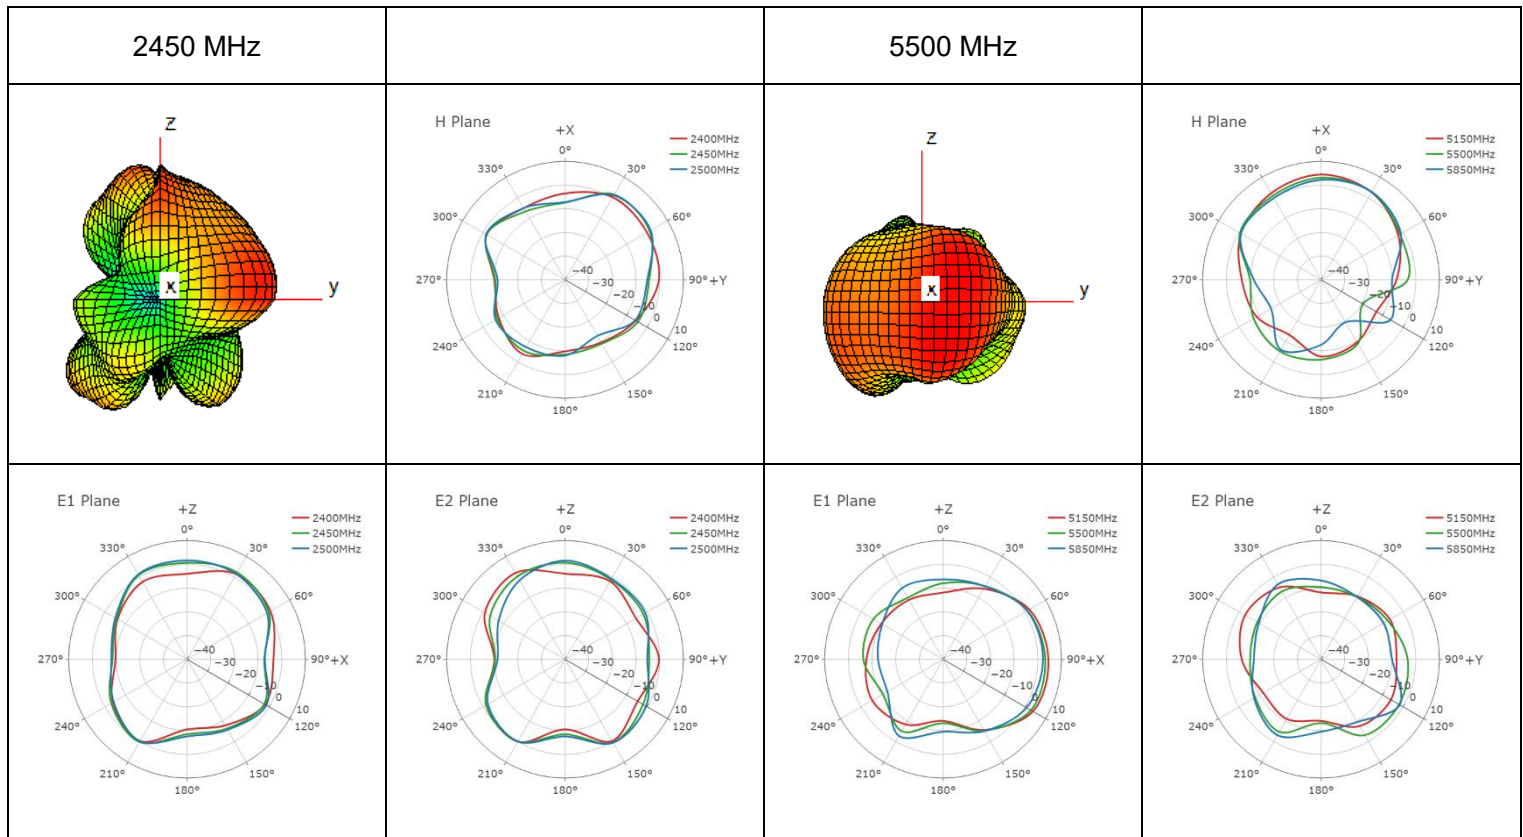

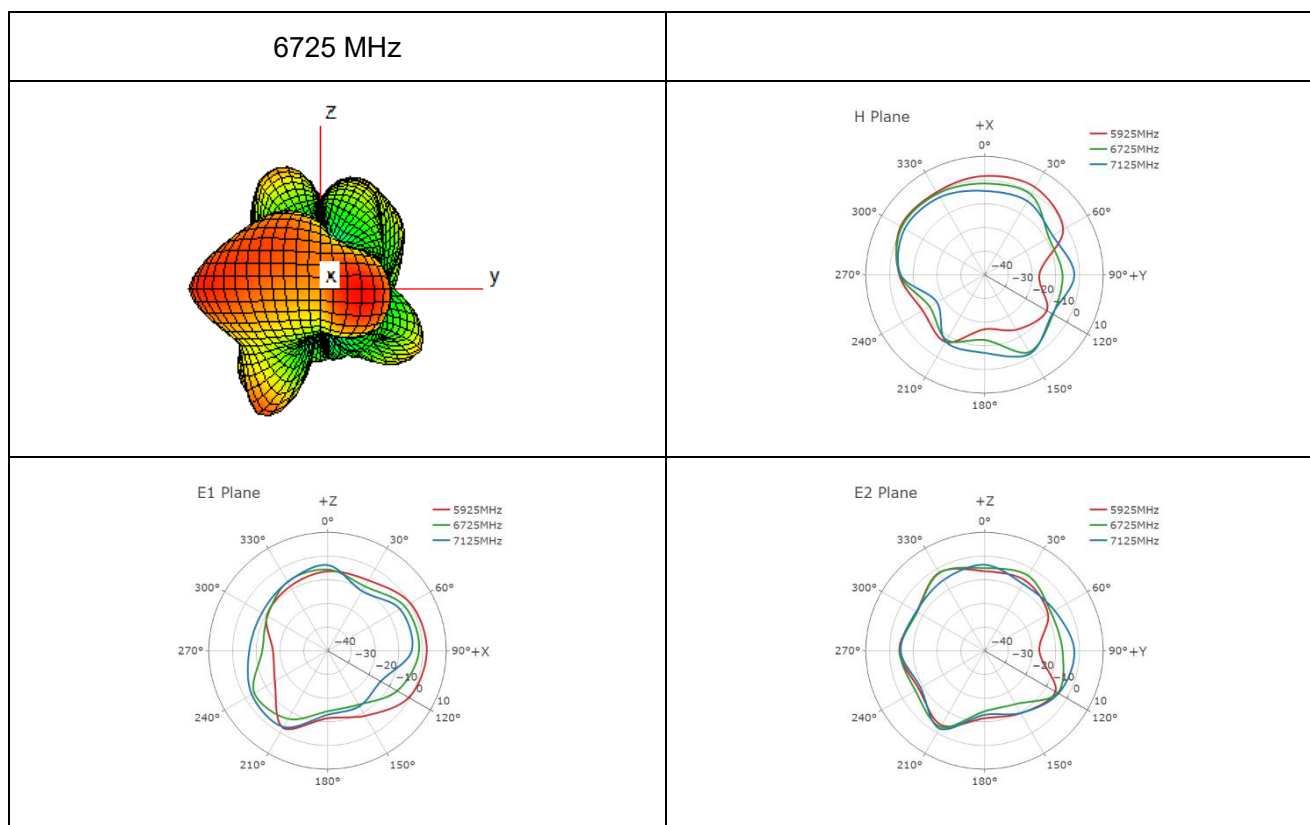


● **GNSS**


1561 MHz

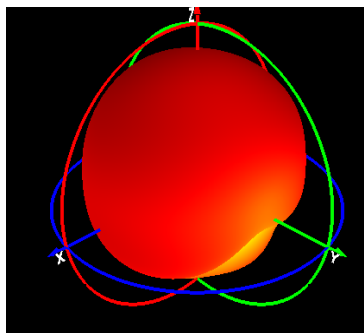


Phi=0 freq=1561MHz




1575 MHz

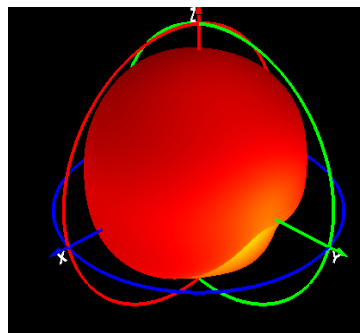


Phi=0 freq=1575MHz

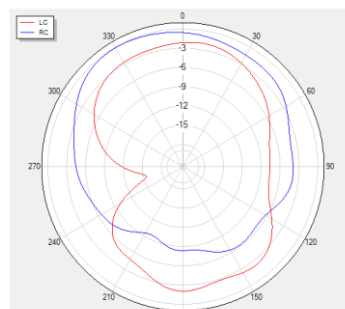


Phi=90 freq=1561MHz

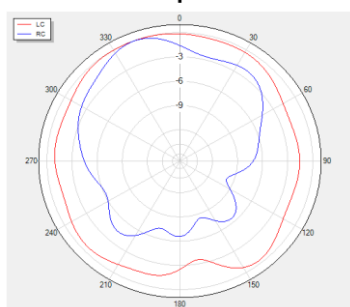


Theta=90 freq=1561MHz




Phi=90 freq=1575MHz




Theta=90 freq=1575MHz




1602 MHz

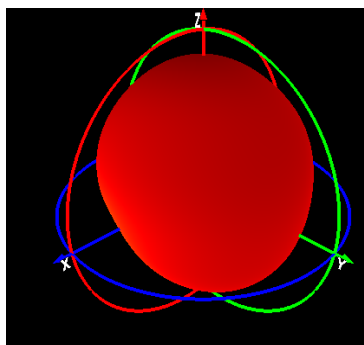


Phi=0 freq=1602MHz




Phi=90 freq=1602MHz

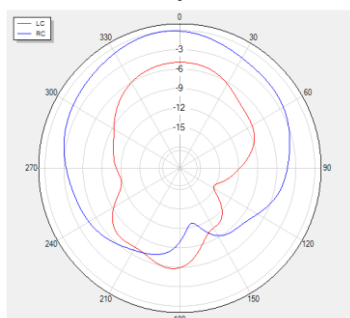

Theta=90 freq=1602MHz





- Test Condition: On 300 mm × 300 mm Metal Plane
- Test Chamber: FS-G-1(LTE)






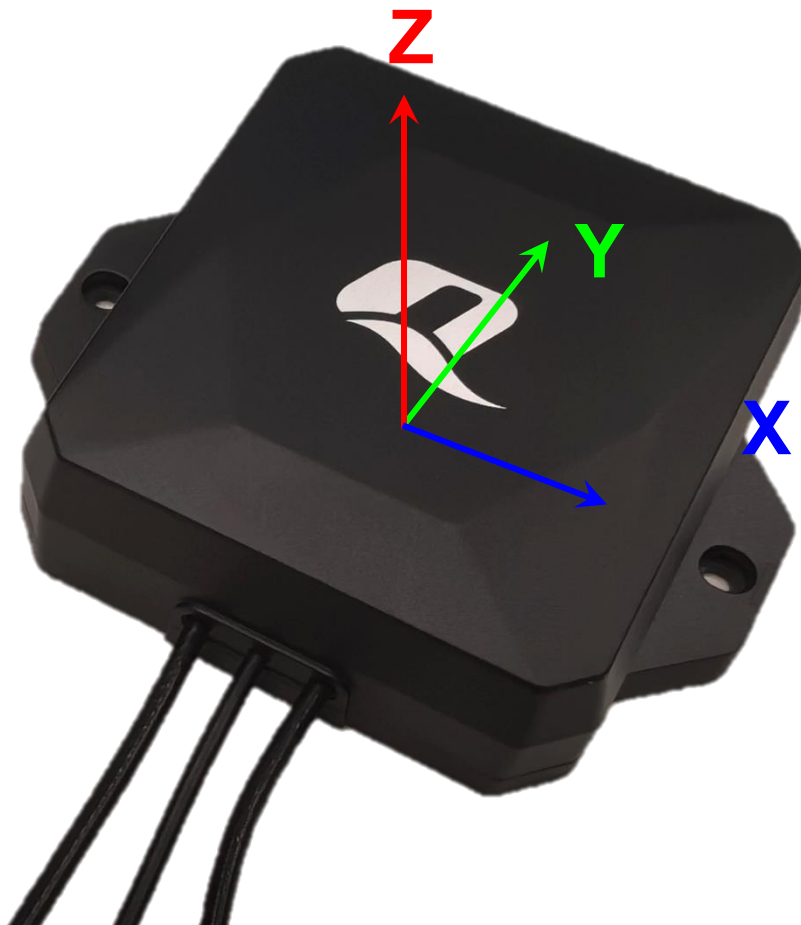


● **LTE**









710 MHz





830 MHz

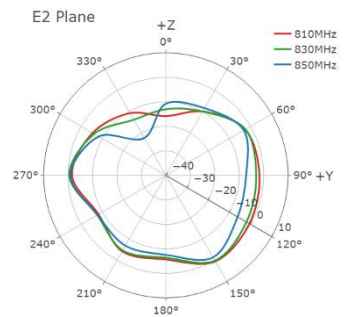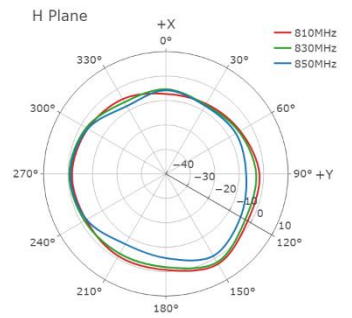


900 MHz

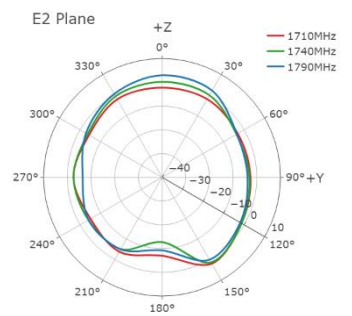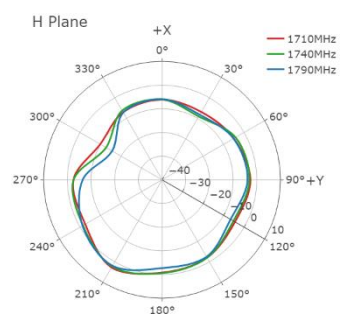


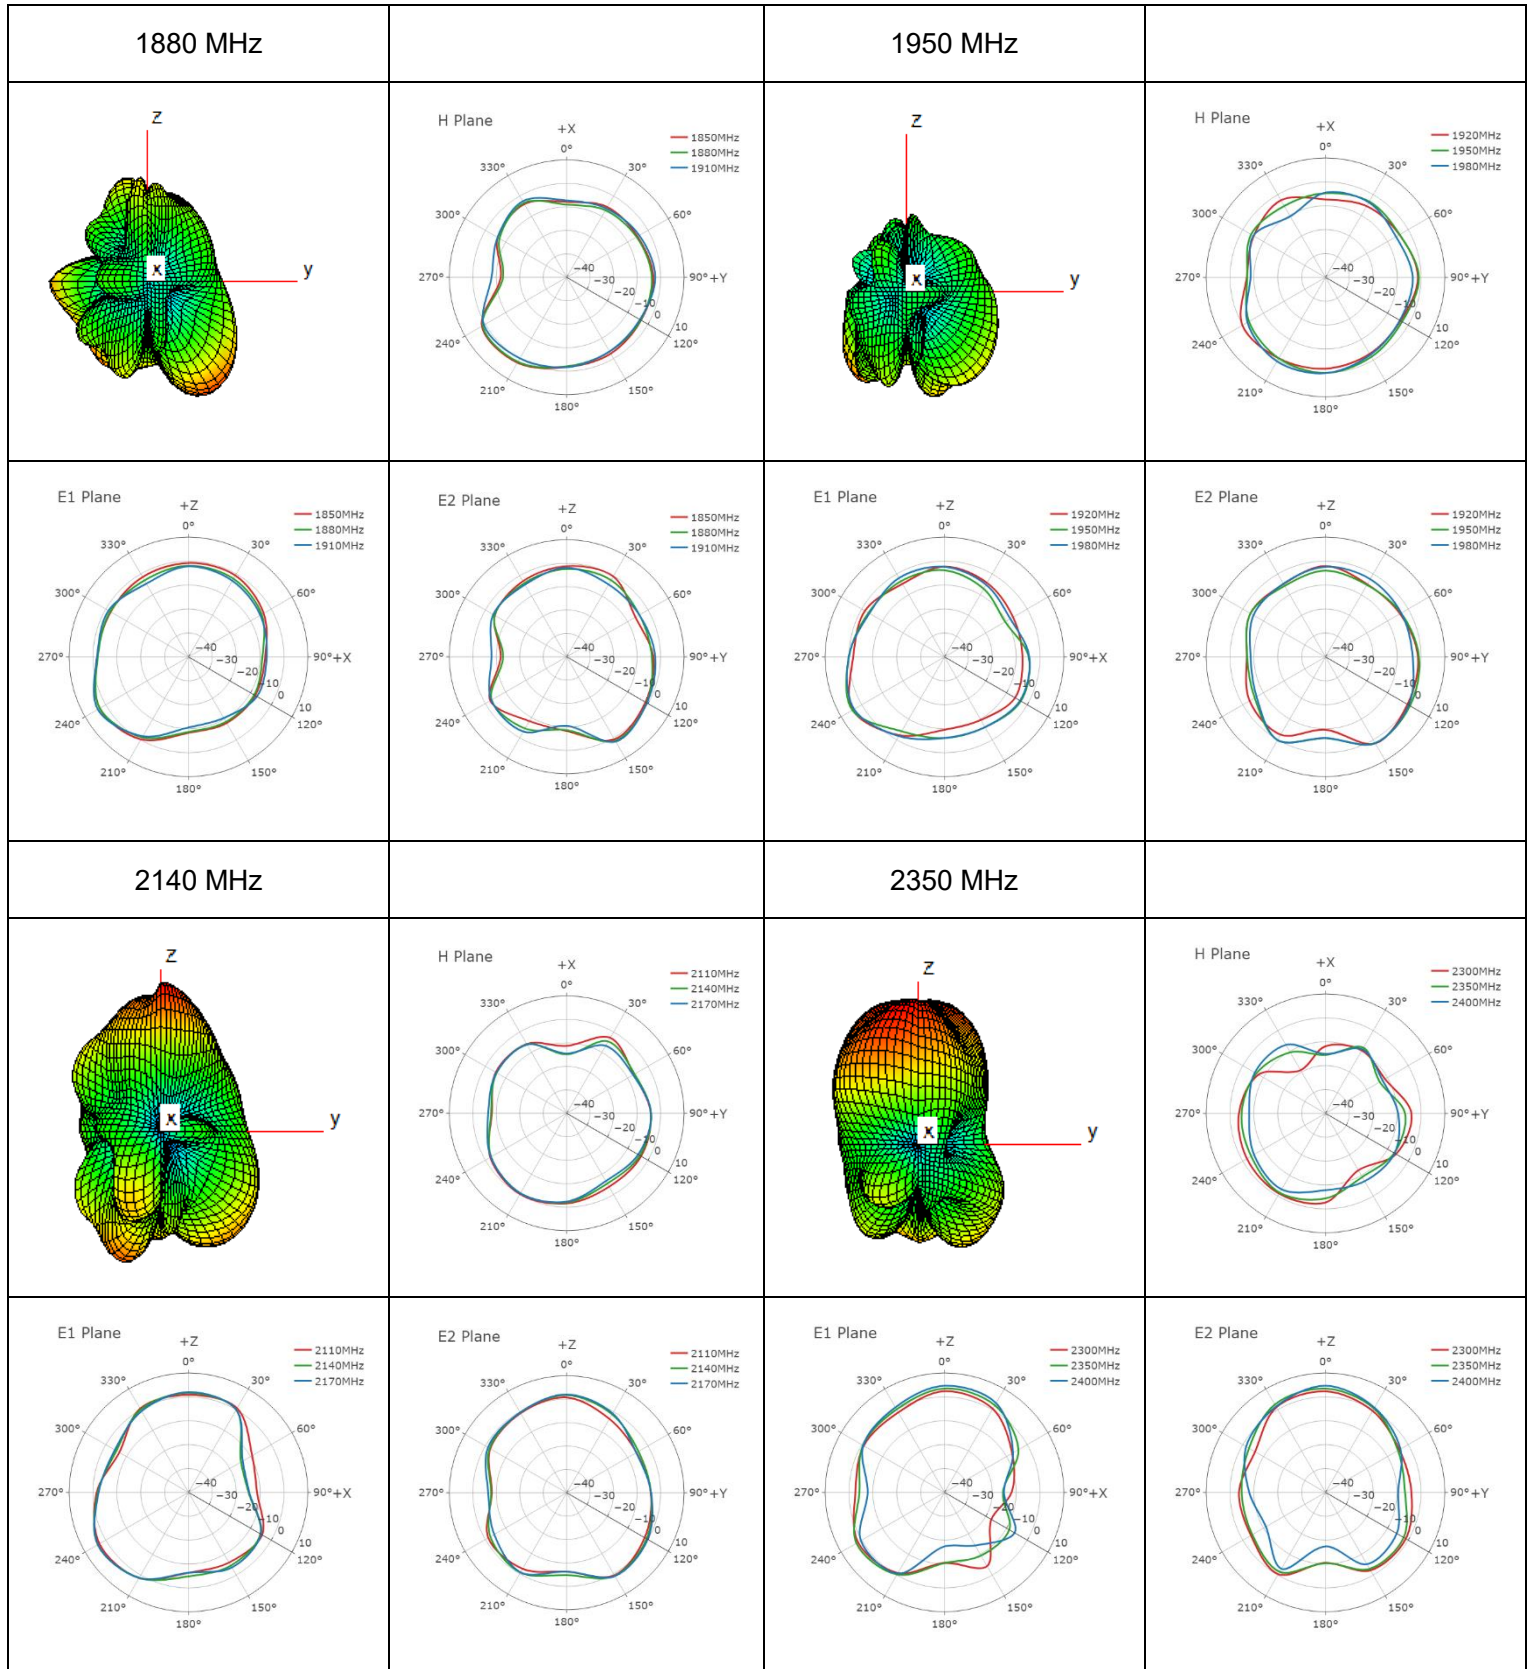

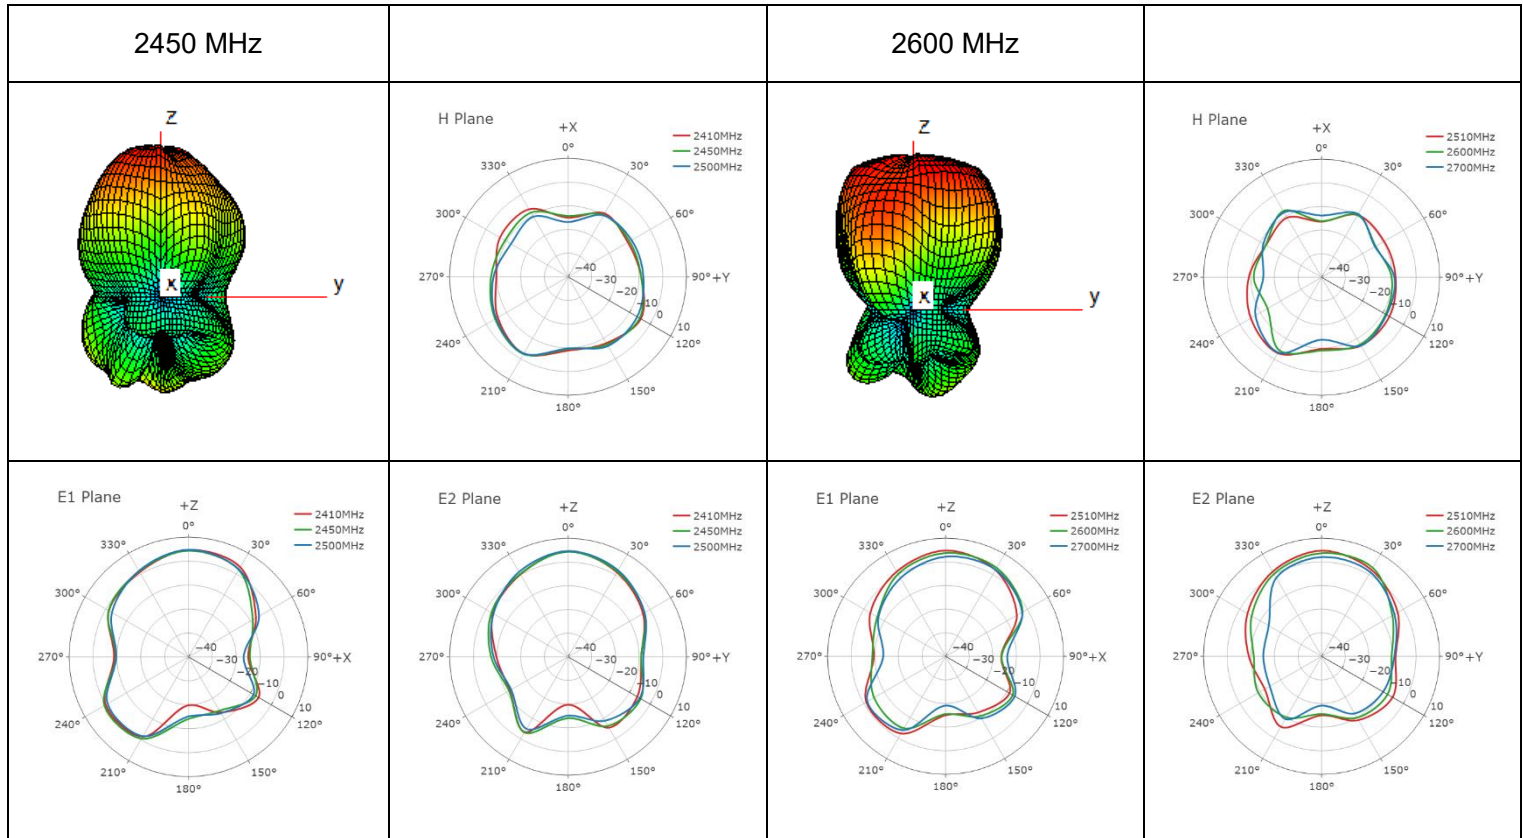

● **Wi-Fi**

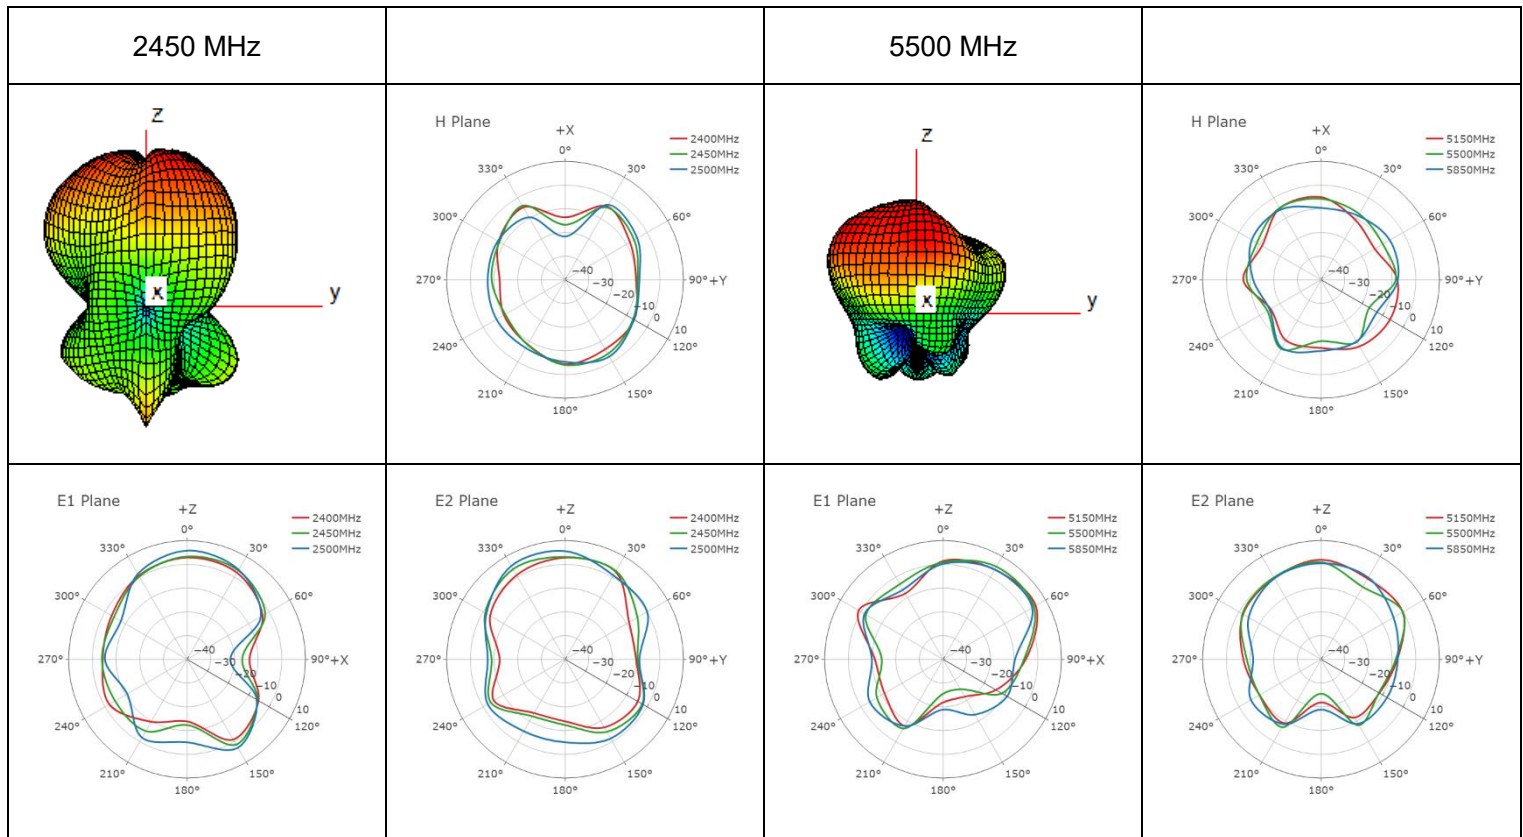


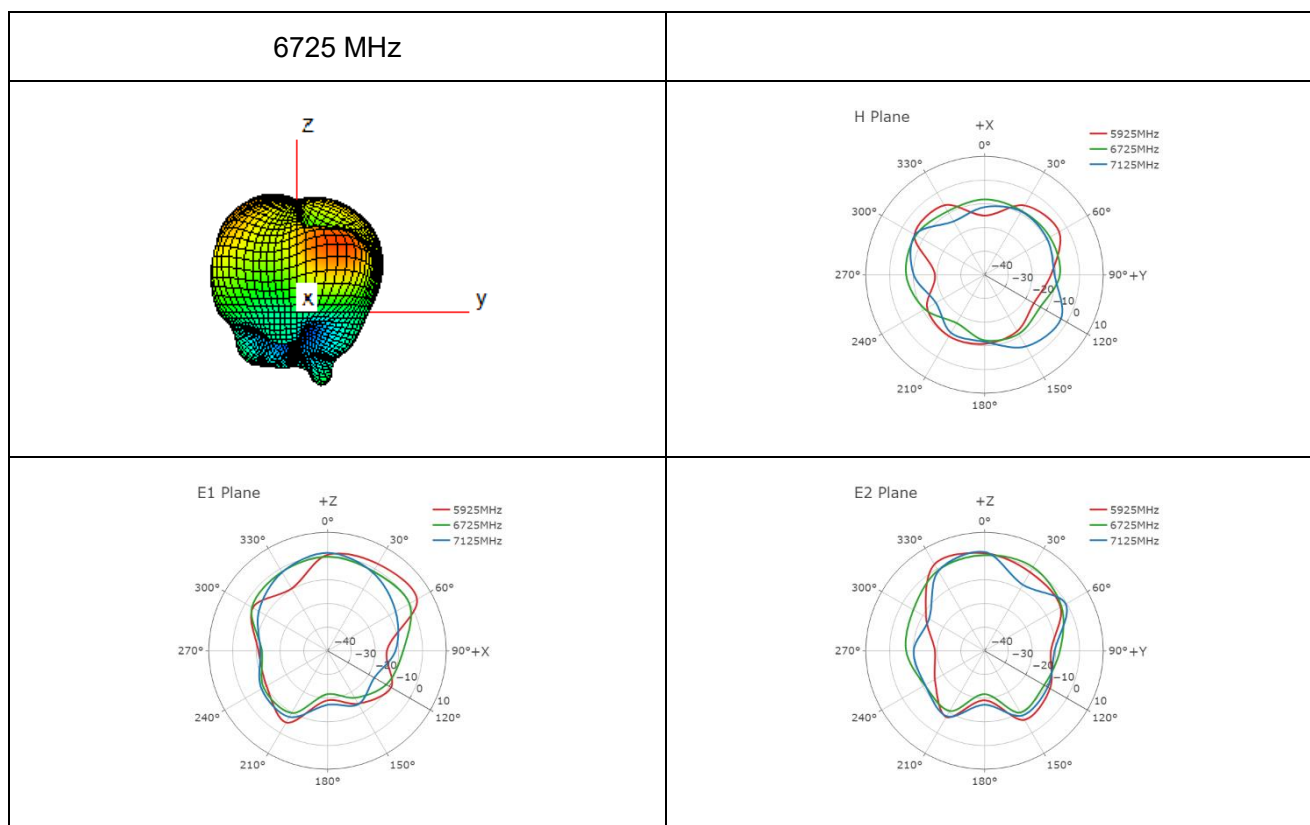


4 Installation

Below are three installation methods that can be combined.

- Magnet

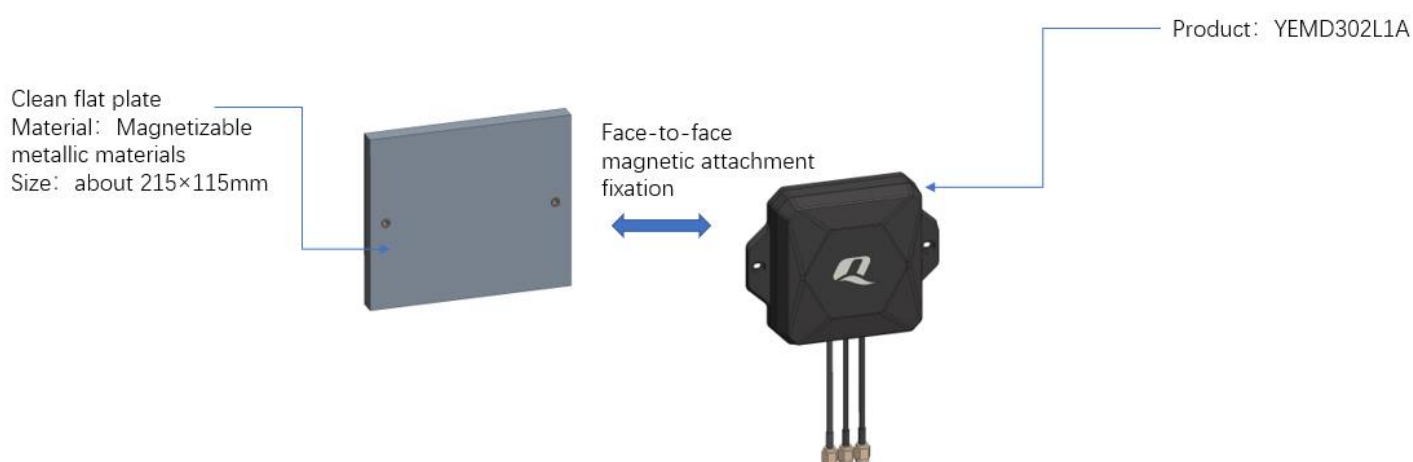


- Adhesive

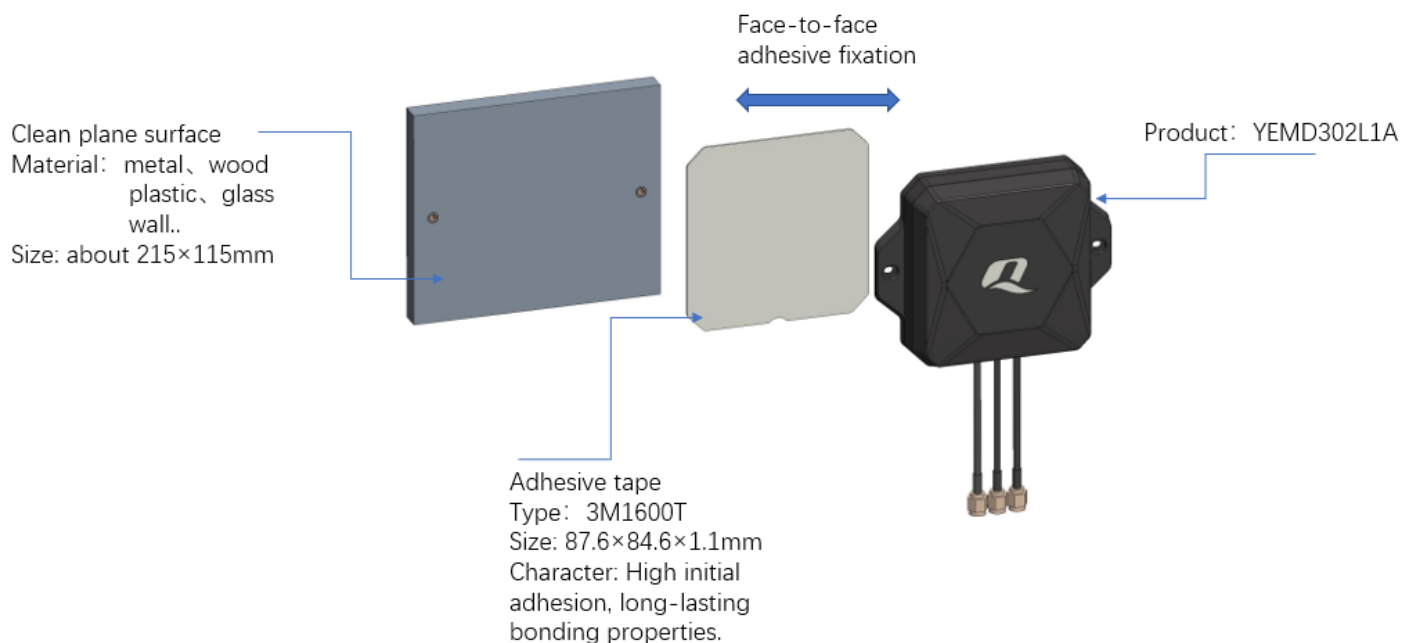



● Screw

Clean flat plate
Material: metal, wood
plastic, glass
wall...
Size: about 215×115mm
Plastic stopper
Quantity: 2
Suitable for ST3 screw

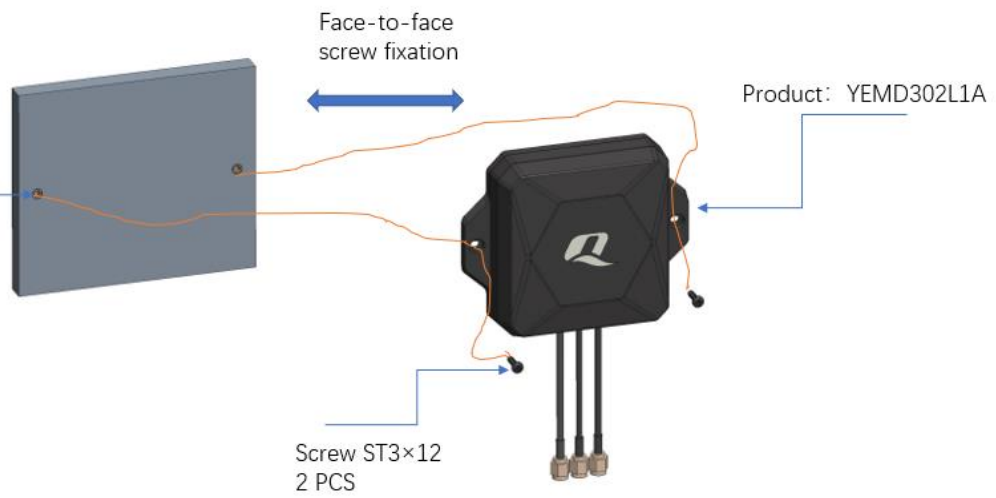

5 Packaging

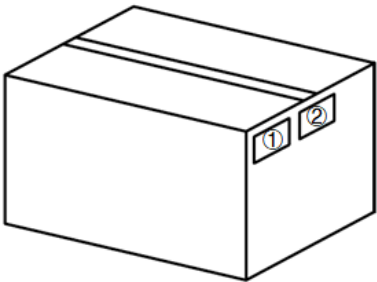Step	Packaging Picture / 2D Picture	Description
1		1 antenna product in a PE bag. (1 Antenna / PE Bag)
2		5 antenna products in an inner box. (5 Antennas / Inner Box)
3		(12 Inner Boxes / Carton Box) (60 Antennas/ Carton Box) <u>Carton Size:</u> <u>L × W × H = 600 × 405 × 300 mm</u>
4		Position for Attaching Labels ① Carton Label ② Quality Label

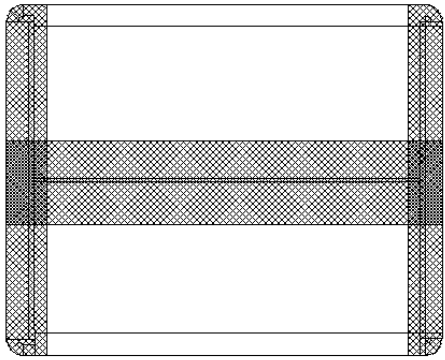5		Sealing Cartons H-shaped sealing cartons
---	---	--

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<https://www.quectel.com/contact/>.

For technical support, or to report documentation errors, please visit:

<https://www.quectel.com/tech-support/>.

Or email us at: support@quectel.com.

Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

Use and Disclosure Restrictions

License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the intended project.

Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

Disclaimer

- a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
- b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
- c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
- d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2026. All rights reserved.

Revision History

Version	Date	Author	Note
-	2024-07-03	Mordecai Liu/ Junsen Li/ Rojin Luo/ David Liu/ Rainey Liao	Creation of the document
1.0	2024-07-03	Mordecai Liu/ Junsen Li/ Rojin Luo/ David Liu/ Rainey Liao	First official release
1.1	2024-11-07	Junsen Li	- Updated block diagram (Chapter 1.3). - Added 1561 MHz test data.
1.2	2025-06-12	Rojin Luo/ Rainey Liao	- Updated the starting frequency to 698 MHz. - Updated the antenna image (Cover page). - Updated the drawing (Chapter 2). - Added installation method (Chapter 4).
1.3	2025-10-14	Junsen Li	Added LNA gains according to different supply voltages (Chapter 1.1.3).
1.4	2026-04-13	Kessie Geng	Updated the packaging (Chapter 5).



www.quectel.com