



Antenna Datasheet

Product OC: YEMN410L1AM

Version: 1.0

Date: 2026-04-27

Status: Released

Product Name: 4G & Wi-Fi & GNSS 4in1 Screw Mount Combo External Antenna

Key Features:

Frequency Band: 4G: 698–960 MHz, 1710–2690 MHz;

Wi-Fi: 2400–2500 MHz, 5150–5850 MHz;

GNSS: 1559–1606 MHz

Dimensions: 89.3 mm × 86.3 mm × 35.4 mm

Efficiency: Up to 62.7 % (MP)

GNSS LNA Gain: 18 ±3 dB

RoHS & REACH Compliant

IP67

Overview

YEMN410L1AM is a 4G & Wi-Fi & GNSS 4in1 combo antenna measuring 89.3 mm × 86.3 mm × 35.4 mm. This ultra-wide-band antenna provides broad coverage from 1559–1606 MHz, 698–960 MHz, 1710–2690 MHz, 2400–2500 MHz, 5150–5850 MHz whilst offering backward-compatibility to support 3G and 2G networks as well as LTE Cat-M and narrowband IoT (NB-IoT). Ideal for applications where the antenna is required to be discrete, the antenna is available screw mount omni-directional antenna. It is easy to install with maximum durability assured and suitable for use in harsh outdoor environments thanks to its IP67 rated, UV-resistant and UL 94 V-0 Flame Rating enclosure. It is compatible with Quectel's RM520x Series modules.

YEMN410L1AM has 2 × 4G LMH antennas, 1 × Wi-Fi and 1 × GNSS L1 antenna. It allows high efficiency, stable signal transmission and reception for active GNSS from 1559–1606 MHz, 4G bands from 698–960 MHz, 1710–2690 MHz and WIFI bands from 2400–2500 MHz, 5150–5850 MHz. In the meantime, this product also offers high isolation between antennas to avoid self-interference. All in all, this unique product is designed to provide stable and high-speed data connection to 4G & GNSS applications. YEMN410L1AM can be used in harsh environments thanks to its robust UV resistant (UL 746c f1) and flame resistant (UL 94 V-0) enclosure.

- **Typical applications include:**

- ✓ Public safety
- ✓ HD Video Streaming
- ✓ Utilities and Smart Cities
- ✓ Fleet Management
- ✓ Automotive vehicle tracking

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

Overview	1
Contents	2
1 Specification	3
1.1. Electrical	3
1.1.1. LTE-1	5
1.1.2. LTE-2	6
1.1.3. Wi-Fi	7
1.1.4. GNSS	8
1.2. Supported Bands	9
1.3. Mechanical & Environmental	11
1.4. Block Diagram (Active Antenna)	12
1.5. Supported GNSS Frequency Bands	13
2 Drawing	15
3 Detailed Performance	16
3.1. S-Parameter Test	16
3.1.1. VSWR	16
3.1.2. Return Loss	19
3.1.3. Isolation	22
3.1.4. GNSS LNA Gain	25
3.1.5. GNSS Noise Figure	26
3.2. Radiation Performance Test	27
3.2.1. Efficiency	27
3.2.2. Average Gain	30
3.2.3. Peak Gain	32
3.2.4. 3D & 2D Radiation Pattern	35
4 Packaging	56
Contact Us	58
Legal Notices	59
Revision History	61

1 Specification

Test Condition: Free Space & On 500 mm × 500 mm Metal Plane

1.1. Electrical

Electrical Specifications			
Frequency Range	LTE-1	698–960 MHz, 1710–2690 MHz	
	LTE-2	698–960 MHz, 1710–2690 MHz	
	Wi-Fi	2400–2500 MHz, 5150–5850 MHz	
	GNSS	1559–1606 MHz	
Radiation Pattern	LTE-1	Omni-directional	
	LTE-2	Omni-directional	
	Wi-Fi	Omni-directional	
	GNSS	Directional	
Polarization	LTE-1	Linear	
	LTE-2	Linear	
	Wi-Fi	Linear	
	GNSS	RHCP	
Impedance		50 Ω	
Isolation	LTE-1 - LTE-2	FS	≤ -6.3 dB
		MP	≤ -8.1 dB
	LTE-1 - GNSS	FS	≤ -21.4 dB
		MP	≤ -19.3 dB
	LTE-2 - GNSS	FS	≤ -22.0 dB

		MP	≤ -29.6 dB
		FS	≤ -11.8 dB
	LTE-1 - Wi-Fi	MP	≤ -9.4 dB
		FS	≤ -13.9 dB
	LTE-2 - Wi-Fi	MP	≤ -15.0 dB
		FS	≤ -22.1 dB
	GNSS - Wi-Fi	MP	≤ -23.8 dB
		FS	

1.1.1. LTE-1

Electrical – Detail													
SPEC	Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600– 698	698– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850	
Max. VSWR	FS	-	1.5	2.3	-	1.8	1.8	1.8	1.8	-	-	-	
	MP	-	2.6	2.7	-	1.7	2.6	2.6	2.6	-	-	-	
Max. Return Loss (dB)	FS	-	-13.8	-8.1	-	-11.1	-10.9	-10.7	-10.9	-	-	-	
	MP	-	-7.2	-6.6	-	-11.8	-7.1	-7.1	-7.2	-	-	-	
AVG Eff. (%)	FS	-	40.7	43.0	-	44.7	40.0	37.7	36.3	-	-	-	
	MP	-	31.6	36.1	-	41.4	29.9	27.8	25.8	-	-	-	
AVG AVG Gain (dB)	FS	-	-3.9	-3.7	-	-3.5	-4.0	-4.2	-4.4	-	-	-	
	MP	-	-5.0	-4.4	-	-3.9	-5.3	-5.6	-5.9	-	-	-	
Max. Peak Gain (dBi)	FS	-	0.7 (800)	2.1 (830)	-	4.2 (1940)	2.6 (2320)	2.4 (2420)	1.3 (2650)	-	-	-	
	MP	-	0.7 (800)	2.2 (890)	-	4.4 (1820)	2.8 (2400)	2.9 (2420)	1.3 (2530)	-	-	-	
VSWR			FS				≤ 2.3						
			MP				≤ 2.7						
Return Loss			FS				≤ -8.1 dB						
			MP				≤ -6.6 dB						
Gain			FS				≤ 4.2 dBi						
			MP				≤ 4.4 dBi						

- FS: Free Space
- MP: On 500 mm × 500 mm Metal Plane

1.1.2. LTE-2

Electrical – Detail												
SPEC	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600– 698	698– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850
Max. VSWR	FS	-	2.4	1.9	-	2.4	2.0	1.8	1.6	-	-	-
	MP	-	3.9	2.7	-	3.1	2.4	1.8	1.4	-	-	-
Max. Return Loss (dB)	FS	-	-7.9	-10.4	-	-7.8	-9.5	-11.0	-12.9	-	-	-
	MP	-	-4.5	-6.8	-	-5.9	-7.7	-11.1	-15.9	-	-	-
AVG Eff. (%)	FS	-	35.9	49.8	-	42.2	43.0	44.5	45.1	-	-	-
	MP	-	45.4	49.2	-	33.2	32.6	40.7	43.8	-	-	-
AVG AVG Gain (dB)	FS	-	-4.5	-3.0	-	-3.8	-3.7	-3.5	-3.5	-	-	-
	MP	-	-3.6	-3.1	-	-4.8	-4.9	-3.9	-3.6	-	-	-
Max. Peak Gain (dBi)	FS	-	1.3 (770)	3.9 (860)	-	3.1 (2020)	2.6 (2400)	3.3 (2440)	3.1 (2620)	-	-	-
	MP	-	3.5 (800)	3.1 (820)	-	2.7 (2150)	2.4 (2320)	3.0 (2420)	4.1 (2640)	-	-	-
VSWR			FS			≤2 .4						
			MP			≤ 3.9						
Return Loss			FS			≤ -7.8 dB						
			MP			≤ -4.5 dB						
Gain			FS			≤ 3.9 dBi						
			MP			≤ 4.1 dBi						

- FS: Free Space
- MP: On 500 mm × 500 mm Metal Plane

1.1.3. Wi-Fi

Electrical – Detail					
Specification	Band	Band	Wi-Fi 2G	Wi-Fi 5G	Wi-Fi 6G
		Freq. (MHz)	2400–2500	5150–5850	5925–7125
Max. VSWR	FS		1.9	2.1	-
	MP		2.1	1.6	-
Max. Return Loss (dB)	FS		-10.5	-8.9	-
	MP		-9.0	-12.2	-
AVG Eff. (%)	FS		36.0	33.0	-
	MP		32.5	33.8	-
AVG. AVG Gain (dB)	FS		-4.4	-4.8	-
	MP		-4.9	-4.7	-
Max. Peak Gain (dBi)	FS		2.3 (2400)	2.4 (5180)	-
	MP		1.6 (2500)	3.6 (5400)	-
VSWR	FS		≤ 2.1		
	MP		≤ 2.1		
Return Loss	FS		≤ -8.9 dB		
	MP		≤ -9.0 dB		
Peak Gain	FS		≤ 2.4 dBi		
	MP		≤ 3.6 dBi		

1.1.4. GNSS

Band Frequency (MHz)	GPS L5 GALILEO E5a BDS B2a- B2I QZSS L5 IRNSS L5	GALILEO E5b BDS B2b	GPS L2 QZSS L2C	GLONASS G2	BDS B3	BDS B1I	GPS L1 GALILEO E1 BDS B1C QZSS L1	GLONASS G1
	1176	1207	1227	1248	1268	1561	1575	1602
VSWR	-	-	-	-	-	4.83	1.69	1.47
Return Loss (dB)	-	-	-	-	-	-3.6	-11.7	-14.2
Efficiency (%)	-	-	-	-	-	26.7	61.6	62.5
Peak Gain (dBi)	-	-	-	-	-	-2.76	0.61	1.57

LNA Electrical	
LNA Gain	18 ±3 Db @ 3 V 17±3 dB @ 1.8 V
Noise Figure	≤ 2.5 dB
Output VSWR	< 2.0
Input VSWR	< 2.0
Filter Out-of-Band Attenuation	60 dB f0 ±100 MHz f0 (1580 MHz)
Working Voltage	1.8–3.3 V
Working Current	8.3 ±2 mA
Impedance	50 Ω

1.2. Supported Bands


LTE/ LTE-Advanced/ WCDMA/ HSPA/ HSPA+/ GPRS/ GSM/ NB-IoT				
Band	Frequency (MHz)	Uplink (MHz)	Downlink (MHz)	Covered
1	2100	1920–1980	2110–2170	√
2	1900	1850–1910	1930–1990	√
3	1800	1710–1785	1805–1880	√
4	1700	1710–1755	2110–2155	√
5	850	824–849	869–894	√
7	2600	2500–2570	2620–2690	√
8	900	880–915	925–960	√
9	1800	1749.9-1784.9	1844.9-1879.9	√
12	698	699–716	729–746	√
13	698	777–787	746–756	√
14	698	788–798	758–768	√
17	698	704–716	734–746	√
18	850	815–830	860–875	√
19	850	830–845	875–890	√
20	800	832–862	791–821	√
23	2100	2000–2020	2180–2200	√
25	1900	1850–1915	1930–1995	√
26	850	814–849	859–894	√
28	698	703–748	758–803	√
34	2100	2010–2025		√
38	2600	2570–2620		√
39	1900	1880–1920		√

LTE/ LTE-Advanced/ WCDMA/ HSPA/ HSPA+/ GPRS/ GSM/ NB-IoT				
Band	Frequency (MHz)	Uplink (MHz)	Downlink (MHz)	Covered
40	2300	2300–2400		√
41	2500	2496–2690		√
66	1700	1710–1780	2110–2200	√

1.3. Mechanical & Environmental

Mechanical		
Antenna Dimensions		89.3 mm × 86.3 mm × 35.4 mm
Antenna Material & Color		PC & Black
Cable Type & Color & Length	LTE-1	ALS302 & Black & 1000 mm
	LTE-2	ALS302 & Black & 1000 mm
	Wi-Fi	ALS302 & Black & 1000 mm
	GNSS	RG174 & Black & 1000 mm
Connector Type	LTE-1	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
	LTE-2	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
	Wi-Fi	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
	GNSS	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
Weight		Typ. 237.8 g
Mounting Type		Screw (M20 Nut)
Environmental		
Storage Temperature		-40 °C to +85 °C
Operation Temperature		-40 °C to +85 °C
Ingress Protection (IP) Rating		IP67
RoHS & REACH Compliant		Yes
Housing Flame Rating		UL 94 V-0
Housing UV Resistant		UL 746c f1


1.4. Block Diagram (Active Antenna)

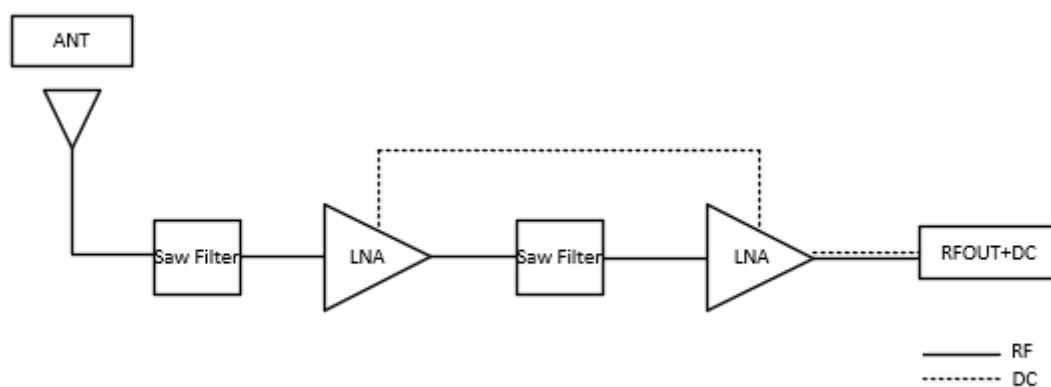


1.5. Supported GNSS Frequency Bands

GNSS Frequency Bands (MHz)					
GPS	L1 Centre 1575.42 (1565–1586)	L2 Centre 1227.6 (1217–1238)	L5 Centre 1176.45 (1164–1189)		
	√	-	-		
GLONASS	G1-L10C-L10F Centre 1601 (1595–1606)	G2-L20C-L20F Centre 1248.06 (1241–1255)	G3-L30C Centre 1202.025 (1189–1213)		
	√	-	-		
GALILEO	E1 Centre 1575.42 (1563–1588)	E5a Centre 1176.45 (1166–1187)	E5b Centre 1207.14 (1197–1218)	E6 Centre 1278.75 (1258–1300)	
	√	-	-	-	
BDS	B1I Centre 1561.098 (1559–1564)	B1C (BDS-3) Centre 1575.42 (1559–1592)	B2a-B2I Centre 1176.45 (1166–1187)	B2b Centre 1207.14 (1197–1217)	B3 Centre 1268.52 (1258–1279)
	√	√	-	-	-
QZSS	L1 Centre 1575.42 (1573–1578)	L2C Centre 1227.6 (1226–1229)	L5 Centre 1176.45 (1166–1187)	L6 Centre 1278.75 (1257–1300)	
	√	-	-	-	
IRNSS	L5 Centre 1176.45 (1164–1189)				
	-				

GNSS Bands and Constellations

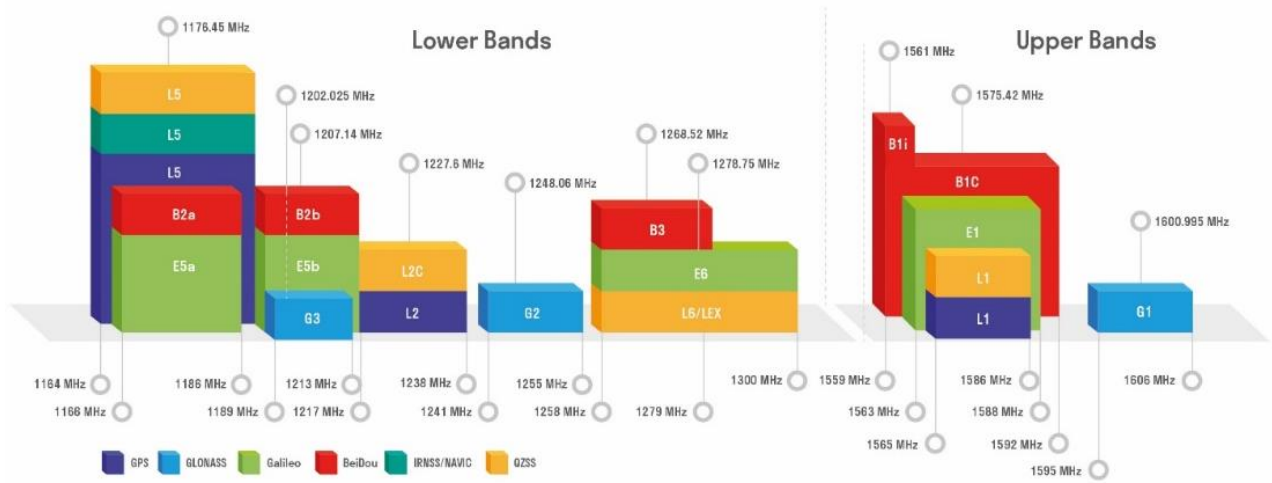


2 Drawing

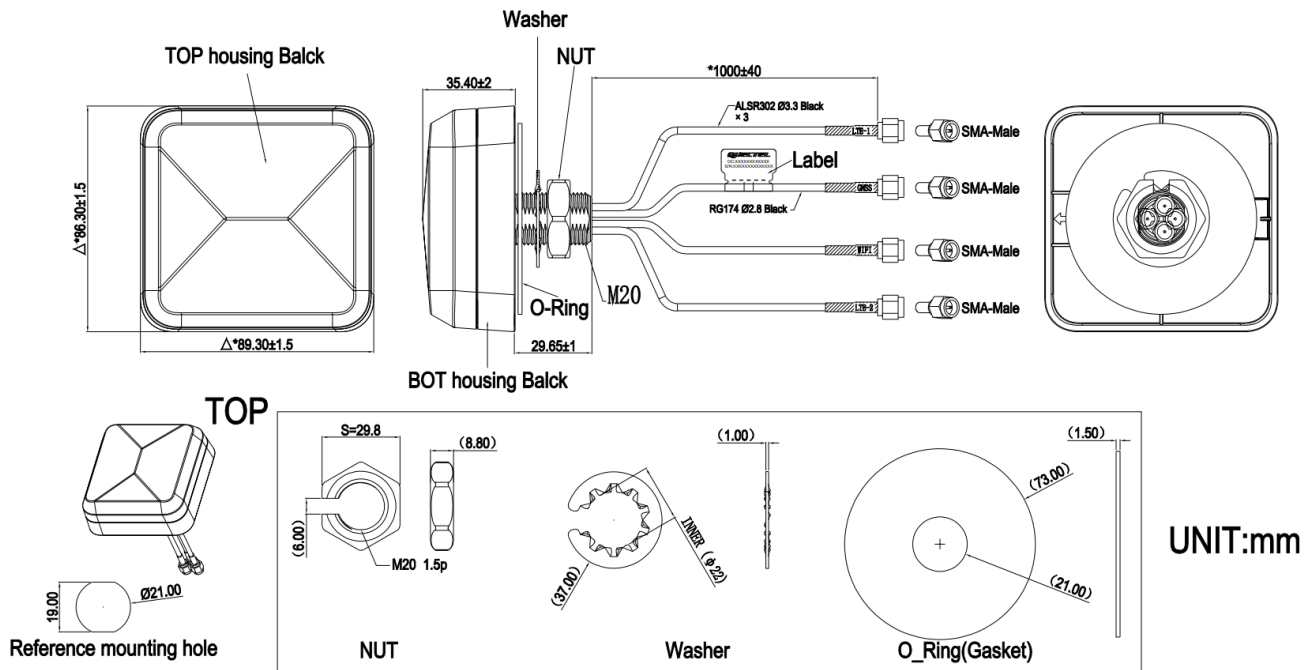

3 Detailed Performance


3.1. S-Parameter Test

3.1.1. VSWR

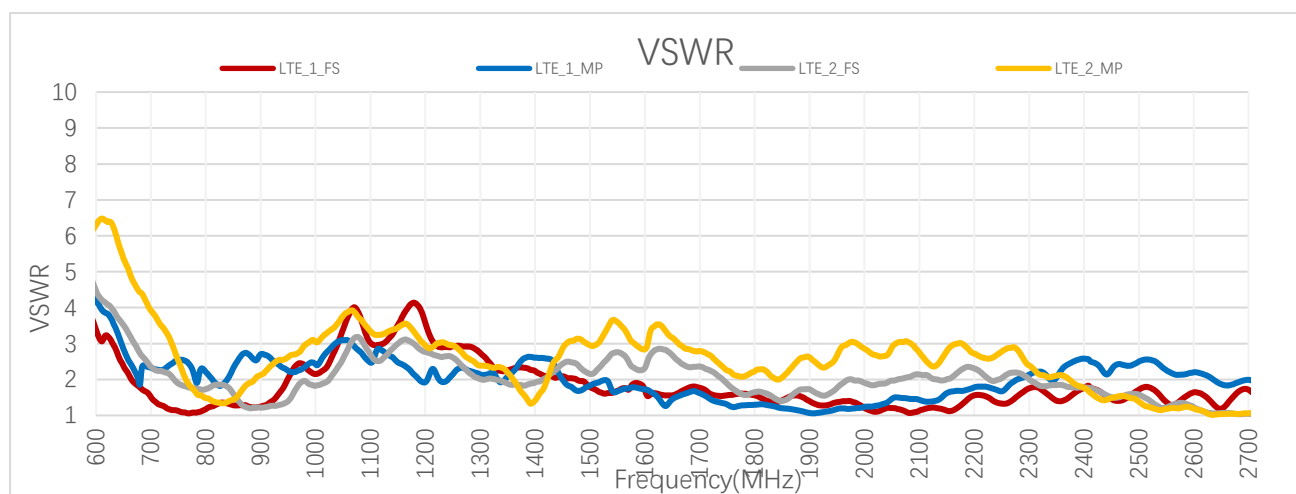


VSWR – LTE

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE-1	FS	-	-	1.4	1.4	1.2	2.3	-	1.7	1.5	1.5
	MP	-	-	2.3	1.8	2.7	2.2	-	1.5	1.3	1.1
LTE-2	FS	-	-	2.3	1.9	1.2	1.6	-	2.3	2.0	1.7
	MP	-	-	3.7	1.3	2.1	2.7	-	2.7	2.4	2.5
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE-1	FS	1.4	1.2	1.4	1.5	1.6	1.7	1.8	1.5	1.6	1.7
	MP	1.2	1.5	2.1	2.3	2.2	2.0	2.4	2.3	1.8	1.5
LTE-2	FS	1.8	2.0	1.8	1.5	1.2	1.0	1.3	1.6	1.9	1.7
	MP	2.7	2.6	2.1	1.5	1.2	1.1	1.8	1.9	1.8	1.3

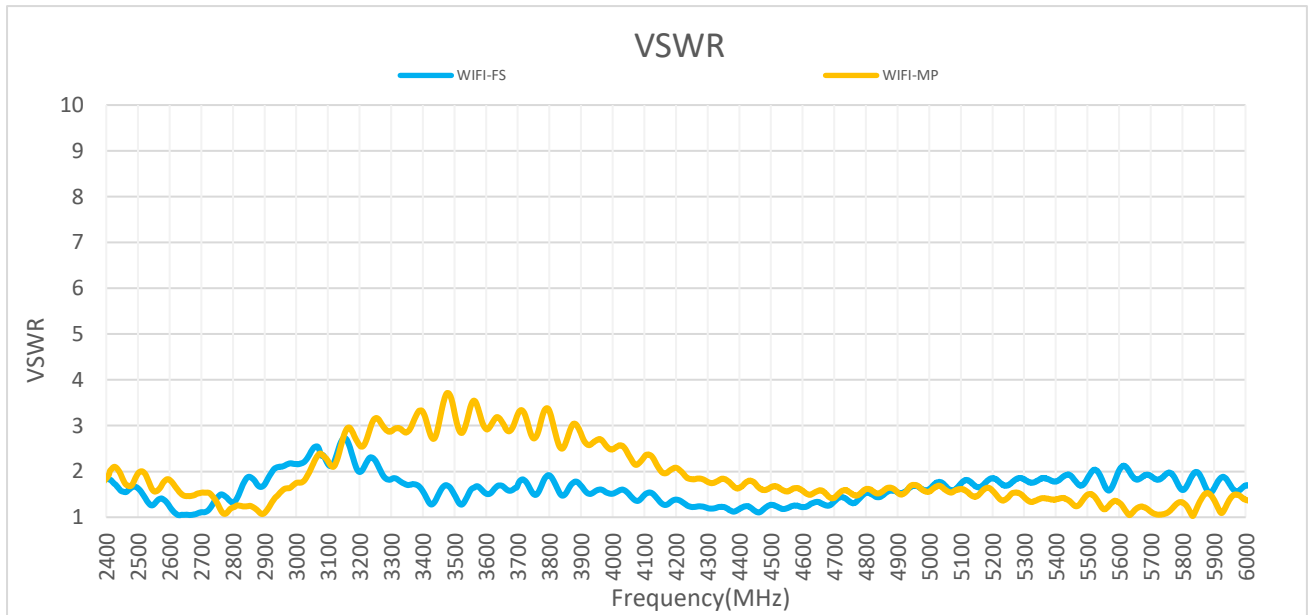

VSWR – Wi-Fi


Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	1.9	1.6	1.6	1.7	1.8	2.0	-	-	-	-
	MP	1.8	1.9	2.0	1.5	1.5	1.3	-	-	-	-

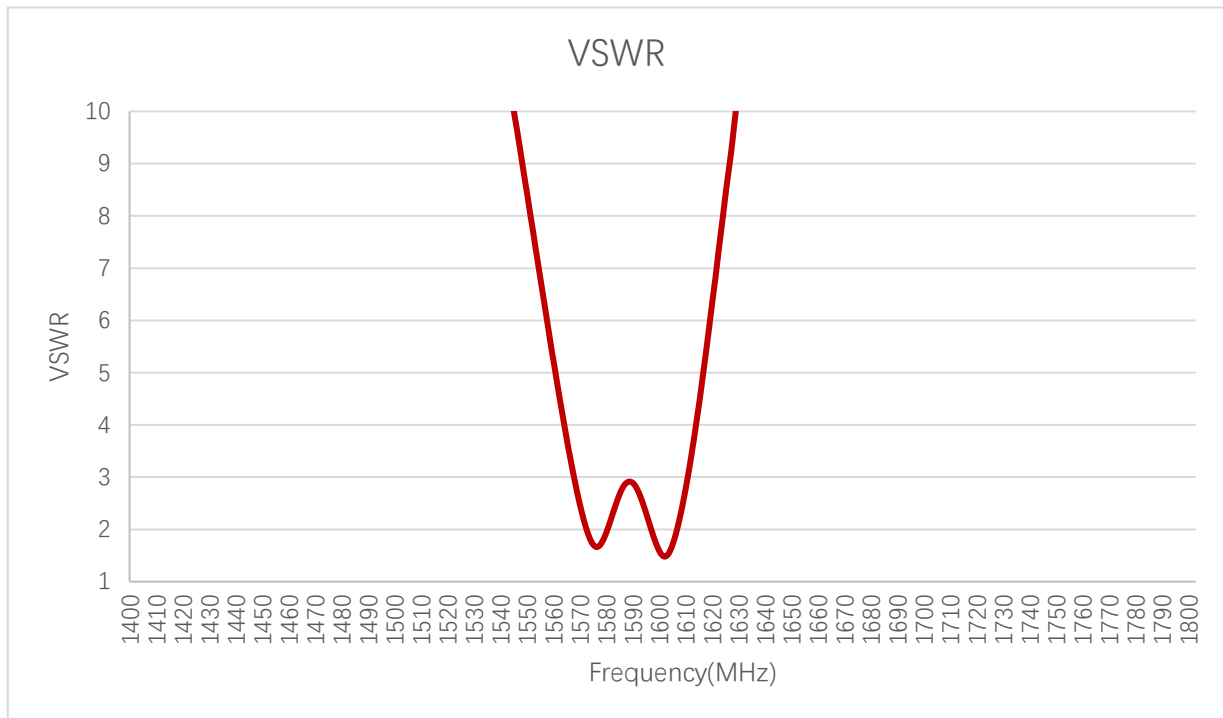

VSWR – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
VSWR	-	-	-	-	-	4.83	1.69	1.47

3.1.2. Return Loss

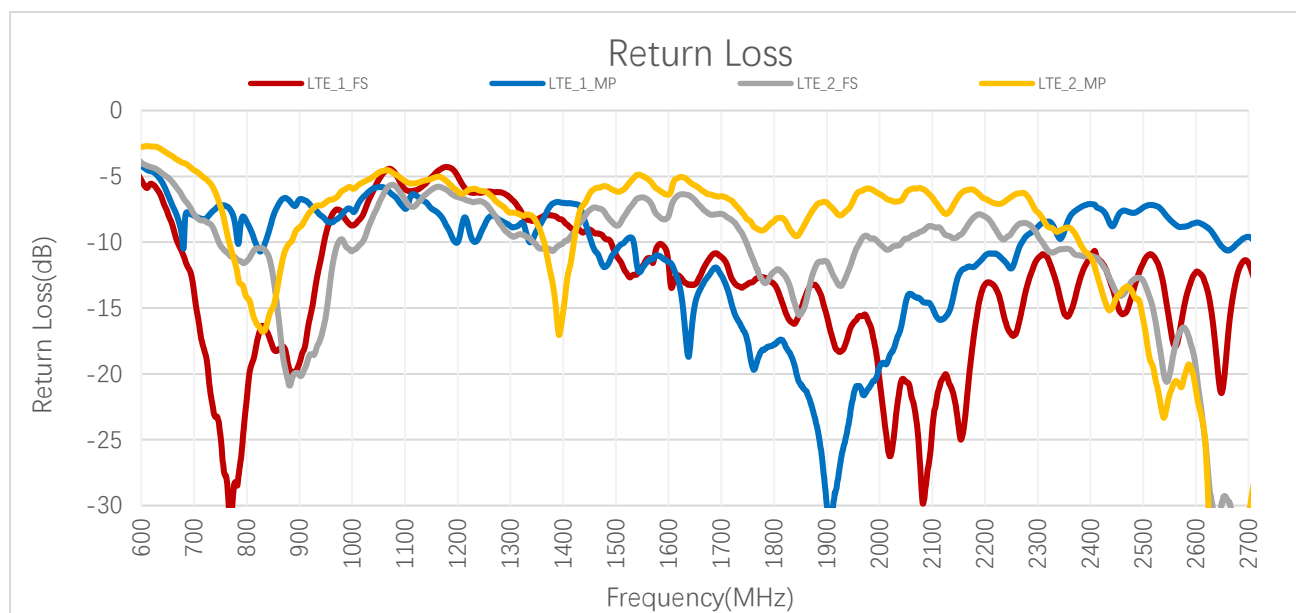

Return Loss (dB) – LTE

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE-1	FS	-	-	-16.4	-16.4	-19.2	-8.1	-	-11.7	-13.4	-13.3
	MP	-	-	-8.2	-10.5	-6.7	-8.5	-	-13.4	-16.6	-23.8
LTE-2	FS	-	-	-8.3	-10.5	-20.1	-12.4	-	-8.1	-9.4	-11.7
	MP	-	-	-4.8	-16.8	-8.9	-6.8	-	-6.6	-7.8	-7.2
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE-1	FS	-16.2	-21.5	-15.4	-14.6	-12.3	-11.4	-10.7	-14.1	-12.2	-11.8
	MP	-21.8	-14.1	-9.2	-8.2	-8.5	-9.7	-7.6	-7.9	-10.7	-14.4
LTE-2	FS	-11.1	-9.7	-10.5	-13.9	-19.6	-34.5	-17.0	-12.8	-10.5	-11.9
	MP	-6.9	-7.2	-9.0	-14.2	-21.2	-31.4	-11.2	-10.3	-10.8	-17.2

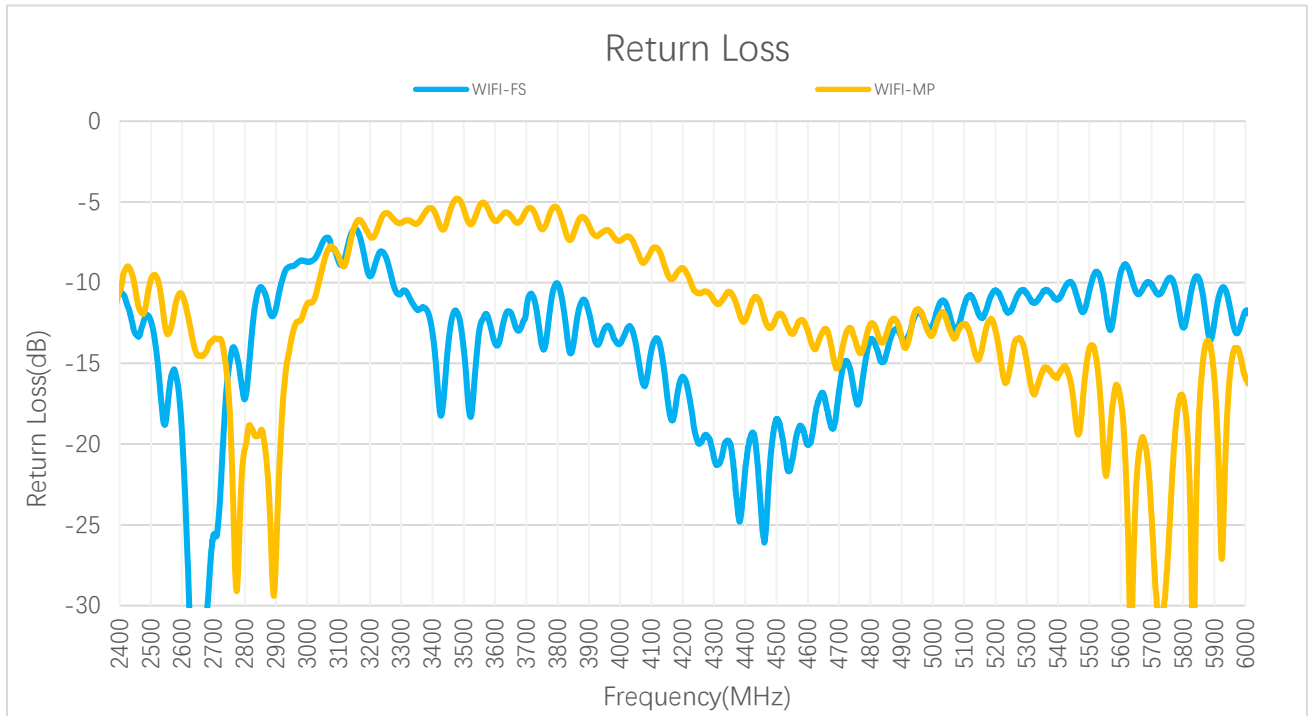

Return Loss (dB) – Wi-Fi


Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	-10.5	-13.1	-12.4	-12.1	-10.5	-9.7	-	-	-	-
	MP	-10.5	-10.4	-9.8	-14.6	-14.1	-18.6	-	-	-	-



Return Loss (dB) – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Return Loss (dB)	-	-	-	-	-	-3.6	-11.7	-14.2

3.1.3. Isolation

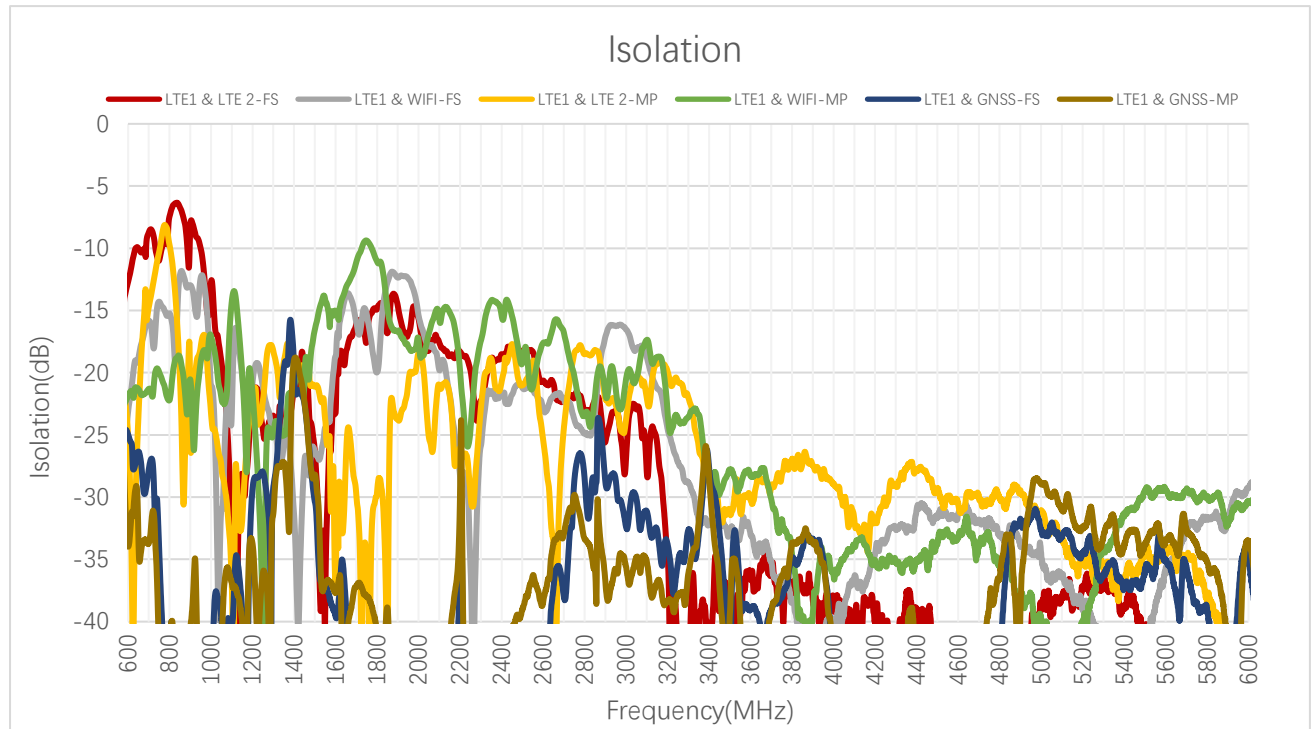


Max Isolation (dB)

Band		B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	WIFI 5G	BDS B1I	GPS L1
Freq. (MHz)		600– 698	698– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	5150– 5850	1559– 1564	1565– 1586
LTE-1 & LTE-2	FS	-	-6.8	-6.3	-	-13.7	-18.5	-17.9	-18.1	-36.1	-28.8	-23.0
	MP	-	-8.1	-12.2	-	-18.4	-18.8	-17.7	-19.0	-33.6	-25.8	-25.1
LTE-1 & WIFI	FS	-	-14.3	-11.8	-	-11.9	-21.4	-20.9	-20.9	-31.2	-	-
	MP	-	-19.7	-18.4	-	-9.4	-14.1	-14.1	-15.7	-29.2	-	-
LTE-1 & GNSS	FS	-	-26.9	-42.0	-	-40.5	-47.7	-43.9	-35.5	-	-37.4	-37.7
	MP	-	-31.1	-34.9	-	-36.9	-42.9	-39.0	-32.9	-	-36.6	-36.7

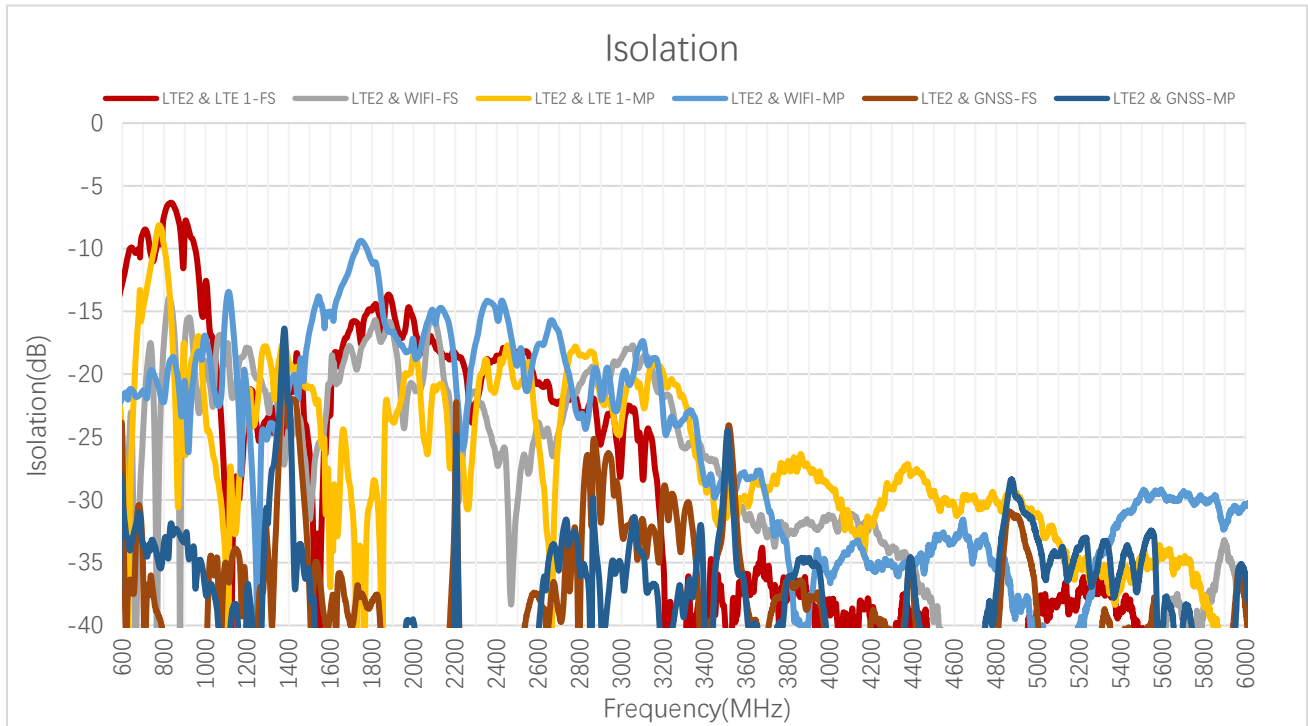

Max Isolation (dB)


Band		B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	WIFI 5G	BDS B1I	GPS L1
Freq. (MHz)		600– 698	698– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	5150– 5850	1559– 1564	1565– 1586
LTE-2 & LTE-1	FS	-	-6.8	-6.3	-	-13.7	-18.5	-17.9	-18.1	-36.1	-28.8	-23.0
	MP	-	-8.1	-12.2	-	-18.4	-18.8	-17.7	-19.0	-33.6	-25.8	-25.1
LTE-2 & WIFI	FS	-	-15.5	-13.9	-	-15.2	-21.3	-25.8	-23.8	-36.7	-	-
	MP	-	-20.2	-20.0	-	-17.7	-15.0	-18.6	-21.0	-29.2	-	-
LTE-2 & GNSS	FS	-	-36.0	-42.2	-	-36.8	-52.9	-43.0	-36.6	-37.8	-37.9	-38.8
	MP	-	-33.0	-31.9	-	-39.5	-46.9	-43.9	-33.5	-32.4	-44.8	-45.3

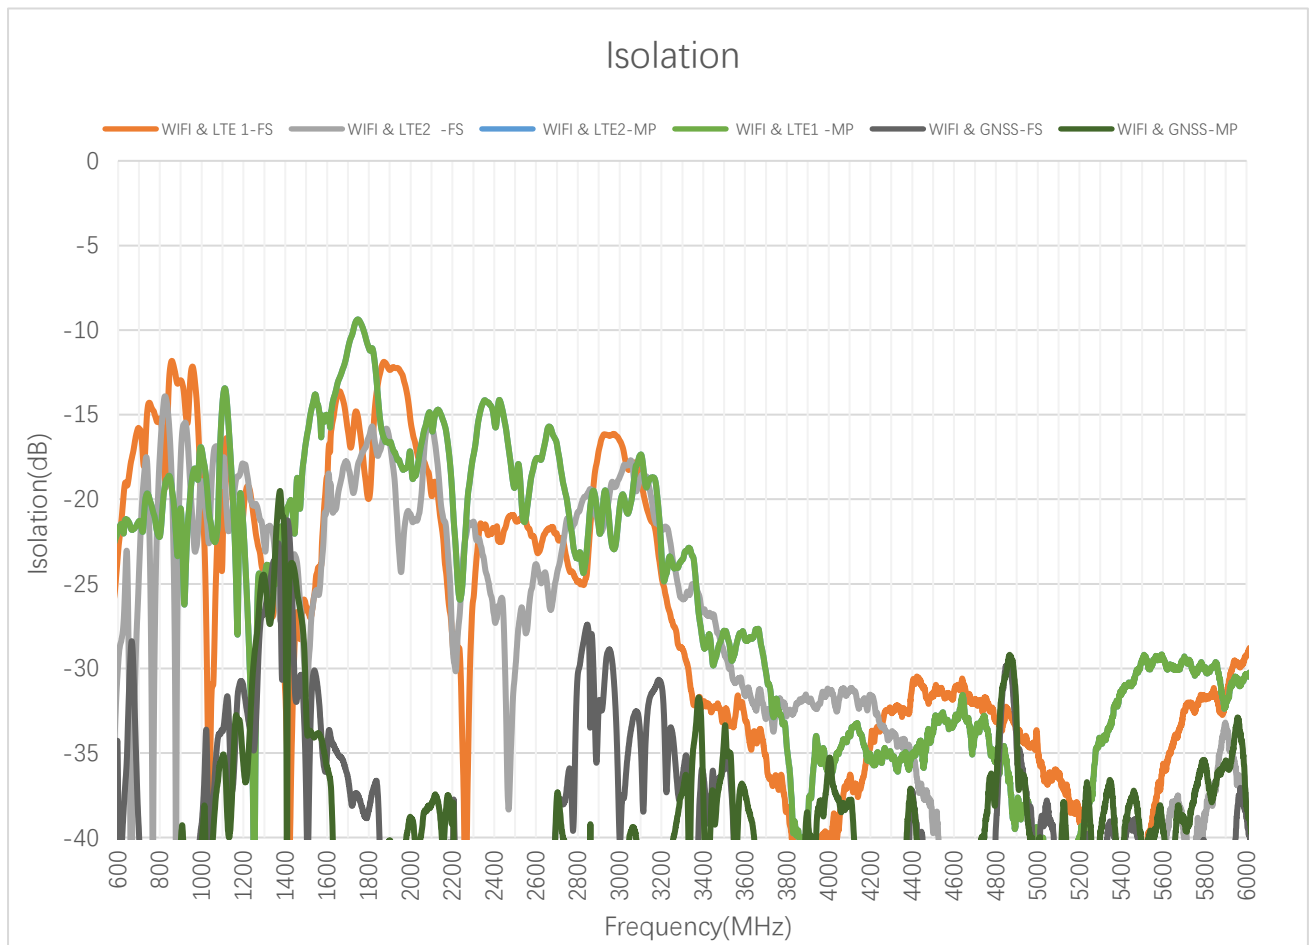

Max Isolation (dB)

Band		B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	WIFI 5G	BDS B1I	GPS L1
Freq. (MHz)		600– 698	698– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	5150– 5850	1559– 1564	1565– 1586
WIFI & LTE 1	FS	-	-14.3	-11.8	-	-11.9	-21.4	-20.9	-20.9	-31.2	-	-
	MP	-	-19.7	-18.4	-	-9.4	-14.1	-14.1	-15.7	-29.2	-	-
WIFI & LTE 2	FS	-	-15.5	-13.9	-	-15.2	-21.3	-25.8	-23.8	-36.7	-	-
	MP	-	-20.2	-20.0	-	-17.7	-15.0	-18.6	-21.0	-29.2	-	-
WIFI & GNSS	FS	-	-	-	-	-	-	-44.8	-	-38.9	-31.6	-32.4
	MP	-	-	-	-	-	-	-44.2	-	-35.4	-33.8	-34.0


3.1.4. GNSS LNA Gain

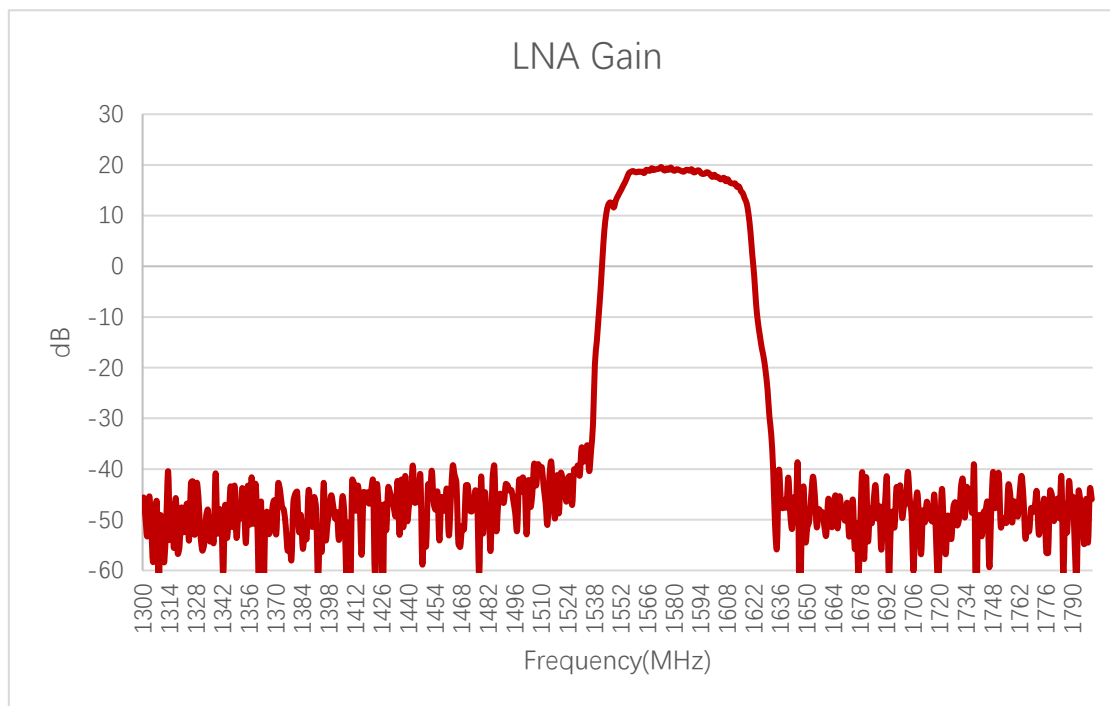

LNA Gain (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
LNA Gain (dB)	-	-	-	-	-	18.7	18.8	17.5

3.1.5. GNSS Noise Figure

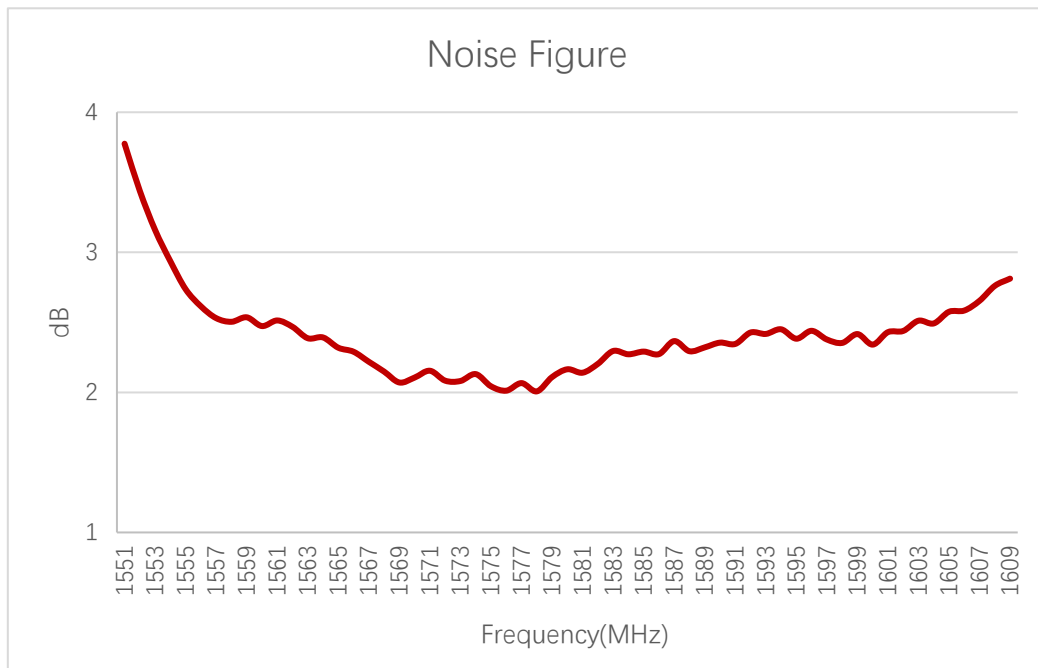


Noise Figure (dB)

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Noise Figure (dB)	-	-	-	-	-	2.5	2.04	2.43


3.2. Radiation Performance Test

3.2.1. Efficiency

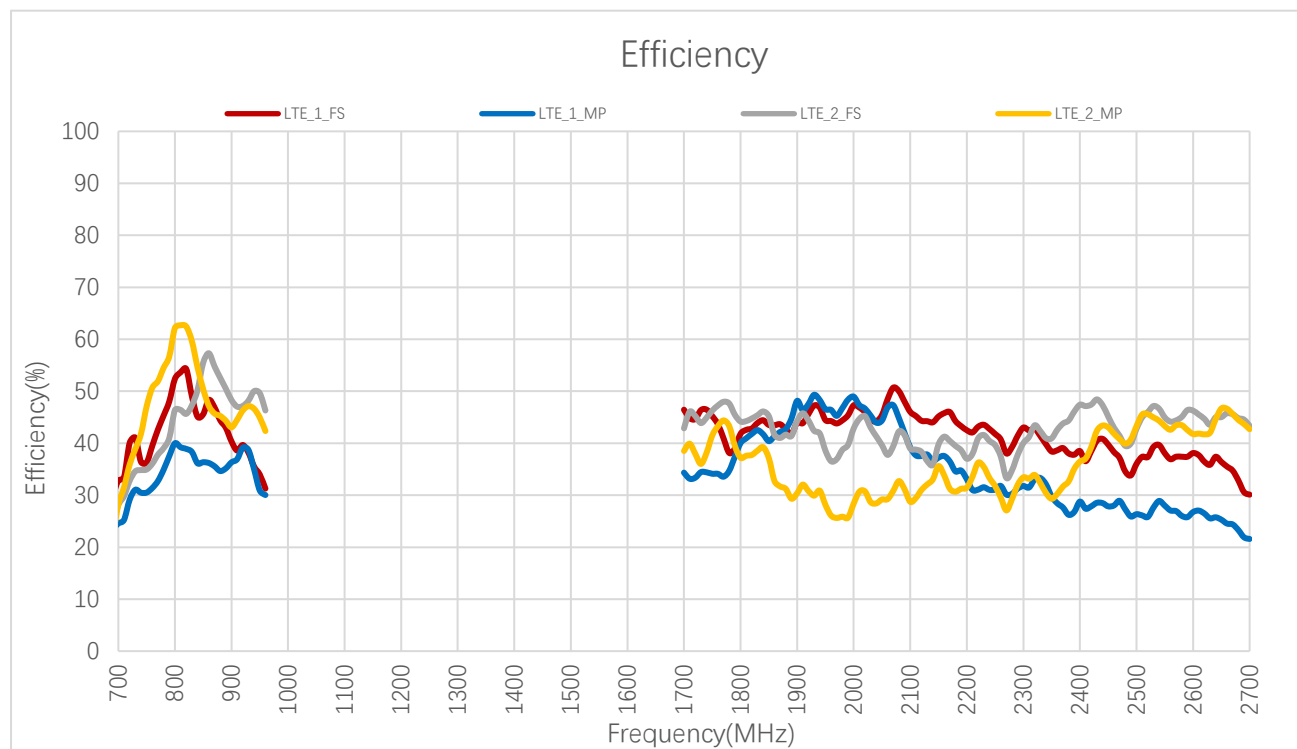


Efficiency (%) – LTE

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE-1	FS	-	-	33.5	49.0	40.4	31.3	-	44.9	46.5	42.7
	MP	-	-	25.2	38.3	36.3	30.0	-	33.2	34.4	42.7
LTE-2	FS	-	-	29.8	47.3	48.3	46.3	-	46.1	44.9	41.7
	MP	-	-	31.5	59.6	43.1	42.4	-	39.9	38.2	31.2
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE-1	FS	44.5	44.0	38.4	39.7	38.1	30.6	-	-	-	-
	MP	46.6	36.6	29.7	27.9	26.8	21.9	-	-	-	-
LTE-2	FS	38.6	35.9	40.9	45.1	46.3	44.6	-	-	-	-
	MP	28.2	33.0	29.3	43.1	41.8	43.7	-	-	-	-

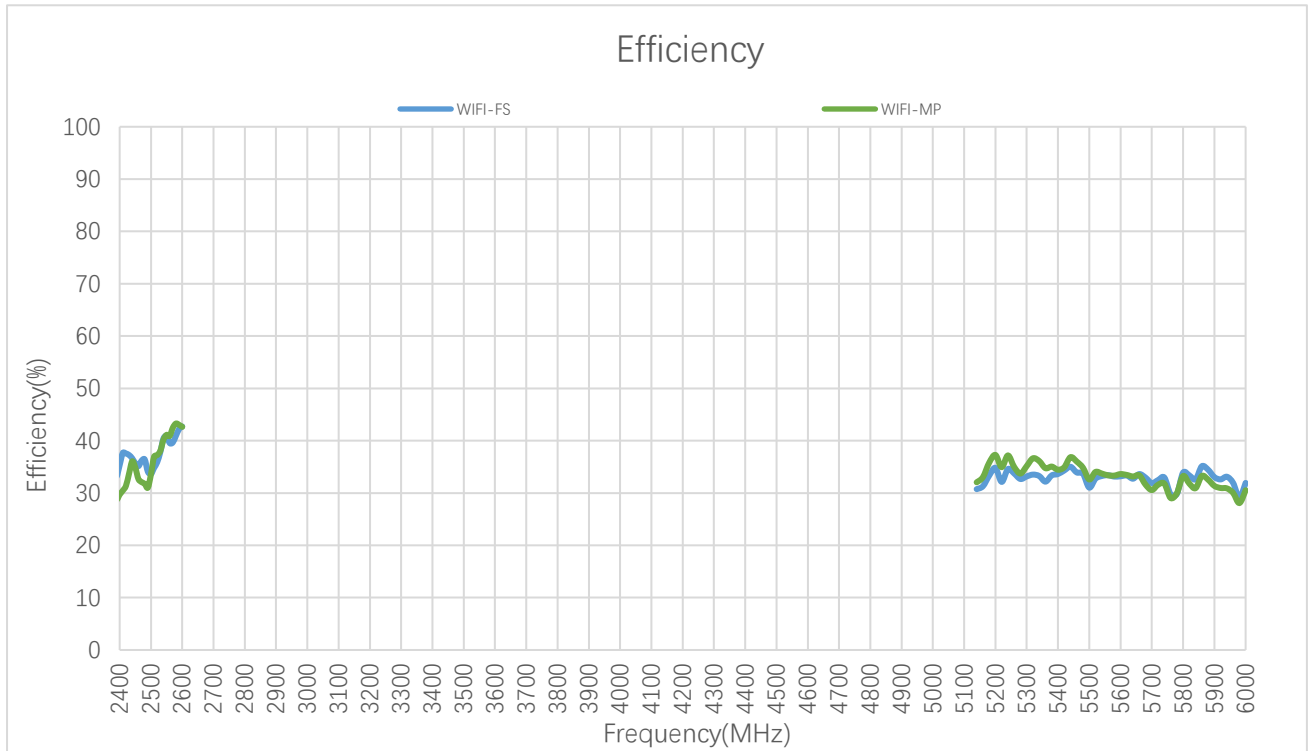

Efficiency (%) – Wi-Fi


Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	35.4	35.7	33.6	30.7	31.0	32.6	-	-	-	-
	MP	29.7	34.9	33.6	32.1	32.6	30.9	-	-	-	-

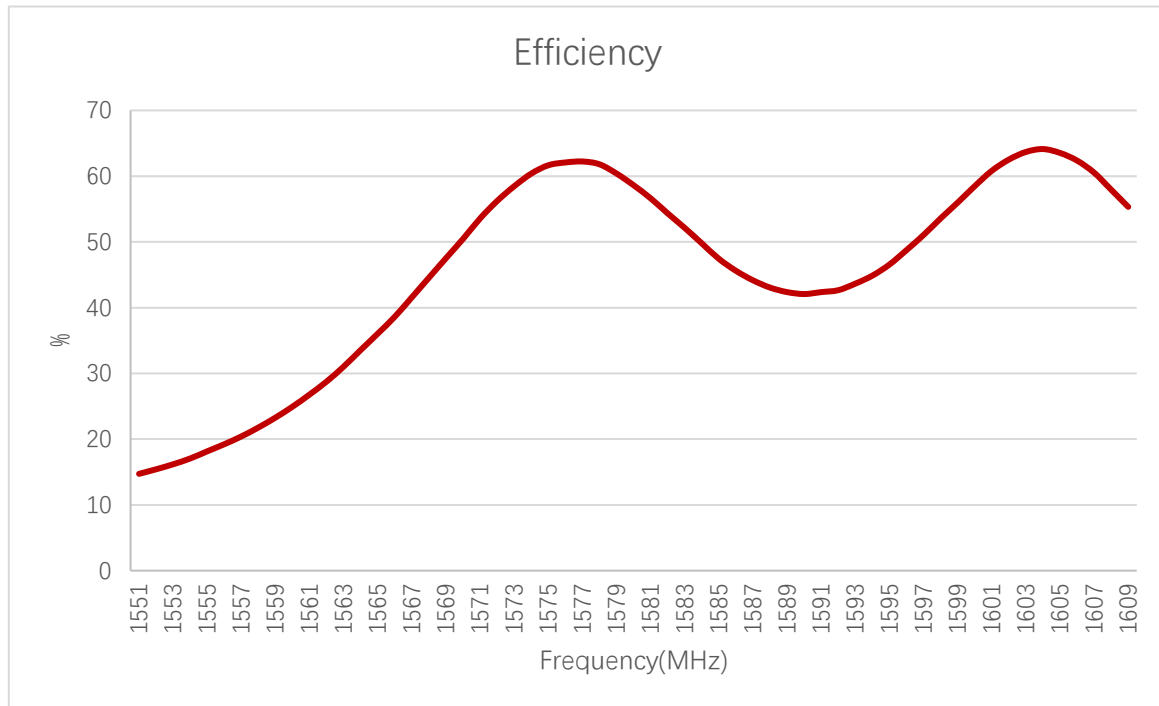

Efficiency (%) – GNSS


Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Efficiency (%)	-	-	-	-	-	26.7	61.6	62.5

3.2.2. Average Gain

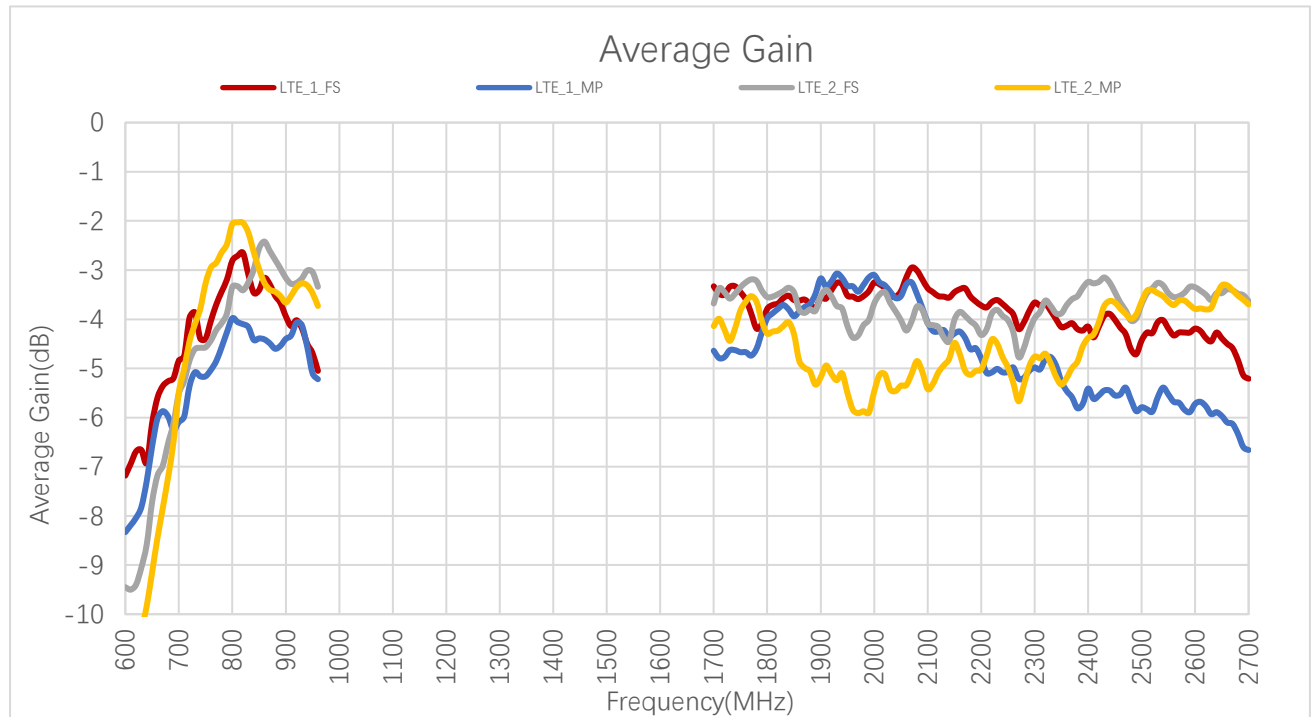

Average Gain (dB) – LTE


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE-1	FS	-	-	-4.8	-3.1	-3.9	-5.1	-	-3.5	-3.3	-3.7
	MP	-	-	-6.0	-4.2	-4.4	-5.2	-	-4.8	-4.6	-3.7
LTE-2	FS	-	-	-5.3	-3.3	-3.2	-3.3	-	-3.4	-3.5	-3.8
	MP	-	-	-5.0	-2.2	-3.7	-3.7	-	-4.0	-4.2	-5.1
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE-1	FS	-3.5	-3.6	-4.2	-4.0	-4.2	-5.1	-	-	-	-
	MP	-3.3	-4.4	-5.3	-5.6	-5.7	-6.6	-	-	-	-
LTE-2	FS	-4.1	-4.5	-3.9	-3.5	-3.4	-3.5	-	-	-	-
	MP	-5.5	-4.8	-5.3	-3.7	-3.8	-3.6	-	-	-	-

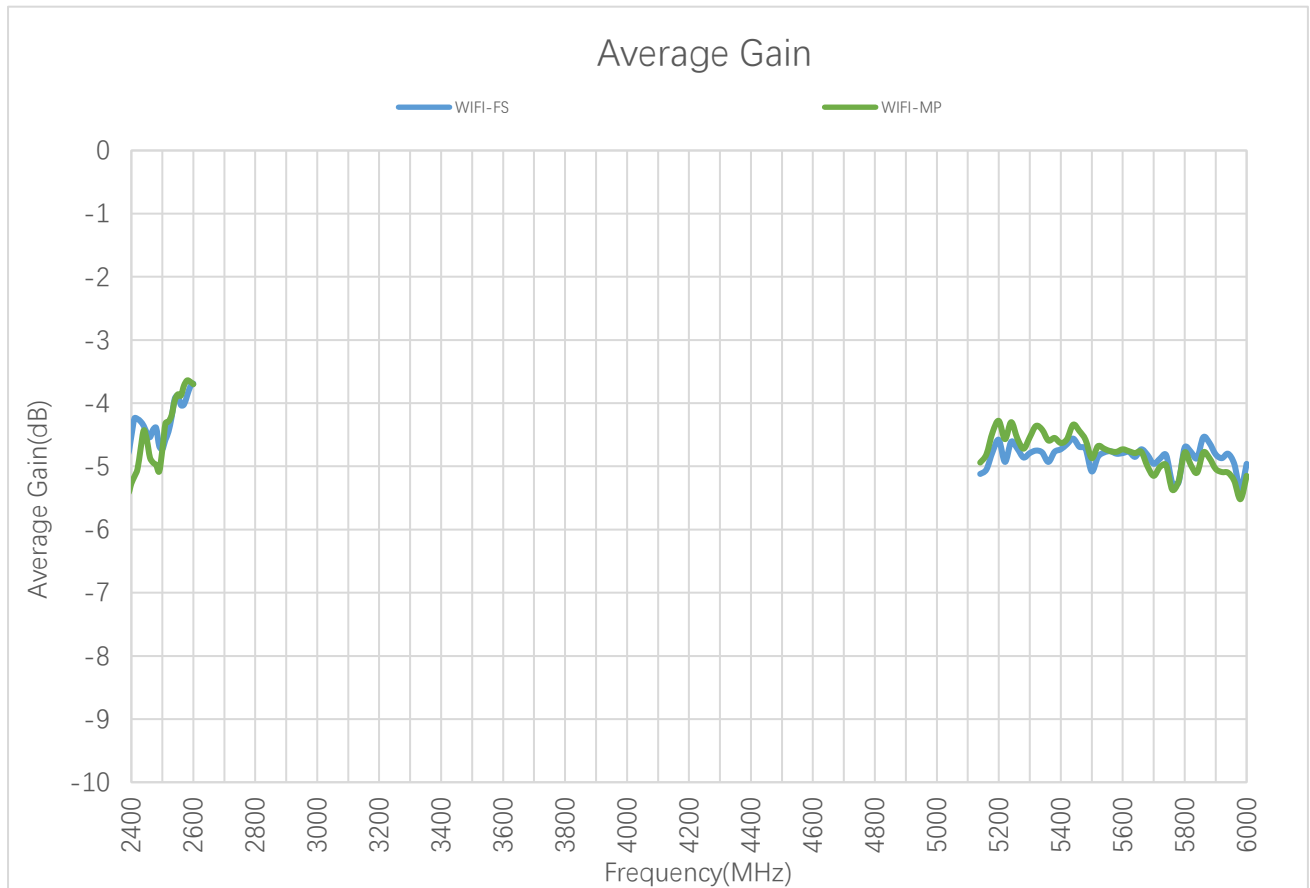

Average Gain (dB) – Wi-Fi


Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	-4.5	-4.5	-4.7	-5.1	-5.1	-4.9	-	-	-	-
	MP	-5.3	-4.6	-4.7	-4.9	-4.9	-5.1	-	-	-	-

3.2.3. Peak Gain

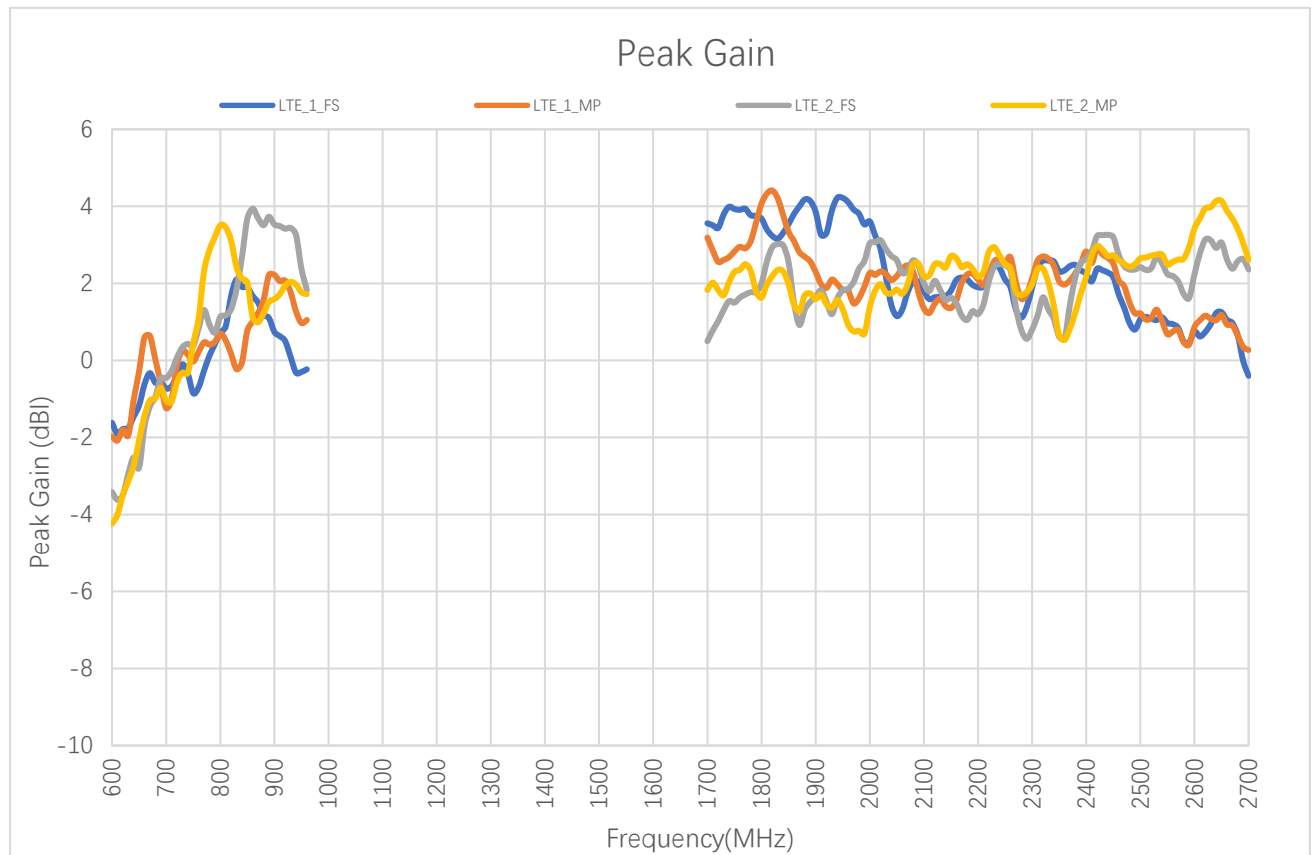


Peak Gain (dBi) – LTE

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
LTE-1	FS	-	-	-0.7	2.1	0.7	-0.2	-	3.5	4.0	4.2
	MP	-	-	-1.0	-0.2	2.2	1.1	-	2.9	2.7	2.7
LTE-2	FS	-	-	-0.3	1.8	3.5	1.8	-	0.8	1.5	1.3
	MP	-	-	-1.1	2.4	1.6	1.7	-	2.0	2.0	1.7
Frequency (MHz)		1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
LTE-1	FS	4.2	1.7	2.3	2.2	0.8	0.0	-	-	-	-
	MP	1.8	1.4	2.1	2.5	0.9	0.4	-	-	-	-
LTE-2	FS	1.8	1.6	0.6	3.2	2.2	2.6	-	-	-	-
	MP	1.3	2.4	0.7	2.7	3.4	3.0	-	-	-	-

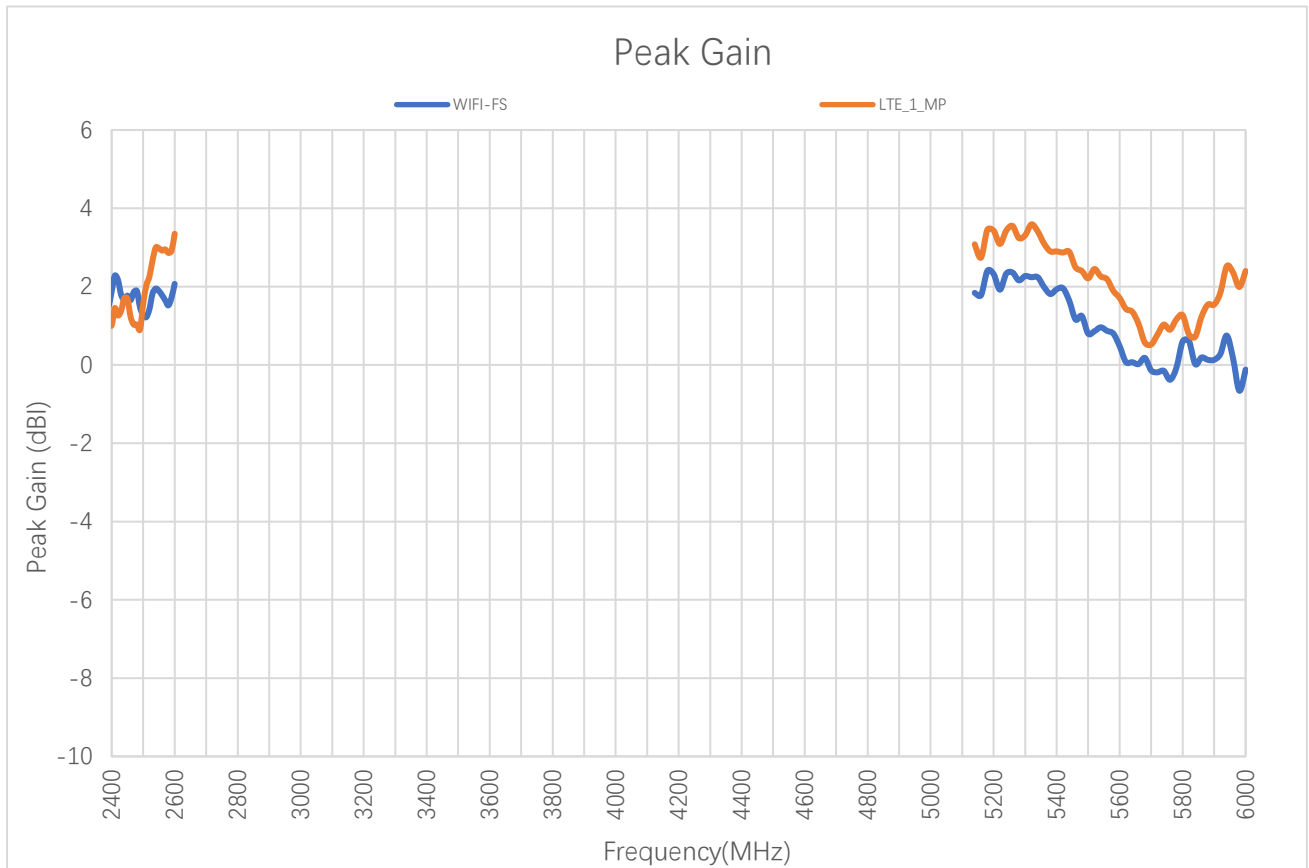

Peak Gain (dBi) – Wi-Fi

Frequency (MHz)		2400	2450	2500	5150	5500	5850	5925	6325	6725	7125
Wi-Fi	FS	1.9	1.8	1.3	1.8	0.8	0.0	-	-	-	-
	MP	1.0	1.7	1.6	3.1	2.2	0.7	-	-	-	-

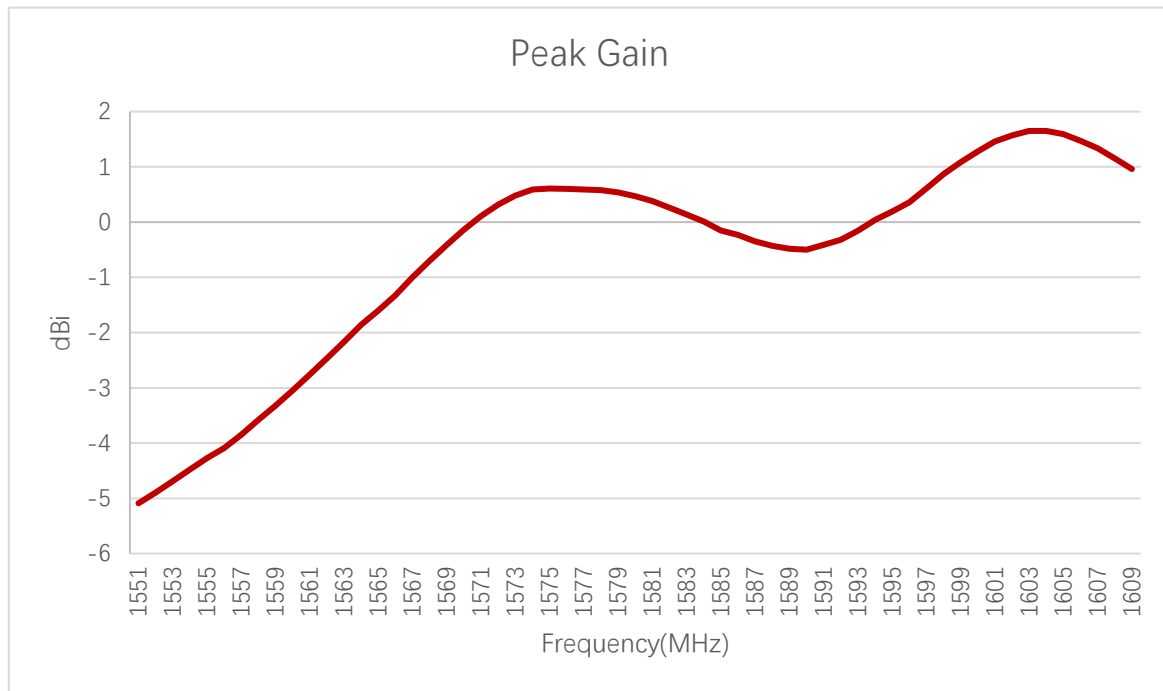


Peak Gain (dBi) – GNSS

Frequency (MHz)	1176	1207	1227	1248	1268	1561	1575	1602
Peak Gain (dBi)	-	-	-	-	-	-2.76	0.61	1.57



3.2.4. 3D & 2D Radiation Pattern

- Test Condition: Free space
- Test Chamber: HF-SY-1 (LTE); SH-SY-16 (GNSS)


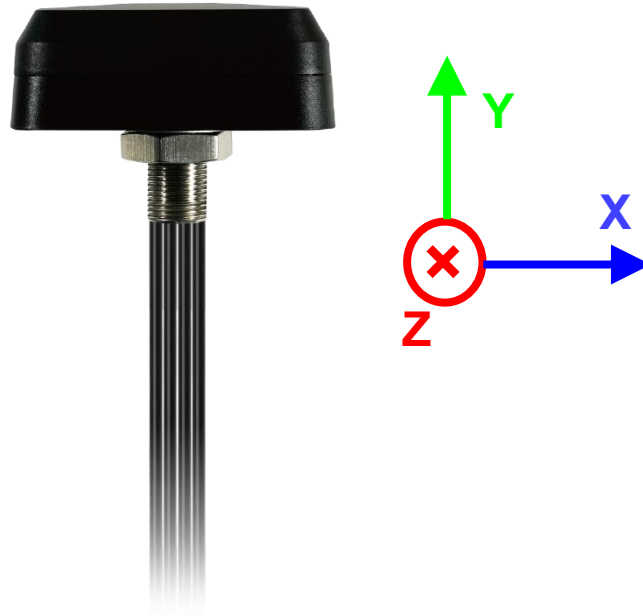


● **LTE-1**


710 MHz




830 MHz




Phi=90 freq=710MHz




Theta=90 freq=710MHz





Phi=90 freq=830MHz





Theta=90 freq=830MHz




900 MHz




1740 MHz




Phi=90 freq=900MHz




Theta=90 freq=900MHz





Phi=90 freq=1740MHz




Theta=90 freq=1740MHz



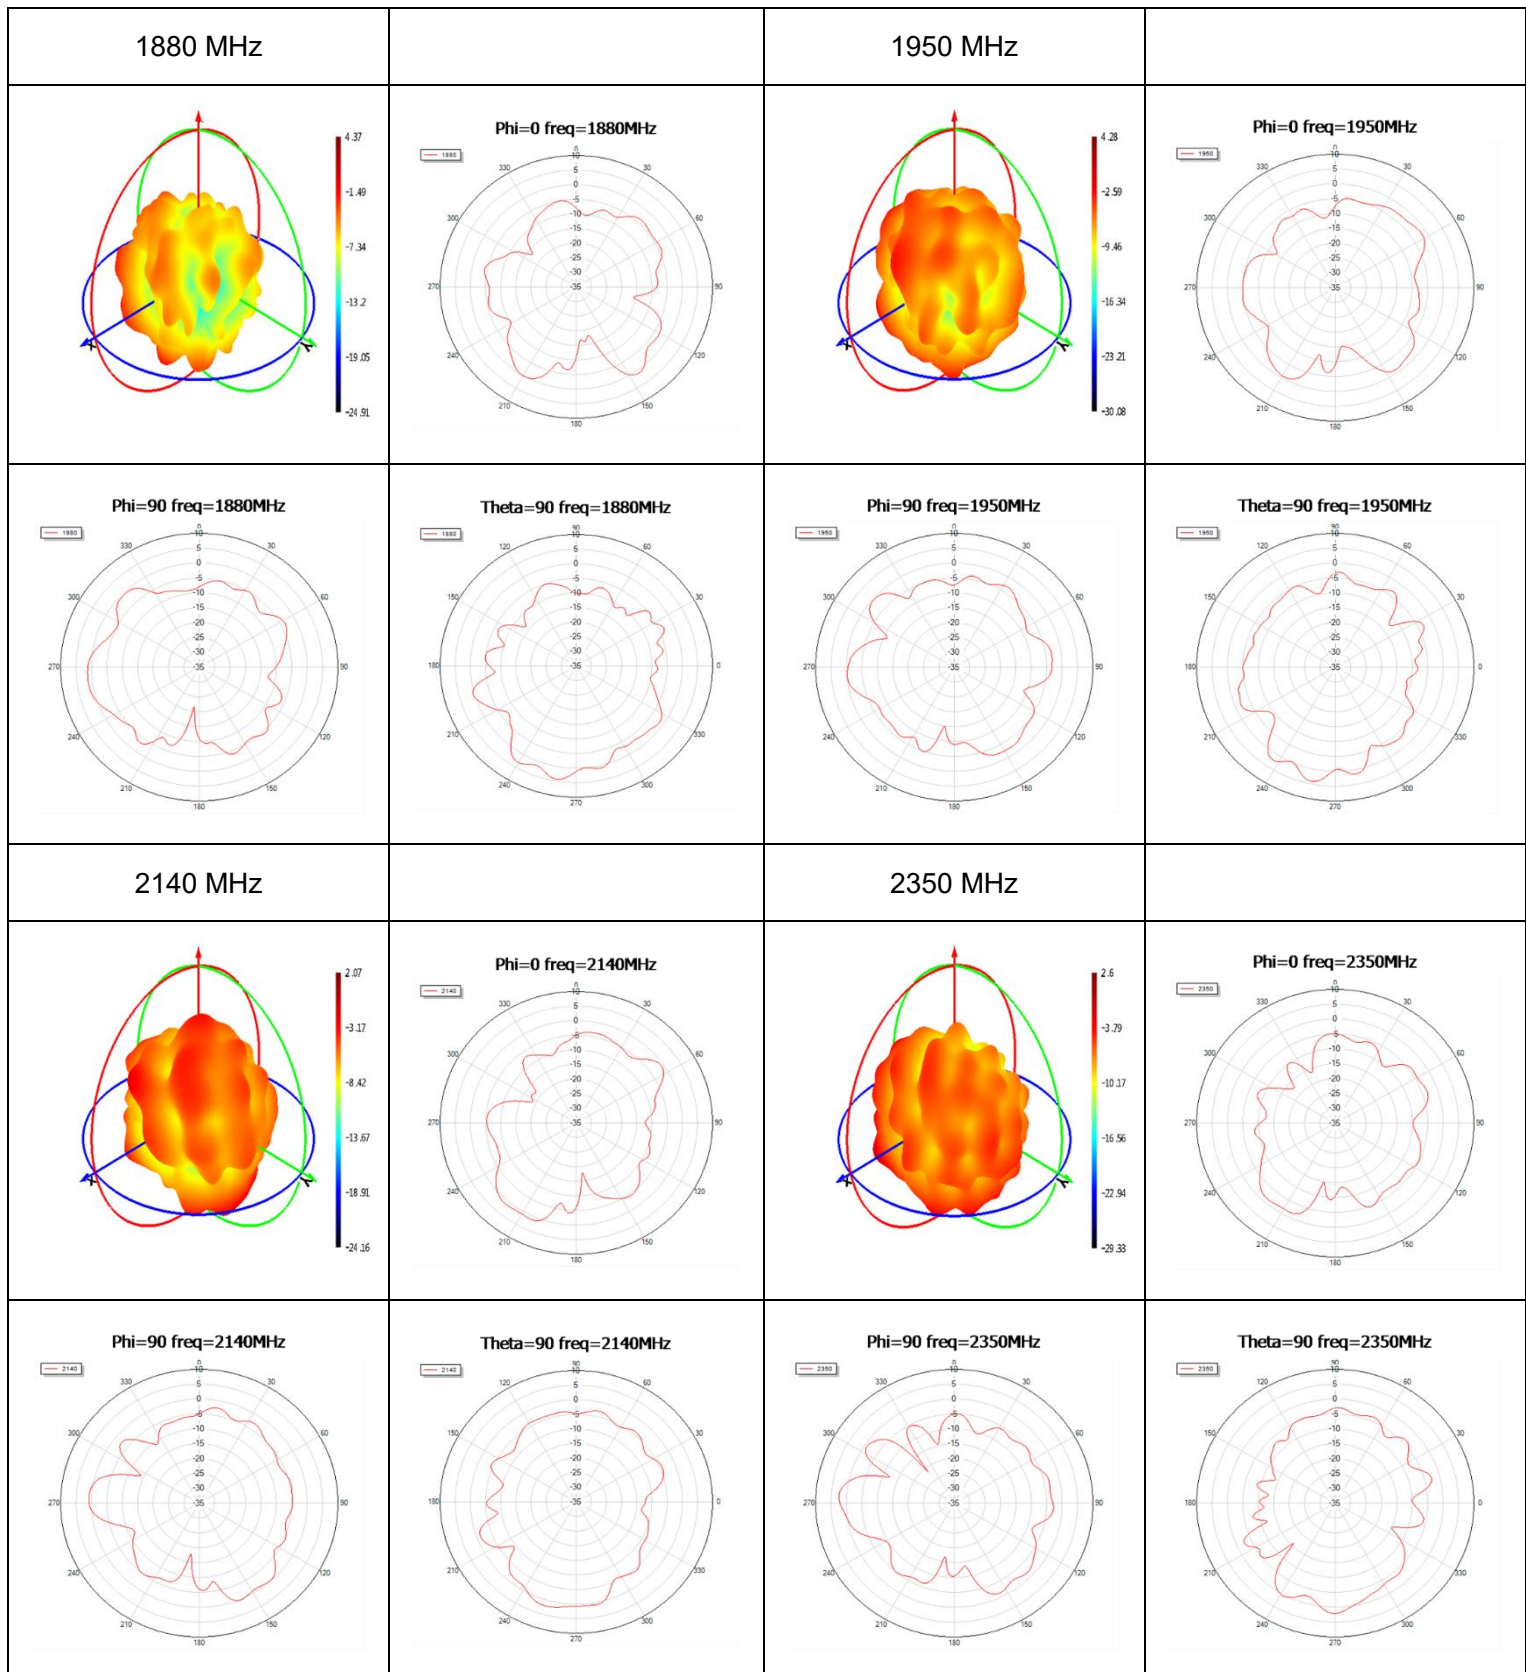


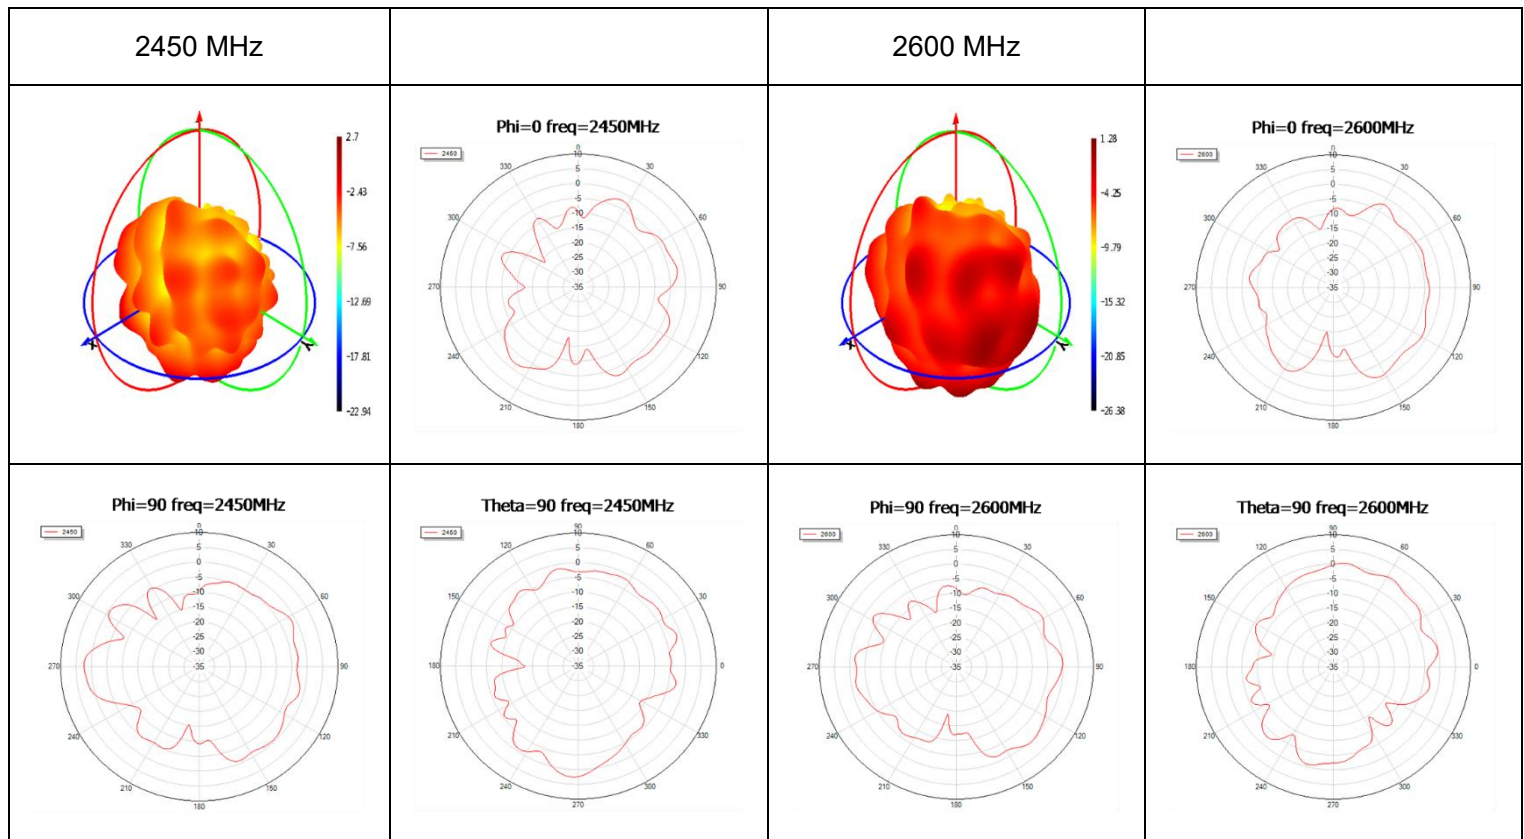


● **Max Peak Gain**

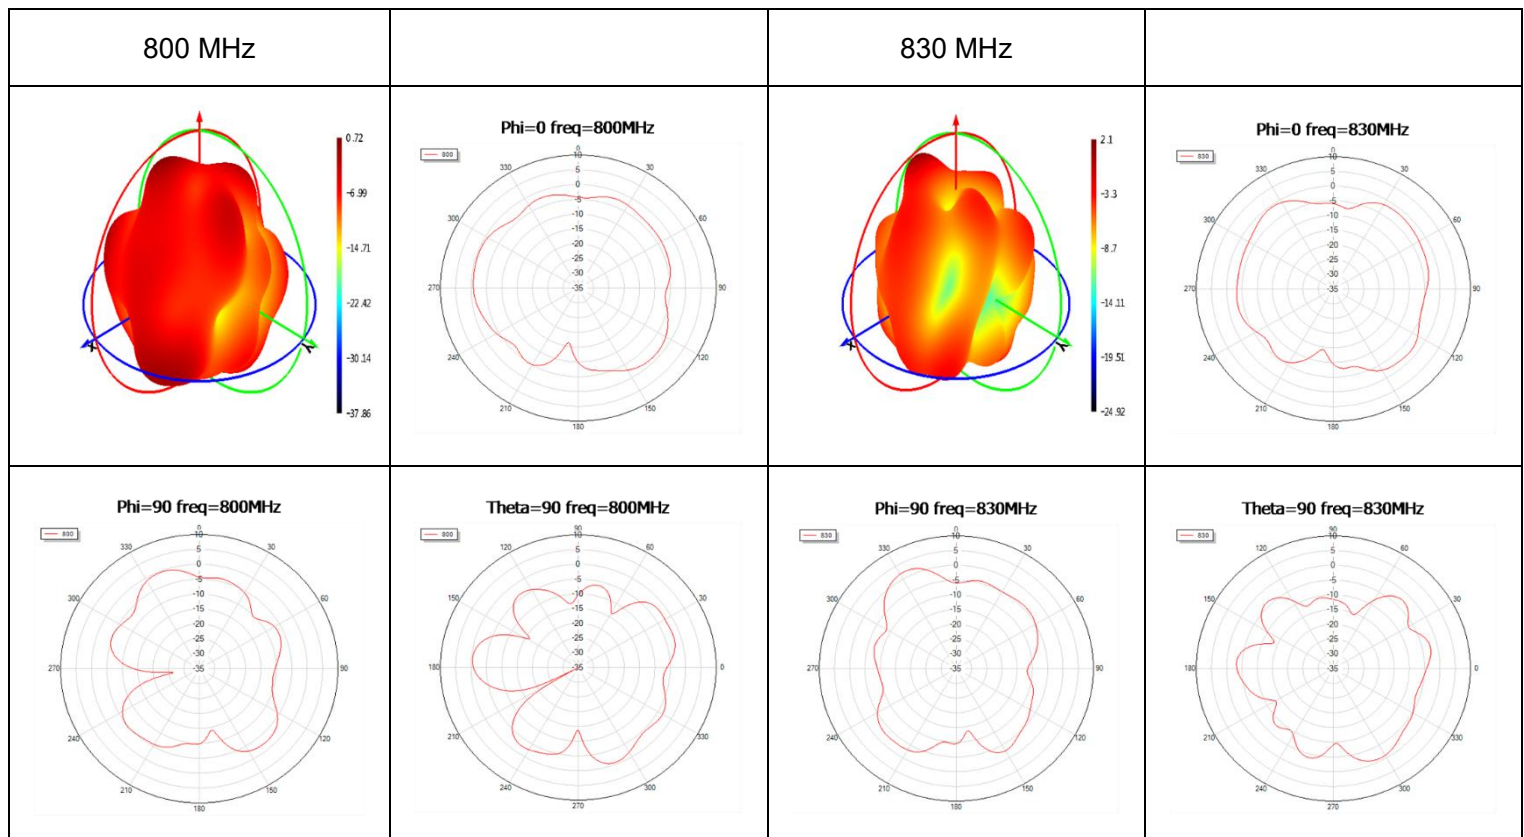


1940 MHz




Phi=0 freq=1940MHz




2320 MHz




Phi=0 freq=2320MHz




Phi=90 freq=1940MHz




Theta=90 freq=1940MHz




Phi=90 freq=2320MHz




Theta=90 freq=2320MHz




2420 MHz




Phi=0 freq=2420MHz




2650 MHz




Phi=0 freq=2650MHz




Phi=90 freq=2420MHz




Theta=90 freq=2420MHz



Phi=90 freq=2650MHz





Theta=90 freq=2650MHz





● **LTE-2**


710 MHz




830 MHz




Phi=90 freq=710MHz




Theta=90 freq=710MHz





Phi=90 freq=830MHz





Theta=90 freq=830MHz




900 MHz




1740 MHz




Phi=90 freq=900MHz




Theta=90 freq=900MHz




Phi=90 freq=1740MHz




Theta=90 freq=1740MHz




1880 MHz




Phi=0 freq=1880MHz




1950 MHz




Phi=0 freq=1950MHz




Phi=90 freq=1880MHz




Theta=90 freq=1880MHz




Phi=90 freq=1950MHz




Theta=90 freq=1950MHz




2140 MHz




Phi=0 freq=2140MHz




2350 MHz




Phi=0 freq=2350MHz




Phi=90 freq=2140MHz




Theta=90 freq=2140MHz




Phi=90 freq=2350MHz




Theta=90 freq=2350MHz




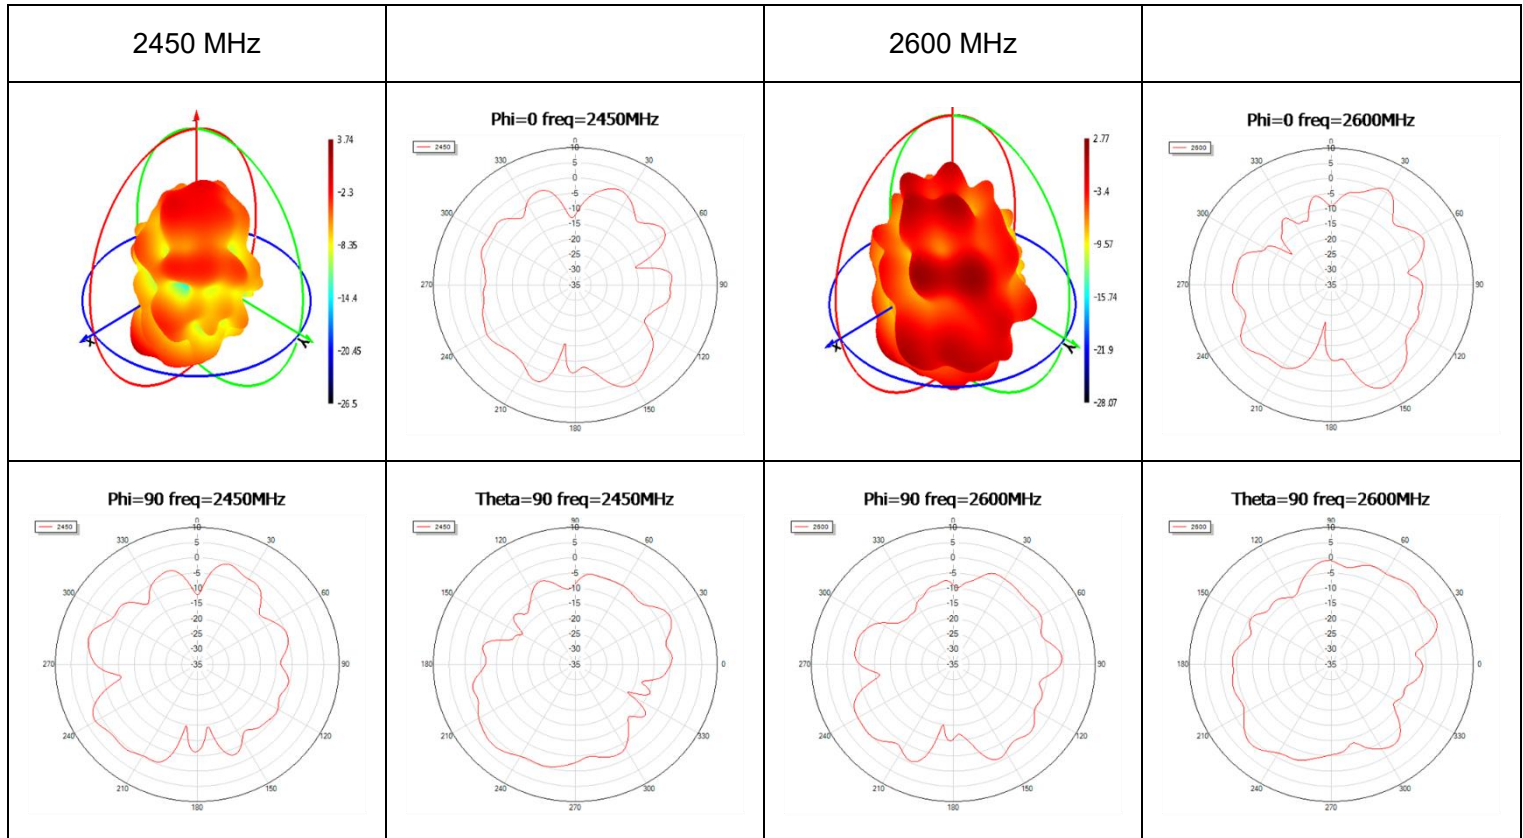


● **Max Peak Gain**

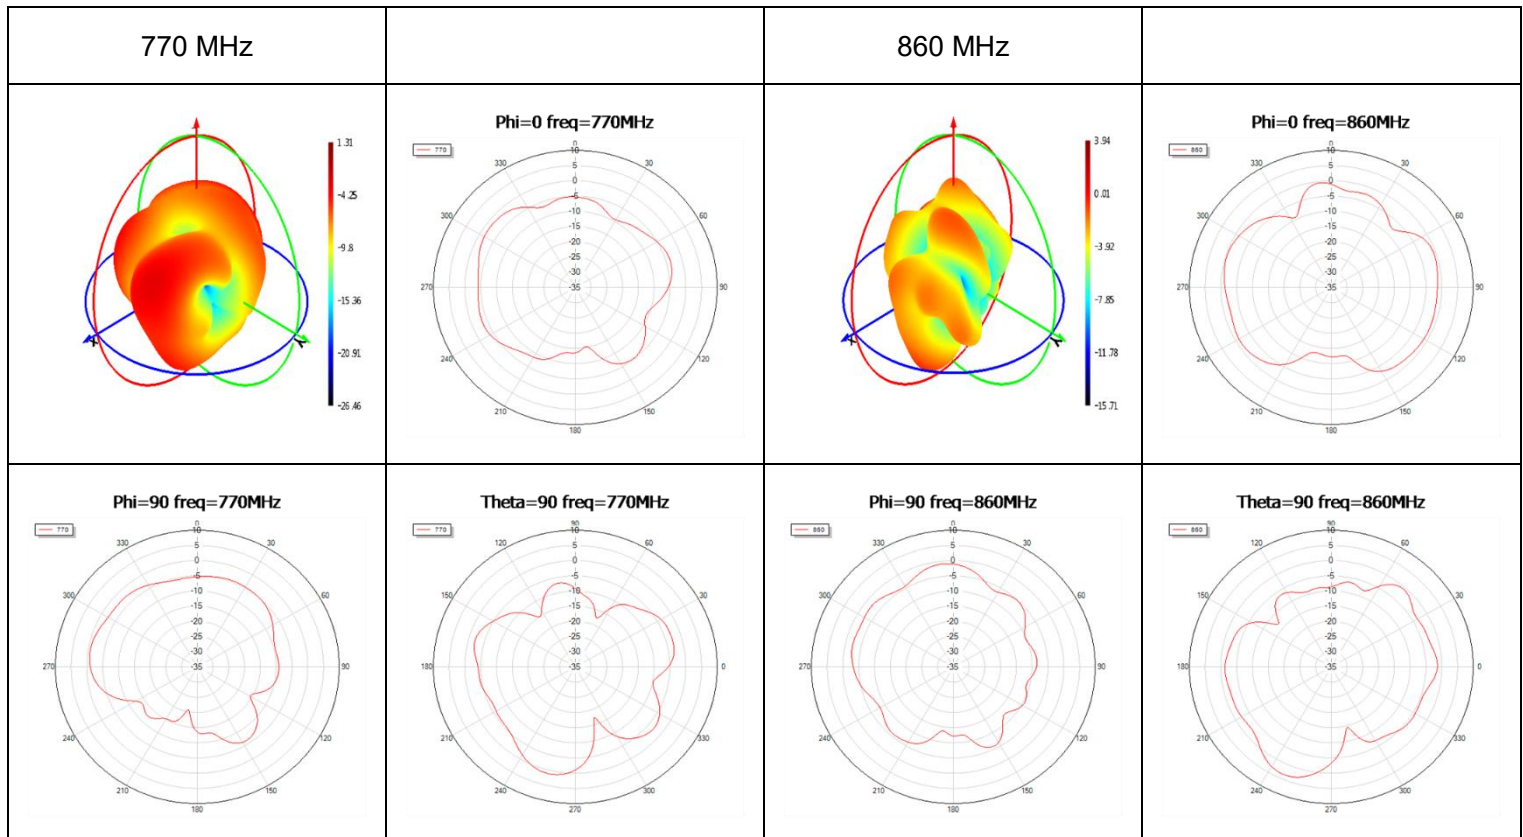


2020 MHz




Phi=0 freq=2020MHz




2400 MHz




Phi=0 freq=2400MHz




Phi=90 freq=2020MHz




Theta=90 freq=2020MHz




Phi=90 freq=2400MHz




Theta=90 freq=2400MHz




2440 MHz




Phi=0 freq=2440MHz




2620 MHz




Phi=0 freq=2620MHz




Phi=90 freq=2440MHz




Theta=90 freq=2440MHz




Phi=90 freq=2620MHz




Theta=90 freq=2620MHz



● **Wi-Fi**


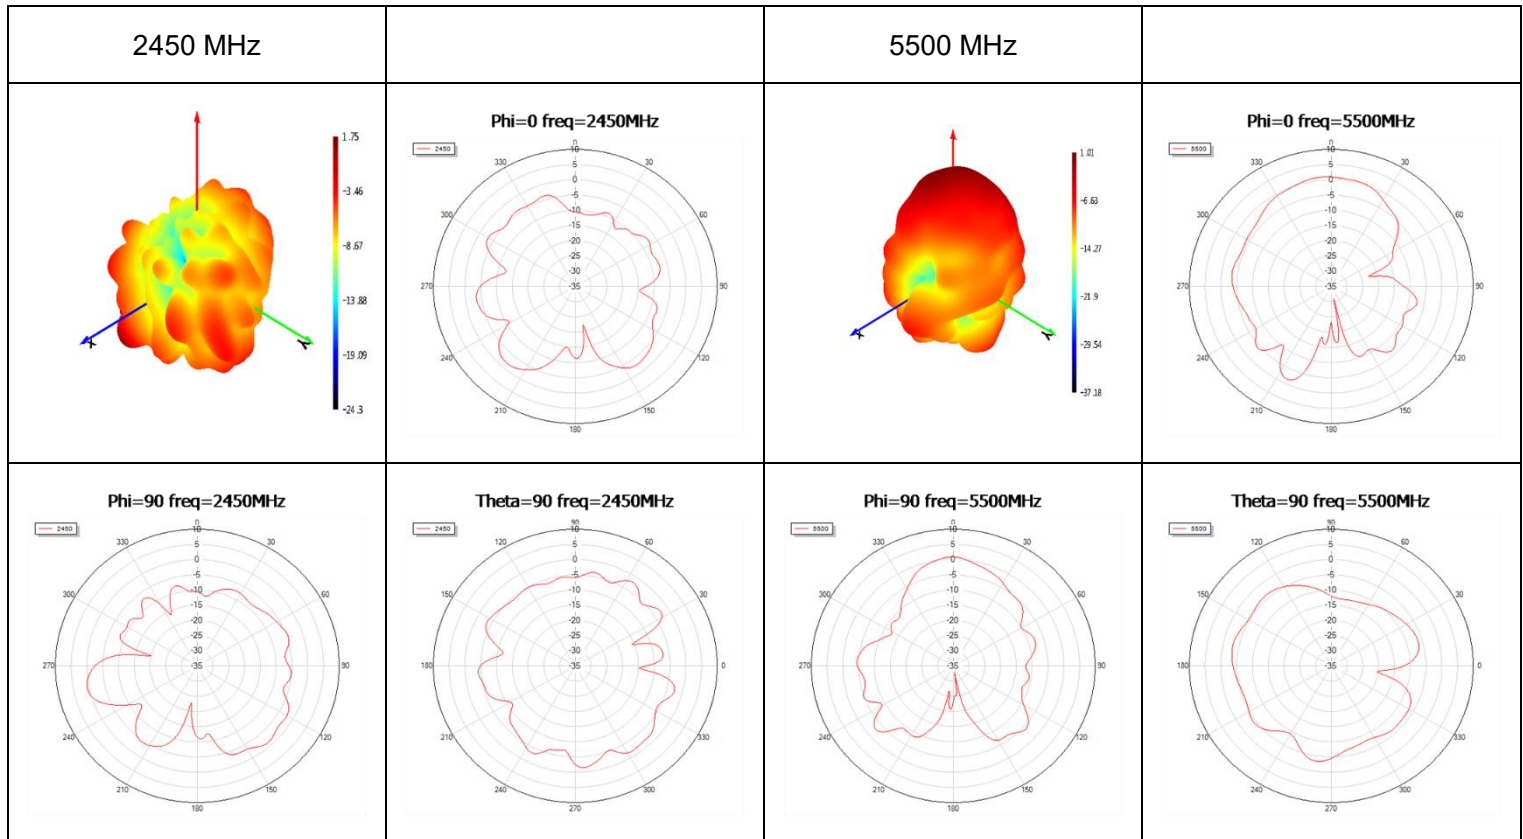


● **Max Peak Gain**


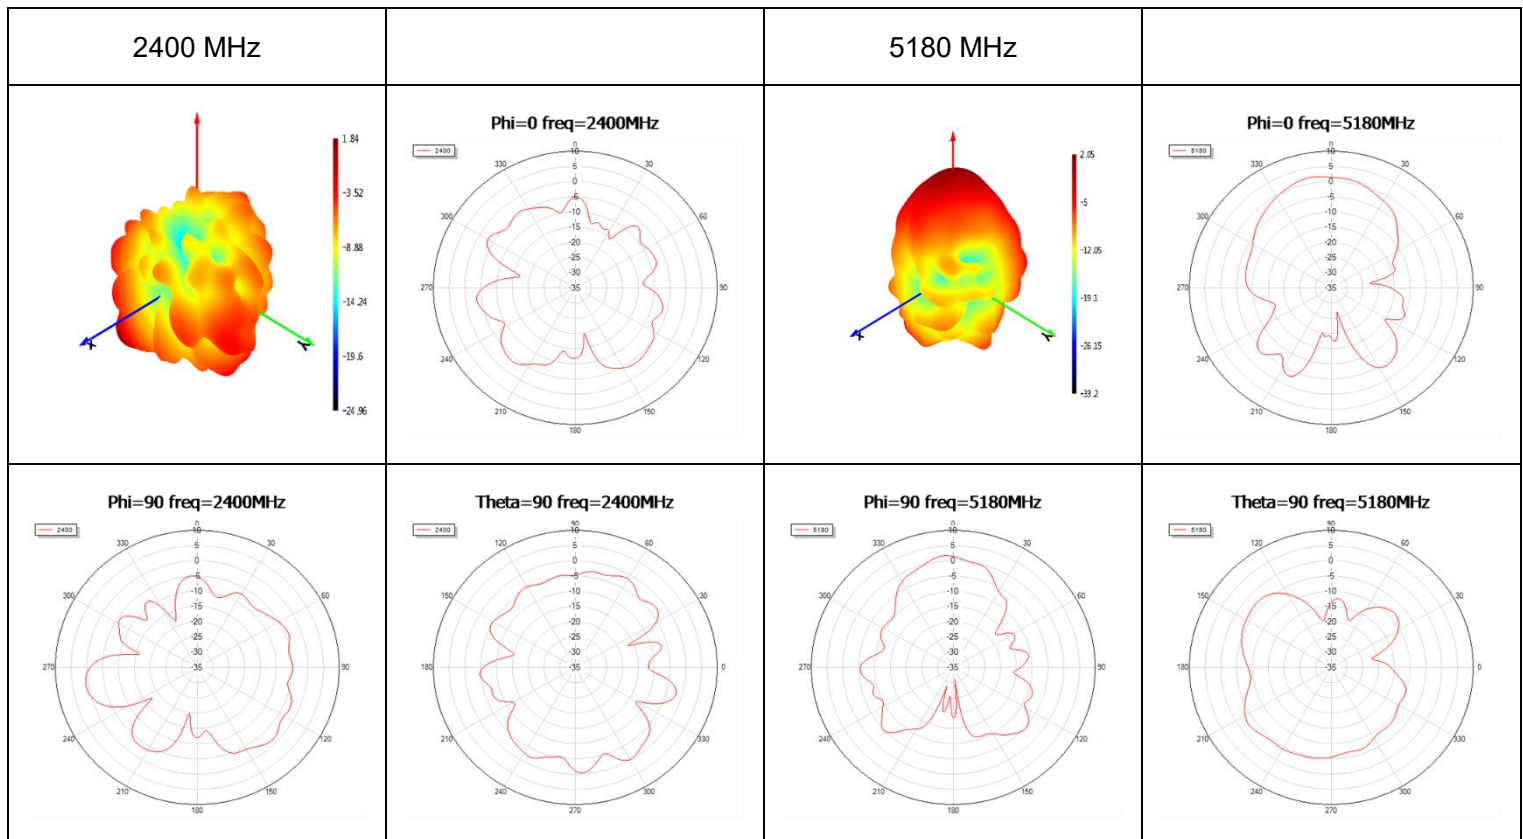


● **GNSS**


1561 MHz

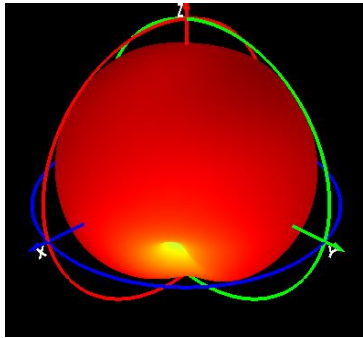


1575 MHz

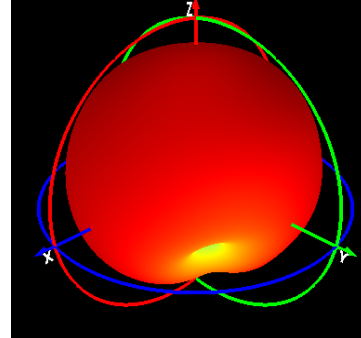


Phi=90 freq=1561MHz




Theta=90 freq=1561MHz





Phi=90 freq=1575MHz




Theta=90 freq=1575MHz




1602 MHz

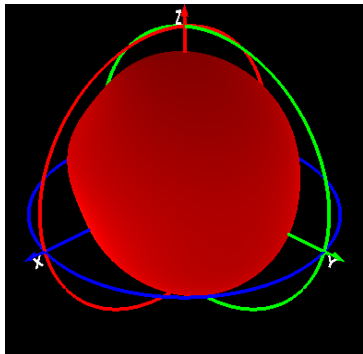


Phi=90 freq=1602MHz



Theta=90 freq=1602MHz







- Test Condition: On 500 mm × 500 mm Metal Plane
- Test Chamber: HF-SY-1 (LTE)

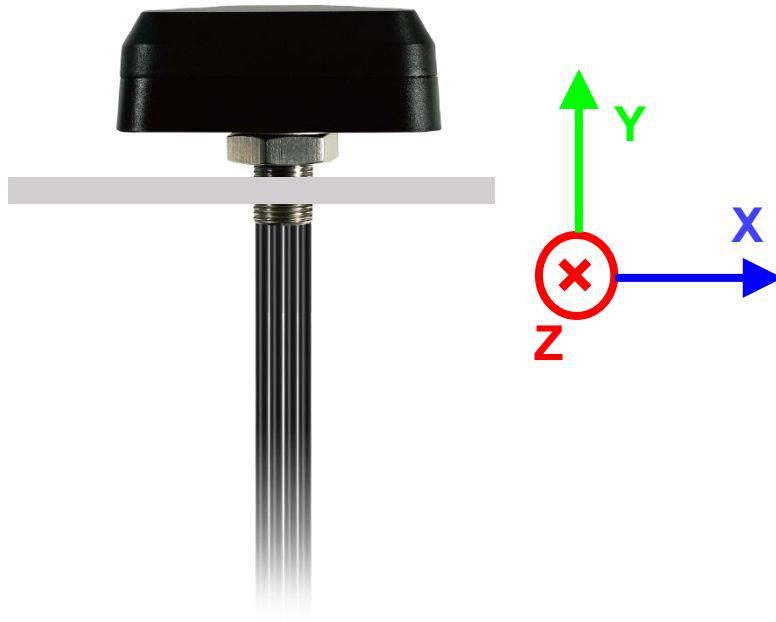

● **LTE-1**

710 MHz

830 MHz







Phi=90 freq=710MHz

Theta=90 freq=710MHz





Phi=90 freq=830MHz

Theta=90 freq=830MHz



900 MHz

1740 MHz








Phi=90 freq=900MHz


Theta=90 freq=900MHz

Phi=90 freq=1740MHz


Theta=90 freq=1740MHz



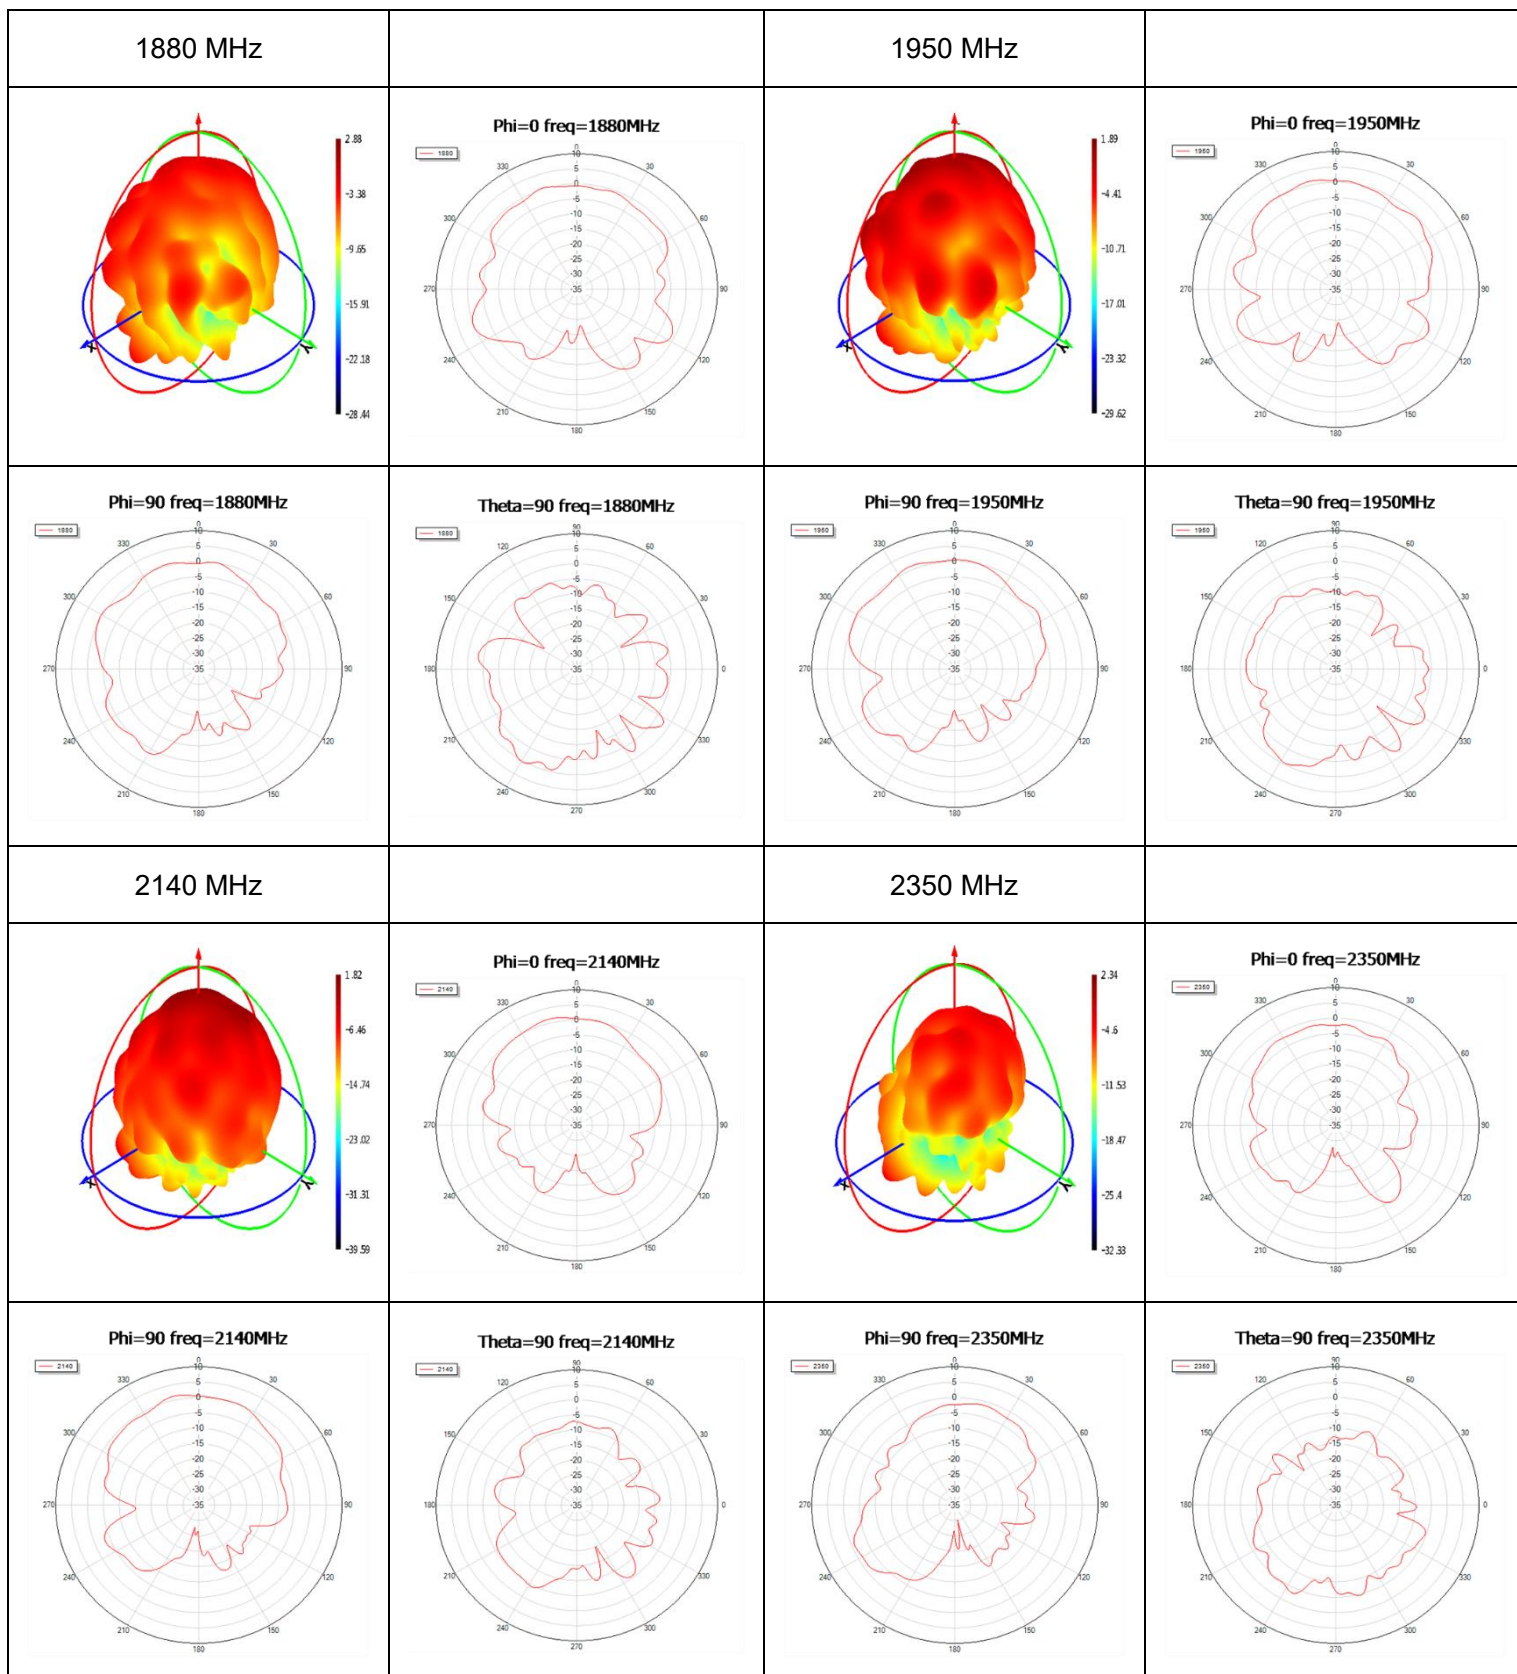


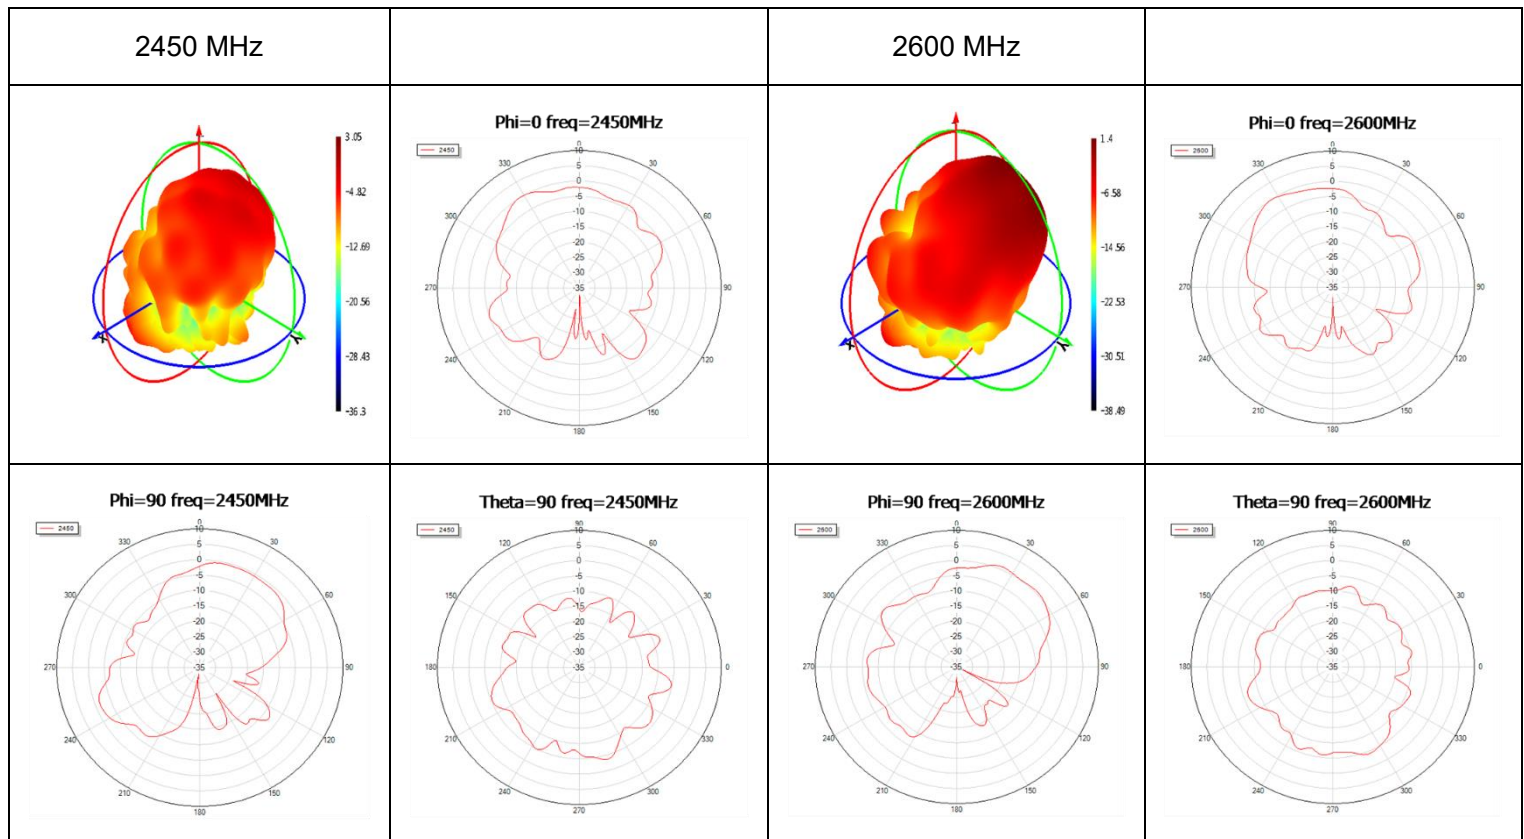


● **Max Peak Gain**

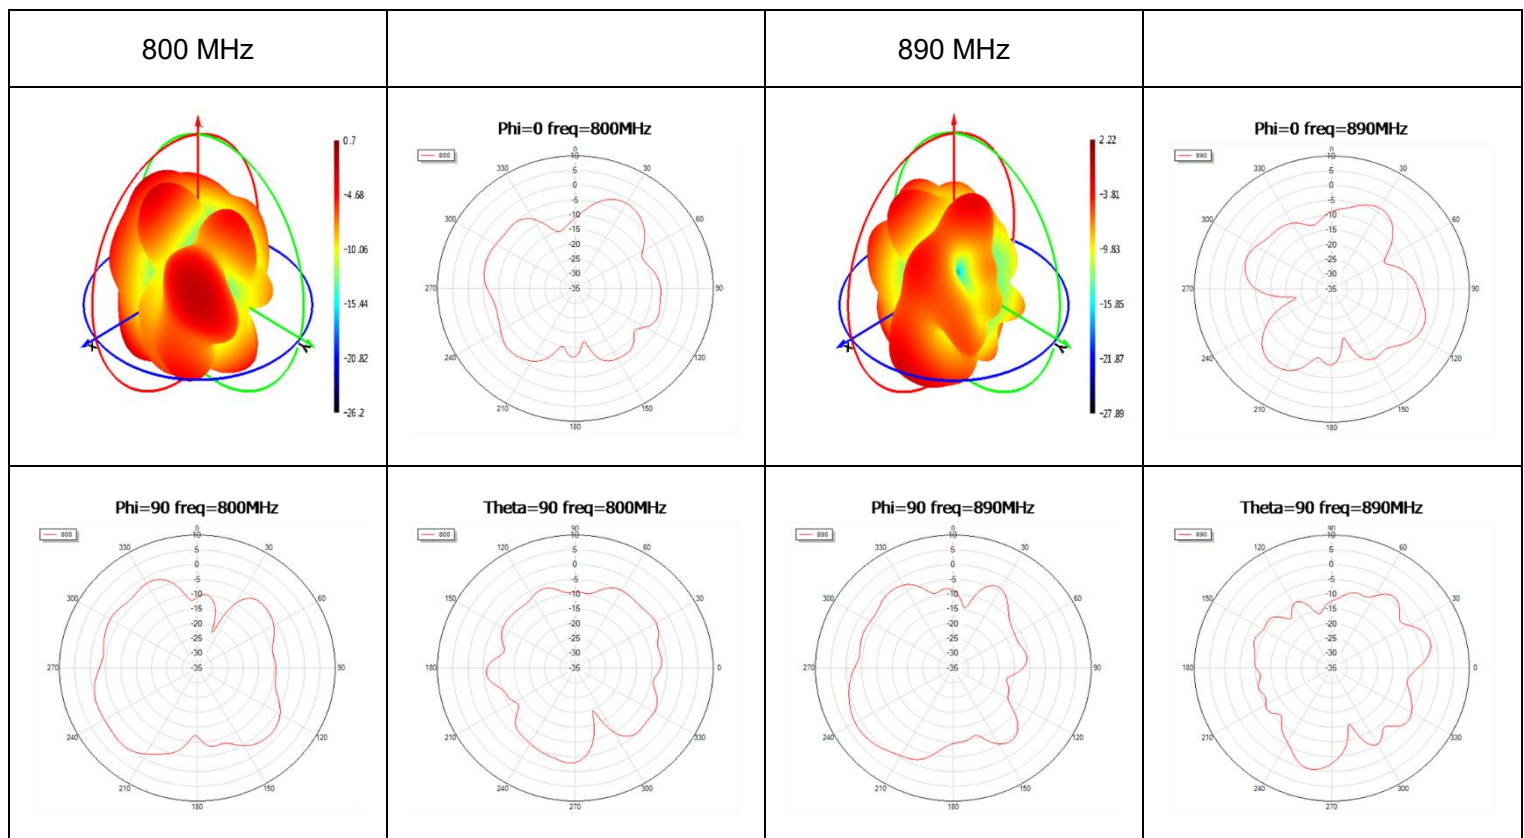


1820 MHz




Phi=0 freq=1820MHz




2400 MHz




Phi=0 freq=2400MHz




Phi=90 freq=1820MHz




Theta=90 freq=1820MHz




Phi=90 freq=2400MHz




Theta=90 freq=2400MHz




2420 MHz




Phi=0 freq=2420MHz




2530 MHz




Phi=0 freq=2530MHz




Phi=90 freq=2420MHz




Theta=90 freq=2420MHz



Phi=90 freq=2530MHz





Theta=90 freq=2530MHz





● **LTE-2**


710 MHz




830 MHz




Phi=90 freq=710MHz




Theta=90 freq=710MHz





Phi=90 freq=830MHz





Theta=90 freq=830MHz




900 MHz




1740 MHz




Phi=90 freq=900MHz




Theta=90 freq=900MHz




Phi=90 freq=1740MHz




Theta=90 freq=1740MHz




1880 MHz




Phi=0 freq=1880MHz




1950 MHz




Phi=0 freq=1950MHz




Phi=90 freq=1880MHz




Theta=90 freq=1880MHz




Phi=90 freq=1950MHz




Theta=90 freq=1950MHz




2140 MHz




Phi=0 freq=2140MHz




2350 MHz




Phi=0 freq=2350MHz




Phi=90 freq=2140MHz




Theta=90 freq=2140MHz




Phi=90 freq=2350MHz




Theta=90 freq=2350MHz




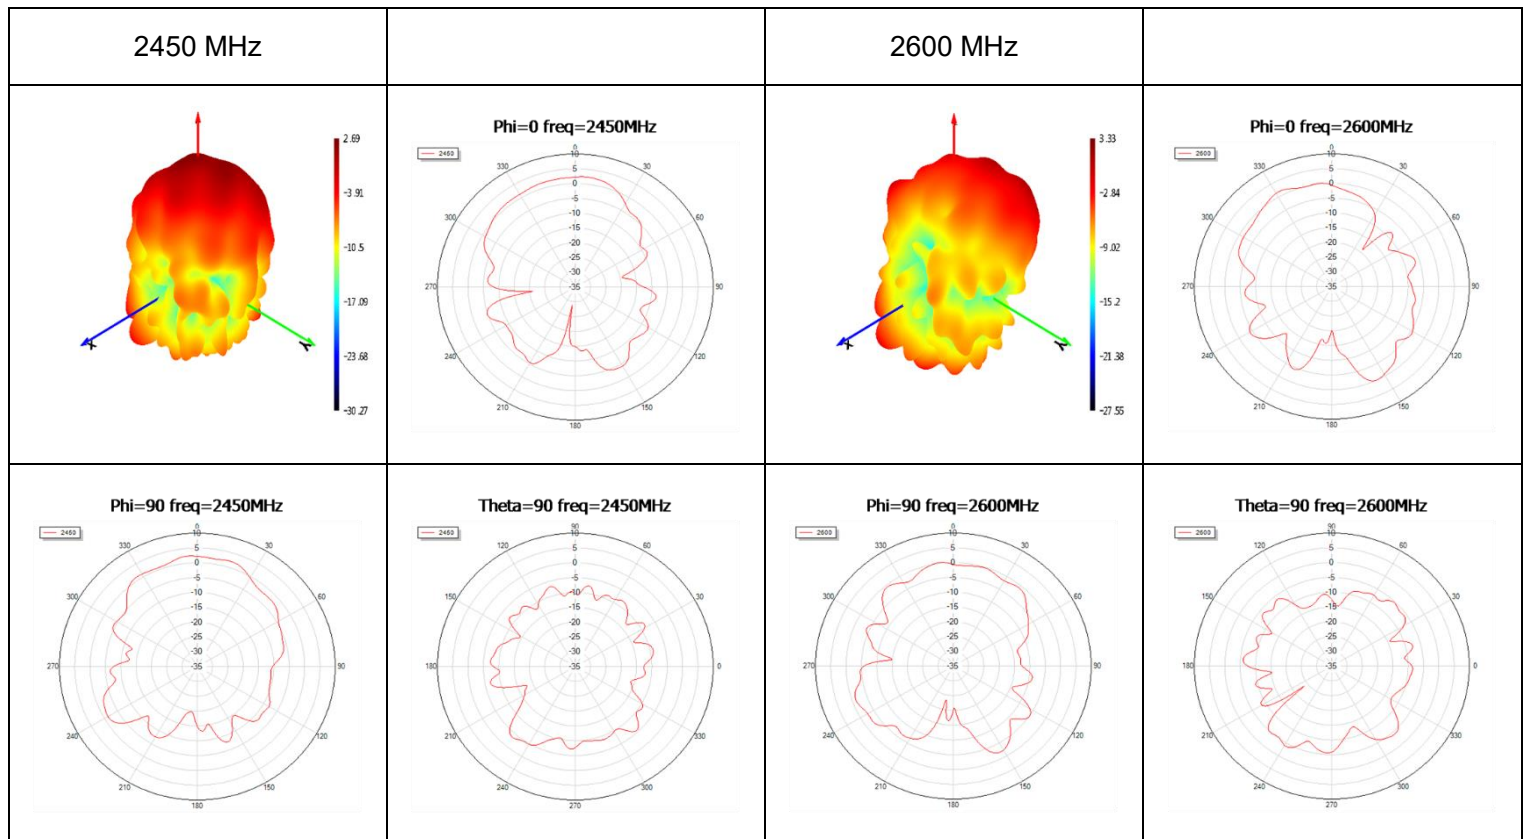


● **Max Peak Gain**

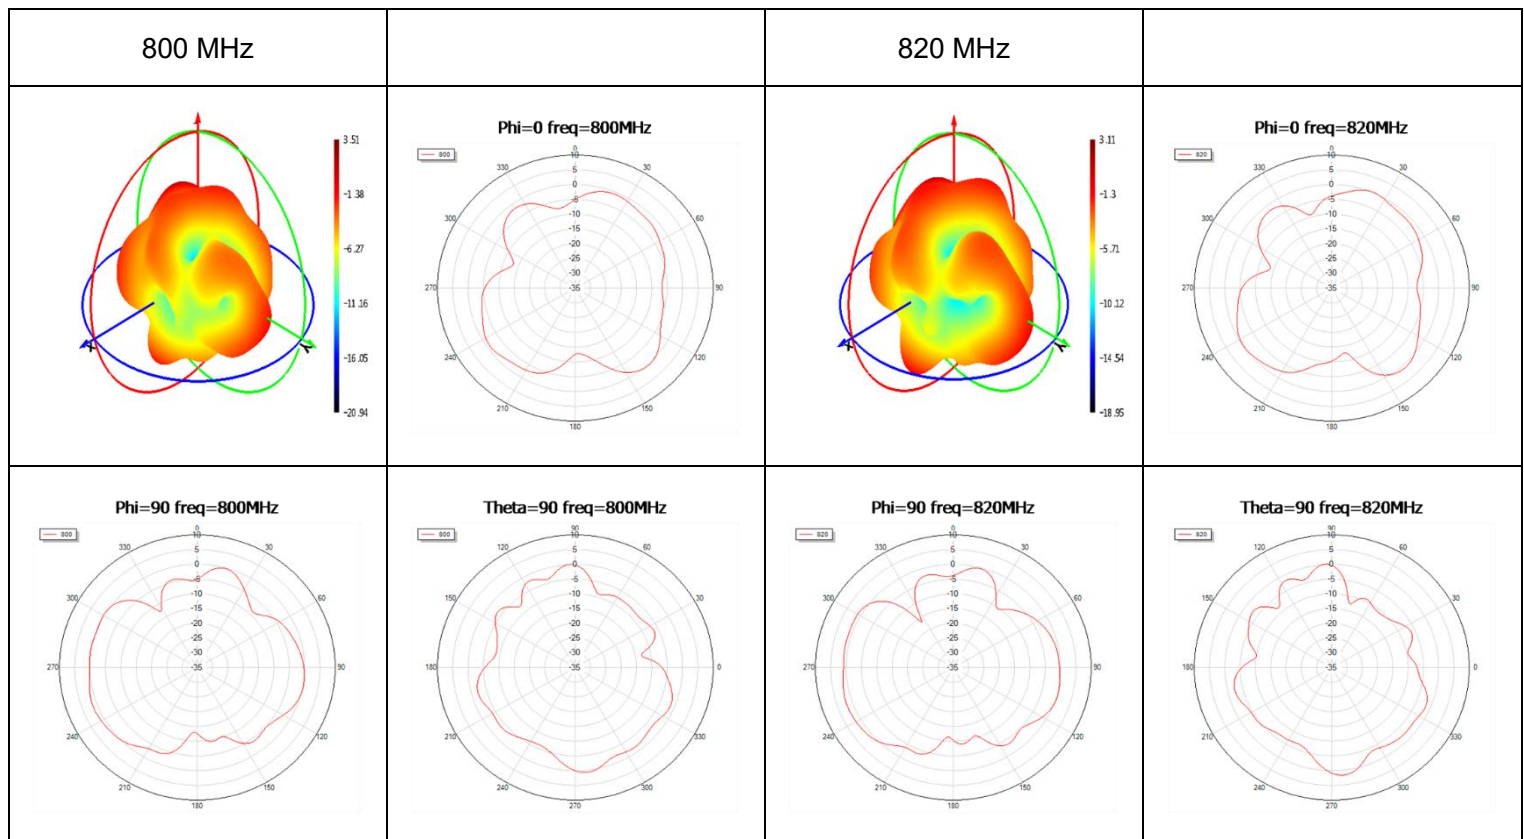


2150 MHz




Phi=0 freq=2150MHz




2320 MHz




Phi=0 freq=2320MHz




Phi=90 freq=2150MHz




Theta=90 freq=2150MHz




Phi=90 freq=2320MHz




Theta=90 freq=2320MHz




2420 MHz




Phi=0 freq=2420MHz




2640 MHz




Phi=0 freq=2640MHz




Phi=90 freq=2420MHz




Theta=90 freq=2420MHz




Phi=90 freq=2640MHz




Theta=90 freq=2640MHz



● **Wi-Fi**


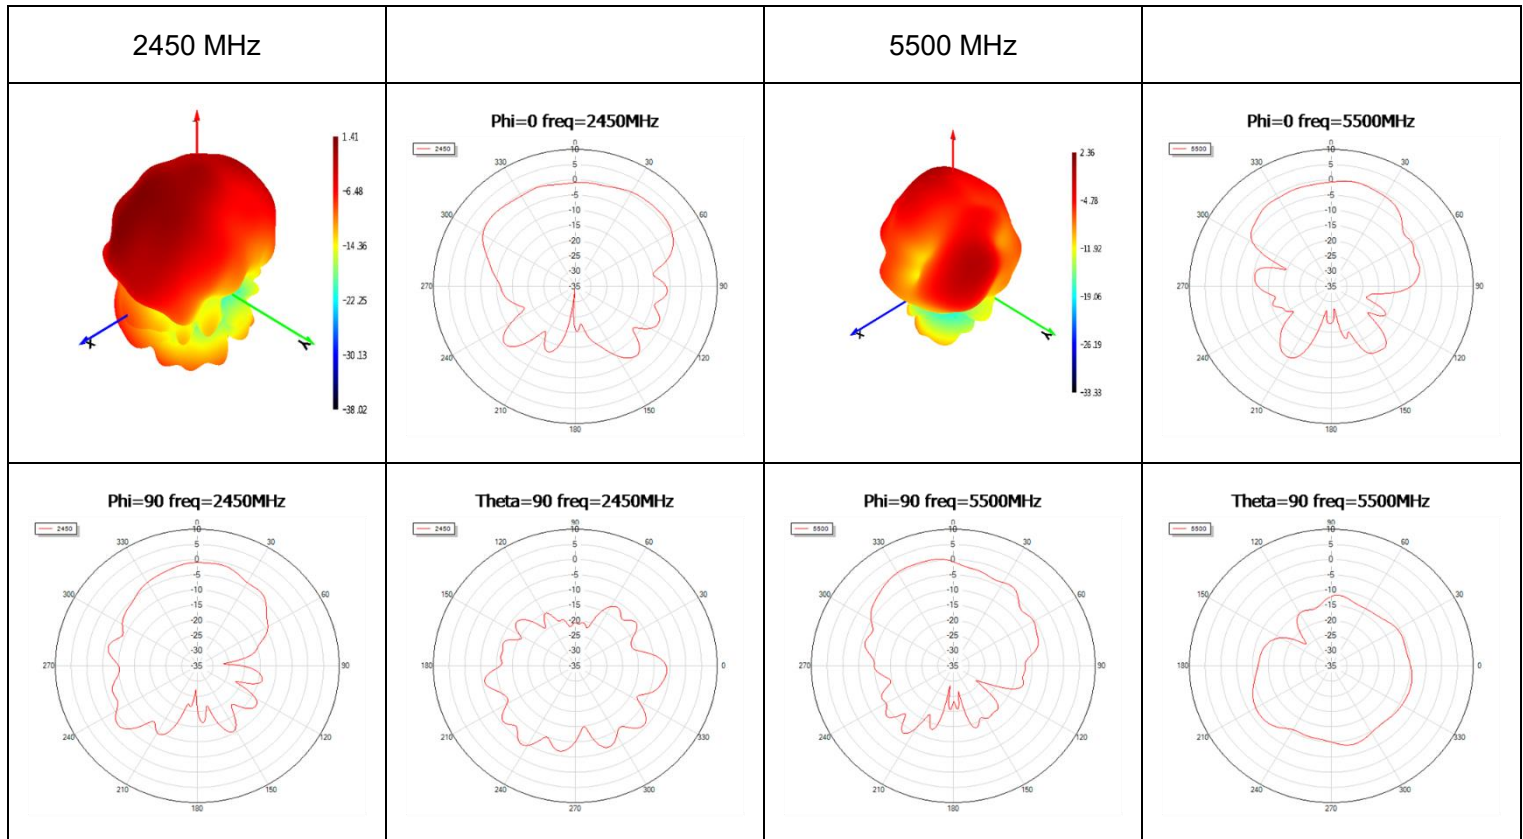


● **Max Peak Gain**

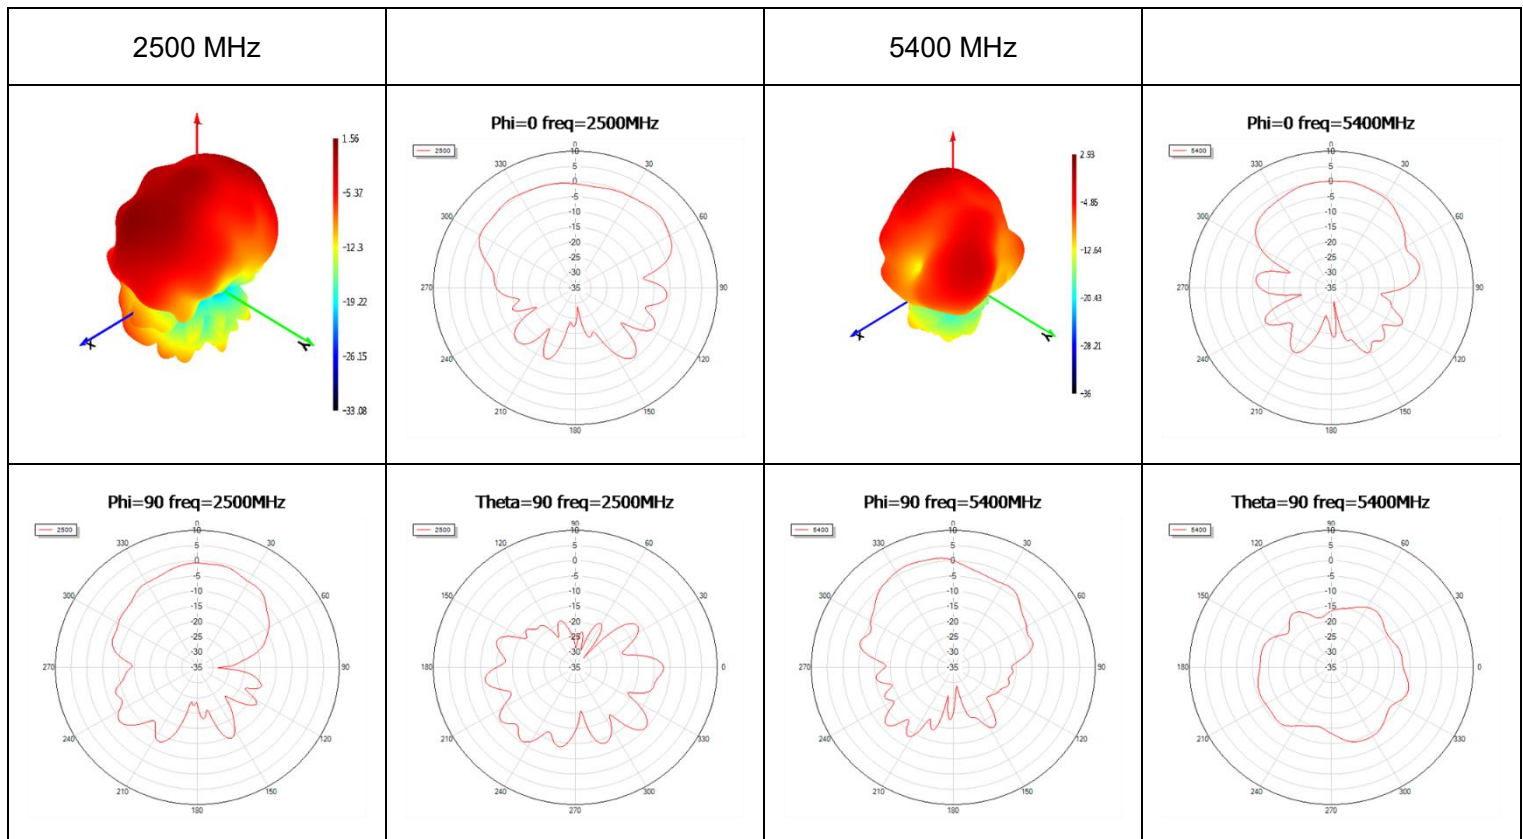

4 Packaging

Step	Packaging Picture / 2D Picture	Description
1		Put the product in a PE bag inside the inner box.
2		Top the product with the pearl cotton.
3		Inner box diagram <u>Inner Box Size:</u> <u>L × W × H = 165 × 165 × 135 mm</u>
4		(18 Inner Boxes / Carton Box) (18 Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. <u>Carton Size:</u> <u>L × W × H = 525 × 525 × 305 mm</u>

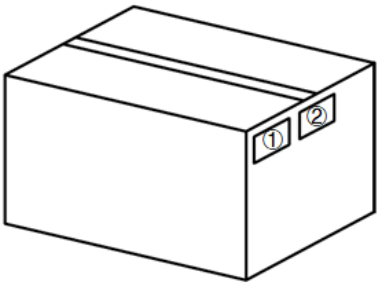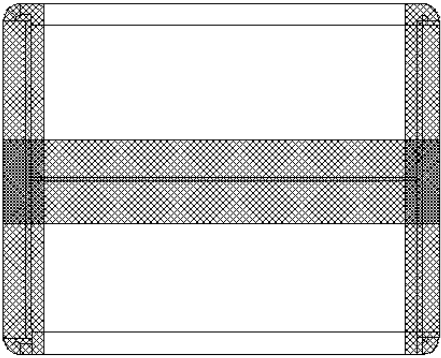5		Position for Attaching Labels ① Carton Label ② Quality Label
6		Sealing Cartons H-shaped sealing cartons
Note	The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<https://www.quectel.com/contact/>.

For technical support, or to report documentation errors, please visit:

<https://www.quectel.com/tech-support/>.

Or email us at: support@quectel.com.

Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

Use and Disclosure Restrictions

License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the intended project.

Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

Disclaimer

- a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
- b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
- c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
- d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2026. All rights reserved.

Revision History

Version	Date	Author	Note
-	2026-04-27	Nero Zhang/ Junsen Li/ Blake Xiang/ Kessie Geng/ Rainey Liao	Creation of the document
1.0	2026-04-27	Nero Zhang/ Junsen Li/ Blake Xiang/ Kessie Geng/ Rainey Liao	First official release



www.quectel.com