




Build a smarter world

Global IoT solutions provider

IoT modules and antenna catalogue

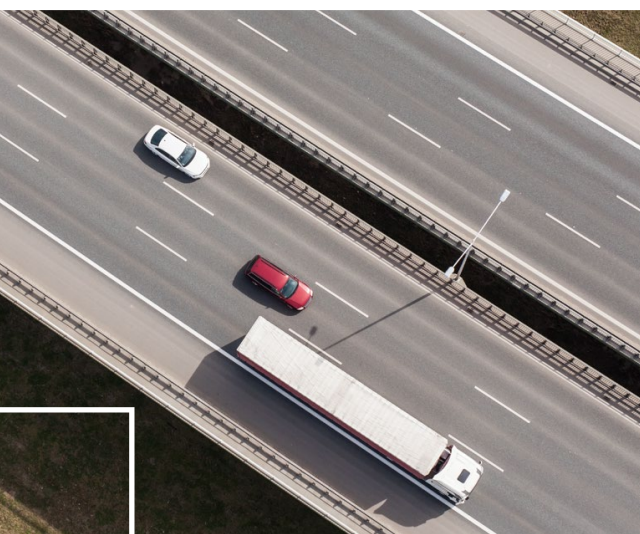

For more information contact us at
www.quectel.com

About Quectel Wireless Solutions

Quectel's passion for a smarter world drives us to accelerate IoT innovation. A highly customer-centric organization, we are a global IoT solutions provider backed by outstanding support and services. Our growing global team of 5,600 professionals sets the pace for innovation in cellular, GNSS, satellite, Wi-Fi and Bluetooth modules as well as antennas and services.

With regional offices and support across the globe, our international leadership is devoted to advancing IoT and helping build a smarter world.

For more information, please visit: www.quectel.com, LinkedIn, Facebook and X.

An extensive IoT products and services portfolio, providing the full solution



Cellular

- 5G
- 4G
- LPWA
- 3G/ 2G



Automotive

- 5G/ 4G
- C-V2X
- GNSS
- Cockpit/ IVI
- Wi-Fi & Bluetooth



Smart

- 5G
- 4G
- Edge compute



Wi-Fi & Bluetooth

- Wi-Fi 7
- Wi-Fi 6E
- Wi-Fi 6
- Wi-Fi 5
- Wi-Fi 4
- BT 5.x
- Sub-G (LoRa/HaLow)



GNSS

- DR positioning
- RTK positioning
- Fusion positioning
- Timing
- Multiple frequency localization
- Single frequency localization
- Integrated antenna
- IMU



Satellite

- 5G NTN
- Proprietary



Antenna

- Embedded antennas
- External antennas
- Cables & accessories
- Automotive antennas
- mmWave antennas



Services

- Antenna (consultation, design, evaluation and testing)
- Certification & testing
- RTK Correction Solution

Contents

01	Quectel's IoT vertical framework	84	External antennas
02	5G NR modules	84	5G antennas
11	5G RedCap modules	91	4G antennas
15	LTE-A modules	98	Wi-Fi antennas
21	LTE modules	101	Combo antennas
29	Smart modules	112	GNSS antennas
36	Industrial motherboards	117	L-Band & GNSS L1 & Iridium antennas
38	LPWA modules	118	LPWA/ISM antennas
43	Satellite modules	120	Embedded antennas
45	Automotive modules	120	5G antennas
46	Automotive 5G modules	124	4G antennas
50	Automotive LTE-A modules	133	Wi-Fi antennas
52	Automotive LTE modules	140	Combo antennas
53	Automotive C-V2X modules	142	GNSS antennas
55	Automotive smart modules	162	L-Band & GNSS L1 & Iridium antennas
56	Automotive Wi-Fi & Bluetooth modules	163	LPWA/ISM antennas
58	Wi-Fi & Bluetooth modules	167	UWB chip antennas
59	RF Wi-Fi & Bluetooth modules	168	Cables & Connectors
64	MCU Wi-Fi & Bluetooth modules	168	Cables
66	MCU Bluetooth modules	185	Accessories
67	Sub-GHz modules		
68	GNSS modules		
79	UMTS/HSPA (+) modules		
81	GSM/GPRS modules		

Quectel's IoT vertical framework



Intelligent transportation

IoV
CVI
Vehicle tracking
Asset tracking
Ship tracking
Fleet management
OBD
DVR
UBI auto insurance



Smart energy

Electricity meters
Gas meters
Water meters
Thermal meters
Smart grid
Wind generators
Solar power generation
Charging piles



Payment

Wireless POS
Cash registers
ATM
Vending machines
Top-up machines



Smart city

Street lighting
Traffic lights
Sharing economy
Elevator monitoring
Smart parking
Parking meters
Toll collection systems
Digital indicators
Advertising boards
Smart bins
LED landscape lighting controls



Wireless gateways

DTUs
Consumers routers
Industrial routers
VOIP
Servers
Wi-Fi hotspots



Intelligent agriculture & environmental monitoring

Food traceability
Farmland monitoring
Farm irrigation
Farm management
Meteorological stations
Environmental monitoring
Wildlife protection



Intelligent industry

Industrial PDAs/ scanners
Industrial PCs
Industrial computers
Pipeline monitoring
Robots
Flow meters
Industrial refrigeration
Indoor air detection
Water valves/ Pump controls



Smart life & healthcare

Personal trackers
Pet trackers
Wearables
Gaming consoles
Mobile PCs
Home automation
Elderly monitoring
Patient monitoring
Glucometers
Blood pressure monitors
Remote medical equipment



Smart safety

Alarms
Intrusion detectors
Smoke detectors
Gas detectors
Motion sensors
Asset protection



5G NR
modules

5G NR modules

Product	RG650V	RG650E*	RG651E*	RM551E-GL*
				
Form factor	LGA	LGA	LGA	M.2
Dimensions (mm)	46.0 × 53.0 × 3.05	46.0 × 53.0 × 3.05	46.0 × 53.0 × 3.05	52.0 × 30.0 × 2.3
5G	Sub-6 GHz	Sub-6 GHz	Sub-6 GHz & mmWave	Sub-6 GHz & mmWave
Frequency bands (MHz)	-EU (EMEA/ APAC/ Brazil) 5G NR: n1/3/5/7/8/20/26/28/38/40/41/71 ¹ / 75/76/77/78; LTE-FDD: B1/3/5/7/8/20/28/32/71 ¹ ; LTE-TDD: B38/40/41/42/43; WCDMA: B1/5/8	5G NR: n1/3/5/7/8/20/26/28/38/40/41/67/ 71/75/76/77/78; LTE-FDD: B1/3/5/7/8/20/28/32/71 ¹ ; LTE-TDD: B38/40/41/42/43; WCDMA: B1/5/8	-EU(EMEA/APAC ² /Brazil); 5G NR: n1/3/5/7/8/20/28/38/41/77/78/257/ 258/260/261; LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/41/42/43	/
	-NA (North America) 5G NR: n2/5/7/12/13 ¹ /14/25/26/29 ¹ /30/38/ 41/48 ¹ /66/70 ¹ /71/77/78; LTE-FDD: B2/4/5/7/12/13/17/14/25/26/29/ 30/66/71; LTE-TDD: B38/41/42/43/48	5G NR: n2/5/7/12/13 ¹ /14/25/26/29 ¹ /30/38/ 41/48 ¹ /66/70 ¹ /71/77/78; LTE-FDD: B2/4/5/7/12/13/17/14/25/26/29/30/ 66/71; LTE-TDD: B38/41/42/43/48	5G NR: n2/5/7/12/13 ¹ /14/25/26/29 ¹ /30/38/ 41/48 ¹ /66/70 ¹ /71/77/78/257/258/260/ 261; LTE-FDD: B2/4/5/7/12/13/17/14/25/26/29/ 30/66/71; LTE-TDD: B38/41/42/43/48	/
	-GL (Global) /	/	/	5G NR: n1/2/3/5/7/8/12/13/14/18/ 20/25/26/ 28/29 (Rx)/30/38/40/41/48/53/66/70/71/75/ 76/77/78/79/91/92/93/94/257/258/260/261; LTE-FDD: B1/2/3/4/5/7/8/12/13/14/ 17/18/19/ 20/25/26/28/29/30/32/ 66/70/71; LTE-TDD: B34/38/39/40/41/42/43/48/53; LAA: B46 (Rx) WCDMA: B1/2/4/5/8/19
Weight (approx.) (g)	17.8	17.8	TBD	8.73
Operating temperature	-30°C ~ +75°C	-30°C ~ +75°C	-30°C ~ +75°C	-30°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)				
5G SA Sub-6	4.67 Gbps (DL)/1.25 Gbps (UL)	7.01 Gbps (DL)/1.25 Gbps (UL)	7.01 Gbps (DL)/1.25 Gbps (UL)	7.01 Gbps (DL)/1.25 Gbps (UL)
5G NSA Sub-6	4.52 Gbps (DL)/730 Mbps (UL)	5.47 Gbps (DL)/730 Mbps (UL)	5.47 Gbps (DL)/730 Mbps (UL)	5.47 Gbps (DL)/730 Mbps (UL)
5G SA mmWave	/	/	8.61 Gbps (DL)/3.54 Gbps (UL)	/
5G NSA mmWave	/	/	9.41 Gbps (DL)/3.66 Gbps (UL)	9.41 Gbps (DL)/3.66 Gbps (UL)
5G TDD + mmWave	/	/	10.95 Gbps (DL)/4.79 Gbps (UL)	/
5G FDD + mmWave	/	/	9.54 Gbps (DL)/3.79 Gbps (UL)	/
LTE	LTE-FDD: 2.0 Gbps (DL)/211 Mbps (UL)	LTE-FDD: 2.0 Gbps (DL)/211 Mbps (UL)	LTE-FDD: 2.0 Gbps (DL)/200 Mbps (UL)	LTE: 2.0 Gbps (DL)/211 Mbps (UL)
UMTS (Mbps)	WCDMA: 42 (DL)/5.76 (UL) (RG650V-EU)	WCDMA: 42 (DL)/5.76 (UL) (RG650E-EU)	/	WCDMA: 42 (DL)/5.76 (UL)
SMS	•	•	•	•
Protocols	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS
Interfaces				
(U)SIM	1.8/ 3.0 V × 1; 1.8 V × 1 (eSIM external)	1.8/ 3.0 V × 1; 1.8 V × 1 (eSIM external)	1.8/ 3.0 V × 1; 1.8 V × 1 (eSIM external)	1.8/3.0 V × 2 (eSIM optional)
UART	× 3	× 3	× 3	/
USB	2.0/3.0/3.1	2.0/3.0/3.1	2.0/3.0/3.1	2.0/3.0/3.1
PCIe	2-Lane × 2, 1-Lane × 1	2-Lane × 2, 1-Lane × 1	2-Lane × 2, 1-Lane × 1	1-Lane × 1
PCM	× 2	× 2	× 2	/
I2C	× 2	× 2	× 2	/
SPI	× 2	× 2	× 2	/
GPIO	•	•	•	•
ADC	•	•	•	/
SD card	/	/	/	/
RESET_N	•	•	•	•
Antenna	Sub-6 GHz: × 8; GNSS: × 1	Sub-6 GHz: × 8; GNSS: × 1	Sub-6 GHz: × 8; GNSS: × 1; mmWave: × 8	Sub-6 : × 4; GNSS: × 2; mmWave: × 3
Enhanced features				
MIMO	Sub-6: DL 4 × 4, UL 2 × 2	Sub-6: DL 4 × 4, UL 2 × 2	Sub-6: DL 4 × 4, UL 2 × 2 mmWave: DL 2 × 2, UL 2 × 2	Sub-6: DL 4 × 4, UL 2 × 2
Voice	Optional	Optional	Optional	Optional
DTMF	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency
DFOTA	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air
GNSS	Optional	Optional	Optional	Optional
(U)SIM card detection	•	•	•	•
Electrical features				
Supply voltage range	3.3 V ~ 4.4 V, typ. 3.8 V	3.3 V ~ 4.4 V, typ. 3.8 V	3.3 V ~ 4.4 V, typ. 3.8 V	3.135 V ~ 4.4 V, typ. 3.7 V
Power consumption	0.22 mA @ Power off 2.7 mA @ Sleep	TBD	TBD	TBD
Software features				
USB serial driver	Windows 10/ 11, Linux 2.6 ~ 6.11, Android 4.x ~ 14.x	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 10/11, Linux 2.6 ~ 6.11, Android 4.x ~ 14.x
GNSS driver	Android 4.x ~ 14.x	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 14.x
RIL driver	Android 4.x ~ 14.x	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 14.x
NDIS driver*	Windows 10/11*	Windows 8.1/10/11	Windows 8.1/10/11	Windows 10/11*
MBIM driver	Windows 10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 10/11, Linux 3.18 ~ 6.7
Gobinet driver*	Below Linux 2.6	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Below Linux 2.6
QMI_WWAN driver	Linux 2.6 ~ 6.8	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7	Linux 2.6 ~ 6.8
PCIe driver	Linux 3.10 ~ 6.7	Linux 3.10 ~ 6.7	Linux 3.10 ~ 6.7	Linux 3.10 ~ 6.7
Certifications ³	CE/RCM/GCF/Verizon/AT&T/T-Mobile/PTCRB/ FCC/IC/Dish	GCF*/CE*/ RCM*/FCC*/IC*/PTCRB*/Verizon*/ AT&T*/T-Mobile*	Quectel will provide technical support for customer to certify RG651E-NA based device directly	Quectel will provide technical support for customer to certify RM551E-GL based device directly
Recommended applications	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage

Note 1: Optional.
Note 2: Excluding China/Japan.
Note 3: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

Product	RG520N	RG520F	RG525F	RG530F
				
Form factor	LGA	LGA	LGA	LGA
Dimensions (mm)	41.0 × 44.0 × 2.75	41.0 × 44.0 × 2.75	48.0 × 45.0 × 2.85	48.0 × 45.0 × 2.85
5G	Sub-6 GHz	Sub-6 GHz	Sub-6 GHz	Sub-6 GHz & mmWave
Frequency bands (MHz)	-EU (EMEA/ APAC/ Brazil)	5G NR: n1/3/5/7/8/20/28/38/40/41/75/76/77/78; LTE-FDD: B1/3/5/7/8/20/28/32; LTE-TDD: B38/40/41/42/43; WCDMA: B1/5/8	5G NR: n1/3/5/7/8/20/28/38/40/41/75/76/77/78; LTE-FDD: B1/3/5/7/8/20/28/32; LTE-TDD: B38/40/41/42/43; WCDMA: B1/5/8	/
	-EB (EMEA/ APAC/ Brazil)	5G NR: n1/3/5/7/8/20/28/38/40/41/71/75/76/77/78; LTE-FDD: B1/3/5/7/8/20/28/32/71; LTE-TDD: B38/40/41/42/43/71; WCDMA: B1/5/8	5G NR: n1/3/5/7/8/20/28/38/40/41/71/75/76/77/78; LTE-FDD: B1/3/5/7/8/20/28/32/71; LTE-TDD: B38/40/41/42/43; WCDMA: B1/5/8	/
	-GT (Europe)	5G NR: n48/77/78; LTE-TDD: B42/43/48	/	/
	-NA (North America)	5G NR: n2/5/7/12/13/14/25/26/29/30/38/41/48/66/70/71/77/78; LTE-FDD: B2/4/5/7/12/13/14/17/25/26/29/30/66/71; LTE-TDD: B38/41/42/43/48; LAA: B46	5G NR: 2/5/7/12/13/14/25/26/29/30/38/41/48/66/70/71/77/78; LTE-FDD: B2/4/5/7/12/13/14/17/25/26/29/30/66/71; LTE-TDD: B38/41/42/43/48; LAA: B46	5G NR: n2/5/7/12/13/14/25/26/29/30/38/41/48/66/70/71/77/78/257/258/260/261; LTE-FDD: B2/4/5/7/12/13/14/17/25/26/29/30/66/71; LTE-TDD: B38/41/42/43/48; LAA: B46
	-LA (Latin America)	5G NR: n2/5/7/8/28/40/66/78; LTE-FDD: B2/4/5/7/8/26/28/66; LTE-TDD: B40/42; WCDMA: B2/4/5	/	/
Weight (approx.) (g)	11	11	14.1	14.1
Operating temperature	-30°C ~ +75°C	-30°C ~ +75°C	-30°C ~ +75°C	-30°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.) ³				
5G SA Sub-6	2.4 Gbps (DL)/900 Mbps (UL)	4.0 Gbps (DL)/900 Mbps (UL)	4.0 Gbps (DL)/900 Mbps (UL)	4.0 Gbps (DL)/900 Mbps (UL)
5G NSA Sub-6	3.4 Gbps (DL)/550 Mbps (UL)	4.0 Gbps (DL)/550 Mbps (UL)	4.0 Gbps (DL)/550 Mbps (UL)	4.0 Gbps (DL)/550 Mbps (UL)
5G NSA mmWave	/	/	/	8.8 Gbps (DL)/2.6Gbps (UL)
5G TDD + mmWave	/	/	/	8.0 Gbps (DL)/3.4Gbps (UL)
5G FDD + mmWave	/	/	/	8.9 Gbps (DL)/2.7Gbps (UL)
LTE	LTE-FDD: 1.6 Gbps (DL)/200 Mbps (UL) WCDMA: 42 (DL)/5.76 (UL) (RG520N-EU/RG520N-EB/RG520N-LA)	LTE-FDD: 2.0 Gbps (DL)/200 Mbps (UL) WCDMA: 42 (DL)/5.76 (UL) (RG520F-EU/RG520F-EB)	LTE-FDD: 2.0 Gbps (DL)/200 Mbps (UL)	LTE-FDD: 2.0 Gbps (DL)/200 Mbps (UL) WCDMA: 42 (DL)/5.76 (UL) (RG530F-EU)
UMTS (Mbps)			/	
SMS	•	•	•	•
Protocols	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS
Interfaces				
(U)SIM	× 2, 1.8 V/2.95 V	× 2, 1.8 V/2.95 V	× 2, 1.8 V/2.95 V	× 2, 1.8 V/2.95 V
UART	× 3	× 3	× 3	× 3
USB	2.0/3.0/3.1	2.0/3.0/3.1	2.0/3.0/3.1	2.0/3.0/3.1
PCIe	Gen3 × 2Lane	Gen3 × 2Lane	Gen3 × 2Lane	Gen3 × 2Lane
PCM	•	•	•	•
I2C	× 1	× 1	× 1	× 1
SPI	•	•	•	•
GPIO	•	•	•	•
ADC	× 2	× 2	× 2	× 2
SD card	•	•	•	•
RESET_N	•	•	•	•
Antenna	Cellular: 4, GNSS: × 1 (RG520N-EB/RG520N-NA/RG520N-GT/RG520N-LA); Cellular: 4 + 2 (optional), GNSS: × 1 (RG520N-EU)	Cellular: 4 + 2 (optional), GNSS: × 1 (RG520F-EU); Cellular: 4, GNSS: × 1 (RG520F-NA)	Cellular: sub6G: 8, GNSS: × 1	Cellular: sub6G × 4 + 2 (optional), mmWave × 8, GNSS: × 1 (RG530F-EU); Cellular: sub6G × 4, mmWave × 8, GNSS: × 1 (RG530F-NA)
Enhanced features				
MIMO	Sub-6: DL 4 × 4, UL 2 × 2	Sub-6: DL 4 × 4, UL 2 × 2	Sub-6: DL 4 × 4, UL 2 × 2	Sub-6: DL 4 × 4, UL 2 × 2; mmWave: DL 2 × 2, UL 2 × 2
Voice	Optional	Optional	Optional	Optional
DTMF	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency
DFOTA	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air
GNSS	GPS/GLONASS/BDS/Galileo/QZSS	GPS/GLONASS/BDS/Galileo/QZSS	GPS/GLONASS/BDS/Galileo/QZSS	GPS/GLONASS/BDS/Galileo/QZSS
(U)SIM card detection	•	•	•	•
Electrical features				
Supply voltage range	3.3 V ~ 4.4 V, typ. 3.8 V	3.3 V ~ 4.4 V, typ. 3.8 V	3.3 V ~ 4.4 V, typ. 3.8 V	3.3 V ~ 4.4 V, typ. 3.8 V
Power consumption	0.142 mA @ power off, 2.6 mA @ sleep (typ.) ⁴ (RG520N-EU/RG520N-EB/ RG520N-GT/ RG520N-NA); TBD (RG520N-LA)	0.142 mA @ power off, 2.6 mA @ sleep (typ.) ⁴	104 µA @ Power off, 5.78 mA @ Sleep, 43.31 mA @ USB 2.0, Idle, 63.74 mA @ USB 3.0, Idle (RG525F-NA)	110µA @Power off, 3.96mA@Sleep, 33.5mA@USB2.0, Idle, 50.58mA@USB3.0, Idle
Software features				
USB serial driver	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13
GNSS driver/ RIL driver	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13
NDIS driver	/	/	/	/
MBIM driver*	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7
Gobinet driver	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
QMI_WWAN driver	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7
PCIe driver	Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7
Certifications ⁵	Telstra/GCF/CE/RCM/Anatel/Verizon/T-Mobile/ AT&T/PTCRB/FCC/IC	CE/RCM/UKCA/GCF/FCC/PTCRB	Rogers/GCF/PTCRB/FCC/IC/T-Mobile	Quectel will provide technical support for customer to certify RG530F based device directly
Recommended applications	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage

Note 1: Excl. China/Japan.
Note 2: n48/77/78 support 8RX.
Note 3: means the data transmission is theoretical data rate and depends on network conditions.
Note 4: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

5G NR modules

Product		RM520N	RM530N-GL
			
Form factor		M.2	M.2
Dimensions (mm)		52.0 × 30.0 × 2.3	52.0 × 30.0 × 2.3
5G		Sub-6 GHz	Sub-6 GHz/mmWave
Frequency bands (MHz)	-GL (Global)	5G NR: n1/2/3/5/7/8/12/13/14/18/20/25/26/28/29/30/38/40/41/48/66/70/71/75/76/77/78/79; LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29/30/32/66/71; LTE-TDD: B34/38/39/40/41/42/43/48; LAA: B46; WCDMA: B1/2/4/5/8/19	5G NR: n1/2/3/5/7/8/12/13/14/18/20/25/26/28/29/30/38/40/41/48/66/70/71/75/76/77/78/79/257/258/260/261; LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29/30/32/66/71; LTE-TDD: B34/38/39/40/41/42/43/48; LAA: B46; WCDMA: B1/2/4/5/8/19
	-EU (EMEA/ APAC ¹ / Brazil)	5G NR: n1/3/5/7/8/20/28/38/40/41/71/75/76/77/78; LTE-FDD: B1/3/5/7/8/20/28/32/71; LTE-TDD: B38/40/41/42/43; WCDMA: B1/5/8	/
Weight (approx.) (g)		8.7	8.8
Operating temperature		-30°C ~ +75°C	-30°C ~ +75°C
Extended temperature		-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands		3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.) ²			
5G SA Sub-6		2.4 Gbps (DL)/900 Mbps (UL)	2.4 Gbps (DL)/900 Mbps (UL)
5G NSA Sub-6		3.4 Gbps (DL)/550 Mbps (UL)	3.4 Gbps (DL)/550 Mbps (UL)
5G NSA mmWave		/	4.0 Gbps (DL)/1.4 Gbps (UL)
LTE		LTE-FDD: 1.6 Gbps (DL)/200 Mbps (UL)	LTE-FDD: 1.6 Gbps (DL)/200 Mbps (UL)
UMTS (Mbps)		WCDMA: 42 (DL)/5.76 (UL)	WCDMA: 42 (DL)/5.76 (UL)
SMS		•	•
Protocols		TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS
Interfaces			
(U)SIM		× 2	× 2
USB		2.0/3.0/3.1	2.0/3.0/3.1
PCIe		PCIe 3.0	PCIe 3.0
Antenna		Sub-6/GNSS × 4 (RM520N-CN/RM520N-GL); Sub-6/GNSS: 4+1 (optional) (RM520N-EU)	Sub-6/GNSS × 4, mmWave × 2
Enhanced features			
MIMO		Sub-6: DL 4 × 4, UL 2 × 2	Sub-6: DL 4 × 4, UL 2 × 2 mmWave: DL 2 × 2, UL 2 × 2
Voice		Optional ³	Optional
DTMF		Dual-tone Multi-frequency	Dual-tone Multi-frequency
DFOTA		Delta Firmware over the Air	Delta Firmware over the Air
GNSS		GPS/GLONASS/BDS/Galileo/QZSS	GPS/GLONASS/BDS/Galileo/QZSS
(U)SIM card detection		•	•
Electrical features			
Supply voltage range		3.135 V ~ 4.4 V, typ. 3.7 V	3.135 V ~ 4.4 V, typ. 3.7 V
Power consumption		195 µA @ Power off; 4.7 mA @ Sleep; 40mA @ USB 2.0, Idle; 60 mA @ USB 3.0, Idle	173µA@Power off; 5.1mA@Sleep; 51mA@USB2.0, Idle; 69.4mA@USB3.0, Idle
Software features			
USB serial driver		Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13
GNSS driver		Android 4.x ~ 13	Android 4.x ~ 13
RIL driver		Android 4.x ~ 13	Android 4.x ~ 13
NDIS driver		Windows 8.1/10/11	Windows 8.1/10/11
MBIM driver		Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7
Gobinet driver		Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
QMI_WWAN driver		Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7
PCIe driver		Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7
Certifications ³		T-Mobile/Verizon/AT&T/NTT DOCOMO/Deutsche Telekom/Telefónica/Telstra/KT/GCF/PTCRB/CE/Anatel/CCC/RCM/IC/FCC/JATE/TELEC/KC/NCC/SRRC	Quectel will provide technical support for customer to certify RM530N-GL based device directly
Recommended applications		Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage

Note 1: Excl. China/Japan.

Note 2: means the data transmission is theoretical data rate and depends on network conditions.

Note 3: May depend on modules' variant.

* Planning/ Under development/ In progress

• Supported

Product	RG500Q-EA/RG502Q-EA	RG500Q-EU/RG501Q-EU/RG502Q-EU	RG500Q-GT/RG502Q-GT
			
Form factor	LGA	LGA	LGA
Dimensions (mm)	41.0 × 44.0 × 2.75	41.0 × 44.0 × 2.75	41.0 × 44.0 × 2.75
5G	Sub-6 GHz	Sub-6 GHz	Sub-6 GHz
Frequency bands (MHz)	5G NR: n41/77/78/79/1/3/5/7/8/20/28/38/40; LTE-FDD: B1/3/5/7/8/18/19/20/26/28/32; LTE-TDD: B34/38/39/40/41/42/43; WCDMA: B1/3/5/6/8/19	5G NR: n1/3/5/7/8/20/28/38/40/41/77/78; LTE-FDD: B1/3/5/7/8/20/28/32; LTE-TDD: B38/40/41/42/43; WCDMA: B1/5/8	5G NR: n78; LTE-TDD: B42/43
Region	EMEA/ APAC	EMEA/APAC (exclude China)/Brazil	Global TDD Network
Weight (approx.) (g)	11	11	11
Operating temperature	-30°C ~ +75°C	-30°C ~ +75°C	-30°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)¹			
5G SA Sub-6	2.1 Gbps (DL)/900 Mbps (UL) (RG500Q-EA); 4.2 Gbps (DL)/900 Mbps (UL) (RG502Q-EA)	2.1 Gbps (DL)/900Mbps (UL) (RG500Q-EU/RG501Q-EU); 4.2 Gbps (DL)/900Mbps (UL) (RG502Q-EU)	2.1 Gbps (DL)/900 Mbps (UL) (RG500Q-GT); 4.2 Gbps (DL)/900 Mbps (UL) (RG502Q-GT)
5G NSA Sub-6	2.5 Gbps (DL)/600/650 Mbps (UL) ² (RG500Q-EA); 5.0 Gbps (DL)/600/650 Mbps (UL) ² (RG502Q-EA)	2.5 Gbps (DL)/600/650 Mbps (UL) ² (RG500Q-EU); 3.3 Gbps (DL)/600/650 Mbps (UL) ² (RG501Q-EU); 5.0 Gbps (DL)/600/650 Mbps (UL) ² (RG502Q-EU)	/
LTE	LTE-FDD: 1 Gbps (DL)/200 Mbps (UL) (RG500Q-EA); LTE-FDD: 2 Gbps (DL)/200 Mbps (UL) (RG502Q-EA)	LTE-FDD: 1 Gbps (DL)/200 Mbps (UL) (RG500Q-EU); LTE-FDD: 2 Gbps (DL)/200 Mbps (UL) (RG501Q-EU/RG502Q-EU)	LTE-TDD: 700 Mbps (DL)/116 Mbps (UL) (RG500Q-GT); LTE-TDD: 1.2 Gbps (DL)/116 Mbps (UL) (RG502Q-GT)
UMTS (Mbps)	WCDMA: 42 (DL)/5.76 (UL)	WCDMA: 42 (DL)/5.76 (UL)	/
SMS	•	•	•
Protocols	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS
Interfaces			
(U)SIM	× 2, 1.8 V/2.95 V	× 2, 1.8 V/2.95 V	× 2, 1.8 V/2.95 V
UART	× 3	× 3	× 3
USB	2.0/3.0/3.1	2.0/3.0/3.1	2.0/3.0/3.1
PCIe	PCIe Gen3 × 2 Lane	PCIe Gen3 × 2 Lane	PCIe Gen3 × 2 Lane
RGMI	•	•	•
PCM	•	•	•
I2C	× 1	× 1	× 1
SPI	•	•	•
GPIO	•	•	•
ADC	× 2	× 2	× 2
SD card	•	•	•
RESET_N	•	•	•
Antenna	Cellular: 6 + 2 (n79), GNSS: × 1	Cellular: 4+2 (B32), GNSS: × 1	Cellular: 4
Enhanced features			
MIMO	4 × 4 DL	4 × 4 DL	4 × 4 DL
Voice	Optional	Optional	Optional
DTMF	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency
DFOTA	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air
GNSS	GPS/GLONASS/BDS/Galileo	GPS/GLONASS/BDS/Galileo	/
(U)SIM card detection	•	•	•
Electrical features			
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V	3.3 V ~ 4.3 V, typ. 3.8 V	3.3 V ~ 4.3 V, typ. 3.8 V
Power consumption	0.045 mA @ Power off 1.5 mA @ Sleep, Typ. 25 mA @ Idle	0.045 mA @Power off 1.5 mA @Sleep, Typ. 25 mA @Idle	0.045 mA @Power off 1.5 mA @Sleep, Typ. 25 mA @Idle
Software features			
USB serial driver	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13
GNSS driver	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13
RIL driver	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13
NDIS driver	Windows 8.1/10/11	Windows 8.1/10/11	Windows 8.1/10/11
MBIM driver	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7
Gobinet driver	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
QMI_WWAN driver	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7
PCIe driver	Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7
Certifications ³	China Telecom/China Mobile/China Unicom/KT/SKT/LGU+/CCC/ SRRC/NAL/CE/RCM/KC/JATE/TELEC	CE/RCM/GCF	CE
Recommended applications	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage

Note 1: means the data transmission is theoretical data rate and depends on network condition.

Note 2: 600 Mbps is the typical value; while 650 Mbps is the theoretical data rate when the UL 256QAM of both LTE and 5G NR are enabled (LTE UL 256QAM in EN-DC is disabled by default and has not been deployed by operators, and it is not fully tested).

Note 3: May depend on modules' variant.

* Planning/ Under development/
In progress
• Supported

5G NR modules

Product	RM500Q-AE/RM502Q-AE/RM505Q-AE	RM500Q-GL	RM510Q-GL
			
Form factor	M.2	M.2	M.2
Dimensions (mm)	52.0 × 30.0 × 2.3	52.0 × 30.0 × 2.3	52.0 × 30.0 × 2.3
5G	Sub-6 GHz	Sub-6 GHz	Sub-6 GHz/ mmWave
Frequency bands (MHz)	5G NR: n1/2/3/5/7/8/12/20/25/28/38/40/41/48/66/71/77/78/79; LTE-FDD: B1/2/3/4/5/7/8/12 (17)/13/14/18/19/20/25/26/28/29/30/32/66/71; LTE-TDD: B34/38/39/40/41/42/43/48; LAA: B46 ³ ; WCDMA: B1/2/3/4/5/6/8/19	5G NR: n1/2/3/5/7/8/12/20/25/28/38/40/41/48/66/71/77/78/79; LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29/30/32/66/71; LTE-TDD: B34/38/39/40/41/42/43/48; LAA: B46; WCDMA: B1/2/3/4/5/6/8/19;	5G NR: n1/2/3/5/7/8/12/20/25/28/38/40/41/48/66/71/77/78/79/257/258/260/261; LTE-FDD: B1/2/3/4/5/7/8/12 (17)/13/14/18/19/20/25/26/28/29/30/32/66/71; LTE-TDD: B34/38/39/40/41/42/43/48; LAA: B46; WCDMA: B1/2/3/4/5/6/8/19
Region	Global (except for China)	Global (except for US)	Global
Weight (approx.) (g)	8.7	9	9.1
Operating temperature	-30°C ~ +70°C	-30°C ~ +75°C	-30°C ~ +70°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)¹			
5G SA Sub-6	2.1Gbps (DL)/450Mbps (UL) (RM500Q-AE/RM505Q-AE); 4.2 Gbps (DL)/450 Mbps (UL) (RM502Q-AE)	2.1 Gbps (DL)/900 Mbps (UL)	4.2 Gbps (DL)/450 Mbps (UL)
5G NSA Sub-6	2.5Gbps (DL)/650Mbps (UL) (RM500Q-AE/RM505Q-AE); 5 Gbps (DL)/650 Mbps (UL) (RM502Q-AE)	2.5 Gbps (DL)/600/650 Mbps (UL) ²	5.0 Gbps (DL)/600/650 Mbps (UL) ²
5G NSA mmWave	/	/	7.5 Gbps (DL)/2.9 Gbps (UL)
LTE	LTE-FDD: 1 Gbps (DL)/200 Mbps (UL) (RM500Q-AE/RM505Q-AE); LTE-FDD: 2 Gbps (DL)/200 Mbps (UL) (RM502Q-AE)	LTE-FDD: 1 Gbps (DL)/200 Mbps (UL)	LTE-FDD: 2 Gbps (DL)/200 Mbps (UL)
UMTS (Mbps)	WCDMA: 42 (DL)/5.76 (UL)	WCDMA: 42 (DL)/5.76 (UL)	WCDMA: 42 (DL)/5.76 (UL)
SMS	•	•	•
Protocols	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS
Interfaces			
(U)SIM	× 1, 1.8 V/3.0 V (RM500Q-AE/RM502Q-AE) × 2, 1.8 V/3.0 V (RM505Q-AE)	× 2, 1.8 V/ 3.0 V	× 1, 1.8 V/ 3.0 V
USB	2.0/3.0/3.1	2.0/3.0/3.1	2.0/3.0/3.1
PCIe	PCIe Gen3 × 1 Lane	PCIe Gen3 × 1 Lane	PCIe Gen3 × 1 Lane
PCM	× 1	× 1	× 1
GPIO	•	•	•
RESET_N	•	•	•
Antenna	Cellular: × 4, GNSS: × 1	Cellular: × 4, GNSS: × 1	Cellular: × 4, GNSS: × 1; mmWave IF *4 pairs
Enhanced features			
MIMO	DL: 4 × 4, UL: 2 × 2 (Only n41)	DL: 4 × 4, UL: 2 × 2	Sub-6: DL 4 × 4, UL 2 × 2 (Only n41); mmWave: DL 2 × 2, UL 2 × 2
Voice	Optional	Optional	Optional
DTMF	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency
DFOTA	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air
GNSS	GPS/ GLONASS/ BeiDou/ Galileo	GPS/ GLONASS/ BeiDou/ Galileo	GPS/ GLONASS/ BeiDou/ Galileo
(U)SIM card detection	•	•	•
Electrical features			
Supply voltage range	3.135 V ~ 4.4 V, typ. 3.7 V	3.135 V ~ 4.4 V, typ. 3.7 V	3.135 V ~ 4.4 V, typ. 3.7 V
Power consumption	82 µA @Power off 4.2 mA @Sleep, Typ. 32 mA, USB 2.0 @Idle 55 mA, USB 3.0 @Idle	70 µA @Power off 4.0 mA @Sleep, Typ. 32 mA, USB 2.0 @Idle 54 mA, USB 3.0 @Idle	82 µA @ Power off 5.11 mA @ Sleep 39 mA @ USB 2.0, Idle 54.5 mA @ USB 3.0, Idle
Software features			
USB serial driver	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13
GNSS driver	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13
RIL driver	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13
NDIS driver	Windows 8.1/10/11	Windows 8.1/10/11	Windows 8.1/10/11
MBIM driver	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7
Gobinet driver	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
QMI_WWAN driver	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7
PCIe driver	Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7
Certifications ⁴	Deutsche Telekom/Verizon/ AT&T/T-Mobile/Telus/Telstra/CE/RCM/GCF/PTCRB/FCC/IC/JATE/TELEC/NCC	China Telecom/China Mobile/China Unicom/Deutsche Telecom/KT/SKT/LGU+/CE/RCM/GCF/KC/CCC/SRRC/NAL	CE/RCM/GCF/PTCRB/FCC/IC/
Recommended applications	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage

Note 1: means the data transmission is theoretical data rate and depends on network conditions.

Note 2: 600 Mbps is the typical value; while 650 Mbps is the theoretical data rate when the UL 256QAM of both LTE and 5G NR are enabled. LTE UL 256QAM in EN-DC is disabled by default and has not been deployed by operators, and it is not fully tested.

Note 3: RM500Q-AE/RM505Q-AE only support 2 × 2 MIMO.

Note 4: May depend on modules' variant.

* Planning/ Under development/
In progress
• Supported

Product	RG500L	RG600L-EU	RG600L-JP
			
Form factor	LGA	LGA	LGA
Dimensions (mm)	41.0 × 44.0 × 2.75	44.0 × 53.0 × 2.95	44.0 × 53.0 × 2.95
5G	Sub-6 GHz	Sub-6 GHz	Sub-6 GHz
Frequency bands (MHz)	-EU (EMEA/Oceania/Brazil)	RG600L-EUAA: 5G NR: n1/3/5/7/8/20/28/38/40/41/77/78; LTE-FDD: B1/3/5/7/8/20/28/32; LTE-TDD: B38/40/41/42/43; WCDMA: B1/5/8 RG600L-EUAB: 5G NR: n1/3/5/7/8/20/28/38/40/41/71/77/78; LTE FDD: B1/3/5/7/8/20/28/71; LTE TDD: B38/40/41/42/43; WCDMA: B1/5/8	/
	-NA (North America)	5G NR: n2/5/7/12/25/38/41/48/66/71/77/78; LTE-FDD: B2/4/5/7/12/13/14/17/25/26/29/30/66/71; LTE-TDD: B38/41/42/43/48; LAA: B46	/
	-AR (India)	5G: n1/3/5/8/40/78; LTE-FDD: B1/3/5/8; LTE-TDD: B40	/
	-ARS (India)	5G: n1/3/40/78; LTE-FDD: B1/3; LTE-TDD: B40	/
	-JIO (India)	5G: n78	/
	-JP (Japan)	/	/
			5G NR: n1/3/28/38/41/77/78/79; LTE-FDD: B1/3/5/8/12/17/18/19/21/26/28; LTE-TDD: B38/41/42
Weight (approx.) (g)	11.16 (RG500L-EU/RG500L-NA); 11.32 (RG500L-AR/RG500L-ARS); 10.91 (RG500L-JIO)	16.56	15.14
Operating temperature	-30°C ~ +70°C	-30°C ~ +70°C	-30°C ~ +70°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)¹			
5G SA Sub-6	4.67 Gbps (DL)/1.25 Gbps (UL)	4.67 Gbps (DL)/1.25 Gbps (UL)	4.67 Gbps (DL)/1.25 Gbps (UL)
5G NSA Sub-6	4.67 Gbps (DL)/825 Mbps (UL) (RG500L-EU/RG500L-NA), 3.75 Gbps (DL)/725 Mbps (UL) (RG500L-AR), 4.67 Gbps (DL)/836 Mbps (UL) (RG500L-ARS)	4.67 Gbps (DL)/836 Mbps (UL)	4.67 Gbps (DL)/836 Mbps (UL)
LTE	LTE-FDD: 1.6 Gbps (DL)/211 Mbps (UL) (RG500L-EU/RG500L-NA/ RG500L-ARS); 1.6 Gbps (DL)/200 Mbps (UL) (RG500L-AR)	LTE-FDD: 1.6 Gbps (DL)/211 Mbps (UL)	LTE-FDD: 1.6 Gbps (DL)/211 Mbps (UL)
UMTS (Mbps)	WCDMA: 42 (DL)/5.76 (UL) (RG500L-EU/RG500L-NA)	WCDMA: 42.2 (DL)/11.5 (UL)	/
SMS	•	•	•
Protocols	HTTPS/TCP/UDP/FTP/HTTP/PING/FTPS/SSL/NTP	HTTPS/TCP/UDP/FTP/HTTP/PING/FTPS/SSL/NTP	HTTPS/TCP/UDP/FTP/HTTP/PING/FTPS/SSL/NTP
Interfaces			
(U)SIM	× 2 (Dual SIM single standby)	× 2 (Dual SIM single standby)	× 2 (Dual SIM single standby)
UART	× 3 (including 1 Bluetooth UART)	× 3 (including 1 Bluetooth UART)	× 3 (including 1 Bluetooth UART)
USB	× 1 (USB 2.0/3.0)	× 1 (USB 2.0/3.0)	× 1 (USB 2.0/3.0)
PCIe	PCIe 3 × 4 (RG500L-EU/RG500L-NA); PCIe 3 × 2 (RG500L-AR); PCIe 3 × 1 (RG500L-JIO/RG500L-ARS)	PCIe 3 × 2	PCIe 3 × 2
SGMII	× 2 (RG500L-EU/RG500L-NA/RG500L-AR); × 1 (RG500L-ARS)	× 2	× 2
PCM	•	•	•
I2C	× 1	× 4	× 4
SPI	× 2 (RG500L-EU/RG500L-NA/RG500L-AR/RG500L-ARS); × 1 (RG500L-JIO)	× 2	× 2
GPIO	•	•	•
ADC	× 3 (RG500L-EU/RG500L-NA/RG500L-AR); × 2 (RG500L-JIO)	× 3	× 3
SD card	•	•	•
RESET_N	•	•	•
Antenna	Cellular: × 8, GNSS: × 1 (RG500L-EU/RG500L-NA); Cellular: × 8, (RG500L-AR); Cellular: × 4, (RG500L-JIO/RG500L-ARS)	Cellular: × 8	Cellular: × 8
Enhanced features			
MIMO	DL: 4 × 4, UL: 2 × 2	DL: 4 × 4, UL: 2 × 2	DL: 4 × 4, UL: 2 × 2
Voice	Optional	Optional	Optional
DTMF	•	•	•
FOTA	•	•	•
GNSS	GPS/BDS/GLONASS/Galileo, L1 only (RG500L-NA); GPS/BDS/GLONASS/Galileo, L1 + L5 (RG500L-EU)	/	/
(U)SIM card detection	•	•	•
Electrical features			
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V	3.3 V ~ 4.3 V, typ. 3.8 V	3.3 V ~ 4.3 V, typ. 3.8 V
Power consumption	80 µA @Power off 6.5 mA @Sleep 125 mA @Idle (USB active)	100 µA @Power off 6.5 mA @Sleep 125 mA @Idle (USB active)	TBD
Software features			
USB serial driver	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13	Linux 3.18 ~ 6.5	Linux 3.18 ~ 6.5
GNSS driver	Android 4.x ~ 13	/	/
RIL driver	Android 4.x ~ 13	/	/
NDIS driver	Windows 8.1/10/11	/	/
MBIM driver	Windows 8.1/10/11, Linux 3.18 ~ 6.7	/	/
Gobinet driver	Linux 2.6 ~ 6.7	/	/
QMI_WWAN driver	Linux 3.4 ~ 6.7	/	/
PCIe driver	Windows 10/11, Linux 3.10 ~ 6.7	/	/
Certifications ²	GSF/CE/RCM/FCC/IC	GSF/CE/RCM/Anatel*	JATE/TELEC
Recommended applications	Wireless routers, CPE, industrial routers, home gateways, etc.	Wireless routers, CPE, industrial routers, home gateways, etc.	Wireless routers, CPE, industrial routers, home gateways, etc.

Note 1: means the data transmission is theoretical data rate and depends on network conditions.

Note 2: May depend on modules' variant.

* Planning/ Under development/ In progress

• Supported

5G NR modules

Product		RG620T	RG620T-SBK
			
Form factor		LGA	LGA
Dimensions (mm)		44.0 × 53.0 × 2.95	44.0 × 53.0 × 2.95
5G		Sub-6 GHz	Sub-6 GHz
Frequency bands (MHz)	-EU (EMEA/Oceania/Brazil)	5G NR: n1/3/5/7/8/20/28/38/40/41/71 (optional)/75/76/77/78/79 (optional); LTE-TDD: B38/40/41/42/43; LTE-FDD: B1/3/5/7/8/20/28/32/71 (optional); WCDMA: B1/5/8	/
	-NA (North America)	5G NR: n2/5/7/12/13/14/25/26/29/30/38/41/48/66/70/71/77/78; LTE-TDD: B38/41/42/43/48; LTE-FDD: B2/4/5/7/12/13/14/17/25/26/29/30/66/70/71; LAA: B46	/
	-SBK (Japan)	/	5G NR: n3/28/77/79; LTE-FDD: B1/8; LTE-TDD: B41/42
	-EP (EMEA)	5G NR: n1/3/7/8/28/78; LTE-FDD: B1/3/7/8/28; LTE-TDD: B40	/
Weight (approx.) (g)		16.82 (RG620T-EU/RG620T-NA); 16.61 (RG620T-EP)	16.59
Operating temperature		-30°C ~ +70°C	-30°C ~ +70°C
Extended temperature		-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands		3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.) ¹			
5G SA Sub-6		7.01 Gbps (DL)/2.5 Gbps (UL)	7.01 Gbps (DL)/2.5 Gbps (UL)
5G NSA Sub-6		5.67 Gbps (DL)/1.46 Gbps (UL)	/
LTE		LTE-FDD: 1.6 Gbps (DL)/211 Mbps (UL)	LTE-FDD: 1.6 Gbps (DL)/211 Mbps (UL)
UMTS (Mbps)		WCDMA: 42.2 (DL)/11.5 (UL) (RG620T-EU)	/
SMS		•	•
Protocols		HTTPS/TCP/UDP/FTP/HTTP/PING/FTPS/SSL/NTP	HTTPS/TCP/UDP/FTP/HTTP/PING/FTPS/SSL/NTP
Interfaces			
(U)SIM		× 2 (Dual SIM single standby)	× 2
UART		× 3	× 3
USB		× 1 (USB 2.0/3.2)	× 1 (USB 2.0/3.2)
PCIe		PCIe 4 × 1, PCIe 3 × 2	PCIe 4 × 1, PCIe 3 × 1
UXSGMII		× 2	× 2
I2C		× 2	× 1
SPI		× 3	× 2
GPIO		•	•
ADC		× 3	× 4
SD card		•	/
RESET_N		•	•
Antenna		Cellular: × 8, GNSS (optional): × 1 (RG620T-EU); Cellular: × 8, GNSS: × 1 (RG620T-NA/RG620T-EP)	Cellular: × 6, GNSS: × 1 (RG620T-SBK)
Enhanced features			
MIMO		DL: 4 × 4, UL: 2 × 2	DL: 4 × 4, UL: 2 × 2
Voice		Optional	Optional
DTMF		•	Dual-tone Multi-frequency
FOTA		•	•
GNSS		GPS/BDS/GLONASS/Galileo/QZSS, L1 + L5 (optional) (RG620T-EU); GPS/BDS/GLONASS/Galileo/QZSS, L1 + L5 (RG620T-EP/RG620T-NA)	GPS/BDS/GLONASS/Galileo/QZSS, L1
(U)SIM card detection		•	•
Electrical features			
Supply voltage range		3.3 V ~ 4.4 V, typ. 3.8 V	3.3 V ~ 4.4 V, typ. 3.8 V
Power consumption		135 µA @ Power off 6 mA @ Sleep 145 mA @ Idle (USB active)	135 µA @ Power down 4 mA @ Sleep 160 mA @ Idle (USB connected)
Software features			
USB serial driver		Linux 3.18 ~ 6.5	Linux 3.18 ~ 6.5
GNSS driver		/	/
RIL driver		/	/
RNDIS driver		/	/
Certifications ²		CE/RCM/GCF/FCC/IC/PTCRB/AT&T-Mobile/Verizon/Telstra*	JATA/TELEC
Recommended applications		Industrial routers, CPE, home gateways, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, CPE, MiFi, home gateways, industrial PDAs, rugged tablet PCs and digital signage

Note 1: means the data transmission is theoretical data rate and depends on network conditions.
Note 2: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

Product		RG500U	RM500U
			
Form factor		LGA	M.2
Dimensions (mm)		41.0 × 44.0 × 2.85	52.0 × 30.0 × 2.3 (RM500U-CNV); 52.0 × 30.0 × 3.75 (RM500U-EA)
5G		Sub-6 GHz	Sub-6 GHz
Frequency bands (MHz)	-EA (APAC/Africa)	5G NR: n1/3/5/7/8/20/28/38/40/41/66/77/78; LTE-FDD: B1/2/3/4/5/7/8/20/28A/28B/66; LTE-TDD: B38/40/41; WCDMA: B1/2/5/8	5G NR: n1/3/5/7/8/20/28/38/40/41/66/77/78; LTE-FDD: B1/2/3/4/5/7/8/20/28/66; LTE-TDD: B38/40/41; WCDMA: B1/2/5/8
	-EB (APAC/Africa)	5G NR: n1/3/5/7/8/20/28/38/40/41/66/77/78; LTE-FDD: B1/2/3/4/5/7/8/20/28/66; LTE-TDD: B38/40/41; WCDMA: B1/2/5/8	/
	-LA (Latin America)	5G NR: n2/5/7/8/28/38/40/66/71/78; LTE-FDD: B2/4/5/7/8/26/28/66/71; LTE-TDD: B38/40; WCDMA: B2/4/5	/
	-CNV (China)	/	5G NR: n1/3/5/8/28A/41/77 ¹ /78/79; LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/5 ¹ /8
Weight (approx.) (g)		13 (RG500U-EA); 12.5 (RG500U-EB); 12.2 (RG500U-LA)	9.2 (RM500U-EA); 8.8 (RM500U-CNV)
Operating temperature		-30° C ~ +75° C	-30° C ~ +75° C
Extended temperature		-40° C ~ +85° C	-40° C ~ +85° C
Control via AT commands		3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.) ²			
5G SA Sub-6		2 Gbps (DL)/1 Gbps (UL)	2 Gbps (DL)/1 Gbps (UL)
5G NSA Sub-6		2.6 Gbps (DL)/650 Mbps (UL)	2.6Gbps (DL)/650Mbps (UL) (RM500U-EA); 2.2 Gbps (DL)/575 Mbps (UL) (RM500U-CNV)
LTE (Mbps)		LTE-FDD: 600 (DL)/150 (UL)	LTE-FDD: 600 (DL)/150 (UL)
UMTS (Mbps)		WCDMA: 42.2 (DL)/11 (UL)	WCDMA: 42.2 (DL)/11 (UL)
SMS		•	•
Protocols		TCP/UDP/PPP/FTP/HTTP/HTTPS/FTPS/SSL/NTP	TCP/UDP/PPP/FTP/HTTP/HTTPS/FTPS/SSL/NTP
Interfaces			
(U)SIM		× 2, 1.8 V/ 3.0 V	× 2, 1.8 V/3.0 V
USB		2.0/3.0	2.0/3.0
PCIe		PCIe Gen2 × 1 Lane	PCIe Gen2 × 1 Lane
PCM		•	•
GPIO		•	•
RESET_N		•	•
Antenna		Cellular: × 4 (RG500U-EB); Cellular: × 6 (RG500U-EA/RG500U-LA)	Cellular: × 4
Enhanced features			
MIMO		DL 4 × 4 MIMO: n1/3/7/38/40/41/77/78/79 ¹ , UL 2 × 2 MIMO: n38/40/41/77/78/79 ¹ , DL 2 × 2 MIMO: n5 ¹ /8/20/28/66 ¹ /71* & LTE (RG500U-EA); DL 4 × 4 MIMO: n1/3/7/28/38/40/41/66/77/78, UL 2 × 2 MIMO: n38/40/41/77/78, DL 2 × 2 MIMO: n5/8/20 & LTE (RG500U-EB); DL 4 × 4 MIMO: n2/7/28/38/40/66/78, UL 2 × 2 MIMO: n38/40/78, DL 2 × 2 MIMO: n5/8/71 & LTE (RG500U-LA);	DL 4 × 4 MIMO: n1/3/7/28/66/38/40/41/77/78, UL 2 × 2 MIMO: n38/40/41/77/78, DL 2 × 2 MIMO: n5/8/20 & LTE (RM500U-EA); DL 4 × 4 MIMO: n1/28A/41/77/78/79, UL 2 × 2 MIMO: n41/77/78/79, DL 2 × 2 MIMO: n3/5/8 (RM500U-CNV)
Voice		Optional	Optional
DTMF		Dual-tone Multi-frequency	Dual-tone Multi-frequency
DFOTA		Delta Firmware over the Air	Delta Firmware over the Air
GNSS		/	/
(U)SIM card detection		•	•
Electrical features			
Supply voltage range		3.3 V ~ 4.3 V, typ. 3.8 V	3.3 V ~ 4.4 V, typ. 3.7 V
Power consumption		86 µA @ Power off; 4.4 mA @ Sleep; 56 mA @ USB 2.0, idle; 70 mA @ USB 3.0, idle (RG500U-EA); 88 µA @ Power off; 5.0 mA @ Sleep; 56 mA @ USB 2.0, idle; 70 mA @ USB 3.0, idle (RG500U-EB); 82 µA @ Power off; 5.0 mA @ Sleep; 60 mA @ USB 2.0, idle; 73 mA @ USB 3.0, idle (RG500U-LA)	99 µA @ Power off; 4.8 mA @ Sleep; 62 mA @ USB 2.0, idle; 75.5 mA @ USB 3.0, idle (RM500U-EA); 78 µA @ Power off; 5.1 mA @ Sleep; 57 mA @ USB 2.0, idle; 71 mA @ USB 3.0, idle (RM500U-CNV)
Software features			
USB serial driver		Windows 7*/8/8.1/10/11, Linux 2.6 ~ 6.5, Android 4.x ~ 13.x	Windows 7*/8/8.1/10/11, Linux 2.6 ~ 6.5, Android 4.x ~ 13.x
GNSS driver		/	/
RIL driver		Android 4.x ~ 13.x	Android 4.x ~ 13.x
RNDIS driver		Windows 7*/8/8.1/10/11, Linux 2.6 ~ 6.5	Windows 7*/8/8.1/10/11, Linux 2.6 ~ 6.5
MBIM driver		/	/
ECM driver		Linux 2.6 ~ 6.5	Linux 2.6 ~ 6.5
NCM driver		Linux 2.6 ~ 6.5	Linux 2.6 ~ 6.5
PCIe driver		Linux 3.10 ~ 6.5	Linux 3.10 ~ 6.5
Certifications ³		China Telecom/China Mobile*/China Unicom*/GCF/CE/RCM/FCC	China Telecom*/China Mobile*/China Unicom*/CCC/SRRC/NAL/CE/RCM
Recommended applications		Wireless routers, CPE, industrial routers, home gateways, etc. (RG500U-EA); used in vertical industries such as smart energy, internet of vehicles, industrial internet, telemedicine, smart education, high-definition video, smart city, and home entertainment (RG500U-EB/RG500U-LA);	Wireless routers, CPE, industrial routers, home gateways, etc. (RM500U-CNV) industrial routers, home gateways, set-top boxes, industrial PDAs and digital labels (RM500U-EA)

Note 1: 0C optional.

Note 2: means the data transmission is theoretical data rate and depends on network conditions.

Note 3: May depend on modules' variant.

* Planning/ Under development/ In progress

• Supported

5G RedCap modules



5G RedCap modules

Product		RG255C	RG255C M.2	RG255C Mini PCIe	RM255C-GL*
					
Form factor		LGA	M.2	Mini PCIe	M.2
Dimensions (mm)		29.0 × 32.0 × 2.4	30.0 × 42.0 × 3.25	30.0 × 50.95 × 4.95	42.0 × 30.0 × 2.3
5G		5G RedCap	5G RedCap	5G RedCap	5G RedCap
Frequency bands (MHz)	-NA* (North America)	5G: n2/5/7/12/13/14/25/26/30/38/41/48/66/70/71/77/78; LTE-FDD: B2/4/5/7/12/13/14/17/25/26/30/66/71; LTE-TDD: B38/41/42/43/48	/	/	/
	-EU* (EMEA/APAC* /Brazil)	5G: n1/3/5/7/8/20/28/38/40/41/77/78/79; LTE-FDD: B1/3/5/7/8/20/28/71; LTE-TDD: B38/40/41/42/43	/	/	/
	-GL (Global)	5G SA: n1/2/3/5/7/8/12/13/14/18/20/25/26/28/30/38/40/41/48/66/70/71/77/78/79; LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/30/66/70/71; LTE-TDD: B34/38/39/40/41/42/43/48	5G SA: n1/2/3/5/7/8/12/13/14/18/20/25/26/28/30/38/40/41/48/66/70/71/77/78/79; LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/30/66/71; LTE-TDD: B34/38/39/40/41/42/43/48	5G SA: n1/2/3/5/7/8/12/13/14/18/20/25/26/28/30/38/40/41/48/66/70/71/77/78/79; LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/30/66/71; LTE-TDD: B34/38/39/40/41/42/43/48	5G SA: n1/2/3/5/7/8/12/13/14/18/20/25/26/28/30/38/40/41/48/66/70/71/77/78/79; LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/30/66/71; LTE-TDD: B34/38/39/40/41/42/43/48
Weight (approx.) (g)		5.2	8.4	11	6.0
Operating temperature		-30°C ~ +75°C	-30°C ~ +75°C	-30°C ~ +75°C	-30°C ~ +75°C
Extended temperature		-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands		3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)					
5G (Mbps)		223 (DL)/123 (UL)	223 (DL)/123 (UL)	223 (DL)/123 (UL)	223 (DL)/123 (UL)
LTE (Mbps)		195 (DL)/105 (UL)	195 (DL)/105 (UL)	195 (DL)/105 (UL)	195 (DL)/105 (UL)
UMTS (Mbps)		/	/	/	/
SMS		Support SGS, IMS and NAS SMS	Support SGS, IMS and NAS SMS	Support SGS, IMS and NAS SMS	Support SGS, IMS and NAS SMS
Protocols		TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/MQTT (S)/SMTP (S)/NTP/PING/NITZ/LwM2M protocols	TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/MQTT (S)/SMTP (S)/NTP/PING/NITZ/LwM2M protocols	TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/MQTT (S)/SMTP (S)/NTP/PING/NITZ/LwM2M protocols	TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/MQTT (S)/SMTP (S)/NTP/PING/NITZ/LwM2M protocols
Interfaces					
(U)SIM		× 2	× 2	× 2	× 2
UART		× 2	/	× 1	/
USB		2.0	2.0	2.0	2.0
PCIe		PCIe Gen2 × 1 Lane	PCIe Gen2 × 1 Lane	/	PCIe Gen2 × 1 Lane
PCM		•	•	•	•
GPIO		•	/	/	/
RESET_N		•	•	•	•
Antenna		Cellular: × 2, GNSS: × 1	Cellular: × 2, GNSS: × 1	Cellular: × 2, GNSS: × 1	Cellular: × 2, GNSS: × 1 (Optional)
Enhanced features					
MIMO		/	/	/	/
Voice		Optional	Optional	Optional	/
DTMF		•	•	•	•
DFOTA		•	•	•	•
GNSS		GPS/GLONASS/BDS/Galileo/QZSS	GPS/GLONASS/BDS/Galileo/QZSS	GPS/GLONASS/BDS/Galileo/QZSS	GPS/GLONASS/BDS/Galileo/QZSS
(U)SIM card detection		•	•	•	•
Electrical features					
Supply voltage range		3.3 V ~ 4.3 V, typ. 3.8 V	3.135 V ~ 4.4 V, typ. 3.7 V	3.0 V ~ 3.6 V, typ. 3.3 V	3.135 V ~ 4.4 V, typ. 3.7 V
Power consumption		0.05 mA@Power off, 1.8 mA@ Sleep, Typical (RG255C-GL) TBD (RG255C-NA*/RG255C-EU*)	0.13 mA@Power off, 3 mA@ Sleep, Typical	4 mA@ Sleep, Typical	TBD
Software features					
USB serial driver		Windows 8.1/10/11, linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, linux 2.6 ~ 6.7, Android 4.x ~ 13	Windows 8.1/10/11, linux 2.6 ~ 6.7, Android 4.x ~ 13
GNSS driver		Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13
RIL driver		Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13	Android 4.x ~ 13
NDIS driver		Windows 8.1/10/11	Windows 8.1/10/11	Windows 8.1/10/11	Windows 8.1/10/11
MBIM driver		Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7	Windows 8.1/10/11, Linux 3.18 ~ 6.7
Gobinet driver		Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
QMI_WWAN driver		Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7
PCIe driver		Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7	Windows 10/11, Linux 3.10 ~ 6.7
Certifications ²		FCC/IC/PTCRB/CE/RCM/GCF/Verizon*/AT&T/T-Mobile	CE, RCM, FCC and IC are reported only; GCF*, PTCRB*, AT&T* and T-Mobile* can reuse RG255C-GL certification result; Verizon* need be delta-tested based on RG255C-GL and certified separately as Variant.	CE, RCM, FCC and IC are reported only; GCF*, PTCRB*, AT&T* and T-Mobile* can reuse RG255C-GL certification result; Verizon* need be delta-tested based on RG255C-GL and certified separately as Variant.	FCC*/IC*/CE*/RCM*/GCF*/PTCRB*/AT&T*/Verizon*/T-Mobile*
Recommended applications		Industrial routers, industrial PDAs, rugged tablet PCs, wearable devices and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs, wearable devices and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs, wearable devices and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs, wearable devices and digital signage

Note 1: Excl. China/Japan.

Note 2: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

5G RedCap modules

Product		RG255AA	RG255AA-CN M.2
			
Form factor		LGA	M.2
Dimensions (mm)		29.0 × 32.0 × 2.4	30.0 × 52.0 × 3.25
5G		5G RedCap	5G RedCap
Frequency bands (MHz)	-CN (China)	5G SA: n1/3/5/8/28/40/41/78/79; LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41	5G SA: n1/3/5/8/28/40/41/78/79; LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41
	-EU (EMEA/ Southeast Asia/Australia/ New Zealand)	5G SA: n1/3/5/7/8/20/28/38/40/41/77/78; LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40/41/42/43	
Weight (approx.) (g)		4.7	/
Operating temperature		-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature		-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands		3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)			
5G (Mbps)		226 (DL)/120 (UL)	226 (DL)/120 (UL)
LTE (Mbps)		150 (DL)/50 (UL)	150 (DL)/50 (UL)
UMTS (Mbps)		/	/
SMS		*	*
Protocols		TCP/UDP/PPP/FTP/HTTP/HTTPS/FTPS/SSL/NTP	TCP/UDP/PPP/FTP/HTTP/HTTPS/FTPS/SSL/NTP
Interfaces			
(U)SIM		× 2	× 2
UART		× 2	/
USB		× 1	× 1
PCIe		× 1	× 1
PCM		× 1	× 1
GPIO		•	•
RESET_N		•	•
Antenna		Cellular: × 2	Cellular: × 2
Enhanced features			
MIMO		DL: 2 × 2, UL: 1 × 1	DL: 2 × 2, UL: 1 × 1
Voice		•	•
DTMF		•	•
DFOTA		•	•
GNSS		/	/
(U)SIM card detection		•	•
Electrical features			
Supply voltage range		3.4 V ~ 4.3 V, typ. 3.8 V	3.4 V ~ 4.3 V, typ. 3.8 V
Power consumption		Typical 2.9 mA @ sleep, Typical 39 mA @ Idle	TBD
Software features			
USB serial driver		Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x
RIL driver		Android 4.x ~ 13.x	Android 4.x ~ 13.x
USB RNDIS driver		Windows 8.1/10/11, Linux 2.6 ~ 6.7	Windows 8.1/10/11, Linux 2.6 ~ 6.7
USB ECM driver		Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
Certifications ¹		CCC/SRRC/NAL/CE*/RCM*	CCC*/SRRC*/NAL*
Recommended applications		CPE, MiFi, electric power	Cloud computers

Note 1: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

5G RedCap modules

Product		RG255G*	RG255G M.2*	RG255G Mini PCIe*
				
Form factor		LGA	M.2	Mini PCIe
Dimensions (mm)		29.0 × 32.0 × 2.4	30.0 × 42.0 × 3.25	30.0 × 50.95 × 4.95
5G		5G RedCap	5G RedCap	5G RedCap
Frequency bands (MHz)	-NA* (North America)	5G SA: n2/5/7/12/13/14/25/26/30/38/41/48/66/71/77/78; LTE-FDD: B2/4/5/7/12/13/14/17/25/26/30/66/71; LTE-TDD: 38/41/42/43/48	/	/
	-EU* (EMEA/APAC/Brazil)	5G SA: n1/3/5/7/8/20/28/38/40/41/77/78; LTE-FDD: B1/3/5/8/20/28/71; LTE-TDD: B38/40/41/42/43	/	/
	-CN* (China)	5G SA: n1/5/8/28/41/78/79 (optional); LTE-FDD: B1/3/5/8; LTE-TDD: B38/39/40/41	/	/
	-GL* (Global)	5G SA: n1/2/3/5/7/8/12/13/14/18/20/25/26/28/30/38/40/41/ 48/66/71/77/78; LTE-FDD: B1/2/3/4/5/7/8/12 (17)/13/14/18/19/20/25/26/28/ 30/66/71; LTE-TDD: 34/38/39/40/41/42/43/48	5G SA: n1/2/3/5/7/8/12/13/14/18/20/25/26/28/30/38/40/41/ 48/66/71/77/78; LTE-FDD: B1/2/3/4/5/7/8/12 (17)/13/14/18/19/20/25/26/28/ 30/66/71; LTE-TDD: 34/38/39/40/41/42/43/48	5G SA: n1/2/3/5/7/8/12/13/14/18/20/25/26/28/30/38/40/41/ 48/66/71/77/78; LTE-FDD: B1/2/3/4/5/7/8/12 (17)/13/14/18/19/20/25/26/28/ 30/66/71; LTE-TDD: 34/38/39/40/41/42/43/48
	Weight (approx.) (g)	4.85	TBD	TBD
Operating temperature		-30°C ~ +75°C	-30°C ~ +75°C	-30°C ~ +75°C
Extended temperature		-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands		3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)				
5G (Mbps)		227 (DL)/122 (UL)	227 (DL)/122 (UL)	227 (DL)/122 (UL)
LTE (Mbps)		150 (DL)/75 (UL)	150 (DL)/75 (UL)	150 (DL)/75 (UL)
SMS		•	•	•
Interfaces				
(U)SIM		× 2	× 2	× 1
UART		× 2	× 2	× 2
USB		USB 2.0 × 1	USB 2.0 × 1	USB 2.0 × 1
PCIe		PCIe 1.0* × 1	PCIe 1.0* × 1	/
PCM		× 1	× 1	× 1
I2C*		× 1	/	× 1
SPI*		× 1	/	/
GPIO		•	•	•
ADC		× 2	/	/
RESET_N		•	•	•
Antenna		Cellular: × 2, GNSS: × 1 (Optional)	Cellular: × 2, GNSS: × 1 (Optional)	Cellular: × 2, GNSS: × 1 (Optional)
Enhanced features				
MIMO		DL: 2 × 2, UL: 1 × 1	DL: 2 × 2, UL: 1 × 1	DL: 2 × 2, UL: 1 × 1
FOTA*		•	•	•
GNSS		•	•	•
(U)SIM Card Detection*		•	•	•
Electrical features				
Supply voltage range		3.3 V ~ 4.3 V, typ. 3.8 V	3.135 V ~ 4.4 V, typ. 3.7 V	3.0 V ~ 3.6 V, typ. 3.3 V
Power consumption		0.06 mA@ Power Off, 1.89 mA@ sleep (Typical)	TBD	TBD
Software features				
USB serial driver		Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 14.x*	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 14.x*	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 14.x*
GNSS driver*		Android 4.x ~ 14.x	Android 4.x ~ 14.x	Android 4.x ~ 14.x
RIL driver*		Android 4.x ~ 14.x	Android 4.x ~ 14.x	Android 4.x ~ 14.x
RNDIS driver		Windows 8.1/10/11, Linux 2.6 ~ 6.7	Windows 8.1/10/11, Linux 2.6 ~ 6.7	Windows 8.1/10/11, Linux 2.6 ~ 6.7
MBIM driver		Windows 10/11, Linux 3.18 ~ 6.7	Windows 10/11, Linux 3.18 ~ 6.7	Windows 10/11, Linux 3.18 ~ 6.7
ECM driver		Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
NCM driver		Windows 11, Linux 3.10 ~ 6.7	Windows 11, Linux 3.10 ~ 6.7	Windows 11, Linux 3.10 ~ 6.7
PCIe driver*		linux 5.15 ~ 6.7	Linux 5.15 ~ 6.7	Linux 5.15 ~ 6.7
Certifications [†]		FCC*/ IC*/ PTCRB* /CE*/ RCM*/ GCF* /CCC*/NAL*	/	/
Recommended applications		Industrial routers, industrial PDAs, rugged tablet PCs, wearable devices and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs, wearable devices and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs, wearable devices and digital signage

Note 1: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported



LTE-A modules

Product		EG060K	EG065K
			
Form factor		LGA	LGA
Dimensions (mm)		37.0 × 39.5 × 2.8	28.0 × 31.0 × 2.4
4G		LTE Cat 6	LTE Cat 6
Frequency bands (MHz)	-E (EMEA/ Australia/ Brazil)	/	/
	-EA (EMEA/ Australia/ Brazil)	LTE-FDD: B1/3/5/7/8/20/28/32 ¹ ; LTE-TDD: B38/40/41/42 (optional)/43 (optional); Up to 2 × CA: B1+B1/3/5/7/8/20/28; B3+B3/5/7/8/20/28; B7+B5/7/8/20/28; B20+B32 ² ; B38+B38; B40+B40; B41+B41 WCDMA: B1/3/5/8	LTE-FDD: B1/2/3/4/5/7/8/20/28; LTE-TDD: B40; WCDMA*: B1/2/3/4/5/8
	-NA (North America)	LTE-FDD: B2/4/5/7/12/13/14/25/26/29/30/66/71; LTE-TDD: B41/48	LTE-FDD: B2/4/5/7/12/13/14/25/26/30/66
	-GT (Global)	LTE-TDD: B40/41/42/43/48	/
	-JP (Japan)	LTE-FDD: B1/3/5/8/18/19/26/28; LTE-TDD: B41; WCDMA: B1/3/5/6/8/9/19	/
	-LA (Latin America)	LTE-FDD: B2/4/5/7/8/25/28/66; LTE-TDD: B42/B43; WCDMA: B2/B4/B5/B8	/
Weight (approx.) (g)		9.1	5.3
Operating temperature		-30°C ~ +75°C	-30°C ~ +75°C
Extended temperature		-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands		3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)			
LTE (Mbps)		LTE-FDD: 300 (DL)/50 (UL); LTE-TDD: 226 (DL)/28 (UL)	LTE-FDD: 300 (DL)/75 (UL)
UMTS		DC-HSDPA: 42 Mbps (DL)/HSUPA: 5.76 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	/
SMS		•	•
Protocols		QMI/MBIM/NITZ/HTTP/HTTPS/FTP/LwM2M*/PING*	QMI/MBIM/NITZ/HTTP/HTTPS/FTP/LwM2M*/PING*
Interfaces			
USB		2.0/3.0, supports master* and slave modes	2.0/3.0, supports master* and slave modes
PCM		•	•
I2S		× 1	× 1
SPI		× 1	× 1
SDIO		× 1	× 1
RFFE		TBD	× 1
GRFC		TBD	× 4
I2C		× 1	× 1
(U)SIM		× 2, 1.8 V/ 3.0 V	× 2, 1.8 V/ 3.0 V
eSIM		Optional	/
GPIO		× 3	× 5
UART		× 3	× 2
ADC		× 2	× 1
RESET_N		•	× 1
PCIe		Optional	Optional
Antenna		Main, Diversity and GNSS	× 2 (Main antenna); × 2 (Diversity antennas)
Enhanced features			
MIMO		2 × 2, 4 × 2, 4 × 4 DL	2 × 2, 4 × 2 DL
eCall		Emergency services	Emergency services*
Voice		Optional	Optional
DTMF		Dual-tone Multi-frequency	Dual-tone Multi-frequency*
DFOTA		Delta Firmware over the Air	Delta Firmware over the Air
FOTA		•	/
GNSS		GPS/GLONASS/BeiDou/Galileo/QZSS	/
(U)SIM card detection		•	•
Electrical features			
Supply voltage range		3.3 V ~ 4.4 V, typ. 3.8 V	3.3 V ~ 4.5 V, typ. 3.8 V
Power consumption		20 μA @Power off 2.47 mA @LTE sleep (PF=128) 4.18 mA@LTE sleep (PF=64) 38.8 mA@Idle	26 μA @ Power off, 3.1 mA @ Sleep (PF = 128), 4.0 mA @ Sleep (PF = 64), 12.8 mA @ Idle (EG065K-NA); 26 μA @ Power off, 2.7 mA @ Sleep (PF = 128), 3.4 mA @ Sleep (PF = 64), 12.6 mA @ Idle (EG065K-EA)
Software features			
USB serial driver		Windows 7*/8/8.1/10, WinCE 5.0/6.0/7.0*, Linux 2.6/3.x/4.1~ 4.14, Android 4.x/5.x/6.x/7.x/8.x	Windows 7*/8/8.1/10/11, Linux 2.6 ~ 5.18, Android 4.x ~ 12.x
RIL driver		Android 4.x/5.x/6.x/7.x/8.x	Android 4.x ~ 12.x*
NDIS driver		Windows 7*/8/8.1/10	Windows 7*/8/8.1/10/11
RNDIS driver		/	/
ECM driver		Linux 2.6 or later	Linux 2.6 ~ 5.18*
Gobinet driver		Linux 2.6 or later	Linux 2.6 ~ 5.18
QMI_WWAN driver		Linux 3.4 or later	Linux 3.4~5.18
Certifications ²		CE/RCM/Verizon/AT&T/T-Mobile/GCF/PTCRB/FCC/IC	British Telecom/Telefónica/Telstra/Deutsche Telekom/GCF/CE/RCM/Anatel/JATE/TELEC/KC/AT&T/Firstnet/Verizon/Telus/PTCRB/FCC/IC
Recommended applications		Routers, home gateways, set-top boxes, PDAs, tablet PCs and digital signage	Routers, home gateways, set-top boxes, PDAs, tablet PCs and digital signage

Note 1: B32 is only for secondary component carrier.
Note 2: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

LTE-A modules

Product		EG060W-EA
		
Form factor		LGA
Dimensions (mm)		37.0 × 39.5 × 3.05
4G		LTE Cat 6
Frequency bands (MHz)	-EA (EMEA/APAC)	LTE-FDD: B1/3/5/7/8/20/28/32; LTE-TDD: B38/40/41/42 ² /43 ² ; 2 × CA: B1+B1/3/5/7/8/20/28/38 ² /40 ² /41 ² /42 ² /43 ² ; B3+B3/5/7/8/20/28/38 ² /40 ² /41 ² /42 ² /43 ² ; B5+B5 ² /7/38 ² /40/41; B7+B7/8/20/28/32 ² /42 ² ; B8+B8 ² /32 ² /38 ² /40/41/42 ² ; B20+B32/38/40/41 ² /42 ² /43 ² ; B28+B28 ² /32 ² /38 ² /40/41/B42 ² ; B38+B38; B40+B40; B41+B41; B42+B42 ² ; B43+B43 ² ; WCDMA: B1/3 ² /5/8
Weight (approx.) (g)		8.2
Operating temperature		-20°C ~ +70°C
Extended temperature		-25°C ~ +75°C
Control via AT commands		3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)		
LTE (Mbps)		LTE-FDD: 300 (DL)/50 (UL) LTE-TDD: 220 (DL)/30 (UL)
UMTS		DC-HSDPA: 42 Mbps (DL) HSUPA: 5.76 Mbps (UL) WCDMA: 384 Kbps (DL/UL)
SMS		•
Protocols		TCP/PPP/UDP/FTP*/HTTP/SSL/HTTPS/NTP*/PING/MMS*/SMTPS*/FTPS*/SMTP*
Interfaces		
USB		2.0/3.0, supports master* and slave modes
PCM		× 1
SPI		× 1
SDIO		× 1
I2C		× 1
(U)SIM		× 1
RGMII		× 1
UART		× 2
ADC		× 2
RESET_N		× 1
PCIe		× 2
Antenna		× 2
Enhanced features		
MIMO		•
eCall		•
Voice		•
DTMF		•
DFOTA		/
FOTA		•
GNSS		/
(U)SIM card detection		•
Electrical features		
Supply voltage range		3.3 V ~ 4.3 V, typ. 3.8 V
Power consumption		56 µA @ Power off; 5.42 mA @ Sleep; 58.63 mA @ Idle
Software features		
USB serial driver		Windows 7*/8/8.1/10/11, Linux 2.6 ~ 6.5, Android 4.x ~ 13.x
RIL driver		Android 4.x ~ 13.x
NDIS driver		/
RNDIS driver		Windows 7*/8/8.1/10/11, Linux 2.6 ~ 6.5
ECM driver		Linux 2.6 ~ 6.5
Gobinet driver		/
QMI_WWAN driver		/
Certifications		CE
Recommended applications		Routers, home gateways, set-top boxes, PDAs, tablet PCs and digital signage

Note 1: Excl. China/Japan.
Note 2: Optional.

* Planning/ Under development/ In progress
• Supported

Product	EG120K	EG12	EG18
			
Form factor	LGA	LGA	LGA
Dimensions (mm)	37.0 × 39.5 × 2.8	37.0 × 39.5 × 2.8	37.0 × 39.5 × 2.8
4G	LTE Cat 12	LTE Cat 12	LTE Cat 18
Frequency bands (MHz)	-GT (Global)	/	/
	-EA (EMEA/ Australia/ Brazil)	LTE-FDD: B1/3/5/7/8/20/28/32 (optional); LTE-TDD: B38/40/41/42 (optional)/43 (optional); Up to 3 × CA: Intra-band and Inter-band; WCDMA: B1/3/5/8	LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40/41; Up to 3 × CA: Intra-band and Inter-band; WCDMA: B1/3/5/8
	-NA (North America)	-NA (North America) LTE-FDD: B2/4/5/7/12/13/14/25/26/29/30/66/71; LTE-TDD: B41/48	LTE-FDD: B2/4/5/7/12/13/14/17/25/26/29/30/66/71; LTE-TDD: B41; Up to 5 × CA: Intra-band and Inter-band; WCDMA: B2/4/5
	-LA* (Latin America) (planning)	LTE-FDD: B2/4/5/7/8/25/28/66; LTE-TDD: B42/43; WCDMA: B2/4/5/8	/
	-JP (Japan)	LTE-FDD: B1/3/5/8/18/19/26/28; LTE-TDD: B41; WCDMA: B1/3/5/6/8/9/19	/
Weight (approx.) (g)	9.1	9	9
Operating temperature	-30°C ~ +75°C	-30°C ~ +75°C	-30°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)			
LTE	LTE-FDD: 600 Mbps (DL)/150 Mbps (UL); LTE-TDD: 430 Mbps (DL)/90 Mbps (UL)	LTE-FDD: 600 Mbps (DL)/150 Mbps (UL); LTE-TDD: 430 Mbps (DL)/90 Mbps (UL)	LTE-FDD: 1.2 Gbps (DL)/150 Mbps (UL); LTE-TDD: 573 Mbps (DL)/90 Mbps (UL)
UMTS	DC-HSDPA: 42 Mbps (DL)/HSUPA: 11.2 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL)/HSUPA: 11.2 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL)/HSUPA: 11.2 Mbps (UL) WCDMA: 384 Kbps (DL/UL)
SMS	•	•	•
Protocols	QMI/MBIM/NITZ/HTTP/HTTPS/FTP/LwM2M*/PING*	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS
Interfaces			
USB	2.0/3.0, supports master* and slave modes	2.0/3.0, slave mode	2.0/3.0, slave mode
PCM	× 1	•	•
I2C	× 1	× 1	× 1
(U)SIM	1.8 V/ 3.0 V	× 2, 1.8 V/ 3.0 V	× 2, 1.8 V/ 3.0 V
eSIM	Optional	/	/
GPIO	× 3	× 2	× 2
UART	× 2	× 3	× 3
ADC	•	× 2	× 2
SPI	× 1	× 1 (optional)	× 1 (optional)
SD card	•	•	•
RESET_N	•	•	•
PCIe	Optional	Optional	Optional
RGMII	/	/	/
Antenna	Main, Diversity and GNSS	Main, Diversity and GNSS	Main, Diversity and GNSS
Enhanced features			
MIMO	2 × 2, 4 × 2, 4 × 4 DL	2 × 2, 4 × 2, 4 × 4 DL	2 × 2, 4 × 2, 4 × 4 DL
eCall	Emergency services*	•	•
Voice	Optional	Optional	Optional
DTMF	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency
DFOTA	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air
GNSS	GPS/GLONASS/BeiDou/Galileo/QZSS	GPS/GLONASS/BeiDou/Galileo/QZSS	GPS/GLONASS/BeiDou/Galileo/QZSS
(U)SIM card detection	•	•	•
Electrical features			
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V	3.3 V ~ 4.3 V, typ. 3.8 V	3.3 V ~ 4.3 V, typ. 3.8 V
Power consumption	20 μA @Power off 2.14 mA @LTE sleep (PF=128) 3.55 mA@LTE sleep (PF=64) 37.4 mA@Idle	20 μA @Power off 1.83 mA @Sleep, Typ. 9.41 mA @Idle	20 μA @Power off 1.81 mA @Sleep, Typ. 9.38 mA @Idle
Software features			
USB serial driver	Windows 7*/8/8.1/10, WinCE 5.0/6.0/7.0*, Linux 2.6/3.x/4.1 ~ 4.14, Android 4.x/5.x/6.x/7.x/8.x	Windows: 7*/8/8.1/10, Linux: 2.6/3.x/4.x/5.x, Android 4.x/5.x/6.x/7.x/8.x/9.x	Windows 7*/8/8.1/10, Linux 2.6/3.x/4.x/5.x, Android 4.x/5.x/6.x/7.x/8.x/9.x
GNSS driver	/	/	/
RIL driver	Android 4.x/5.x/6.x/7.x/8.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x
NDIS driver	Windows 7*/8/8.1/10	Windows: 7*/8/8.1/10	Windows 7*/8/8.1/10
MBIM driver	Windows 7*/10, Linux 3.18 ~ 5.4	/	/
Gobinet driver	Linux 2.6/3.x/4.x/5.x	Linux 2.6/3.x/4.x/5.x	Linux 2.6/3.x/4.x/5.x
QMI_WWAN driver	Linux 3.x (3.4 or later)/4.x/5.x	Linux 3.x (3.4 or later)/4.x/5.x	Linux 3.x (3.4 or later)/4.x/5.x
PCIe driver	/	/	/
Certifications ²	CE/RCM/Verizon/AT&T/T-Mobile/GCF/PTCRB/FCC/IC	FCC/GCF/CE/RCM	Telstra/GCF/CE/RCM/Verizon/AT&T/T-Mobile/PTCRB/FCC/IC/USCC
Recommended applications	Routers, home gateways, set-top boxes, PDAs, tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage	Industrial routers, industrial PDAs, rugged tablet PCs and digital signage

Note 1: LTE-FDD B17 is supported through MFBI+B12.
Note 2: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

LTE-A modules

Product		EM05	EM060K
			
Form factor		M.2	M.2
Dimensions (mm)		30.0 × 42.0 × 2.3	30.0 × 42.0 × 2.3
4G		LTE Cat 4	LTE Cat 6
Frequency bands (MHz)	-G/Global (Global)	-G(Global) LTE-FDD: B1/2/3/4/5/7/8/12/13/14/18/19/20/25/26/28/66/71; LTE-TDD: B38/39/40/41; WCDMA: B1/2/4/5/6/8/19	-GL (Global) LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29 ² /30/32 ¹ /66/71; LTE-TDD: B34/38/39/40/41/42/43/46 ¹ (LAA)/48 (CBRS); Up to 2 × CA: B2+B2/5/12/13/29 ³ ; B4+B4/5/12/13/29 ³ ; B5+B5/7/25/30/66; B7+B7/12/26; B12+B12/25/30/66; B13+B66; B25+B25/26; B30+B29; B66+B29/66; B41+B41; WCDMA: B1/2/3/4/5/6/8/19
	-E (EMEA/ Australia/New Zealand)	LTE-FDD: B1/3/7/8/20/28; LTE-TDD: B38/41; WCDMA: B1/8	/
	-EA (EMEA/ Australia/New Zealand)	/	LTE-FDD: B1/3/5/7/8/20/28/32/71 ⁴ ; LTE-TDD: 38/40/41/42 ² /43 ³ ; WCDMA: B1/3/5/8
	-NA (North America)	/	LTE-FDD: B2/4/5/7/12/13/14/17/25/26/29/30/66/71; LTE-TDD: B41/42/43/48
	-J (Japan)	/	/
	-CN (China/Thailand/India)	LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/5/8; EVDO/CDMA: BC0	/
Weight (approx.) (g)		6.0	6.2
Operating temperature		-30°C ~ +70°C	-25°C ~ +75°C
Extended temperature		-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands		3GPP TS 27.005, 3GPP TS 27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)			
LTE (Mbps)		LTE-FDD: 150 (DL)/50 (UL); LTE-TDD: 130 (DL)/30 (UL)	LTE-FDD: 300 (DL)/50 (UL); LTE-TDD: 226 (DL)/28 (UL)
UMTS		DC-HSDPA: 42 Mbps (DL)/HSUPA: 5.76 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL)/HSUPA: 5.76 Mbps (UL) WCDMA: 384 Kbps (DL/UL)
SMS		•	•
CDMA2000		EVDO: 3.1 Mbps (DL)/1.8 Mbps (UL) 1X Advanced: 307.2 Kbps (DL)/307.2 Kbps (UL)	/
Protocols		TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/NITZ/SMTP/MMS/HTTPS/SMTPS/SSL/FILE	QMI/MBIM/NITZ/HTTP/HTTPS/FTP/LwM2M [*] /PING [*]
Interfaces			
USB		2.0 hi-speed	2.0/3.0 [*] , slave mode
PCM		•	•
I2C		× 1	× 1
(U)SIM		1.8 V/ 3.0 V	× 2, 1.8 V/ 3.0 V
eSIM		/	× 1/ built-in eSIM (optional)
GPIO		× 1	MIPI interface
RESET_N		•	•
PCIe		/	Optional
Antenna		Main, Diversity /GNSS	Main, Diversity and GNSS
Enhanced features			
MIMO		DL MIMO, support Rx-diversity antenna	2 × 2, 4 × 2 DL
eCall [*]		/	Emergency services
Voice		• ⁴	Optional
DTMF		/	Dual-tone Multi-frequency
DFOTA		•	Delta Firmware over the Air
GNSS		Optional	GPS/ GLONASS/ BeiDou/ Galileo/ QZSS
FOTA		/	/
(U)SIM card detection		•	•
Electrical features			
Supply voltage range		3.135 V ~ 4.4 V, typ. 3.3 V	3.135 V ~ 4.4 V, typ. 3.7 V
Power consumption		5 μA @Power off/3.3 mA (PF=128) @LTE sleep/ 20 mA @Idle	0.07μA@Power off; 1.80mA @Sleep, Typ.; 40 mA @Idle (EM060K-NA) 0.07 mA@Power off; 3.47 mA @Sleep, Typ.; 38 mA @Idle (EM060K-GL) 0.07μA@Power off; 1.86mA@Sleep, Typ.; 38mA@Idle (EM060K-EA)
Software features			
USB serial driver		Windows 7*/8/8.1/10, Linux 2.6~5.4, Android 4.x/5.x/6.x/7.x/8.x/9.x	Windows 7*/8/8.1/10, WinCE 5.0/6.0/7.0*, Linux 2.6/3.x/4.1 ~ 4.14, Android 4.x/5.x/6.x/7.x/8.x
GNSS driver		Android 4.x/5.x/6.x/7.x/8.x/9.x	/
RIL driver		Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x
MBIM driver		Windows 8/8.1/10, Linux 3.18 ~ 5.4	Windows 10
NDIS driver		Windows 7*/8/8.1/10	Windows 7*/8/8.1/10
Gobinet driver		Linux 2.6 ~ 5.4	Linux 2.6/3.x/4.x/5.x
QMI_WWAN driver		Linux 3.4 ~ 5.4	Linux 3.x (3.4 or later)/4.x/5.x
Certifications ⁵		CCC/SRRC/NAL/CE/GCF/PTCRB/FCC/RCM	Verizon/AT&T-Mobile/NTT DOCOMO/KDDI/Vodafone/British Telecom/Orange/Deutsche Telekom/Telstra/Telefónica/Telus/GCF/PTCRB/NCC/CE/RCM/FCC/IC/JATE/TELEC/Anatel
Recommended applications		Consumer laptops, industrial laptops, industrial routers, industrial PDAs, rugged tablet PCs and digital signage.	

Note 1: B32 is only for secondary component carrier, B46 is only for secondary component carrier.

Note 2: B29 is only for secondary component carrier.

Note 3: means LTE-FDD B29 support receiving only, and is only for secondary component carrier in 2×CA.

Note 4: Optional.

Note 5: May depend on modules' variant.

^{*} Planning/ Under development/ In progress

• Supported

Product	EM120K-GL	EM12-G	EM120R-GL	EM121R-GL	EM160R-GL
					
Form factor	M.2	M.2	M.2	M.2	M.2
Dimensions (mm)	42.0 × 30.0 × 2.3	42.0 × 30.0 × 2.3	42.0 × 30.0 × 2.3	42.0 × 30.0 × 2.3	42.0 × 30.0 × 2.3
4G	LTE Cat 12	LTE Cat 12	LTE Cat 12	LTE Cat 12	LTE Cat 16
Frequency bands (MHz)	-G/GL (Global) LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29 ¹ /30/32 ¹ /66/71; LTE-TDD: 34/38/39/40/41/42/43/46 ³ (LAA)/48 (CBRS); Up to 3 × CA: Intra-band and Inter-band; WCDMA: B1/2/3/4/5/6/8/19	LTE-FDD: B1/2/3/4/5/7/8/9/12/13/14/17/18/19/20/21/25/26/28/29 ¹ /30/32/66; LTE-TDD: B38/39/40/41; Up to 3 × CA: Intra-band and Inter-band, B1+3+5/7/8/19/20/28, B2+4+5, B2+4+13, B2+5+30, B2+12+30, etc; WCDMA: B1/2/3/4/5/8/9/19	LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29 ¹ /30/32 ¹ /66; LTE-TDD: B38/39/40/41/42/43/46 ³ /48 (CBRS); Up to 3 × CA: Intra-band and Inter-band; WCDMA: B1/2/3/4/5/6/8/19	LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29 ¹ /30/32 ¹ /66; LTE-TDD: B38/39/40/41/42/43/46 ³ /48 (CBRS); Up to 3 × CA: Intra-band and Inter-band; WCDMA: B1/2/3/4/5/6/8/19	LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29 ¹ /30/32 ¹ /66; LTE-TDD: B38/39/40/41/42/43/46 ³ /48 (CBRS); Up to 5 × CA: Intra-band and Inter-band; WCDMA: B1/2/3/4/5/6/8/19
Weight (approx.) (g)	6.2	6.0	6.8	6.8	6.8
Operating temperature	-25°C ~ +75°C	-30°C ~ +70°C, -10°C ~ +65°C (Only for UL CA test)	-25°C ~ +75°C	-25°C ~ +75°C	-25°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Control via AT commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands	3GPP TS27.007 and Quectel Enhanced AT Commands
Data transmission (Max.)					
LTE	LTE-FDD: 600 Mbps (DL)/150 Mbps (UL); LTE-TDD: 408 Mbps (DL)/90 Mbps (UL)	LTE-FDD: 600 Mbps (DL)/150 Mbps (UL); LTE-TDD: 430 Mbps (DL)/90 Mbps (UL)	LTE-FDD: 600 Mbps (DL)/150 Mbps (UL); LTE-TDD: 408 Mbps (DL)/90 Mbps (UL)	LTE-FDD: 600 Mbps (DL)/150 Mbps (UL); LTE-TDD: 408 Mbps (DL)/90 Mbps (UL)	LTE-FDD: 1.0 Gbps (DL)/150 Mbps (UL); LTE-TDD: 880 Mbps (DL)/90 Mbps (UL)
UMTS	DC-HSDPA: 42 Mbps (DL)/HSUPA: 11.2 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL)/HSUPA: 5.76 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL)/HSUPA: 11.2 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL)/HSUPA: 11.2 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL)/HSUPA: 11.2 Mbps (UL) WCDMA: 384 Kbps (DL/UL)
SMS	•	•	•	•	•
Protocols	QMI/MBIM/NITZ/HTTP/HTTPS/FTP/LwM2M*/PING*	QMI/MBIM/NITZ/HTTP/HTTPS/FTP/LwM2M/PING	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS	TCP/UDP/FTP/HTTP/HTTPS/PING/SMS
Interfaces					
USB	2.0/3.0, slave mode	2.0/3.0, slave mode	2.0/3.0, slave mode	2.0/3.0, slave mode	2.0/3.0, slave mode
PCM	•	•	•	•	•
I2C	/	× 1	/	/	/
(U)SIM	× 2, 1.8 V/ 3.0 V	× 2, 1.8 V/ 3.0 V	× 2, 1.8 V/ 3.0 V	× 2, 1.8 V/ 3.0 V	× 2, 1.8 V/ 3.0 V
eSIM	× 1/ built-in eSIM (optional)	external eSIM supported	× 1/ built-in eSIM (optional)	× 1/ built-in eSIM (optional)	× 1/ built-in eSIM (optional)
GPIO	MIPI interface	Optional	MIPI interface	MIPI interface	MIPI interface
RESET_N	•	•	•	•	•
PCIe	Optional	Optional	PCIe Gen2 × 1 Lane	PCIe Gen2 × 1 Lane	PCIe Gen2 × 1 Lane
Antenna	Main, Diversity and GNSS	Main, Diversity and GNSS	Main, Diversity and GNSS	Main, Diversity and GNSS	Main, Diversity and GNSS, MIMO × 2
Enhanced features					
MIMO	2 × 2, 4 × 2 DL	4 × 2, 2 × 2 DL	2 × 2, 4 × 2 DL	2 × 2, 4 × 2 DL	2 × 2, 4 × 2, 4 × 4 DL
eCall*	Emergency services	Emergency services	Emergency services	Emergency services	Emergency services
Voice	Optional	Optional	Optional	Optional	Optional
DTMF	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency	Dual-tone Multi-frequency
DFOTA	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air	Delta Firmware over the Air
GNSS	GPS/GLONASS/BeiDou/Galileo/QZSS	GPS/GLONASS/BeiDou/Galileo/QZSS	GPS/GLONASS/BeiDou/Galileo/QZSS	GPS/GLONASS/BeiDou/Galileo/QZSS	GPS/GLONASS/BeiDou/Galileo/QZSS
(U)SIM card detection	•	•	•	•	•
Electrical features					
Supply voltage range	3.135 V ~ 4.4 V, typ. 3.7 V	3.135 V ~ 4.4 V, typ. 3.7 V	3.135 V ~ 4.4 V, typ. 3.7 V	3.135 V ~ 4.4 V, typ. 3.7 V	3.135 V ~ 4.4 V, typ. 3.7 V
Power consumption	61 µA@Power off 2.58 mA@Sleep (AT+CFUN=0, USB Suspend) 17.35 mA@Idle (PF=64, USB Active)	56 µA@Power off 2.53 mA@Sleep (AT+CFUN=0, USB disconnected), 19.32 mA@Idle (PF=64, USB Active)	USB mode 66 µA @ Power off 1.84 mA @ Sleep (AT+CFUN=0, USB Suspend) 24.48 mA @ Idle (PF = 64, USB Active); PCIe only mode 66 µA @ Power off 2.35 mA @ Sleep (AT+CFUN=0, Modem standby) 15.05 mA @ Idle (PF = 64, PCIe Active)	USB mode 66 µA @ Power off 1.84 mA @ Sleep (AT+CFUN=0, USB Suspend) 24.48 mA @ Idle (PF = 64, USB Active); PCIe only mode 66 µA @ Power off 2.35 mA @ Sleep (AT+CFUN=0, Modem standby) 15.05 mA @ Idle (PF = 64, PCIe Active)	USB mode 66 µA @ Power off 1.78 mA @ Sleep (AT+CFUN=0, USB Suspend) 24.75 mA @ Idle (PF = 64, USB Active); PCIe only mode 66 µA @ Power off 2.38 mA @ Sleep (AT+CFUN=0, Modem standby) 15.38 mA @ Idle (PF = 64, PCIe Active)
Software features					
USB serial driver	Windows 7*/8/8.1/10, Linux 2.6/3.x/4.x/5.x, Android 4.x/5.x/6.x/7.x/8.x/9.x	Windows: 7*/8/8.1/10/11 Linux: 2.6 ~ 5.x Android 4.x ~ 12.x	Windows 7*/8/8.1/10, Linux 2.6/3.x/4.x/5.x, Android 4.x/5.x/6.x/7.x/8.x/9.x	Windows 7*/8/8.1/10, Linux 2.6/3.x/4.x/5.x, Android 4.x/5.x/6.x/7.x/8.x/9.x	Windows 7*/8/8.1/10, Linux 2.6/3.x/4.x/5.x, Android 4.x/5.x/6.x/7.x/8.x/9.x
RIL driver	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x ~ 12.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x	Android 4.x/5.x/6.x/7.x/8.x/9.x
NDIS driver	Windows 7*/8/8.1/10	Windows: 7*/8/8.1/10/11	Windows 7*/8/8.1/10	Windows 7*/8/8.1/10	Windows 7*/8/8.1/10
Gobinet driver	Linux 2.6/3.x/4.x/5.x	Linux 2.6/3.x/4.x/5.x	Linux 2.6/3.x/4.x/5.x	Linux 2.6/3.x/4.x/5.x	Linux 2.6/3.x/4.x/5.x
QMI_WWAN driver	Linux 3.x (3.4 or later)/4.x/5.x	Linux 3.x (3.4 or later)/4.x/5.x	Linux 3.x (3.4 or later)/4.x/5.x	Linux 3.x (3.4 or later)/4.x/5.x	Linux 3.x (3.4 or later)/4.x/5.x
PCIe driver	Linux 3.x/4.x/5.x	/	Linux 3.x/4.x/5.x	Linux 3.x/4.x/5.x	Linux 3.x/4.x/5.x
Certifications	Verizon/AT&T-Mobile/Telstra/NTT DOCOMO/SoftBank/KDDI/CE/GCF/PTCRB/FCC/IC/RCM/JATE/TELEC/NC	Vodafone/TIM/Deutsche Telekom/British Telecom/Telefonica/Verizon/AT&T-Mobile/Sprint/Rogers/Telus/Telstra/NTT DOCOMO/SoftBank*/KDDI/CE/UKCA/GCF/PTCRB/FCC/IC/Anatel/RCM/KC/JATE/TELEC/ICASA/NCG/WHQL	Vodafone/Swisscom/British Telecom/Verizon/AT&T T-Mobile/Sprint/Telstra/NTT DOCOMO/SoftBank*/KDDI/China Mobile/China Unicom/CE/GCF/PTCRB/FCC/IC/Anatel/IFETEL/RCM/KC/JATE/TELEC/ICASA/NCG/CCC/SRRC/NAL	Verizon/AT&T/CE/GCF/PTCRB/FCC/IC/RCM	Vodafone/Swisscom/British Telecom/Verizon/AT&T T-Mobile/Sprint/Telstra/NTT DOCOMO/SoftBank*/KDDI/China Mobile/China Unicom/CE/GCF/PTCRB/FCC/IC/Anatel/IFETEL/RCM/KC/JATE/TELEC/ICASA/NCG/CCC/SRRC/NAL
Recommended applications	Consumer laptops, industrial laptops, industrial routers, industrial PDAs, rugged tablet PCs and digital signage.				

Note 1: B32 is only for secondary component carrier.

Note 2: B29 is only for secondary component carrier.

Note 3: B46 is only for secondary component carrier.

Note 4: Currently, SoftBank certification is only supported for PC applications.

* Planning/ Under development/ In progress
• Supported



LTE modules

Product	EC21/EC21 Mini PCIe	EC25/EC25 Mini PCIe	EC20-CE/EC20-CE Mini PCIe
			
Form factor	LCC (EC21); Mini PCIe (EC21 Mini PCIe)	LCC (EC25); Mini PCIe (EC25 Mini PCIe)	LCC (EC20-CE); Mini PCIe (EC20-CE Mini PCIe)
Dimensions (mm)	29.0 × 32.0 × 2.4 (EC21); 30.0 × 51.0 × 4.9 (EC21 Mini PCIe)	29.0 × 32.0 × 2.4 (EC25); 30.0 × 51.0 × 4.9 (EC25 Mini PCIe)	29.0 × 32.0 × 2.4 (EC20-CE); 30.0 × 51.0 × 4.9 (EC20-CE Mini PCIe)
LTE category	LTE Cat 1	LTE Cat 4	LTE Cat 4
Frequency bands (MHz)	-CE (China/India)	/	/
	-E (EMEA/South Korea/Thailand/India)	(EMEA/Thailand/India) LTE-FDD: B1/3/5/7/8/20; WCDMA: B1/5/8; GSM: B3/8	(EMEA/South Korea/Thailand/India) LTE-FDD: B1/3/5/7/8/20; LTE-TDD: B38/40/41; WCDMA: B1/5/8; GSM: B3/8
	-EM (EMEA)	/	LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40/41; WCDMA: B1/5/8; GSM/EDGE: B3/8
	-EU (EMEA/Thailand)	LTE-FDD: B1/3/7/8/20/28A; WCDMA: B1/8; GSM: B3/8	LTE-FDD: B1/3/7/8/20/28A; LTE-TDD: B38/40/41; WCDMA: B1/8; GSM: B3/8
	-EUX (EMEA/Thailand)	LTE-FDD: B1/3/7/8/20/28A; WCDMA: B1/8; GSM: B3/8	/
	-V (Verizon)	LTE-FDD: B4/13	LTE-FDD: B4/13
	-A (AT&T/T-Mobile/Canada)	LTE-FDD: B2/4/12; WCDMA: B2/4/5	LTE-FDD: B2/4/12; WCDMA: B2/4/5
	-ADL (AT&T/T-Mobile)	/	LTE-FDD: B2/4/12
	-AF (AT&T/Verizon/T-Mobile)	/	LTE-FDD: B2/4/5/12/13/14/66/71; WCDMA: B2/4/5
	-AFDL (AT&T/Verizon/T-Mobile)	/	LTE-FDD: B2/4/5/12/13/14/66/71
	-AFX (AT&T/Verizon)	/	LTE-FDD: B2/4/5/12/13/14/66/71; WCDMA: B2/4/5
	-AFXD (AT&T/Verizon/T-Mobile)	/	LTE-FDD: B2/4/5/12/13/14/66/71; WCDMA: B2/4/5
	-AU (Latin America/ANZ)	LTE-FDD: B1/2 ³ /3/4/5/7/8/28; LTE-FDD: B40; WCDMA: B1/2/5/8; GSM: B2/3/5/8	LTE-FDD: B1/2 ³ /3/4/5/7/8/28; LTE-TDD: B40; WCDMA: B1/2/5/8; GSM: B2/3/5/8
	-AUX (Latin America/ANZ)	LTE-FDD: B1/2 ³ /3/4/5/7/8/28; LTE-TDD: B40; WCDMA: B1/2/4/5/8; GSM: B2/3/5/8	LTE-FDD: B1/2 ³ /3/4/5/7/8/28; LTE-TDD: B40; WCDMA: B1/2/4/5/8; GSM: B2/3/5/8
	-AUT (Australia) ¹	LTE-FDD: B1/3/5/7/28; WCDMA: B1/5	/
Weight (approx.) (g)	-J (Japan)	LTE-FDD: B1/3/8/18/19/26	LTE-FDD: B1/3/8/18/19/26; LTE-TDD: B41; WCDMA: B1/8/8/19
	-KL (South Korea)	LTE-FDD: B1/3/5/7/8	/
	-IN (India)	LTE-FDD: B1/3/5/8/40/41	/
	Operating temperature	4.9 (EC21); 9.8 (EC21 Mini PCIe)	4.9 (EC25); 9.8 (EC25 Mini PCIe)
	Extended temperature	-35°C ~ +75°C	-35°C ~ +75°C
Data transmission (Max.)		-40°C ~ +85°C (EC21); -40°C ~ +80°C (EC21 Mini PCIe)	-40°C ~ +85°C (EC25); -40°C ~ +80°C (EC25 Mini PCIe)
	LTE data rates (Mbps)	LTE-FDD: 10 (DL)/5 (UL); LTE-TDD: 8.96 (DL)/3.1 (UL)	LTE-FDD: 150 (DL)/50 (UL); LTE-TDD: 130 (DL)/30 (UL)
	DC-HSPA+ data rates (Mbps)	42 (DL)/5.76 (UL)	42 (DL)/5.76 (UL)
	WCDMA data rates (Kbps)	384 (DL)/384 (UL)	384 (DL)/384 (UL)
	TD-SCDMA data rates (Mbps)	/	/
EVD0 data rates (Mbps)		/	/
	CDMA2000 data rates (Kbps)	/	/
	EDGE data rates (Kbps)	296 (DL)/236.8 (UL)	296 (DL)/236.8 (UL)
	GPRS data rates (Kbps)	107 (DL)/85.6 (UL)	107 (DL)/85.6 (UL)
	SMS	•	•
CSD		•	•
	Protocols	TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/HTTPS/SMTP/MMS*/FTPS*/SMTPS/SSL	TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/HTTPS/SMTP/MMS*/FTPS*/SMTPS/SSL
			TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/NITZ/CMUX/HTTPS/SMTP/MMS/FTPS/SMTPS/SSL/FILE
Interfaces	(U)SIM	× 1	× 1
	UART	× 2 (EC21); × 1 (EC21 Mini PCIe)	× 2 (EC25); × 1 (EC25 Mini PCIe)
	USB	× 1	× 1
	I2C	× 1	× 1
	Audio digital (PCM)	× 1	× 1
SDIO		× 2 (EC21 optional)	× 2 (EC25 optional)
	ADC	× 2, 15bits (EC21)	× 2, 15bits (EC25)
	SGMII	× 1 (EC21)	× 1 (EC25)
	Antenna	× 1 Main, × 1 Rx-diversity, × 1 GNSS (optional)	× 1 Main, × 1 Rx-diversity, × 1 GNSS (optional)
			× 1 Main, × 1 Rx-diversity (optional), × 1 GNSS (optional)
Enhanced features	GNSS	Optional	Optional
	Wi-Fi scan	/	/
	Bluetooth	/	/
	DTMF	•	•
	DFOTA	•	•
QMI/ RmNet		•	•
	Audio playback/Audio recording	Optional	Optional
	QueoFile	•	•
	(U)SIM card detection	•	•
	Firmware update	Via USB/DFOTA	Via USB/DFOTA
Electrical features			
	Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V (EC21); 3.0 V ~ 3.6 V, typ. 3.3 V (EC21 Mini PCIe)	3.3 V ~ 4.3 V, typ. 3.8 V (EC25); 3.0 V ~ 3.6 V, typ. 3.3 V (EC25 Mini PCIe)
	Power consumption	20 µA @Power off/ 3 mA @Sleep, Typ./ 22 mA @Idle (EC21); 3.5 mA @Sleep, Typ./ 34 mA @Idle (EC21 Mini PCIe)	20 µA @Power off/ 3 mA @Sleep, Typ./ 22 mA @Idle (EC25); 3.6 mA @Sleep, Typ./ 35 mA @Idle (EC25 Mini PCIe)
			11 µA @Power off/ 1.5 mA @Sleep (PF=256), Typ./ 20 mA @Idle (EC20-CE); 4 mA @Sleep (PF=128), 3.7 mA @Sleep (PF=256), Typ./ 30 mA @Idle (EC20-CE Mini PCIe)
Software features			
	USB serial driver	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x
	GNSS driver	Android 4.x ~ 13.x	Android 4.x ~ 13.x
	RIL driver	Android 4.x ~ 13.x	Android 4.x ~ 13.x
	RNDIS driver	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7
ECM driver		Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
	MBIM driver	Windows 7/8/8.1/10/11, Linux 3.18 ~ 6.7	Windows 7/8/8.1/10/11, Linux 3.18 ~ 6.7
	GobiNet driver	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
	QMI_ WWAN driver	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7
	Certifications ²	Carrier certification: Vodafone/Deutsche Telekom/British Telecom/Verizon/AT&T/T-Mobile/U.S. Cellular/Rogers/Telstra/Spark/NTT DOCOMO/KDDI/KT/SKT/LGU+; Regulatory certification: CE/GCF/UKCA/RCM/NCC/KC/FCB/PTC/RC/IC/Anatel/JATE/TELEC; Others: WHQL	Carrier certification: Vodafone/Deutsche Telekom/British Telecom/Orange/Telefonica/KT/SKT/LGU+/Verizon/AT&T/T-Mobile/Rogers/Telstra/NTT DOCOMO/SoftBank/KDDI/Bell+/Spark; Regulatory certification: GCF/CE/UKCA/KC/NCC/RCM/NBCT/ICASA/FCC/PTC/RC/IC/Anatel/JATE/TELEC; Others: WHQL
Recommended applications			
		Telematics, smart metering, mobile POS terminals, gateways, safety, tracking and tracing, remote maintenance and control, networking, mobile computing, healthcare, etc.	
	Note 1: Inapplicable to Mini PCIe.		* Planning/ Under development/ In progress
	Note 2: Rx-diversity not supported.		• Supported
	Note 3: May depend on modules' variant.		
	Note 4: Data only.		
GNSS antenna not supported on EC21-KL.			
	EC25-ADL/EC25-AFDL/EC25-AFXD/EC25-ADL Mini PCIe/EC25-AFDL Mini PCIe/EC25-AFXD Mini PCIe are requested for data only device.		

LTE modules

Product		EG21-G/EG21-G Mini PCIe/EG21-GL/EG21-GL Mini PCIe	EG25-G/EG25-G Mini PCIe/EG25-GL/EG25-GL Mini PCIe
			
Form factor		LGA (EG21-G/GL); Mini PCIe (EG21-G Mini PCIe/EG21-GL Mini PCIe)	LGA (EG25-G/GL); Mini PCIe (EG25-G Mini PCIe/EG25-GL Mini PCIe)
Dimensions (mm)		29.0 × 32.0 × 2.4 (EG21-G/GL); 30.0 × 51.0 × 4.9 (EG21-G Mini PCIe/EG21-GL Mini PCIe)	29.0 × 32.0 × 2.4 (EG25-G/GL); 30.0 × 51.0 × 4.9 (EG25-G Mini PCIe/EG25-GL Mini PCIe)
LTE category		LTE Cat 1	LTE Cat 4
Frequency bands (MHz)	-G (Global) -GL (Global)	LTE-FDD: B1/2/3/4/5/7/8/12/13/18/19/20/25/26/28; LTE-TDD: B38/39/40/41; WCDMA: B1/2/4/5/6/8/19; GSM: B2/3/5/8 LTE-FDD: B1/2/3/4/5/7/8/12/13/18/19/20/25/26/28/66; LTE-TDD: B34/38/39/40/41; WCDMA: B1/2/4/5/6/8/19; TD-SCDMA-GSM/EDGE: B2/3/5/8	LTE-FDD: B1/2/3/4/5/7/8/12/13/18/19/20/25/26/28; LTE-TDD: B38/39/40/41; WCDMA: B1/2/4/5/6/8/19; GSM: B2/3/5/8 LTE-FDD: B1/2/3/4/5/7/8/12/13/18/19/20/25/26/28/66; LTE-TDD: B34/38/39/40/41; WCDMA: B1/2/4/5/6/8/19; TD-SCDMA-GSM/EDGE: B2/3/5/8
Weight (approx.) (g)		4.9 (EG21-G/GL); 9.8 (EG21-G Mini PCIe/EG21-GL Mini PCIe)	4.9 (EG25-G/GL); 9.8 (EG25-G Mini PCIe/EG25-GL Mini PCIe)
Operating temperature		-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature		-40°C ~ +85°C (EG21-G/GL); -40°C ~ +80°C (EG21-G Mini PCIe/EG21-GL Mini PCIe)	-40°C ~ +85°C (EG25-G/GL); -40°C ~ +80°C (EG25-G Mini PCIe/EG25-GL Mini PCIe)
Data transmission (Max.)			
LTE data rates (Mbps)		LTE-FDD: 10 (DL)/5 (UL); LTE-TDD: 8.96 (DL)/3.1 (UL)	LTE-FDD: 150 (DL)/50 (UL); LTE-TDD: 130 (DL)/30 (UL)
DC-HSPA+ data rates (Mbps)		42 (DL)/5.76 (UL)	42 (DL)/5.76 (UL)
WCDMA data rates (Kbps)		384 (DL)/384 (UL)	384 (DL)/384 (UL)
EDGE data rates (Kbps)		296 (DL)/236.8 (UL)	296 (DL)/236.8 (UL)
GPRS data rates (Kbps)		107 (DL)/85.6 (UL)	107 (DL)/85.6 (UL)
SMS		•	•
Protocols		TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/NITZ/CMUX/HTTPS/SMTP/MMS*/FTPS*/SMTPS/SSL/FILE	TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/NITZ/CMUX/HTTPS/SMTP/MMS*/FTPS*/SMTPS/SSL/FILE
Interfaces			
(U)SIM		× 1	× 1
UART		× 2 (EG21-G/GL); × 1 (EG21-G Mini PCIe/EG21-GL Mini PCIe)	× 2 (EG25-G/GL); × 1 (EG25-G Mini PCIe/EG25-GL Mini PCIe)
USB		× 1	× 1
I2C		× 1 (EG21-G/GL); × 1 (EG21-G Mini PCIe/EG21-GL Mini PCIe optional)	× 1 (EG25-G/GL); × 1 (EG25-G Mini PCIe/EG25-GL Mini PCIe optional)
Audio digital (PCM)		× 1 (optional)	× 1 (optional)
SDIO		× 2 (EG21-G/GL optional)	× 2 (EG25-G/GL optional)
ADC		× 2, 15bits (EG21-G/GL)	× 2, 15bits (EG25-G/GL)
Antenna		× 1 Main, × 1 Rx-diversity, × 1 GNSS (optional)	× 1 Main, × 1 Rx-diversity, × 1 GNSS (optional)
Enhanced features			
GNSS		Optional	Optional
Wi-Fi scan		/	/
Bluetooth		/	/
DTMF		•	•
DFOTA		•	•
QMI/ RmNet		•	•
Audio playback/Audio recording		Optional	Optional
(U)SIM card detection		•	•
(U)SIM card connector		Optional (EG21-G Mini PCIe/EG21-GL Mini PCIe)	Optional (EG25-G Mini PCIe/EG25-GL Mini PCIe)
Firmware update		Via USB/DFOTA	Via USB/DFOTA
Electrical features			
Supply voltage range		3.3 V ~ 4.3 V, typ. 3.8 V (EG21-G/GL); 3.0 V ~ 3.6 V, typ. 3.3 V (EG21-G Mini PCIe/EG21-GL Mini PCIe)	3.3 V ~ 4.3 V, typ. 3.8 V (EG25-G/GL); 3.0 V ~ 3.6 V, typ. 3.3 V (EG25-G Mini PCIe/EG25-GL Mini PCIe)
Power consumption		13 µA@Power off/1.8 mA@Sleep, Typ. /22 mA@Idle (EG21-G); 12 µA@Power off/1.3 mA@Sleep, Typ. /15.4 mA@Idle (EG21-GL); 2.8 mA@Sleep, Typ. / 35 mA@Idle (EG21-G Mini PCIe); 2.3 mA@Sleep, Typ. / 22.4 mA@Idle (EG21-GL Mini PCIe)	15 µA@Power off/1.8 mA@Sleep, Typ. /22 mA@Idle (EG25-G); 7 µA@Power off/1.3 mA@Sleep, Typ. /15.7 mA@Idle (EG25-GL); 3.3 mA@Sleep, Typ. / 35 mA@Idle (EG25-G Mini PCIe); 2.4 mA@Sleep, Typ. / 22.3 mA@Idle (EG25-GL Mini PCIe)
Software features			
USB serial driver		Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x
GNSS driver		Android 4.x ~ 13.x	Android 4.x ~ 13.x
RIL driver		Android 4.x ~ 13.x	Android 4.x ~ 13.x
NDIS driver		Windows 7/8/8.1/10/11	Windows 7/8/8.1/10/11
MBIM driver		Windows 7/8/8.1/10/11, Linux 3.18 ~ 6.7	Windows 7/8/8.1/10/11, Linux 3.18 ~ 6.7
GobiNet driver		Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
QMI_WWAN driver		Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7
Certifications¹		Carrier certification: Deutsche Telekom/Verizon/AT&T/Sprint/U.S. Cellular/T-Mobile/Telus; Regulatory certification: GCF/CE/FCC/PTCRB/IC/Anatel/IFETEL/KC/NCC/JATE/TELEC/RCM/ICASA; Others: WHQL	Carrier certification: Deutsche Telekom/Verizon/AT&T/T-Mobile/Sprint/U.S. Cellular/Telus/ Rogers*; Regulatory certification: GCF/CE/PTCRB/FCC/IC/Anatel/IFETEL/STRCC/NAL/CCC/KC/NCC/JATE/ TELEC/RCM/NBCC/IMDA/ICASA; Others: WHQL
Recommended applications		Telematics, smart metering, mobile POS terminals, gateways, safety, tracking and tracing, remote maintenance and control, networking, mobile computing, healthcare, etc.	

Note 1: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

Product	EG91	EG95	EG950A
			
Form factor	LGA	LGA	LGA
Dimensions (mm)	29.0 × 25.0 × 2.45	29.0 × 25.0 × 2.45	29.0 × 25.0 × 2.4
LTE category	LTE Cat 1	LTE Cat 4	LTE Cat 4
Frequency bands (MHz)	-E (Europe)	LTE-FDD: B1/3/7/8/20/28A; WCDMA: B1/8; GSM: B3/8	/
	-EX (Europe)	LTE-FDD: B1/3/7/8/20/28; WCDMA: B1/8; GSM: B3/8	/
	-EL (Europe/Asia-Pacific)	/	LTE-FDD: B1/3/5/7/8/20/28; WCDMA: B1/5/8
	-NAXD (North America)	LTE-FDD: B2/4/5/12/13/25/26; WCDMA: B2/4/5	/
	-NAX (North America)	LTE-FDD: B2/4/5/12/13/25/26; WCDMA: B2/4/5	/
	-NA (North America)	LTE-FDD: B2/4/5/12/13; WCDMA: B2/4/5	/
	-VX (Verizon)	LTE-FDD: B4/13	/
	-AUX (Latin America/ANZ)	LTE-FDD: B1/2/3/4/5/7/8/28/66; WCDMA: B1/2/5/8; GSM: B2/3/5/8	/
	-JP (Japan)	LTE-FDD: B1/3/8/18/19/26	/
	-LA (Latin America)	/	LTE-FDD: B1/2/3/4/5/7/8/28/66; WCDMA: B1/2/4/5/8
Weight (approx.) (g)	3.8	3.8	3.74
	Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Data transmission (Max.)			
LTE data rates (Mbps)	10 (DL)/5 (UL)	150 (DL)/50 (UL)	150 (DL)/50 (UL)
DC-HSPA+ data rates (Mbps)	42 (DL)/5.76 (UL)	42 (DL)/5.76 (UL)	21 (DL)/5.76 (UL)
WCDMA data rates (Kbps)	384 (DL)/384 (UL)	384 (DL)/384 (UL)	384 (DL)/384 (UL)
EDGE data rates (Kbps)	296 (DL)/236.8 (UL)	296 (DL)/236.8 (UL)	/
GPRS data rates (Kbps)	107 (DL)/85.6 (UL)	107 (DL)/85.6 (UL)	/
SMS	•	•	/
Protocols	TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/CMUX/HTTPS/SMTP/MMS*/FTPS*/SMTPS/SSL/FILE	TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/CMUX/HTTPS/SMTP/MMS*/FTPS*/SMTPS/SSL/FILE	TCP/UDP/PPP/NTP/NITZ/FTP/HTTP/PING/CMUX/HTTPS/FTPS/SSL/FILE/MQTT/MMS/SMTP/SMTPS
Interfaces			
(U)SIM	× 2	× 2	× 1
UART	× 2	× 2	× 2
USB	× 1	× 1	× 1
I2C	× 1	× 1	× 1
Audio digital (PCM)	× 1	× 1	× 1
SPI	× 1	× 1	× 1
RESET_N	× 1	× 1	× 1
SDIO	/	/	× 1
ADC	× 1	× 1	× 2
Antenna	× 1 Main, × 1 Rx-diversity, × 1 GNSS (optional) ¹	× 1 Main, × 1 Rx-diversity, × 1 GNSS (optional) ¹	× 1 Main, × 1 Rx-diversity, × 1 GNSS (optional)
Enhanced features			
GNSS ¹	Optional	Optional	Optional
Wi-Fi scan	/	/	/
Bluetooth	/	/	/
E911 (for North America)	•	•	/
Digital audio/VoLTE	Optional	Optional	•
DTMF	•	•	/
DFOTA	•	•	•
QMI/ RmNet	•	•	/
Audio playback/Audio recording	Optional	Optional	•
QuecFile	•	•	•
(U)SIM card detection	•	•	•
Firmware update	Via USB/DFOTA	Via USB/DFOTA	Via USB/DFOTA
Electrical features			
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V	3.3 V ~ 4.3 V, typ. 3.8 V	3.4 V ~ 4.5 V, typ. 3.8 V
Power consumption	15 µA@Power off/2.6 mA@Sleep, Typ./21 mA@Idle	15 µA@Power off/2.6 mA@Sleep, Typ./21 mA@Idle	11 µA@Power off mode /1.1 mA@LTE sleep mode (PF=256), Typ /18 mA@ Idle mode
Software features			
USB serial driver	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x
GNSS driver	Android 4.x ~ 13.x	Android 4.x ~ 13.x	Android 4.x ~ 13.x
RIL driver	Android 4.x ~ 13.x	Android 4.x ~ 13.x	Android 4.x ~ 13.x
NDIS driver	Windows 7/8/8.1/10/11	Windows 7/8/8.1/10/11	Windows 7/8/8.1/10/11
MBIM driver	Windows 7/8/8.1/10/11, Linux 3.18 ~ 6.7	Windows 7/8/8.1/10/11, Linux 3.18 ~ 6.7	/
GobiNet driver	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	/
QMI_ WWAN driver	Linux 3.4 ~ 6.7	Linux 3.4 ~ 6.7	/
Certifications ²	Carrier certification: Deutsche Telekom/Telstra ³ /Verizon/AT&T/T-Mobile/Sprint/Rogers/Telus/U.S. Cellular/NTT DOCOMO/KDDI/SoftBank*; Regulatory certification: GCF/CE/UKCA/RCM/Anatel/NCC/PTCRB/FCC/IC/JATE/TELEC; Others: WHQL	Carrier certification: Deutsche Telekom/Telstra ³ /Verizon/AT&T/T-Mobile/Sprint/Rogers/Telus/U.S. Cellular/NTT DOCOMO/KDDI/SoftBank*; Regulatory certification: GCF/CE/UKCA/PTCRB/FCC/IC/JATE/TELEC; Others: WHQL	Regulatory: CE/RCM/UKCA
	Telematics, smart metering, mobile POS terminals, gateways, safety, tracking and tracing, remote maintenance and control, networking, mobile computing, healthcare, etc.		Wildlife cameras

Note 1: GNSS antenna not supported on EG91-E/EG95-E.

Note 2: May depend on modules' variant.

Note 3: EG91-AUX/EG95-AUX (Data Only).

EG91-AUX does not support Rx-diversity.

EG91-NAXD and EG95-NAXD are requested for data only device.

* Planning/ Under development/ In progress

• Supported

LTE modules

Product	EG915Q/EG915Q-NA Mini PCIe	EG916Q
		
Form factor	LGA (EG915Q); Mini PCIe (EG915Q-NA Mini PCIe)	LGA
Dimensions (mm)	23.6 × 19.9 × 2.4 (EG915Q); 51.0 × 30.0 × 4.9 (EG915Q-NA Mini PCIe)	26.5 × 22.5 × 2.4
LTE category	LTE Cat 1 bis	LTE Cat 1 bis
Frequency bands (MHz)	-AF (North America)	LTE-FDD: B2/4/5/12/13/14/66/71
	-NA (North America)	LTE-FDD: B2/4/5/12/13/66
	-EU (Europe)	/
	-JP (Japan)	LTE-FDD: B1/3/8/18/19/26/28
	-GL (Global)	/
Weight (approx.) (g)	2.3 (EG915Q); 7.1 (EG915Q-NA Mini PCIe)	2.9
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C (EG915Q); -40°C ~ +80°C (EG915Q-NA Mini PCIe)	-40°C ~ +85°C
Data transmission (Max.)		
LTE data rates (Mbps)	10 (DL)/5 (UL)	10 (DL)/5 (UL)
DC-HSPA+ data rates (Mbps)	/	/
WCDMA data rates (Kbps)	/	/
EDGE data rates (Kbps)	/	/
GPRS data rates (Kbps)	/	/
SMS	•	•
Protocols	TCP/UDP/NTP/NITZ/FTP/HTTP/PING/HTTPS/FTPS/SSL/MQTT/CMUX/PPP/FILE/MMS*/SMTP/SMTPS	TCP/UDP/NTP/NITZ/FTP/HTTP/PING/HTTPS/FTPS/SSL/MQTT/CMUX/PPP/FILE/SMTP/SMTPS/MMS*
Interfaces		
USIM	× 2 ¹ (EG915Q); × 1 (EG915Q-NA Mini PCIe)	× 2 ¹ (1.8/ 3.0 V)
UART	× 3 ² (optional) (EG915Q); × 2 (EG915Q-NA Mini PCIe)	× 4 ³ (optional)
USB	× 1	× 1
I2C	× 1	× 1
Audio digital (PCM)	× 1	× 1
SDIO	/	/
ADC	× 2 (EG915Q)	× 2
Antenna	× 1 Main, × 1 GNSS (optional)	× 1 Main, × 1 GNSS (optional)
Enhanced features		
GNSS	Optional	Optional
Wi-Fi scan	•	•
BlueTooth	/	/
DTMF	/	/
DFOTA	•	•
QMI/ RmNet	/	/
Audio playback/Audio recording	•	•
QuecFile	•	•
(U)SIM card detection	•	•
Firmware update	Via USB/DFOTA	Via USB/DFOTA
Electrical features		
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V (EG915Q); 3.0~3.6 V, typ.3.3 V (EG915Q-NA Mini PCIe)	3.3 V ~ 4.3 V, typ. 3.8 V
Power consumption	0.4 μA @ Power off mode / 54 μA @ Sleep mode (AT+CFUN = 0, USB disconnected) / 130 μA @ Sleep mode (AT+CFUN = 4, USB disconnected) / 4.55 mA @ Idle mode (PF = 64, USB disconnected) / 28.22 mA @ Idle mode (PF = 64, USB connected) (EG915Q); TBD (EG915Q-NA Mini PCIe)	0.5 μA @ Power off / 54 μA @ Sleep Mode (AT+CFUN = 0, USB Disconnected) / 0.135 mA @ Sleep Mode (AT+CFUN = 4, USB Disconnected) / 4.56 mA @ Idle Mode (PF = 64, USB Disconnected) / 25.80 mA @ Idle Mode (PF = 64, USB Connected)
Software features		
USB serial driver	Windows 10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 14.x	Windows 10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 14.x
GNSS driver	Android 4.x ~ 14.x	Android 4.x ~ 14.x
RIL driver	Android 4.x ~ 14.x	Android 4.x ~ 14.x
RNDIS driver	Windows 10/11, Linux 2.6 ~ 6.7	Windows 10/11, Linux 2.6~ 6.7
MBIM driver	/	/
GobiNet driver	/	/
QMI_WWAN driver	/	/
Certifications ⁴	Carrier certification: Verizon/AT&T/T-Mobile/Telus/NTT DOCOMO/KDDI/SoftBank*; Regulatory certification: FCC/IC/GCF/PTCRB/JATE/TELEC; Others: WHQL	Carrier certification: Verizon/AT&T/T-Mobile; Regulatory certification: CCC/CE/GCF/PTCRB/FCC/IC/RCM/KC/Anatel/JATE/TELEC; Others: WHQL
Recommended applications	Asset management, commercial telematics, payment, RMAC (remote monitoring and control), safety and automation, smart metering and smart grid (EG915Q); IoT gateways, industrial PCs, etc. (EG915Q-NA Mini PCIe)	Asset management, commercial telematics, payment, RMAC (remote monitoring and control), smart safety and automation, smart metering and smart grid

Note 1: Both USIM1 and USIM2 interfaces support 1.8 V USIM cards only, when the USIM2 interface is enabled.

Note 2: The third GNSS serial port is optional.

Note 3: GNSS UART, GNSS Debug UART and GNSS antenna interfaces are optional.

Note 4: May depend on modules' variant.

* Planning/ Under development/ In progress

• Supported

Product	EG800Q	EG800K	EG800AK	EG810M
				
Form factor	LGA	LGA	LGA	LGA
Dimensions (mm)	17.7 × 15.8 × 2.4	17.7 × 15.8 × 2.4	17.7 × 15.8 × 2.4	17.7 × 15.8 × 1.7
LTE category	LTE Cat 1 bis	LTE Cat 1 bis	LTE Cat 1 bis	LTE Cat 1 bis
Frequency bands (MHz)	-CN (China/India)	/	/	/
	-NA (North America)	LTE-FDD: B2/4/5/12/13/66	/	/
	-EU (Europe)	LTE-FDD: B1/3/5/7/8/20/28	/	-EU (Europe/New Zealand/Australia) LTE-FDD: B1/3/5/7/8/20/28
	-LA (Latin America)	/	LTE-FDD: B2/3/4/5/7/8/28/66	LTE-FDD: B2/3/4/5/7/8/28/66
	-GL (Global)	/	/	/
Weight (approx.) (g)	2.0	1.37	TBD	0.98 (EG810M-CN/EG810M-EU); 1.03 (EG810M-LA)
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Data transmission (Max.)				
LTE data rates (Mbps)	10 (DL)/5 (UL)	10 (DL)/5 (UL)	LTE-FDD: 10 (DL)/5 (UL) LTE-TDD: 8.96 (DL)/3.1 (UL)	LTE-FDD: 10 (DL)/5 (UL), LTE-TDD: 8.96 (DL)/3.1 (UL) (EG810M-CN); 10 (DL)/ 5 (UL) (EG810M-EU/EG810M-LA)
DC-HSPA+ data rates (Mbps)	/	/	/	/
WCDMA data rates (Kbps)	/	/	/	/
EDGE data rates (Kbps)	/	/	/	/
GPRS data rates (Kbps)	/	/	/	/
SMS	•	Optional (EG800K-CN)	/	Optional
Protocols	TCP/UDP/NTP/NITZ/FTP/HTTP/PING/HTTPS/FTPS/SSL/MQTT/CMUX/PPP/FILE/MMS*/SMTP/SMTPS	TCP/UDP/PPP*/NTP/NITZ/FTP*/HTTP*/PING/HTTPS*/FTPS*/FILE*/SSL/MQTT	TCP/UDP/NTP/NITZ/MQTT/SSL/PPP/PING/FTP/HTTP/HTTPS/FTPS	TCP/UDP/PPP/NTP/NITZ/FTP*/HTTP*/PING/HTTPS*/FTPS*/FILE*/MQTT*/CMUX*/MMS*/SMTP*/SMTPS* (EG810M-LA)
Interfaces				
USIM	× 1	× 1	× 2, 1.8/ 3.0 V	× 1 (EG810M-CN/EG810M-LA); × 2 (EG810M-EU)
UART	× 3 ²	× 3 ³	× 3 ³	× 3 ³
USB	× 1	× 1	× 1	× 1
I2C	× 1	× 1 ⁴	× 1 ⁴	× 1 ⁴
Audio digital (PCM)	× 1	/	/	× 1
SDIO	/	/	/	/
ADC	× 2	× 2	× 2	× 2
Antenna	× 1 Main	× 1 Main, × 1 GNSS (optional)	× 1 Main, × 1 GNSS (optional)	× 1 Main, × 1 GNSS (optional)
Enhanced features				
GNSS	/	Optional	Optional	Optional (EG810M-CN)
Wi-Fi scan	•	Optional	Optional	• (EG810M-CN); Optional (EG810M-EU/EG810M-LA)
Bluetooth	/	/	/	/
DTMF	/	/	/	Optional (EG810M-CN/EG810M-EU)
DFOTA	•	•	•	•
Audio playback/Audio recording	•	/	•	Optional (EG810M-CN/EG810M-EU)
QuecFile	•	Optional	•	• (only support ufs)
(U)SIM card detection	•	•	•	•
Firmware update	Via USB/DFOTA	Via USB/DFOTA	Via USB/DFOTA	Via USB/DFOTA
Electrical features				
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V	3.4 V ~ 4.3 V, typ. 3.8 V	3.4 V ~ 4.5 V, typ. 3.8 V	3.4 V ~ 4.3 V, typ. 3.8 V
Power consumption	55 µA @ Power off mode 0.06 mA @ Sleep mode (AT+CFUN=0, USB disconnected) 0.15 mA @ Sleep mode (AT+CFUN=4, USB disconnected) 4.50 mA @ Idle mode (PF=64, USB disconnected) 25.50 mA @ Idle mode (PF=64, USB connected)	6.15µA @ Power off mode /0.82mA @ LTE-FDD Sleep mode (PF = 128)/0.72mA @ LTE-FDD Sleep mode (PF = 256)/7.98mA @ LTE-TDD Idle mode (PF = 64 USB disconnected)/19.46mA @ LTE-TDD Idle mode (PF = 64 USB connected) (EG800K-CN); 7.47µA @ Power Off mode/0.64mA @ LTE-FDD Sleep mode (PF = 128)/0.56mA @ LTE-FDD Sleep mode (PF = 256)/7.82mA @ LTE-TDD Idle mode (PF = 64 USB disconnected)/19.66mA @ LTE-TDD Idle mode (PF = 64 USB connected) (EG800K-EU); 7.68 µA @ Power Off mode/0.73 mA @ LTE-FDD Sleep mode (PF = 128)/0.64 mA @ LTE-FDD Sleep mode (PF = 256)/7.43 mA @ LTE-FDD Idle mode (PF = 64, USB disconnected)/19 mA @ LTE-FDD Idle mode (PF = 64, USB connected) (EG800K-LA)	TBD @ Power off mode TBD @ Sleep mode TBD @ Idle mode	17.7 µA @ Power off/ 1.0 mA @ LTE Sleep/ 18.2 mA @ Idle (USB disconnected)/ 31.2 mA @ Idle (USB connected) (EG810M-CN) 17.6 µA @ Power off/ 0.73 mA @ LTE Sleep/ 19.2 mA @ Idle (USB disconnected)/ 29.3 mA @ Idle (USB connected) (EG810M-EU) 10.0 µA @ Power off/ 0.79 mA @ LTE Sleep/ 16.99 mA @ Idle (USB disconnected)/ 28.75 mA @ Idle (USB connected) (EG810M-LA)
Software features				
USB serial driver	Windows 10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10, Linux 2.6 ~ 5.15, Android 4.x ~ 12.x	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x
GNSS driver	/	/	Android 4.x ~ 12.x	/
RIL driver	Android 4.x ~ 13.x	Android 4.x ~ 13.x	Android 4.x ~ 12.x	Android 4.x ~ 13.x
RNDIS driver	Windows 10/11, Linux 2.6 ~ 6.7	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7	Windows 7/8/8.1/10, Linux 2.6 ~ 5.15	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7
ECM driver	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 5.15	Linux 2.6 ~ 6.7
Certifications ⁵	Carrier certification: Verizon/AT&T-Mobile/Deutsche Telekom/Spark; Regulatory certification: GCF/PTCRB/FCC/IC/CE/UKCA/RCM/Anatel; Others: WHQL	Regulatory certification: CCC/SRRC/NAL/CE/RCM/FCC/Anatel	Regulatory certification: CE*/RCM*/JATE*/TELEC*/FCC*/IC*/SRRC*/NAL*/CCC*/GCF*/PTCRB*/NCC*/Anatel*/KC* Others: WHQL	Regulatory certification: CCC/SRRC/NAL/ CE/RCM/ FCC*/Anatel*
Recommended applications	Asset management, commercial telematics, payment, RMAC (remote monitoring and control), safety and automation, smart metering and smart grid	Cloud speakers, trackers, POS, data cards, smart safety, industrial PDAs, etc.	Aftermarket telematics, asset management, commercial telematics, payment, vending	Cloud speakers, trackers, POS, data cards, smart safety, industrial PDAs, interphones, student cards, children's smart watches, etc.

Note 1: The PPP, FTP, HTTP, HTTPS, FTPS and FILE protocols are optional.
Note 2: The third auxiliary serial port is under development.
Note 3: Indicates that only QuecOpen® supports the third auxiliary serial port.
Note 4: The QuecOpen® solution can support two I2C interfaces.
Note 5: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

LTE modules

Product	EC200U/EC200U Mini PCIe	EC200A/EC200A Mini PCIe	EC200A-xxV1/EC200A-xxV1 Mini PCIe
			
Form factor	LCC (EC200U); Mini PCIe-C (EC200U-CN Mini PCIe-C); Mini PCIe (EC200U-EU/-AU Mini PCIe)	LCC (EC200A); Mini PCIe (EC200A Mini PCIe); Mini PCIe-C (EC200A-CN Mini PCIe-C)	LCC (EC200A-xxV1); Mini PCIe (EC200A-ELV1 Mini PCIe); Mini PCIe-D (EC200A-CNV1 Mini PCIe-D)
Dimensions (mm)	28.0 × 31.0 × 2.4 (EC200U); 30.0 × 51.0 × 3.4 (EC200U-CN Mini PCIe-C); 30.0 × 51.0 × 4.9 (EC200U-EU/-AU Mini PCIe)	29.0 × 32.0 × 2.4 (EC200A); 30.0 × 51.0 × 4.9 (EC200A Mini PCIe); 30.0 × 51.0 × 3.5 (EC200A-CN Mini PCIe-C)	29.0 × 32.0 × 2.4 (EC200A-xxV1); 30.0 × 51.0 × 4.9 (EC200A-ELV1 Mini PCIe); 30.0 × 51.0 × 3.5 (EC200A-CNV1 Mini PCIe-D)
LTE category	LTE Cat 1	LTE Cat 4	LTE Cat 4
Frequency bands (MHz)	-CN (China/India)	LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; GSM: B3/8	LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/5/8; GSM: B3/8
	-EU (Europe/Asia-Pacific)	LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40/41; GSM: B2/3/5/8	LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40/41; WCDMA: B1/5/8; GSM: B3/8
	-EN (EMEA/APAC)	/	/
	-EL (Europe/Asia-Pacific)	/	LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40/41; WCDMA: B1/5/8
	-AU (Australia/New Zealand/Latin America)	LTE-FDD: B1/2/3/4/5/7/8/28/66; LTE-TDD: B38/40/41; GSM: B2/3/5/8	LTE-FDD: B1/2/3/4/5/7/8/28/66; LTE-TDD: B40; WCDMA: B1/2/4/5/8; GSM: B2/3/5/8
Weight (approx.) (g)	4.1 (EC200U); 7.2 (EC200U-CN Mini PCIe-C); 9.25 (EC200U-EU/-AU Mini PCIe)	4.3 (EC200A); 9.7 (EC200A Mini PCIe); 8.5 (EC200A Mini PCIe-C)	4.2 (EC200A-xxV1); TBD (EC200A-ELV1 Mini PCIe); TBD (EC200A-CNV1 Mini PCIe-D)
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C (EC200U); -40°C ~ +80°C (EC200U-CN Mini PCIe-C/EC200U-EU/-AU Mini PCIe)	-40°C ~ +85°C (EC200A); -40°C ~ +80°C (EC200A Mini PCIe/EC200A-CN Mini PCIe-C)	-40°C ~ +85°C
Data transmission (Max.)			
LTE data rates (Mbps)	10 (DL)/5 (UL) (EC200U); LTE-FDD: 10 (DL)/5 (UL); LTE-TDD: 8.96 (DL)/3.1 (UL) (EC200U-CN Mini PCIe-C, EC200U-EU/-AU Mini PCIe)	LTE-FDD: 150 (DL)/50 (UL); LTE-TDD: 130 (DL)/30 (UL)	LTE-FDD: 150 (DL)/50 (UL); LTE-TDD: 130 (DL)/30 (UL)
DC-HSPA+ data rates (Mbps)	/	21 (DL)/5.76 (UL)	21 (DL)/5.76 (UL)
WCDMA data rates (Kbps)	/	384 (DL)/384 (UL)	384 (DL)/384 (UL)
EDGE data rates (Kbps)	/	236.8 (DL)/236.8 (UL)	236.8 (DL)/236.8 (UL)
GPRS data rates (Kbps)	85.6 (DL)/85.6 (UL)	85.6 (DL)/85.6 (UL)	85.6 (DL)/85.6 (UL)
SMS	•	•	•
CSD	/	•	•
Protocols	TCP/UDP/PPP/FTP/HTTP/NTP/PING/NITZ/CMUX/HTTPS/SMTP/MMS/FTPS/SMTPS/SSL/FILE (EC200U); TCP/UDP/PPP/NITZ/PING/FILE/MQTT/NTP/HTTP/HTTPS/SSL/FTP/FTPS/CMUX/MMS (EC200U-CN Mini PCIe-C, EC200U-EU/-AU Mini PCIe)	TCP/UDP/PPP/NTP/NITZ/FTP/HTTP/PING/CMUX/HTTPS/FTPS/SSL/FILE/MQTT/MMS/SMTP/SMTPS	TCP/UDP/PPP/NTP/NITZ/FTP/HTTP/PING/CMUX*/HTTPS/FTPS/SSL/FILE
Interfaces			
(U)SIM	× 1	× 1	× 1
UART	× 3 (EC200U); × 1 (EC200U-CN Mini PCIe-C, EC200U-EU/-AU Mini PCIe)	× 2 (EC200A); × 1 (EC200A Mini PCIe/EC200A-CN Mini PCIe-C)	× 2 (EC200A-xxV1); × 1 (EC200A-ELV1 Mini PCIe/EC200A-CNV1 Mini PCIe-D)
USB	× 1	× 1	× 1
I2C	× 2 (EC200U); × 1 (EC200U-EU/-AU Mini PCIe)	× 1	× 1
Audio digital (PCM)	× 1 (EC200U/EC200U-EU/-AU Mini PCIe)	× 1	/
SDIO	× 1 ¹	× 2	× 2*
ADC	× 3 (EC200U)	× 2, 12bits (EC200A)	× 2* (EC200A-xxV1)
Antenna	× 1 Main, × 1 GNSS (optional), × 1 Wi-Fi scan/ Bluetooth (optional) (EC200U) × 1 Main, × 1 GNSS (optional) (EC200U-CN Mini PCIe-C/ EC200U-EU/-AU Mini PCIe)	× 1 Main, × 1 Rx-diversity (optional), × 1 GNSS (optional)	× 1 Main, × 1 Rx-diversity (optional)
Enhanced features			
GNSS	Optional	Optional	/
Wi-Fi scan	Optional	/	/
Bluetooth	Optional	/	/
Digital audio	•	•	/
VoLTE	•	•	/
DTMF	•	•	/
DFOTA	•	•	•
Audio playback/Audio recording	•	•	/
QuecFile	• (only support ufs)	•	•
(U)SIM card detection	•	•	•
Firmware update	• (USB or DFOTA) (EC200U); Via USB/DFOTA (EC200U-CN Mini PCIe-C, EC200U-EU/-AU Mini PCIe)	Via USB/DFOTA	Via USB/DFOTA
Electrical features			
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V (EC200U/EC200U-CN Mini PCIe-C); 3.0 V ~ 3.6 V, typ. 3.3 V (EC200U-EU/-AU Mini PCIe)	3.4 V ~ 4.5 V, typ. 3.8 V (EC200A/EC200A Mini PCIe-C); 3.0 V ~ 3.6 V, typ. 3.3 V (EC200A Mini PCIe)	3.4 V ~ 4.3 V, typ. 3.8 V (EC200A-xxV1/ EC200A-CNV1 Mini PCIe-D); 3.0 V ~ 3.6 V, typ. 3.3 V (EC200A-ELV1 Mini PCIe)
Power consumption	30 µA @Power off mode/1.35 mA @LTE sleep mode (PF=256), Typ/13 mA @Idle mode (EC200U) 4.13 mA @ LTE sleep (PF = 128)/3.94 mA @ LTE sleep (PF = 256)/2.9 mA @ Idle (PF = 64, USB connection)/18 mA @ Idle (PF = 64, USB disconnection) (EC200U-CN Mini PCIe-C); 4.54 mA @ LTE sleep (PF = 128)/4.31 mA @ LTE sleep (PF = 256)/ 3.17 mA @ Idle (PF = 64, USB connection)/22.40 mA @ Idle (PF = 64, USB disconnection) (EC200U-EU/-AU Mini PCIe)	11 µA @Power off mode/1.1 mA @LTE sleep mode (PF=256), Typ/18 mA @Idle mode (EC200A); 19 µA @Power off mode, Typ/27.6 mA @LTE sleep mode (EC200A Mini PCIe); 1.59 mA @LTE sleep (PF=256)/28.6 mA @Idle (PF=64) (EC200A Mini PCIe-C)	EC200A-xxV1: 8.05 µA @ Power off mode / 2.7 mA @ LTE sleep mode (PF = 128) / 2.4 mA @ LTE sleep mode (PF = 256) / 22.1 mA @ Idle
Software features			
USB serial driver	Windows 7/8/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x
GNSS driver	Android 4.x ~ 13.x	Android 4.x ~ 13.x	/
RIL driver	Android 4.x ~ 13.x	Android 4.x ~ 13.x	Android 4.x ~ 13.x
RNDIS driver	Windows 7/8/10/11, Linux 2.6 ~ 6.7	Windows 7/8/10/11, Linux 2.6 ~ 6.7	Windows 8.1/10/11, Linux 2.6 ~ 6.7
ECM driver	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7
Certifications ²	Carrier certification: KT; Regulatory certification: NAL/STRCC/CCC/CE/RCM/KC/FCC/Anatel	Regulatory certification: CCC/STRCC/NAL/CE/UKCA/RCM/KC/NCC/FCC/Anatel	Regulatory certification: NAL/STRCC/CCC/CE/RCM/FCC/Anatel
Recommended applications	POS/POC/ETC, shared equipment, data cards, energy control and monitoring, safety and protection, industrial PDAs.	Automotive aftermarket, transportation, green energy, wireless payment, safety, smart cities, mobile gateways, smart industry, tracking, medical monitoring, agriculture and environmental monitoring.	

Note 1: Only QuecOpen® version support.
Note 2: May depend on modules' variant.


* Planning/ Under development/ In progress
• Supported

Product	EG915U	EG912U	EG915N	EG912N	EG915K
					
Form factor	LGA	LGA	LGA	LGA	LGA
Dimensions (mm)	23.6 × 19.9 × 2.4	29.0 × 25.0 × 2.4	23.6 × 19.9 × 2.4	29.0 × 25.0 × 2.4	23.6 × 19.9 × 2.4
LTE category	LTE Cat 1	LTE Cat 1	LTE Cat 1	LTE Cat 1	LTE Cat 1 bis
Frequency bands (MHz)	-CN (China/India)	LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; GSM: B3/8	/	/	/
	-EU (Europe)	LTE-FDD: B1/3/5/7/8/20/28; GSM: B2/3/5/8	/	LTE-FDD: B1/3/7/8/20; GSM: B3/8	LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40/41
	-EN (Europe)	/	/	LTE-FDD: B1/3/5/7/8/20/28/31/72; GSM: B3/8	/
	-EAL (Europe/APAC/Latin)	/	LTE-FDD: B1/2/3/4/5/7/8/20/28/66; LTE-TDD: 38/40/41; GSM: B2/3/5/8	/	/
	-EA (Europe/Asia)	/	/	LTE-FDD: B1/3/7/8/20/28; GSM: B3/8	/
	-GL (Global)	/	LTE-FDD: B1/2/3/4/5/7/8/12/13/17/ 18/19/20/25/26/28/66; LTE-TDD: B34/38/39/40/41 GSM: B2/3/5/8	/	/
	-LA (Latin America)	LTE-FDD: B2/3/4/5/7/8/28/66; GSM: B2/3/5/8	/	LTE-FDD: B2/3/4/5/7/8/28/66; GSM: B2/3/5/8	/
Weight (approx.) (g)	2.48	3.67	2.46	3.5	2.3
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Data transmission (Max.)					
LTE data rates (Mbps)	10 (DL)/5 (UL)	10 (DL)/5 (UL)	10 (DL)/5 (UL)	10 (DL)/5 (UL)	10 (DL)/5 (UL)
DC-HSPA+ data rates (Mbps)	/	/	/	/	/
WCDMA data rates (Kbps)	/	/	/	/	/
EDGE data rates (Kbps)	/	/	236.8 (DL)/236.8 (UL)	236.8 (DL)/236.8 (UL)	/
GPRS data rates (Kbps)	85.6 (DL)/85.6 (UL)	85.6 (DL)/85.6 (UL)	85.6 (DL)/85.6 (UL)	85.6 (DL)/85.6 (UL)	/
SMS	•	•	•	•	/
Protocols	TCP/UDP/PPP/FTP/HTTP/NTP/PING/ NITZ/CMUX/HTTPS/SMTP/MMS/FTPS/ SMTPS/SSL/FILE	TCP/UDP/PPP/FTP/HTTP/NTP/PING/ NITZ/CMUX/HTTPS/SMTP/MMS/FTPS/ SMTPS/SSL/FILE	TCP/UDP/PPP/NITZ/FTP/HTTP/ PING/CMUX/HTTPS/FTPS/SSL/FILE/ MQTT/MMS/SMTP/SMTPS	TCP/UDP/PPP/NITZ/PING/MQTT/NTP/ HTTP/HTTPS/SSL/FTP/SMTPS/SMTP	TCP/UDP/NTP/NITZ/MQTT/SSL/PPP/ PING/FTP/HTTP/HTTPS/FTPS
Interfaces					
(U)SIM	× 2	× 2	× 2	× 2	× 1
UART	× 3	× 3	× 3	× 2	× 3 (main, debug and auxiliary*)
USB	× 1	× 1	× 1	× 1	× 1
I2C	× 1	× 1	× 1	× 1	× 1 ¹
Audio digital (PCM)	× 1	× 1	× 1	× 1	/
SDIO	× 1 ¹	× 1 ¹	/	/	/
ADC	× 2	× 2	× 2 (optional)	× 2	× 2
Antenna	× 1 Main, × 1 Wi-Fi scan/Bluetooth (optional)	× 1 Main, × 1 GNSS (optional), × 1 Wi-Fi scan/Bluetooth (optional)	× 1 Main, × 1 GNSS (optional)	× 1 Main	× 1 Main, × 1 GNSS (optional)
Enhanced features					
GNSS	/	Optional	Optional	/	Optional
Wi-Fi scan	Optional	Optional	•	•	Optional
Bluetooth	Optional	Optional	/	/	/
VoLTE	•	•	•	•	/
DTMF	•	•	•	•	/
DFOTA	•	•	•	•	•
Audio playback/Audio recording	•	•	•	•	/
QueoFile	• (only support ufs)	• (only support ufs)	•	•	•
(U)SIM card detection	•	•	•	•	•
Firmware update	Via USB/DFOTA	Via USB/DFOTA	Via USB/DFOTA	Via USB/DFOTA	Via USB/DFOTA
Electrical features					
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V	3.3 V ~ 4.3 V, typ. 3.8 V	3.4 V ~ 4.5 V, typ. 3.8 V	3.3 V ~ 4.3 V, typ. 3.8 V	3.4 V ~ 4.5 V, typ. 3.8 V
Power consumption	30 µA @ power off/1.3 mA @ sleep/13 mA @ idle	34 µA @ Power off 1.7 mA @ LTE sleep (PF = 128) 1.5 mA @ LTE sleep (PF = 256) 30 mA @ Idle (PF = 64, USB connected) 14 mA @ Idle (PF = 64, USB disconnected)	24 µA @ Power off/1.4 mA @ Sleep, Typ./20.97 mA @ Idle	30 µA @ Power off mode 1.28 mA @ LTE sleep mode (PF = 128) 1.19 mA @ LTE sleep mode (PF = 256) 20.65 mA @ Idle mode (PF = 64, USB Disconnect) 29.83 mA @ Idle mode (PF = 64, USB Active)	9.58 µA @ Power off 0.86 mA @ LTE-FDD Sleep (PF = 128 USB Disconnected) 0.77 mA @ LTE-FDD Sleep (PF = 256 USB Disconnected) 9.71 mA @ LTE-TDD Idle (PF = 64, USB Disconnected) 19.57 mA @ LTE-TDD Idle (PF = 64, USB2.0 Active)
Software features					
USB serial driver	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7, Android 4.x ~ 13.x	Windows 7/8/8.1/10, Linux 2.6~5.15, Android 4.x~12.x
GNSS driver	Android 4.x ~ 13.x	Android 4.x ~ 13.x	Android 4.x ~ 13.x	/	Android 4.x~12.x
RIL driver	Android 4.x ~ 13.x	Android 4.x ~ 13.x	Android 4.x ~ 13.x	Android 4.x ~ 13.x	Android 4.x~12.x
RNDIS driver	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7	Windows 7/8/8.1/10/11, Linux 2.6 ~ 6.7	Windows 7/8/8.1/10, Linux 2.6~5.15
ECM driver	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6 ~ 6.7	Linux 2.6~5.15
Certifications ²	Regulatory certification: GCF/CE/RCM/Anatel/UKCA/NCC/FCC	Regulatory certification: CCC/SRRC/NAL/NCC/CE/FCC/IC/Anatel/RCM/KC	Regulatory certification: CE/RCM/UKCA/FCC/Anatel	Regulatory certification: CE	CE*/RCM*
Recommended applications	POS/POC/ETC, shared equipment, data cards, energy control and monitoring, safety and protection, industrial PDAs.	Telematics, smart metering, mobile POS terminals, gateways, safety, tracking and tracing, remote maintenance and control, networking, mobile computing, healthcare.	POS/POC/ETC, shared equipment, data cards, energy control and monitoring, safety and protection, industrial PDAs.	Asset management , commercial telematics, payment , RMAC, smart safety and automation and smart metering.	

Note 1: Only QueoOpen® version support.
Note 2: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

Smart modules

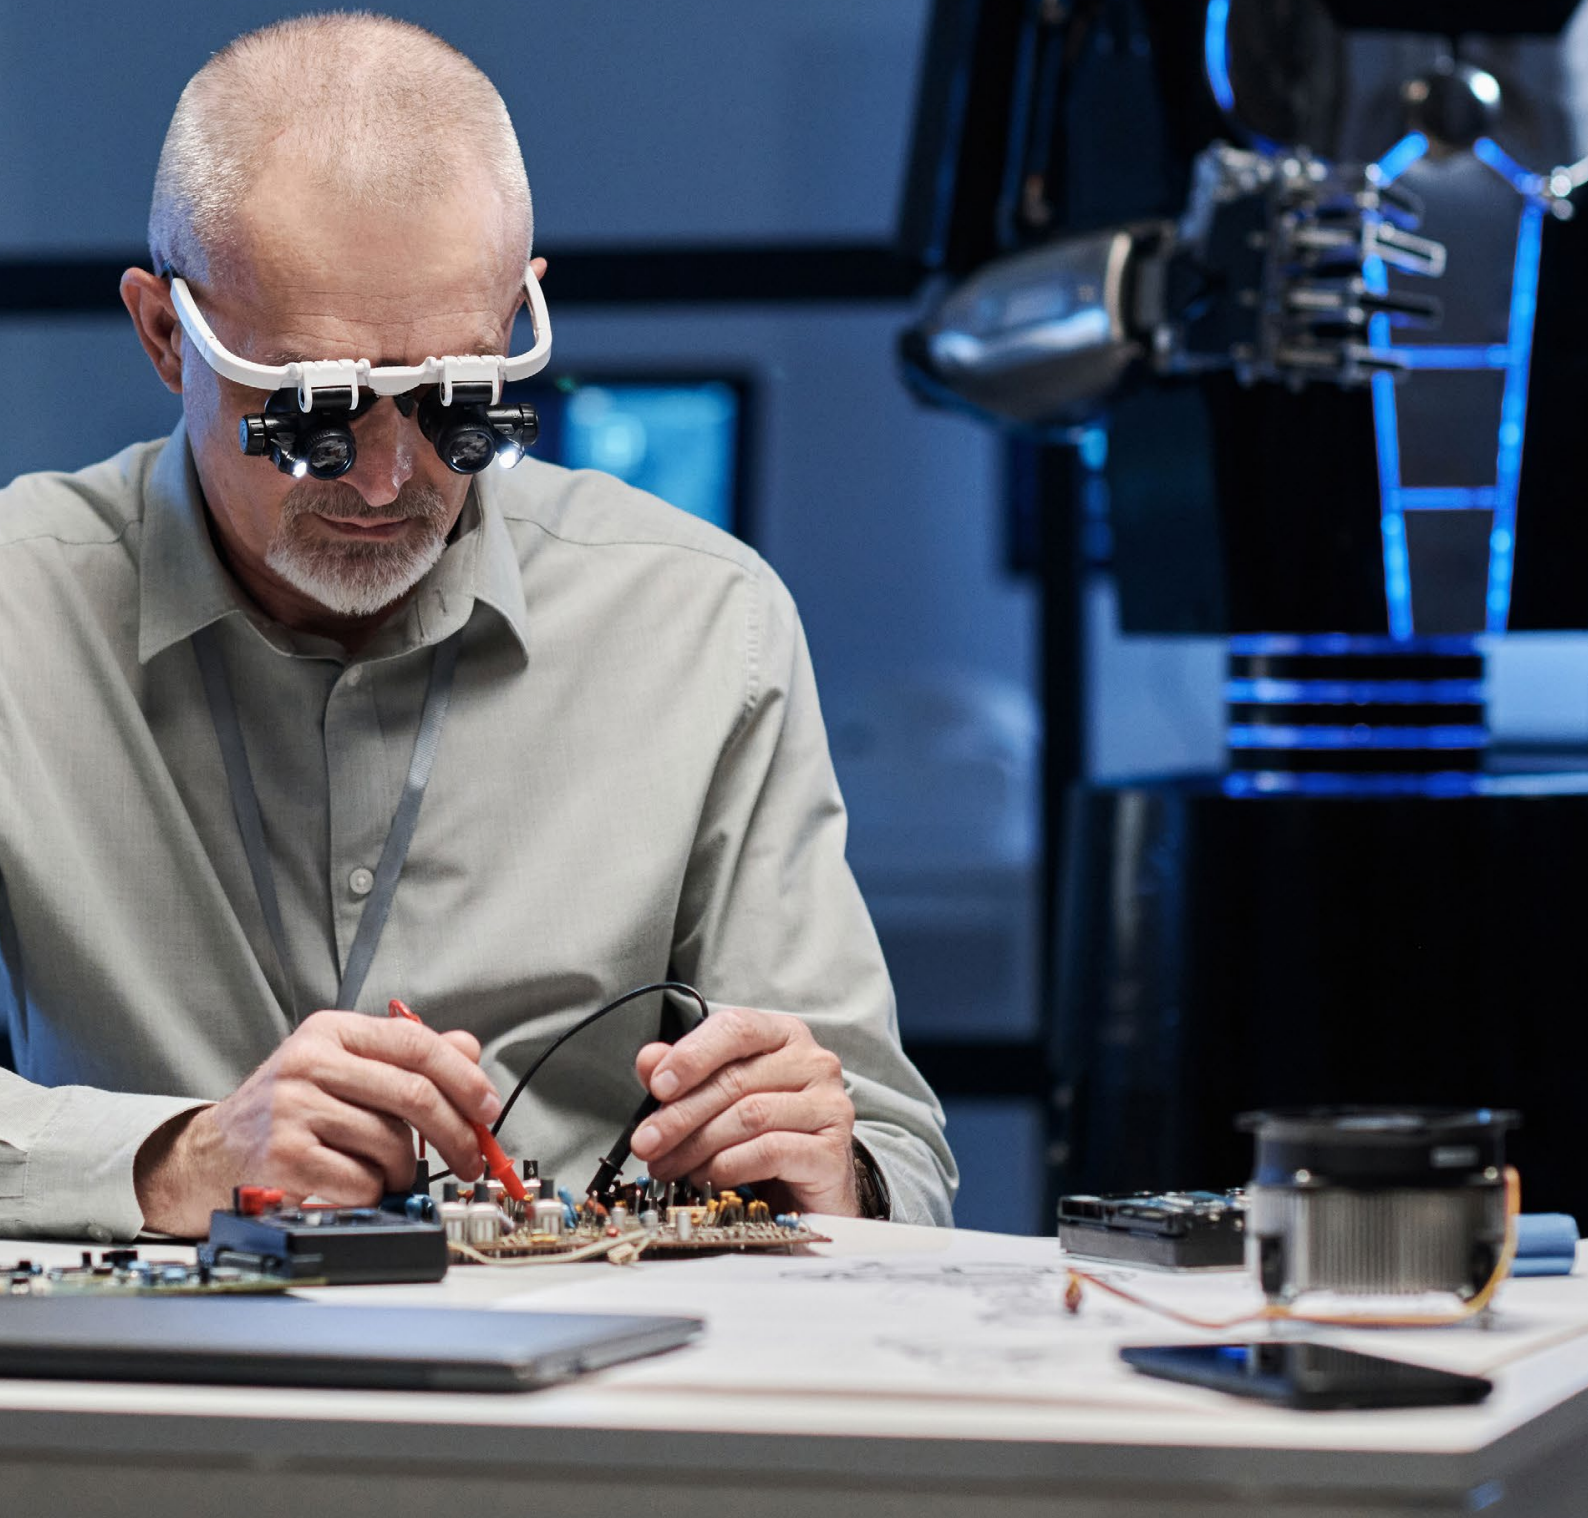

Product	SC362Z	SG368Z
		
Form factor	LGA, LCC	LGA
Dimensions (mm)	SC362Z-AP: 44.0 × 43.0 × 2.9, SC362Z-C: 57.0×41.0×4.9	46.0 × 42.0 × 3.15
Frequency bands (MHz)	-WF (Global)	/
	-AP (Global)	/
CPU	RK3562/RK3562J Quad-core ARM Cortex-A53 CPU 1.8 GHz	RK3568, Quad-core ARM Cortex-A55 CPU @ 2.0 GHz
NPU	1 Tops (Commercial-grade only)	1 Tops
GPU	ARM Mali G52 GPU	ARM Mali-G52
Memory	SC362Z-AP: 1+8/2+32/4G+32G(LPDDR4X+EMMC); SC362Z-C: 1+8/2+16(DDR4X+EMMC)	Commercial grade: LP4x , default 2 GB + 32 GB (4 GB + 32 GB optional) Industrial grade: LP4x, default 2 GB + 16 GB (4 GB + 32 GB optional)
Operating system	SC362Z-AP: Liunx5.10/Liunx6.10*/Andriod13; SC362Z-C: Liunx5.10/Multi-core one*	Linux (Kernel 4.19/ 5.10/6.10*)/ Android 13/ OpenWrt
Supply voltage range	SC362Z-AP: 3.3 V; SC362Z-C: 5 V	3.3 V ~ 3.5 V, typ. 3.4 V
Weight (approx.) (g)	SC362Z-AP: 11.6; SC362Z-C: 11.7	WF:13.1; AP:12.8
Operating temperature	Commercial-grade: -20°C ~ +75°C; Industrial-grade: -40°C ~ +85°C	WF: Commercial grade: -10°C ~ +75°C, Industrial grade: -40°C ~ +85°C; AP: Commercial grade: -25°C ~ +75°C, Industrial grade: -40°C ~ +85°C
Data transmission (Max.)		
LTE (Mbps)	/	/
UMTS	/	/
TD-SCDMA	/	/
CDMA2000	/	/
GSM	/	/
Interfaces		
LCM	SC362Z-AP: 1 × 4-lane MIPI DSI 1.2: Max. (2048 × 1080) @ 60 Hz; 4-lane MIPI DSI 1.2: LVDS TIA/ EIA-644-A, Max. (1280 × 800) @ 60 Hz; 1 × BT.1120: Max. 1080 dpi + 1 × BT.656: Max. 576 dpi; 1 × RGB: Max. (2048 × 1080) @ 60 Hz	1 × HDMI 2.0: Max. (4096 × 2160) @ 60 Hz 8-lane MIPI DSI 1.2: Max. (2048 × 1536) @ 60 Hz or 8-lane LVDS: Max. (1920 × 1080) @ 60 Hz 2 × 4-lane MIPI DSI 1.2: Max. (1920 × 1080) @ 60 Hz 4-lane eDP 1.3: Max. (2560 × 1600) @ 60 Hz 4-lane LVDS: Max. (1280 × 800) @ 60 Hz LDC RGB parallel display interface supports Max. 24 bits RGB*: Max. (1920 × 1080) @ 60 Hz
Camera	SC362Z-AP: 2 × 4-lane MIPI CSI, which can be divided into 4 × 2-lane MIPI CSI; Max. 2.5 Gbps/ lane, Max. 13 M pixels DVP (BT.656/ 1120) analog camera*	1 × 4-lane MIPI CSI 8M or 2 × 2-lane, up to 2.5 Gbps/ lane Supports DVP* (BT.656/ 1120) analog camera
Touch panel	SC362Z-AP: capacitive touch screen	Supported
Audio	SC362Z-AP: Loudspeaker, earpiece, analog microphones and digital audio	Loudspeaker, earpiece, analog microphones and digital audio
Video	SC362Z-AP: Encoding: H.264, Max. 1920 × 1080 @ 60 fps Decoding: H.264 AVC/ MVC Main Profile yuv400/ yuv422 @ L5.0, Max. 1920 × 1080 @ 60 fps; H.265 HEVC/ MVC Main Profile yuv420 @ L5.0, Max. 4096 × 2304 @ 30 fps; SC362Z-C: Parallel output in the format of 24-bit RGB, with up to 1920 × 1080 @ 60 Hz resolution Output in the format of BT.1120, with up to 1920 × 1080 @ 60 Hz resolution Output in the format of BT.656, with up to 720 × 576 @ 60 Hz resolution	Encoding: 1080p @ 60 fps Decoding: 4K @ 60 fps H.264 AVC/ MVC Main10 Profile yuv400/ yuv422 @ L5.1, H.265 HEVC/ MVC Main10 Profile yuv420 @ L5.1, H.264/ AVC BP/ MP/ HP @ level4.2, H.265/ HEVC MP @ level4.1
USB	SC362Z-AP: × 2, compliant with USB 3.0/ 2.0 USB0: USB 2.0/ 3.0, and USB OTG only (multiplexed with PCIe function pin) USB1: USB 2.0, and USB HOST only; SC362Z-C: Max.× 3, compliant with USB 2.0 specification USB0: USB 2.0; USB OTG USB1 and USB2: USB 2.0; USB HOST only	×4, compliant with USB 3.0/ 2.0 USB0: supports USB 2.0/ USB 3.0, supports USB HOST/ USB OTG USB1: supports USB 2.0/ USB 3.0, only supports USB HOST USB2: only supports USB 2.0, only supports USB HOST USB3: only supports USB 2.0, only supports USB HOST
I2C	SC362Z-AP: Max. × 5; SC362Z-C: Max. × 5	Max. ×5
UART	SC362Z-AP: Max. × 10; SC362Z-C: Max. × 10	Max. ×8 (SG368Z-WF); Max. ×10 (SG368Z-AP)
SD card	SC362Z-AP: × 1, SD 3.0; SC362Z-C: × 1, SD 3.0	× 1, SD 3.0
PWRKEY	SC362Z-AP: PWRKEY/RESET_N/VOL_UP/BOOT/VOL_DOWN; SC362Z-C: UP/DOWN/LEFT/RIGHT/CANCEL/OK	× 1
SPI	SC362Z-AP: Max. × 3, both master and slave modes; SC362Z-C: Max. × 3, both master and slave modes	Max. ×4, supports both master and slave modes
ADC	SC362Z-AP: × 13, general-purpose ADC interfaces; SC362Z-C: × 6, general-purpose ADC interfaces	×5, general-purpose ADC interfaces
GPIO	SC362Z-AP: Max. × 86; SC362Z-C: Max. × 104	Max. ×107 (SG368Z-WF); Max. ×128 (SG368Z-AP)
PWM	SC362Z-AP: Max. × 16; SC362Z-C: Max. × 16	Max. ×14 (SG368Z-WF); Max. ×16 (SG368Z-AP)
Motor driver	/	× 1
Flashlight driver	/	× 3 high-current flash LED drivers, which support both flash and torch modes
WLED Sink	/	/
Antenna	/	× 1, Wi-Fi & Bluetooth (SG368Z-WF)
Enhanced features		
BT	/	Bluetooth 4.2 (BR/ EDR + BLE)
WLAN	/	2.4 & 5 GHz, Wi-Fi 5, 802.11a/b/g/n/ac
GNSS	/	/
Charge function	/	Supported
Dual LCDs	/	Supported
Firmware upgrade	Supported	Via USB
Certifications	/	/
Recommended applications	smart business displays, express cabinets, electricity, vehicle center consoles, tablet PCs, industrial control terminals, smart home and other industries.	IoT gateways, smart commercial displays, industrial device terminals, smart hospitals, vehicle consoles and automotive NVR.

* Planning/ Under development/ In progress

Smart modules

Product	SC200L	SC200E	SC206E
			
Form factor	LCC+LGA	LCC+LGA	LCC+LGA
Dimensions (mm)	40.5 × 40.5 × 2.85	40.5 × 40.5 × 2.85	40.5 × 40.5 × 2.85
LTE feature	LTE Cat 4 3GPP E-UTRA Release 10 Compliant, Support DL MIMO 2 × 2	LTE Cat 4 (SC200E-CE/EM/NA/JP/WF/GL)	LTE Cat 4 (SC206E-EM/NA/GL)
Frequency bands (MHz)	-CE -CE (China/ India) LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/8; GSM: 900/1800MHz	-CE (China) LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41 (140M); WCDMA: B1/8; CDMA: BCC0; GSM: 900/1800MHz	/
	-EU/EM -EU (EMEA/ APAC) LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40/41; WCDMA: B1/5/8; GSM: 900/1800MHz	-EM (EMEA/South Korea/South Asia/Latin America/India/ Australia/New Zealand/South Africa) LTE-FDD: B1/2/3/4/5/7/8/20/28 (A+B); LTE-TDD: B38/40/41 (200M); WCDMA: B1/2/4/5/8; GSM: 850/900/1800/1900MHz	-EM (EMEA/South Korea/South Asia/Latin America/India/ Australia/New Zealand/South Africa) LTE-FDD: B1/2/3/4/5/7/8/20/28 (A+B); LTE-TDD: B38/40/41 (200M); WCDMA: B1/2/4/5/8; GSM: 850/900/1800/1900MHz
	-AU (ANZ/Brazil) -AU (Latin America) LTE-FDD: B1/2/3/4/5/7/8/28; LTE-TDD: B38 ; WCDMA: B1/2/4/5/8; GSM: 850/900/1800/1900 MHz	/	/
	-GL (Global)	LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/66/ 71; LTE-TDD: B34/38/39/40/41; WCDMA: B1/2/4/5/6/8/19; GSM: 850/900/1800/1900MHz	LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/66/ 71; LTE-TDD: B34/38/39/40/41 (200M); WCDMA: B1/2/4/5/6/8/19; GSM: Quad-band
	-NA (North America)	LTE-FDD: B2/4/5/7/12/13/14/17/25/26/66/71; LTE-TDD: B41 (200M)	LTE-FDD: B2/4/5/7/12/13/14/17/25/26/66/71; LTE-TDD: B41 (200M)
	-JP (Japan)	LTE-FDD: B1/3/5/8/11/18/19/21/26/28; LTE-TDD: B41 (200M); WCDMA: B1/6/8/19	/
	-WF (Global)	-WF (Wi-Fi) 2.4G & 5G Wi-Fi, 2.4G BT	-WF (Wi-Fi) 2.4G & 5G Wi-Fi, 2.4G BT
CPU	Unisoc SL8541E ARM Cortex 4 × A53@ 1.4GHz	QCM2290, Quad-core ARM Cortex-A53 64-bit CPU @ 2.0 GHz	QCM2290, Quad-core ARM Cortex-A53 64-bit CPU @ 2.0 GHz
NPU	/	/	/
GPU	ARM Mali-T820 as 3D graphics accelerator, up to 680 MHz	Qualcomm® Adreno™ 702 Graphics Processing Unit (GPU) with 64-bit addressing	Qualcomm® Adreno™ 702 Graphics Processing Unit (GPU) with 64-bit addressing
Memory	1 GB LPDDR3 + 8 GB eMMC; 2 GB LPDDR3 + 16 GB eMMC	16GB eMMC + 2GB LPDDR4X; 32GB eMMC + 3GB LPDDR4X	8GB eMMC + 1GB LPDDR4X 16GB eMMC + 2GB LPDDR4X
Operating system	Android 10	Android 12/13/14	Yocto Linux (Kernel 5.4)
Supply voltage range	3.55 V ~ 4.2 V, typ. 3.8 V	3.55 V ~ 4.4 V, typ. 3.8 V	3.55 V ~ 4.4 V, typ. 3.8 V
Weight (approx.) (g)	10	10.3	10.3
Operating temperature	-30°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Data transmission (Max.)			
LTE (Mbps)	LTE-FDD: 150 (DL)/50 (UL) LTE-TDD: 130 (DL)/30 (UL)	Cat 4: LTE-FDD: 150 (DL)/50 (UL) LTE-TDD: 130 (DL)/30 (UL)	Cat 4: LTE-FDD: 150 (DL)/50 (UL) LTE-TDD: 130 (DL)/30 (UL)
UMTS	DC-HSDPA: 42 Mbps (DL); HSUPA: 5.76 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL); DC-HSUPA: 5.76 Mbps (UL) WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL); DC-HSUPA: 5.76 Mbps (UL) WCDMA: 384 Kbps (DL/UL)
CDMA2000	EVDO: 3.1 Mbps (DL)/1.8 Mbps (UL) , 1X Advanced: 307.2 Kbps (DL/UL)	EVDO: 3.1 Mbps (DL)/1.8 Mbps (UL) 1X Advanced: 307.2 Kbps (DL/UL)	EVDO: 3.1 Mbps (DL)/1.8 Mbps (UL) 1X Advanced: 307.2 Kbps (DL/UL)
GSM (Kbps)	EDGE: 296 (DL)/236.8 (UL) , GPRS: 107 (DL)/85.6 (UL)	EDGE: 296 (DL)/236.8 (UL) GPRS: 107 (DL)/85.6 (UL)	EDGE: 296 (DL)/236.8 (UL) GPRS: 107 (DL)/85.6 (UL)
Interfaces			
LCM	4-lane MIPI_DSI, HD+ (1440 × 720) @ 60 fps	1 group of 4-lane MIPI DSI, HD+ (1680 × 720) @ 60 fps	1 group of 4-lane MIPI DSI, HD+ (1680 × 720) @ 60 fps
Camera	2 groups of MIPI_CSI (2-lane + 1-lane), up to 1.5 Gbps/lane 1 × ISP, 8 MP for rear camera (2-lane) and 2 MP for front camera (1-lane)	2 groups of 4-lane MIPI CSI, up to 2.5 Gbps/lane 2 or 3 cameras supported, up to 25 MP or 13 MP + 13 MP with dual ISP	2 groups of 4-lane MIPI CSI, up to 2.5 Gbps/lane 2 or 3 cameras supported, up to 25 MP or 13 MP + 13 MP with dual ISP
Touch panel	Capacitive touch panel, I2C controls	Capacitive touch panel	Capacitive touch panel
Audio	Analog channels: 3 inputs: MIC1, MIC2, MIC3 (including one noise-canceling MIC); 3 outputs: speaker, earpiece, headphone	3 analog inputs: MIC1, MIC2, MIC3 (including one noise- canceling MIC); 3 analog outputs: Line Out, earpiece, headphone	3 analog inputs: MIC1, MIC2, MIC3 (including one noise- canceling MIC); 3 analog outputs: Line Out, earpiece, headphone
Video	Encode: 1080P (H.264) @ 30 fps; WVGA (MPEG-4/VP8) @ 30 fps Decode: 1080P (H.264/MPEG-4/VP8/H.265/DivX4/5/6) @ 30 fps; WVGA (H.263) @ 30 fps	Encoder: 1080P 8-bit H.264/H.265 (HEVC) @ 30 fps Decoder: 1080P 8-bit H.264/H.265 (HEVC)/VP9 @ 30 fps	Encoder: 1080P 8-bit H.264/H.265 (HEVC) @ 30 fps; Decoder: 1080P 8-bit H.264/H.265 (HEVC)/VP9 @ 30 fps
USB	× 2, USB 2.0 USB1 supports USB OTG, does not support USB hub; up to 480 Mbps; USB2 supports USB host mode and USB hub; up to 100 Mbps	× 1, compliant with USB 2.0/ 3.1, supports USB OTG, charge, etc.	× 1, compliant with USB 2.0/ 3.1, supports USB OTG, charge, etc.
I2C	× 4	× 4	× 4
(U)SIM	× 2, support 1.8/2.95 V (U)SIM cards, with (U)SIM card detection function, DSDS supported	× 2 (1.8V/2.95V)	× 2 (1.8V/2.95V)
UART	× 2, up to 3.25 Mbps, UART0 supports hardware flow control	× 3, up to 4 Mbps, supports hardware flow control	× 3, up to 4 Mbps, supports hardware flow control
SDIO	SC200L (Dual-band Wi-Fi): × 1, SD 3.0, 4-bit SDIO (used as the function of SD card by default); SC200L: × 2, SD 3.0, 4-bit SDIO (one is used as the function of SD card by default, while the other for expansion)	× 1 (3.0, 4-bit SDIO)	× 1 (3.0, 4-bit SDIO)
SD card	× 1, SD 3.0, 4-bit SDIO	× 1, SD 3.0, 4-bit SDIO	× 1, SD 3.0, 4-bit SDIO
PWRKEY	× 1	Pulled up internally to 1.1 V	Pulled up internally to 1.1 V
SPI	× 3	× 1 (multiplexed)	× 1 (multiplexed)
ADC	× 1	× 1, general-purpose ADC interface	× 1, general-purpose ADC interface
GPIO	× 25	× 33	× 33
PWM	× 1	× 1	× 1
Motor driver	× 1	× 1	× 1
Antenna	× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth	× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth (SC200E-WF: × 1, Wi-Fi & Bluetooth)	× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth (SC206E-WF: × 1, Wi-Fi & Bluetooth)
Enhanced features			
BT	Bluetooth 2.1 EDR/3.0 HS/4.2 LE/5.0 LE Support a maximum of 10 ACL/EL/SCO links	2.1 EDR/3.0 HS/4.2 LE/5.0 LE	2.1 EDR/3.0 HS/4.2 LE/5.0 LE
Wi-Fi	2.4 & 5 GHz, 802.11 a/b/g/n/ac; 433 Mbps; STA/AP/P2P	2.4/5 GHz 802.11a/b/g/n/ac	2.4/5 GHz 802.11a/b/g/n/ac
GNSS	GPS/GLONASS or GPS/BDS	GPS/BDS/GLONASS/Galileo/QZSS/SBAS	GPS/BeiDou/GLONASS/Galileo/QZSS/SBAS
Charge function	Build-in Charge IC	Build-in Charge IC & Fuel Gauge Qualcomm Quick Charge technology	Build-in Charge IC & Fuel Gauge Qualcomm Quick charge technology
Dual LCDs	Only support single LCD display	Only support single LCD display	Only support single LCD display
DSDS	Support dual SIM dual standby	Support dual SIM dual standby	Support dual SIM dual standby
Firmware upgrade	Firmware upgrade via USB or OTA	Firmware upgrade via USB and OTA	Firmware upgrade via USB and OTA
Certifications ¹	CCC/SRRC*/NAL*/CE/GCF/RCM/Anatel	Verizon/AT&T/T-Mobile/KDDI*/CCC/SRRC/NAL*/CE/UKCA/RCM/ GCF/KC/Anatel/FCC/IC/PTCRB/JATE/TELEC/DCM/NBIC/NCC	Verizon/AT&T/T-Mobile/CE/UKCA/RCM/GCF/KC/Anatel/FCC/IC/ PTCRB/JATE/TELEC
Recommended applications	Smart POS, smart home gateways, smart robots, smart wearables, safety, PDAs & tablets, vending machines, delivery lookers, telematics, mobile computing, in-car video streaming and entertainment systems, etc.	Telematics, mobile POS terminals, gateways, safety, net- working, mobile computing, etc.	Telematics, mobile POS terminals, gateways, safety, net- working, mobile computing, etc.

Note 1: May depend on modules' variant.

SC200L can't be promote to US, Canada, Australia, New Zealand, Japan or South Korea.

* Planning/ Under development/ In progress

Product	SC200P	SC682A	SG520B
			
Form factor	LGA, LCC	LGA, LCC	LGA
Dimensions (mm)	40.5 × 40.5 × 2.85	43.0 × 44.0 × 2.85	42.5 × 56.5 × 2.95
5G feature	/	/	3GPP Release 16, DL 4 × 4 MIMO, (SG520B-EM)UL 2 × 2 MIMO
LTE feature	LTE Cat 4, conform 3GPP E-UTRA R12 standard, support DL MIMO 2 × 2	LTE Cat 4, 3GPP Release 10	LTE Cat 15 3GPP Release 16, DL 4 × 4 MIMO (DL)
Frequency bands (MHz)	-CN (China/India)	LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/8; GSM: 900/1800 MHz	/
	-EM	/	5G SA/NSA: n1/3/5/8/28/41/77/79; LTE: B1/3/5/8/34/38/39/40/41; WCDMA: B1/5/8
	-AU (Latin America)	LTE-FDD: B1/2/3/4/5/7/8/28; LTE-TDD: B38; WCDMA: B1/2/4/5/8; GSM: 850/900/1800/1900 MHz	-EM (EMEA/South Korea/South Africa/Latin America/Australia/ New Zealand/India/China/Japan) 5G SA/NSA: n1/3/5/7/8/20/28/38/40/41/77/78/79; LTE: B1/2/3/4/5/7/8/12/17/18/19/20/28/32/34/38/39/40/ 41/42; WCDMA: B1/2/4/5/8/19; GSM/EDGE: B2/3/5/8
	-EU (EMEA/South Korea/ South Asia/India/ Australia/New Zealand/ South Africa)	LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40/41; WCDMA: B1/5/8; GSM: 900/1800 MHz	/
	-NA (North America)	/	/
	-JP (Japan)	LTE-FDD: B2/4/5/7/12/13/14/17/25/26/66/71; LTE-TDD: B41	/
	-WF (Global)	-WF* (Global) Only Wi-Fi/Bluetooth	/
CPU	UIS 7861 Dual-core A75@1.6GHz+ Hexa-core A55@1.6GHz	SM6115, Kryo 260 Gold: high-performance quad-core 2.0 GHz; + Kryo 260 Silver: low-power quad-core 1.8 GHz	QCM4490, octa-core, 2 × A78 @ 2.4 GHz, 6 × A55 @ 2 GHz
GPU	Arm Mali G57	Qualcomm Adreno™ 610 GPU @ 950 MHz	Qualcomm® Adreno™ 613
NPU	/	1 TOPS	/
Memory	16 GB eMMC + 2 GB LPDDR4x (default) 32 GB eMMC + 2 GB LPDDR4x (optional) 64 GB eMMC + 4 GB LPDDR4x (optional)	3 GB LPDDR4X + 32 GB eMMC	4 GB LPDDR4X + 64 GB UFS (Default)
Operating system	Android 12/14	Android 13/14	Android 13/14/15 ¹ /16 ¹
Supply voltage range	3.55V ~ 4.4V, typ. 3.8V	3.55 V ~ 4.4 V, typ. 3.8 V	3.55 V ~ 4.4 V, typ. 4.0 V
Weight (approx.) (g)	TBD	11.8	17.4
Operating temperature	-30°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Data transmission (Max.)			
5G	/	/	SG520B-CN: 5G SA: 2.1 Gbps (DL)/450 Mbps (UL) 5G NSA: 2.3 Gbps (DL)/550 Mbps (UL) SG520B-EM: 5G SA: 2.1 Gbps (DL)/900 Mbps (UL) 5G NSA: 2.5 Gbps (DL)/550 Mbps (UL)
LTE	Cat 4: LTE-FDD: 150 Mbps (DL)/50 Mbps (UL); LTE-TDD: 130 Mbps (DL)/30 Mbps (UL)	LTE-FDD: 150 Mbps (DL)/50 Mbps (UL); LTE-TDD: 130 Mbps (DL)/30 Mbps (UL)	0.8 Gbps (DL)/200 Mbps (UL)
UMTS	DC-HSPA+: 42 Mbps (DL)/11 Mbps (UL); WCDMA: 384 kbps (DL/UL)	WCDMA: 384 kbps (DL)/384 kbps (UL)	DC-HSPA+: 42 Mbps (DL)/5.7 Mbps (UL) WCDMA: 384 kbps (DL)/384 kbps (UL)
GSM (Kbps)	EDGE: 296 (DL)/236.8 (UL); GPRS: 107 (DL)/85.6 (UL)	EDGE: 296 (DL)/236.8 (UL); GPRS: 107 (DL)/85.6 (UL)	EDGE: SG520B-EM: 296 (DL)/236.8 (UL) GPRS: SG520B-EM: 107 (DL)/85.6 (UL)
Interfaces			
LCM	1 × MIPI DSI 4-lane, with up to FHD+ (2520 × 1080) @ 60 fps/ HD+ (1680 × 720) @ 90 fps	4-lane MIPI DSI FHD+ (2520 × 1080) @ 60 fps	FHD+ @ 60/ 90/ 120 Hz
Camera	2 × 4-lane MIPI CSI, 1 × 1-lane MIPI CSI, with up to 2.5 Gbps/ lane up to 3 cameras which can work concurrently, a single camera can support up to 24 M @ 30 fps ZSL	Three 4-lane MIPI CSI, up to 2.5 Gbps/ lane Up to 4 cameras, up to 25 MP with triple ISPs	3x MIPI CSI, 2x ISP: 25 MP @ 30 pfs, 16 + 16 MP @ 30 fps, 25 MP @ 30 fps ZSL, 64 MP NZSL
Touch panel	Capacitive touch panel	Capacitive touch panel, controlled by I2C	Capacitive touch panel
Audio	Analog outputs × 3: speaker, headset and earpiece Analog inputs × 3: MIC1, MIC2 and MIC3	3 analog inputs: MIC1, MIC2, and MIC3 (including 1 noise- canceling MIC); 3 analog outputs: speaker, earpiece, and headphone	Needs external audio codec
Video	Encoding + decoding: H.265/ H.264 1080P @ 60 fps	/	Encode: 1080p (H.264/ H.265) @ 60 fps Decode: 1080p (H.264/ H.265) @ 60 fps
USB	× 1, USB 2.0 ²	USB 3.1 Gen 1 (5 Gbps), USB 2.0 compliant, supporting USB OTG	Supports USB 3.1 Gen 1
I2C	× 7	× 7 (4 of them are dedicated I2Cs, 1 of them is general- purpose I2Cs, while the rest 2 of them are I2Cs multiplexed from other interfaces)	× 8
(U)SIM	× 2, 1.8/ 2.95 V (U)SIM card, (U)SIM card hot-swap detection and DSDS	× 2 (1.8/ 2.95 V)	× 2 (1.8/ 2.95 V)
UART	× 4	× 4, 4 Mbps with hardware flow control (2 of them are default UARTs, while the other 2 of them are UARTs multiplexed from other interfaces)	× 2
SD card	× 1, SD 3.0, 4-bit SDIO	× 1 (SD 3.0, 4-bit SDIO)	× 1, SDIO 3.0, supports 4-bit SDIO
PWRKEY	× 1, internally pulled up	Pulled up internally to 1.8 V	1.8 V, pulled up internally
SPI	× 4	× 3 (Can be multiplexed as UARTs and I2Ses respectively, and the I2S multiplexed from other interfaces supports both Tx and Rx)	× 1
ADC	× 1, general-purpose ADC interface	× 2	× 6, general-purpose ADC interfaces
GPIO	× 36	× 23	× 56
PWM	× 2	/	× 2
Motor driver	× 1	/	× 1
Flashlight driver	/	/	× 1
Antenna	× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth antennas respectively (SC200P-WF: × 1, Wi-Fi & Bluetooth antenna)	× 4, Main/ Rx-diversity/ GNSS/ Wi-Fi & Bluetooth antenna interface respectively (SC682A-WF: × 1, Wi-Fi & Bluetooth antenna interface)	× 8, cellular: × 5, Wi-Fi & Bluetooth: × 1, Wi-Fi MIMO: × 1, GNSS: × 1
Enhanced features			
BT	Bluetooth 5.0 (BR/ EDR + BLE) ²	Bluetooth 5.1	Bluetooth 5.2
Wi-Fi	2.4 & 5 GHz, 802.11 a/b/g/n/ac ²	2.4 & 5 GHz, 802.11a/b/g/n/ac	2.4 & 5 & 6 GHz; 802.11a/b/g/n/ac/ax; Supports DBS, 2 × 2 MU- MIMO
GNSS	GPS/GLONASS/BDS/Galileo	GPS/GLONASS/BDS/Galileo/QZSS, L1	GPS/GLONASS/BDS/Galileo/NavIC/QZSS/SBAS; L1
Charge function	Supported	/	Build-in Charge IC & Fuel Gauge Qualcomm Quick Charge technology
DSDS	Supported	/	Supports dual card dual standby
Firmware upgrade	Supported	/	Firmware upgrade via USB or OTA
Certifications ²	CCC/SRRC/NAL/CE/RCM/Anatel	CE/RCM/KC*/GCF/TELEC*/JATE*/FCC/IC/PTCRB/AT&T/Verizon*/ T-Mobile*	CCC/SRRC/NAL/GCF*/CE*/RCM*/UKCA*
Recommended applications	smart cash registers, smart POS, tax control machines, smart safety, automotive equipment, high-end information acquisition equipment, smart robots, smart home, smart hardware, industrial smart handheld equipment, audio and video recorders, smart interphones, smart wearables, vending machines, logistics cabinets, etc.	Cloud services IoT, vending, telehealth, security and automation, RMAC (Remote Monitoring & Control Applications), PDA and handheld, payment, display and signage, asset management, commercial telematics, aftermarket telematics	Smart POS, smart home gateways, smart robots, smart wearables, safety, PDAs & tablets, vending machines, de- livery lockers, telematics, mobile computing, in-car video streaming and entertainment systems, etc.

Note 1: TBD.

Note 2: May depend on modules' variant.

* Planning/ Under development/ In progress

Smart modules

Product	SC200V	SC200J	SC668S
			
Form factor	LGA, LCC	LGA, LCC	LCC+LGA
Dimensions (mm)	40.5 × 40.5 × 2.85	40.5 × 40.5 × 2.85	43.0 × 44.0 × 2.85
LTE feature	LTE Cat 4	LTE Cat 4, conform 3GPP E-UTRA R12 standard, support DL MIMO 2 × 2	LTE Cat 4
Frequency bands (MHz)	-CN (China/ India)	LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/8; GSM: 900/1800	LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/8; CDMA: BCC; GSM: 900/1800MHz
	-EM	-EM(Europe/Middle East/Asia-Pacific/India/Africa) LTE-FDD: B1/2/3/4/5/7/8/20/28/66; LTE-TDD: B38/40/41; WCDMA: B1/2/4/5/8; GSM/EDGE (MHz): 850/900/1800/1900	-EM (Europe /India /South Korea /South Asia /Latin America / Australia /South Africa) LTE-FDD: B1/2/3/4/5/7/8/20/28; LTE-TDD: B38/39/40/41 (200M); WCDMA: B1/2/4/5/8; GSM: GSM850/EGSM900/DCS1800/PCS1900
	-EU(EMEA/ South Korea/ South Asia/ India/ Australia/New Zealand/ South Africa)	/	/
	-NA (North America)	LTE-FDD: B2/4/5/7/12/13/14/17/25/26/66/71; LTE-TDD: B41;	LTE-FDD: B2/4/5/7/12/13/14/17/25/26/66/71; LTE-TDD: B41
	-JP(Japan)	LTE-FDD: B1/3/5/8/11/18/19/21/26/28; LTE-TDD: B41; WCDMA: B1/6/8/19	LTE-FDD: B1/3/5/8/11/18/19/21/26/28; LTE-TDD: B41; WCDMA: B1/6/8/19
	-WF (Global)	2.4 & 5 GHz, 802.11a/b/g/n/ac, BT 2.1 + EDR/3.0/4.1 LE/4.2 BLE/ 5.0 LE	-WF Only Wi-Fi/BT
CPU	SM6225 4xA73@2.4 GHz 4xA53@1.9 GHz	UIS 7863 Dual-core A75@2.0GHz+ Hexa-core A55@1.8GHz	QCM6125; Kryo Gold: high-performance quad-core processor @ 2.0 GHz; Kryo Silver: low-power quad-core processor @ 1.8 GHz
GPU	Adreno™ 610@1.1 GHz	Arm Mali G57	Qualcomm high-performance Adreno™ 610 graphics engine
NPU	0.9 TOPS	/	1.1 TOPS
Memory	4 GB LPDDR4X + 64 GB eMMC (Default) 3 GB LPDDR4X + 32 GB eMMC (Optional) 8 GB LPDDR4X + 128 GB eMMC (Optional)	16 GB eMMC + 2 GB LPDDR4X(default) 32 GB eMMC + 2 GB LPDDR4X(optional) 64 GB eMMC + 4 GB LPDDR4X(optional)	32GB eMMC+3GB LPDDR4X; 64GB eMMC+4GB LPDDR4X; 128GB UFS+8GB LPDDR4X
Operating system	Android 13/14	Android 12/14	Android 10/11/13/15*
Supply voltage range	3.4 V ~ 4.4 V	3.55 V ~ 4.4 V, typ. 3.8 V	3.55 V ~ 4.4 V, typ. 3.8 V
Weight (approx.) (g)	10.6	TBD	12.0
Operating temperature	-35°C ~ +70°C	-30°C ~ +75°C	-35°C ~ +75°C
Data transmission (Max.)			
LTE (Mbps)	LTE-FDD: 150 (DL)/50 (UL); LTE-TDD: 130 (DL)/30 (UL)	LTE-FDD: 150 (DL)/50 (UL); LTE-TDD: 130 (DL)/30 (UL)	Cat 4; LTE-FDD: 150 (DL)/50 (UL); LTE-TDD: 130 (DL)/30 (UL)
UMTS	DC-HSDPA: 42 Mbps (DL); HSUPA: 5.76 Mbps (UL); WCDMA: 384 Kbps (DL/UL)	DC-HSPA+: 42 Mbps (DL); HSPA+/HSPA: 5.76 Mbps (UL); WCDMA: 384 Kbps (DL/UL)	DC-HSDPA: 42 Mbps (DL); DC-HSPA: 5.76 Mbps (UL); WCDMA: 384 Kbps (DL/UL)
TD-SCDMA (Mbps)	/	/	/
CDMA2000	/	/	EVDO : 3.1 Mbps (DL)/1.8 Mbps (UL) 1X Advanced: 307.2 Kbps (DL/UL)
GSM (Kbps)	EDGE: 296 (DL)/236.8 (UL); GPRS: 107 (DL)/85.6 (UL)	EDGE: 296 (DL)/236.8 (UL); GPRS: 107 (DL)/85.6 (UL)	EDGE: 296 (DL)/236.8 (UL); GPRS: 107 (DL)/85.6 (UL)
Interfaces			
LCM	One 4-lane MIPI DSI, supports up to 1080 × 2520 @ 90 fps	1 × MIPI DSI 4-lane, with up to FHD+ (2520 × 1080) @ 60 fps/ HD+ (1680 × 720) @ 90 fps	4-lane MIPI DSI, supports up to 1920 × 1200 @ 60 fps or 1080 × 2520 @ 60 fps
Camera	Two 4-lane MIPI CSI, up to 2.5 Gbps/ lane Each 4-lane can be divided into (2-lane + 1-lane), and supports 3 concurrent cameras 3 ISPs, supports up to 3 concurrencies (13 MP + 13 MP + 5 MP) or 2 concurrencies (25 MP + 5 MP or 16 MP + 16 MP) or 1 single connection of 32 MP (30 fps @ ZSL) Up to 64 MP for 1 single camera (ZSL)	2 × 4-lane MIPI CSIs + 1 × 1-lane MIPI CSI, with up to 2.5 Gbps/ lane data rate; up to 3 cameras which can work concurrently; a single camera can support up to 48 M @ 17 fps ZSL	3 groups of 4-lane MIPI CSI, up to 2.1 Gbps per lane; Each group of 4-lane can be divided into (2-lane + 1-lane), supports up to 6 cameras, supports 2 concurrently working cameras; Dual-ISP, supports up to (16 MP + 16 MP) or up to 24 MP
Touch panel	Capacitive touch panel	Capacitive touch pane	Capacitive touch panel
Audio	3 analog audio inputs: MIC1, MIC2 and MIC3 3 analog audio outputs: speaker, headset and earpiece	Analog outputs × 3: speaker, headset and earpiece Analog inputs × 3: MIC1, MIC2 and MIC3	Analog audio: speakers, handsets, headphones, 3-way microphones
Video	Encoding: 1080P @ 60 fps; HEVC/ H.264/ H.265 Decoding: 1080P @ 60 fps; HEVC/ H.264/ H.265/ VP9	Encoding + decoding: H.265/ H.264 1080P @ 60 fps	Encode: 4K @ 30 fps; HEVC/ H.264/ VP8 Decode: 4K @ 30 fps; HEVC/ H.264/ VP8/ VP9 1080P @ 30 fps, MPEG-2
USB	× 1, supports USB 3.1 Type-C interface, compatible with USB 2.0	× 1, USB 2.0 ¹	× 1, supports USB 3.1 Type-C interface, compatible with USB 2.0
I2C	× 4	× 7	× 2
(U)SIM	× 2, supports 1.8/ 2.95 V (U)SIM cards; supports (U)SIM card hot swap detection and DSDS (Dual-SIM Dual-Standby)	× 2, 1.8/ 2.95 V (U)SIM card, (U)SIM card hot-swap detection and DSDS	× 2; supports 1.8/ 2.95 V (U)SIM cards; supports (U)SIM card hot swap detection and dual-SIM dual-standby
UART	× 3, Debug UART: 2-wire serial port, dedicated for debug UART1: 2-wire serial port UART0: 4-wire serial port, supports RTS and CTS hardware flow control	× 4	× 3 (Debug UART: 2-wire serial port, specialized for debugging use; UART03: 2-wire serial port; UART00: 4-wire serial port, supports RTS and CTS hardware flow control with maximum data rate of 4 Mbps)
SD card	× 1, SD 3.0, supports 4-bit SDIO	× 1, SD 3.0, 4-bit SDIO	× 1 (3.0, 4-bit SDIO)
PWRKEY	1.1 V, internally pulled up	× 1, internally pulled up	Supported
SPI	× 1 (Multiplexed from UART0)	× 4	× 2
ADC	× 2, general-purpose ADC interface	× 1, general-purpose ADC interface	× 2, general-purpose ADC interfaces
GPIO	× 26	× 36	× 20
PWM	/	/	× 1
Motor driver	Supported	× 1	/
Flashlight driver	/	/	/
Antenna	× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth antennas respectively	× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth antennas respectively (SC200J-WF)*; × 1, Wi-Fi & Bluetooth antenna	× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth (SC668S-WF: × 1, Wi-Fi & Bluetooth)
Enhanced features			
BT	Bluetooth 2.1 + EDR/ 3.0/ 4.1 LE/ 4.2 BLE/ 5.0 LE	Bluetooth 5.0 (BR/ EDR + BLE) ¹	BT2.1+EDR/3.0/4.1 LE/4.2 BLE/5.0
Wi-Fi	2.4 & 5 GHz 802.11a /b/g/n/ac	2.4 & 5 GHz, 802.11a/b/g/n/ac ¹	2.4G/5G, 802.11a/b/g/n/ac
GNSS	GPS/GLONASS/BDS/Galileo	GPS/GLONASS/BDS/Galileo	GPS/GLONASS/BeiDou/Galileo/QZSS
Charge function	Not supported, need a plugin	/	Need external third-party charging chips and meters
Dual LCDs	/	/	Supports dual screen display, 1920 × 1200 or 1080 × 2520 (MIPI screen) 1920 × 1080 (DP screen)
DSDS	Supported	Supported	Supported dual-SIM dual-standby
Firmware upgrade	OTG/USB	Supported	Firmware upgrade via USB or OTA
Certifications ¹	CE/TELEC*/JATE*/FCC*/ PTCRB*/GCF*/AT&T*/Verizon/T-Mobile	CCC/SRRC/NAL/CE/RCM/Anatel	Verizon/AT&T/T-Mobile/CCC/SRRC/NAL/CE/RCM/UKCA/GCF/KC/PTCRB/FCC/IC/JATE/TELEC
Recommended applications	smart cash registers, smart POS, tax control machines, smart safety, automotive equipment, high-end information acquisition equipment, smart robots, smart home, smart hardware, industrial smart handheld equipment, audio and video recorders, smart interphones, smart wearables, vending machines, logistics cabinets, etc.		Smart POS, smart home gateways, smart robots, smart wearables, safety, PDAs & tablets, vending machines, delivery lockers, telematics, mobile computing, in-car video streaming and entertainment systems, etc.

Note 1: May depend on modules' variant.

* Planning/ Under development/ In progress

Product		SC696S	SG560D
			
Form factor		LCC+LGA	LGA
Dimensions (mm)		43.0 × 44.0 × 2.85	42.5 × 56.5 × 2.95
5G feature		/	3GPP Release 15, DL 4 × 4 MIMO/UL 2 × 2 MIMO
LTE feature		LTE Cat 4	LTE Cat 15, 3GPP Release 15, DL MIMO 4 × 4
Frequency bands (MHz)	-CE (China/ India)	/	5G SA/NSA: n1/3/5/7/8/20/28/41/78/79; LTE: B1/3/5/8/34/38/39/40/41; WCDMA: B1/5/8
	-EM (Europe/ Asia Pacific)	-EM (EMEA/South Korea/South Asia/Latin America/India/Australia/New Zealand/South Africa) LTE-FDD: B1/2/3/4/5/7/8/20/28; LTE-TDD: B38/39/40/41 (200M); WCDMA: B1/2/4/5/8; GSM: GSM850/EGSM900/DCS1800/PCS1900	-EM (EMEA/South Korea/South Africa/Latin America/Australia/India/New Zealand/China/ Japan) 5G SA/NSA: n1/3/5/7/8/20/28/38/40/41/77/78/79; LTE: B1/2/3/4/5/7/8/12/17/18/19/20/26/28/32/34/38/39/40/41/42; WCDMA: B1/2/4/5/6/8/19; GSM: B2/3/5/8
	-NA (North America)	LTE-FDD:B2/4/5/7/12/13/14/17/25/26/66/71; LTE-TDD: B41	5G SA/NSA: n2/5/7/12/13/14/25/26/29/30/38/41/48/66/70/71/77/78; LTE: B2/4/5/7/12/13/14/17/25/26/29/30/38/41/42/43/46/48/66/71
	-J (Japan)	/	/
	-WF (Global)	Only Wi-Fi/BT	only Wi-Fi & BT
CPU		QCM6125 Kryo Gold: high-performance quad-core processor @ 2.0 GHz; Kryo Silver: low-power quad-core processor @ 1.8 GHz	Qualcomm QCM6490 ARM Cortex technology 1 x Kryo670 Goldplus@ 2.7 GHz + 3 x Kryo670 Gold@ 2.4GHz + 4 x Kryo670 Silver@ 1.9GHz
NPU		1.1 TOPS	12.15 TOPS
GPU		Qualcomm high-performance Adreno™ 610 graphics engine	Qualcomm® Adreno™ 643 @ 812 MHz
Memory		16 GB eMMC + 2 GB LPDDR4X	4 GB LPDDR4X + 64 GB UFS 8 GB LPDDR4X + 128 GB UFS
Operating system		Linux	Android 12/13/14/15, Ubuntu 20.04
Supply voltage range		3.55 V ~ 4.4 V, typ. 3.8 V	3.55 V ~ 4.4 V, typ. 4.0 V
Weight (approx.) (g)		12.0	17.5
Operating temperature		-35°C ~ +75°C	-35°C ~ +75°C
Data transmission (Max.)			
5G		/	5G SA: 2.1 Gbps (DL)/450 Mbps (UL); 5G NSA: 2.5 Gbps (DL)/550 Mbps (UL)
LTE		Cat 4: LTE-FDD: 150 Mbps (DL)/50 Mbps (UL); LTE-TDD: 130 Mbps (DL)/30 Mbps (UL)	1.2 Gbps (DL)/200 Mbps (UL)
UMTS		DC-HSDPA: 42 Mbps (DL); DC-HSPA: 5.76 Mbps (UL); WCDMA: 384 Kbps (DL/UL)	DC-HSPA+: 42 Mbps (DL)/5.76 Mbps (UL); WCDMA: 384 Kbps (DL)/384 Kbps (UL)
TD-SCDMA		/	/
CDMA2000		EVDO : 3.1 Mbps (DL)/1.8 Mbps (UL) 1X Advanced: 307.2 Kbps (DL/UL)	/
GSM (Kbps)		EDGE: 296 (DL)/236.8 (UL); GPRS: 107 (DL)/85.6 (UL)	EDGE: 296 (DL)/236.8 (UL); GPRS: 107 (DL)/85.6 (UL)
Interfaces			
LCM		4-lane MIPI DSI, supports up to 1920 × 1200 @ 60 fps or 1080 × 2520 @ 60 fps	1 × 4-lane MIPI DSI, support up to 2.5 Gbps/ lane, 1200 × 2520 @ 144 fps; 1 × DP over Type C, support up to 4K (3840 × 2160) @ 60 fps; Support Wi-Fi Miracast 4K @ 60fps
Camera		3 groups of 4-lane MIPI CSI, up to 2.1 Gbps per lane; Each group of 4-lane can be divided into (2-lane + 1-lane), supports up to 6 cameras, supports 2 concurrently working cameras; Dual-ISP, supports up to (16 MP + 16 MP) or up to 24 MP	4 × 4-lane MIPI CSI, Supports up to 2.5 Gbps/ lane; 3 × ISP, 3 × 27 MP @ 24 fps; or 3 × 22MP @ 30 fps; or 36 MP + 27 MP @ 24 fps; or 36MP + 22MP @ 30 fps; or Max. 1×64 MP @ 30 fps
Touch panel		Capacitive touch panel	Capacitive touchscreen, I2C controls
Audio		Analog audio: speakers, handsets, headphones, 3-way microphones	Needs external audio codec
Video		Encode: 4K @ 30 fps; HEVC/ H.264/ VP8 Decode: 4K @ 30 fps; HEVC/ H.264/ VP8/ VP9 1080P @ 30 fps, MPEG-2	Encode: 4K (H.264/ H.265) @ 30 fps Decode: 4K (H.264/ H.265/ VP9) @ 60 fps
USB		× 1, supports USB 3.1 Type-C interface, compatible with USB 2.0	× 2, USB 3.1 Type-C with DisplayPort 1.4, compatible with USB 2.0; USB 2.0 Host
I2C		× 2	× 8, for cameras, touch screens, sensors and other peripherals
(U)SIM		× 2; supports 1.8/ 2.95 V (U)SIM cards; supports (U)SIM card hot swap detection and dual-SIM dual-standby	× 2, Support 1.8/ 2.95 V (U)SIM cards, with (U)SIM card detection function; Support DSOS
UART		× 3 (Debug UART: 2-wire serial port, specialized for debugging use; UART03: 2-wire serial port; UART00: 4-wire serial port, supports RTS and CTS hardware flow control with maximum data rate of 4 Mbps)	× 3, supports 4 Mbps with Hardware Flow Control
SD card		× 1 (3.0, 4-bit SDIO)	× 1, SD 3.0, 4-bit SDIO
PWRKEY		Supported	Supported
SPI		× 2	× 1
ADC		× 2, general-purpose ADC interface	× 4, General-purpose ADC interfaces
GPIO		× 20	× 35
PWM		× 1	× 1
Motor driver		/	× 1
Flashlight driver		/	× 1
Antenna		× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth (SC696S-WF: × 1, Wi-Fi & Bluetooth)	× 8, cellular : × 5, Wi-Fi & Bluetooth: × 1, Wi-Fi MIMO: × 1, GNSS: × 1
Enhanced features			
BT		BT2.1+EDR/3.0/4.1 LE/4.2 BLE/5.0	Bluetooth 2.1 EDR/3.0 HS/4.2 LE/5.2 LE
Wi-Fi		2.4G/5G, 802.11a/b/g/n/ac	2.4 & 5 & 6 GHz, 802.11a/b/g/n/ac/ax; Wi-Fi 6E, 2 × 2 MU-MIMO, DBS
GNSS		GPS/GLONASS/BeiDou/Galileo/QZSS	GPS/GLONASS/BDS/NavIC/Galileo/QZSS/SBAS; L1 + L5
Charge function		Need external third-party charging chips and meters	Build-in Charge IC & Fuel Gauge Qualcomm Quick Charge technology
Dual LCDs		Supports dual screen display, 1920 × 1200 or 1080 × 2520 (MIPI screen) 1920 × 1080 (DP screen)	/
DSOS		Supports dual-SIM dual-standby	Supports dual SIM dual standby
Firmware upgrade		Firmware upgrade via USB or OTA	Firmware upgrade via USB or OTA
Certifications¹		Verizon®/AT&T/CE/RCM/GCF/FCC/IC/PTCRB	Verizon®/AT&T/Mobile/UKCA/CE/RCM/GCF/PTCRB/FCC/IC
Recommended applications		Smart POS, smart home gateways, smart robots, smart wearables, safety, PDAs & tablets, vending machines, delivery lockers, telematics, mobile computing, in-car video streaming and entertainment systems, etc.	

Note 1: May depend on modules' variant.

* Planning/ Under development/ In progress

Smart modules

Product		SG885G-WF
		
Form factor		LGA
Dimensions (mm)		49.0 × 51.0 × 4.15
Frequency bands (MHz)	-WF (Global)	/
	-AP (Global)	/
CPU		1 ×Kryo Prime @ 3.2 GHz + 4 ×Kryo Gold @ 2.8 GHz + 3 ×Kryo Silver @ 2.0 GHz
GPU		Adreno™ 740 GPU
NPU		Dual eNPU V3, 4 × HVX, HMX, 48 INT8, 12 FP16 TOPs
Memory		8 GB LPDDR5X + 128 GB UFS 3.1 12 GB LPDDR5X + 256 GB UFS 4.0 16 GB LPDDR5X + 256 GB UFS 4.0 16 GB LPDDR5X + 512 GB UFS 4.0
Operating system		Android 13
Supply voltage range		3.55 V ~ 4.4 V, typ. 3.8 V
Weight (approx.) (g)		18.6
Operating temperature		-30°C ~ +75°C
Data transmission (Max.)		
LTE (Mbps)		/
UMTS		/
TD-SCDMA		/
CDMA2000		/
GSM		/
Interfaces		
LCM		2 × 4-lane MIPI DSI
Camera		6 × 4-lane MIPI CSI
Touch panel		Supported
Audio		SWR, Digital microphone, MI2S interfaces, HIFI I2S
Video		Encoder: 4K @ 120 fps; 8K @ 30 fps Decoder: 4K @ 240 fps; 8K @ 60 fps Native encode support for H.265 Main 10, H.265 Main, H.264 high formats Native decode support for H.265 Main 10, H.265 Main, H.264 High, and VP9 profile 2
USB		× 1, both USB 3.1/ 2.0 are compliant
I2C		×21 Max
UART		×10 Max
SD card		× 1, SD 3.0
PWRKEY		× 1
SPI		×9 Max
ADC		× 2, general-purpose ADC interfaces
GPIO		Supported
PWM		Supported
Motor driver		× 1
Flashlight driver		× 2
WLED Sink		/
Antenna		× 2, Wi-Fi & Bluetooth, Wi-Fi MIMO
Enhanced features		
BT		Bluetooth 5.3 (BR/EDR + BLE)
WLAN		2.4 & 5 & 6 GHz, 802.11a/b/g/n/ac/ax/be, 2 ×2 MIMO DBS, HBS Wi-Fi 7
GNSS		/
Charge function		Supported
Dual LCDs		Supported*
Firmware upgrade		Via USB
Certifications		SRRC/FCC/IC/CE*
Recommended applications		Video conference, live broadcast, games, edge computing, robots AR/VR, Smart retail, intelligent security and other terminal products and industries.

* Planning/ Under development/ In progress



Industrial motherboards

Industrial motherboards

Product	QSM368ZP	QSM668SR	QSM560DR	PI-SG565D
				
Form factor	MOB	MOB	MOB	MOB
Dimensions (mm)	100 × 120 × 22.25	102 × 100 × 23	106 × 120	68.7 × 108.99 × 20.77
LTE feature	/	LTE Cat 4	/	/
Frequency bands (MHz)	-CN (China/India)	/	/	/
	-EM(Europe/Asia Pacific)	/	/	/
	-NA (North America)	/	/	/
	-WF (Global)	WLAN: 2.4 & 5 GHz, Wi-Fi 5, 802.11a/b/g/n/ac; Bluetooth: 4.2 (BR/ EDR + BLE)	WLAN: 2.4/5/6 GHz, 802.11a/b/g/n/ac/ax, DBS, 2 × 2 MU-MIMO; BT: Bluetooth 5.2	Wi-Fi 2.4 & 5 G, IEEE 802.11a/b/g/n/ac, Bluetooth 5.0
CPU	RK3568, 4* 64 Quad-core ARM Cortex-A55 CPU @ 2.0 GHz	QCM6125 platform - 8-core 64-bit processor	Octa-core 5G SoC 1 × Gold Plus @ 2.7 GHz+ 3 × Gold @ 2.4 GHz+ 4 × Silver @ 1.9 GHz+ 4 × Silver @ 1.9 GHz	QCS6490, octa-core SoC 1 × Gold Plus @ 2.7 GHz+ 3 × Gold @ 2.4 GHz+ 4 × Silver @ 1.9 GHz
GPU	ARM Mali G52 GPU	Adreno 610 GPU	Adreno™ 643 @ 812 MHz	Adreno™ 642L/643 @ 812 MHz
NPU	1 TOPS	1.1 TOPS	12.15 TOPS	12.15 TOPS @ int8
Memory	Commercial-grade: LP4/ LP4x, default 2 GB + 32 GB	4GB+64GB(LPDDR4X + UFS) 3 GB LPDDR4X + 32 GB EMMC+ 8 GB LPDDR4X + 128 GB UFS*	4 GB LPDDR4X + 64 GB UFS	8 GB LPDDR4X + 128 GB UFS
Operating system	Linux (Kernel 4.19)/ Android 13	Android/Ubuntu	Ubuntu 20.04	Linux/Ubuntu*
Supply voltage range	DC 10~12 V (typical 12 V/ 5 A)	DC: 12-19 V	DC 7 ~ 12 V	Voltage of the power supply through USB Type-C: 9V
Weight (approx.) (g)	90	97.7	118	68
Operating temperature	Commercial-grade: -10 °C ~ +75 °C	-20 °C ~ + 75 °C	-35 °C ~ +75 °C	-20 °C ~ +70 °C
Data transmission (Max.)				
LTE (Mbps)	/	LTE FDD: 150 (DL)/ 50 (UL) LTE TDD: 130 (DL)/ 30 (UL)	/	/
DC-HSPA+ (Mbps)	/	42 (DL)/ 5.76 (UL)	/	/
WCDMA (Kbps)	/	384 (DL)/ 384 (UL)	/	/
CDMA2000	/	EVD0: 3.1 Mbps (DL)/ 1.8 Mbps (UL); 1X Advanced: 307.2 Kbps(DL)/ 307.2 Kbps(UL)	/	/
GSM (Kbps)	/	EDGE: 296 (DL)/ 236.8 (UL); GPRS: 107 (DL)/ 85.6 (UL)	/	/
Interfaces				
LCM	1 × 4-lane MIPI DSI, Max 1920 × 1080 @ 60 fps	HDMI	eDP × 1, supports DisplayPort 1.4, up to 4K (3840 × 2160) @ 30 fps	1 × 4-lane MIPI DSI, with up to 2.5 Gbps/ lane data rate, FHD+ (1200 × 2520) @ 144 fps based on MIPI standards
Camera	2 × 2-lane MIPI CSI, Max 2.5 Gbs/ lane, 8 MP	× 2, 4-lane MIPI CSI	3 × MIPI Camera	4 × 4-lane MIPI CSIs, up to 2.5 Gbps/ lane data rate
Touch panel	/	/	/	external capacitive touch screen, controlled by I2C
Audio	Loudspeaker, earpiece and microphone	× 2, digital microphone × 1, speaker × 1, 3.5 mm earphone jack	× 1, 3.5 mm headset jack line out	1 × 3.5 mm earpiece connector, OMTP and CTIA audio output interface; 1 × HDMI interface, audio output; 1 × on-board DMIC
Video	Encoding: 1080p @ 60 fps Decoding: 4K @ 60 fps H.264 AVC/ MVC Main10 Profile yuv400/ yuv420/ yuv422 @ L5.1, H.265 HEVC/ MVC Main10 Profile yuv420 @ L5.1, H.264/ AVC BP/ MP/ HP @ level4.2, H.265/ HEVC MP @ level4.1	Video coder: 4K @ 30 fps, HEVC/H.264/VP8 Video decoder: 4K @ 30 fps, HEVC/H.264/VP8/VP9 1080P @ 30 fps, MPEG-2	Encoding: 4K (H.264/ H.265) @ 30 fps Decoding: 4K (H.264/ H.265/ VP9) @ 30 fps	1 × USB Type-C interface (DP Over USB Type-C), DisplayPort 1.4, with up to 4K (3840 × 2160) @ 60 fps; 1 × HDMI interface, DMI 2.0 (the frame rate is to be determined*), encoding: 4K (H.264/H.265) @ 30 fps, decoding: 4K (H.264/H.265/ VP9) @ 60 fps; 1 × FPC connector1, FHD+ (1200 × 2520) @ 144 fps based on MIPI standards
USB	2 × USB 2.0 Type-A classic interfaces (USB2, USB3), host mode only; 1 × USB 3.0 Type-A classic interface (USB1), host mode only; 1 × USB 3.0 Type-A classic interface (USB0), host mode only; 1 × Micro USB 2.0 classic interface (USB0), both host and slave modes	× 1, USB 3.0 Type-A × 3, USB 2.0 Type-A	× 5, 4 USB 3.0 Type-A classic interfaces, 1 USB Type-C interface (only supports USB 2.0, used for debugging and firmware upgrade)	1 × USB 3.1 Type-C interface, compatible with USB 2.0, with up to 5 Gbps data rate; 2 × standard USB 2.0 Type-A interface, host mode only, with up to 480 Mbps data rate; 1 × USB Type-C interface, main power supply interface
I2C	× 2	/	/	× 6 (multiplexed with other interfaces)
(U)SIM	× 1, which can be connected to Mini PCIe modules	Supported	× 1, supports 1.8/ 2.95 V (U)SIM card	/
SDIO	1 × SD	Supported	/	× 1 SD 3.0, 4-bit SDIO
UART	× 4	Supported	1 × RS485 2 × RS232	× 1 SH1.0 connector, only for debugging; × 4 (multiplexed with other interfaces)
SD card	× 1, compliant with SD 3.0 specification, supporting hot swap	Supported	× 1	× 1 SD 3.0, 4-bit SDIO
PWRKEY	Supported	/	× 1	× 1, internally pulled up
SPI	/	/	/	× 4 (multiplexed with other interfaces)
ADC	× 4	Supported	/	× 3
I2S	/	Supported	/	× 1 (multiplexed with other interfaces)
GPIO	/	Supported	× 10	× 28 (multiplexed with other interfaces)
PWM	/	/	/	× 3
Antenna	1 × Wi-Fi/ Bluetooth antenna	× 4: Main, Rx-diversity, GNSS, Wi-Fi/Bluetooth antennas respectively (QSM668SR-WF*: 1, Wi-Fi/ Bluetooth antenna)	/	1 × Wi-Fi & Bluetooth antenna
Enhanced features				
BT	Bluetooth 4.2 (BR/ EDR + BLE)	Bluetooth 2.1 + EDR/ 3.0/ 4.1 LE/ 4.2 BLE/ 5.0 LE	Bluetooth 5.2	Supported
Wi-Fi	2.4 & 5 GHz, Wi-Fi 5, 802.11a/b/g/n/ac	2.4/ 5 GHz, 802.11a/ b/ g/ n/ ac	2.4/5/6 GHz, 802.11a/b/g/n/ac/ax, DBS, 2 × 2 MU-MIMO	Supported
GNSS	/	GPS/GLONASS/BDS/Galileo/QZSS/SBAS	/	/
Firmware upgrade	/	/	FW Update over USB	USB0; OTA
Certifications	SRRC/FCC/IC/KC	CE*/FCC*	CE*/FCC*	FCC/IC/CCC/CE
Recommended applications	IoT gateways, smart commercial displays, industrial device terminals, smart hospitals, vehicle consoles and automotive NVR.	Intelligent robots, IoT gateways, smart home devices, industrial equipment terminals, smart commercial displays, intelligent POS systems, smart security solutions, in-vehicle devices, information collection terminals, smart vending machines, and logistics lockers.	Robotics and industrial control fields.	Edge computing, robots, industrial control, multimedia terminals, digital billboards, smart safety, industrial-grade PDA, etc.

QSM560DR: Ethernet × 2, 10/100/1000 Mbps ethernet ports, CAN × 1, M.2 × 1, supports external M.2 4G modules.

* Planning/ Under development/ In progress



LPWA modules

LPWA modules

Product	BG96	BG95 Series ¹	BG95xA-GL Series	BG950S-GL
				
Form factor	LGA	LGA	LGA	LGA
Dimensions (mm)	26.5 × 22.5 × 2.3	23.6 × 19.9 × 2.2	23.6 × 19.9 × 2.2 (BG950A-GL/BG951A-GL/BG955A-GL)	23.6 × 19.9 × 2.2
RAT	LTE Cat M1/NB1/EGPRS	LTE Cat M1/Cat NB2/EGPRS	LTE Cat M1/Cat NB1/NB2; LTE Cat M1/NB1/NB2/GPRS (BG955A-GL)	Cat-M & NB IoT
Frequency bands (MHz)	LTE-FDD: B1/2/3/4/5/8/12/13/18/19/20/26/ ² 28; EGPRS: 850/900/1800/1900MHz	LTE-FDD: B1/2/3/4/5/8/12/13/18/19/20/25/26 (Cat M1 Only)/27 (Cat M1 Only)/28/31/66/71 (Cat NB2 Only)/72/73/85/86 ³ (Cat NB2 only)/87 ⁴ /88 ⁵ ; EGPRS: 850/900/1800/1900MHz	LTE-FDD: B1/2/3/4/5/8/12/13/17 (Cat NB1/NB2 Only)/18/19/20/25/26 (Cat M1 Only)/27 (Cat M1 Only)/28/66 (BG950A-GL/BG951A-GL/BG952A-GL/BG953A-GL); LTE-FDD: B1/2/3/4/5/8/12/13/17 (Cat NB1/NB2 Only)/18/19/20/25/26 (Cat M1 Only)/27 (Cat M1 Only)/28/66; GPRS: 850/900/1800/1900MHz (BG955A-GL)	Cat M1: B1/2/3/4/5/8/12/13/18/19/20/25/26/27/28/66/71; Cat NB2: B1/2/3/4/5/8/12/13/17/18/19/20/25/26/28/66/71/85
Weight (approx.) (g)	3.1	2.15	2.15 (BG950A-GL/BG951A-GL); 2.05 (BG955A-GL)	2.31
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Data transmission (Max.)				
LTE Cat M1 data rates (Kbps)	375 (DL)/375 (UL)	588 (DL)/1119 (UL)	588 (DL)/1119 (UL)	Cat M1*: 588 (DL)/1119 (UL)
LTE Cat NB1 data rates (Kbps)	32 (DL)/70 (UL)	32 (DL)/70 (UL)	27.2 (DL)/62.5 (UL)	27.2 (DL)/62.5 (UL)
LTE Cat NB2 data rates (Kbps)	/	127 (DL)/158.5 (UL)	127 (DL)/158.5 (UL)	Cat NB2*: 127 (DL)/158 (UL)
EDGE data rates (Kbps)	296 (DL)/236.8 (UL)	296 (DL)/236.8 (UL)	/	/
GPRS data rates (Kbps)	107 (DL)/85.6 (UL)	107 (DL)/85.6 (UL)	85.6 (DL)/42.8 (UL) (BG955A-GL)	/
SMS	•	Point-to-point M0 and MT; Text and PDU mode; SMS cell broadcast	Point-to-point M0 and MT; Text and PDU mode; SMS cell broadcast	Point-to-Point M0 and MT; SMS cell broadcast; Text and PDU mode; SMS storage; ME by default
Protocols	PPP/TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/NITZ/PING/MQTT (S)/LwM2M/CoAP (S)/IPv6/DNS/NTP	PPP/TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/NITZ/PING/MQTT (S)/MQTT-SN/LwM2M/CoAP (S)/IPv6/DNS/NTP	PPP/TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/NITZ/PING/MQTT/LwM2M	TCP/PPP*/UDP/SSL*/MQTT/FTP (S)*/HTTP (S)/LwM2M*/IPv4/IPv6*/TLS*/DTLS*/PING*/CoAP/NITZ*
Interfaces				
(U)SIM	1.8 V/ 3 V	1.8 V	1.8 V	× 1 (Supports 1.8 V only)
UART	× 3 (MAIN, DEBUG, NMEA)	× 3 (MAIN, DEBUG, NMEA)	× 3 (MAIN, DEBUG, GNSS) (BG950A-GL/BG951A-GL/BG955A-GL)	× 2
USB	USB 2.0 × 1	USB 2.0 × 1	USB 2.0 × 1	/
I2C	I2C ³ × 1	I2C ³ × 1	/	/
ADC	ADC × 2	ADC × 1	ADC × 2	× 2
GPIO	GPIO × 2 (I2C and NMEA can be re-configured as GPIO)	GPIO ⁴ × 9	GPIO × 9 (BG950A-GL/BG951A-GL/BG955A-GL)	× 9
RESET	RESET × 1	RESET × 1	RESET × 1	× 1
PCM	PCM ⁵ × 1	PCM ⁵ × 1	/	/
Antenna	Primary, GNSS	Antenna ⁶ : 2 (for main antenna and GNSS antenna, respectively)	2 (for main antenna and GNSS antenna, respectively)	× 2 (Main Antenna: × 1; GNSS Antenna*: × 2)
Enhanced features				
QuecOpen [*]	Simplifies the Development of embedded applications	Simplifies the Development of embedded applications	/	/
iSIM	/	/	/	/
DFOTA	•	•	•	•
SIM detection	•	•	•	•
GNSS	Optional	Optional	GPS, GLONASS (BG950A-GL/BG955A-GL); GPS/GLONASS/Galileo/Beidou/QZSS, LTE & GNSS concurrency (BG951A-GL)	•
Firmware update	via USB Interface	via USB Interface	via UART/USB*/DFOTA	•
Electrical features				
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V	typ. 3.8 V / typ. 3.3 V ⁸	2.2 V ~ 4.35 V, typ. 3.3 V (BG950A-GL/BG951A-GL); 3.3 V ~ 4.3 V, typ. 3.8 V (BG955A-GL)	VBAT_BB/ VBAT_RF: 2.2 V ~ 4.35 V, typ. 3.3 V
Power consumption	10 μA@PSM	3.9 μA@PSM ⁷	1.5 μA@ PSM	Power Saving Mode: 1.35 μA; Sleep Mode @ USCLK=2: Cat M1: 0.6 mA @ DRX = 1.28 s; 18 μA @ e-I-DRX = 40.96 s; PTW = 1.28 s; DRX = 1.28 s; 12 μA @ e-I-DRX = 81.92 s; PTW = 1.28 s; DRX = 1.28 s;
Max output power	Power class 3 23dBm @ LTE bands	Power class5 21dBm @ LTE bands / Power class3 23dBm@ LTE bands ⁹ / Power class 2 26dBm@ LTE B31/72/73 of BG95-M4/Power class 2 26dBm@LTE B31/72/73 and Power class 3 23dBm@other LTE bands of BG95-M9	Power class 3 23dBm @ LTE bands	Power class 3 23dBm @ LTE bands
Software features				
USB serial driver	Windows 7/8/11/10/11, Linux 2.6 or later, Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x/13.x/14.x	Windows 7/8/8.1/10/11, Linux 2.6-5.15, Android 4.x/5.x/6.x/7.x/ 8.x/9.x/10.x/11.x/12.x	/	/
GNSS driver	Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x/13.x/14.x	Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x	/	•
RIL driver	Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x/13.x/14.x	Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x	/	•
NDIS driver	Windows 10/11	/	/	/
Certifications ⁹	Vodafone/Deutsche Telekom/Telefónica/Verizon/AT&T/T-Mobile/U.S. Cellular/Rogers/Telus/Telstra/SKT/LGU+/NTT DOCOMO/SoftBank/KDDI/CE/GCF/PTCRB/FCC/IC/IFETEL/RCM/KC/JATE/TELEC/NBCT/IMDA/ICASA/NCC/CCC	Vodafone/Deutsche Telekom/Telefónica/Verizon/AT&T/T-Mobile/U.S. Cellular/Orange/Rogers/Telus/Telstra/KT/SKT/LGU+/NTT DOCOMO/SoftBank*/KDDI/CE/UKCA/GCF/PTCRB/FCC/IC/Anatel/IFETEL/RCM/KC/JATE/TELEC/NBCT*/IMDA/NCC/RoHS/ATEX/PEN/CCC	Vodafone /Deutsche Telekom/Verizon/AT&T/T-Mobile/Telus/Telstra/KT/SKT*/LGU+/NTT DOCOMO*/KDDI*/CE/GCF/PTCRB/FCC/IC/RCM/KC/JATE/TELEC	GCF*/CE/PTORB*/FCC/IC/RCM
Recommended applications	Gas detectors, soil PH testers, optical sensors, machinery alarm systems, irrigation controllers, elevators, asset tracking electronics, pet tracking, water/gas metering, smart parking systems, fire hydrants, smoke alarms, smart bins, street lighting			Trackers, metering, smart health

Note 1: For different variants, please refer to the BG95 specification.

Note 2: BG95-M9 support B86/B87/B88.

Note 3: For Voice Call only.

Note 4: BG95-MF provides 7 GPIO Interfaces, please refer to HD for details.

Note 5: BG95-MF provides 3 antenna interfaces, please refer to HD for details.

Note 6: For the supply voltage of different variants, please refer to the BG95 Hardware Design document.

Note 7: For the power consumption of different variants, please refer to the BG95 Hardware Design document.

Note 8: For the max output power of different variant, please refer to BG95 Hardware Design document.

Note 9: May depend on modules' variant.

* Planning/ Under development/
In progress
• Supported

LPWA modules

Product	BG600L-M3	BG77	BG77xA-GL Series
			
Form factor	LGA	LGA	LGA
Dimensions (mm)	18.7 × 16.0 × 2.1	14.9 × 12.9 × 1.7	14.9 × 12.9 × 1.9 (BG770A-GL/BG773A-GL)
RAT	LTE Cat M1/Cat NB2/EGPRS	LTE Cat M1/Cat NB2	LTE Cat M1/Cat NB1/NB2
Frequency bands (MHz)	LTE-FDD: B1/2/3/4/5/8/12/13/18/19/20/25/26 (Cat M1 Only)/27 (Cat M1 Only)/28/66/71 (Cat NB2 Only)/85; EGPRS: 850/900/1800/1900MHz	LTE-FDD: B1/2/3/4/5/8/12/13/18/19/20/25/26 (Cat M1 Only)/27 (Cat M1 Only)/28/66/71 (Cat NB2 Only)/85*	LTE-FDD: B1/2/3/4/5/8/12/13/17 (Cat NB1/NB2 Only)/18/19/20/25/26 (Cat M1 Only)/27 (Cat M1 Only)/28/66
Weight (approx.) (g)	1.25	0.73	0.85
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Data transmission (Max.)			
LTE Cat M1 data rates (Kbps)	588 (DL)/1119 (UL)	588 (DL)/1119 (UL)	588 (DL)/1119 (UL)
LTE Cat NB1 data rates (Kbps)	32 (DL)/70 (UL)	32 (DL)/70 (UL)	27.2 (DL)/62.5 (UL)
LTE Cat NB2 data rates (Kbps)	127 (DL)/158.5 (UL)	127 (DL)/158.5 (UL)	127 (DL)/158.5 (UL)
EDGE data rates (Kbps)	296 (DL)/236.8 (UL)	/	/
GPRS data rates (Kbps)	107 (DL)/85.6 (UL)	/	/
SMS	Point-to-point M0 and MT; SMS cell broadcast; Text and PDU mode	Point-to-point M0 and MT; SMS cell broadcast; Text and PDU mode	Point-to-point M0 and MT; SMS cell broadcast; Text and PDU mode
Protocols	PPP/TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/NITZ/PING/MQTT (S)/MQTT-SN/LwM2M/CoAP (S)/IPv6/DNS/NTP	PPP/TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/NITZ/PING/MQTT (S)/MQTT-SN/LwM2M/CoAP (S)/IPv6/DNS/NTP	TCP/PPP/UDP/SSL/MQTT/FTP (S)/HTTP (S)/LwM2M/IPv4/IPv6/TLS/DTLS/CoAP/NITZ (BG770A-GL); PPP/TCP/UDP/SSL/TLS/FTP (S)/HTTP (S)/NITZ/PING/MQTT/LwM2M (BG773A-GL)
Interfaces			
(U)SIM	1.8 V	1.8 V	1.8 V
UART	× 3 (MAIN, DEBUG, NMEA)	× 3 (MAIN, DEBUG, NMEA)	× 3 (MAIN, DEBUG, AUX) (BG770A-GL); × 3 (MAIN, DEBUG, GNSS) (BG773A-GL)
USB	USB 2.0 × 1	USB 2.0 × 1	USB 2.0 × 1
I2C	I2C ¹ × 1	I2C ¹ × 1	/
ADC	ADC × 1	ADC × 2	ADC × 2
GPIO	GPIO × 6	GPIO × 7	GPIO × 7 (BG770A-GL/BG773A-GL); GPIO Max. × 15 (BG772A-GL)
RESET	RESET × 1	RESET × 1	RESET × 1
PCM	PCM ¹ × 1	PCM ¹ × 1	/
Antenna	2 (for main antenna and GNSS antenna, respectively)	2 (for main antenna and GNSS antenna, respectively)	2 (for main antenna and GNSS antenna, respectively)
Enhanced features			
QuecOpen [®]	Simplifies the development of embedded applications	Simplifies the development of embedded applications	/
iSIM	/	/	• (BG773A-GL)
DFOTA	•	•	•
SIM detection	•	•	•
GNSS	Optional	Optional	GPS, GLONASS
RAI	/	/	/
Firmware update	via USB interface	via USB interface	via UART/USB*/DFOTA
Electrical features			
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V	2.6 V ~ 4.8 V, typ. 3.3 V ²	VBAT_BB: 2.2 V ~ 4.35 V, typ. 3.3 V; VBAT_RF: 3.1 V ~ 4.2 V, typ. 3.3 V
Power consumption	4.0 μA@PSM	3.44 μA@PSM	1.4 μA@PSM
Max output power	Power class 5 21dBm @ LTE bands	Power class 5 21dBm @ LTE bands	Power class 3 23dBm @ LTE bands
Software features			
USB serial driver	Windows 7/8/10/11, Linux 2.6~5.15, Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x	Windows 7/8/9/10/11, Linux 2.6~5.15, Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x	/
GNSS driver	Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x	Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x	/
RIL driver	Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x	Android 4.x/5.x/6.x/7.x/8.x/9.x/10.x/11.x/12.x	/
Certifications ³	Vodafone/Deutsche Telekom/Telefónica*/Verizon*/AT&T*/T-Mobile/CE/UKCA/GCF/PTCRB/FCC/IC/RCM/KC*/JATE/TELEC/NBTC*/NCC/USCC/RoHS	Vodafone/Deutsche Telekom/Verizon/AT&T/T-Mobile/Telus/CE/UKCA/GCF/PTCRB/FCC/IC/RCM/KC*/JATE/TELEC/NBTC*/NCC/USCC/RoHS	Vodafone/Deutsche Telekom/Verizon/AT&T/T-Mobile/Orange/Telus/Telstra/KT/SKT/LGU+/NTT DOCOMO/Softbank*/KDDI/CE/GCF/PTCRB/FCC/IC/RCM/KC*/JATE/TELEC/CASA/RoHS
Recommended applications	Gas detectors, soil PH testers, optical sensors, machinery alarm systems, irrigation controllers, elevators, asset tracking electronics, pet tracking, water/gas metering, smart parking systems, fire hydrants, smoke alarms, smart bins, street lighting		

Note 1: For voice call only.

Note 2: please refer to the hardware design manual for more specific requirements on the minimum power supply voltage.

Note 3: May depend on modules' variant.

* Planning/ Under development/ In progress

• Supported

LPWA modules

Product	BC660K-GL	BC950K-GL
		
Form factor	LCC	LCC
Dimensions (mm)	17.7 × 15.8 × 2.0	23.6 × 19.9 × 2.2
RAT	LTE Cat NB2	LTE Cat NB2
Frequency bands (MHz)	B1/2/3/4/5/8/12/13/17/18/19/20/25/28/66/70/85	B1/2/3/4/5/8/12/13/17/18/19/20/25/28/66/70/85
Weight (approx.) (g)	1.0±0.2	1.6±0.2
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C
Data transmission (Max.)		
LTE Cat NB1 data rates (Kbps)	Single-tone: 25.5 (DL)/16.7 (UL) Multi-tone: 127 (DL)/158.5 (UL)	Single-tone: 25.5 (DL)/16.7 (UL) Multi-tone: 127 (DL)/158.5 (UL)
LTE Cat NB2 data rates (Kbps)	127 (DL)/158.5 (UL)	127 (DL)/158.5 (UL)
GPRS data rates (Kbps)	/	/
SMS	Text mode	Text mode
Protocols	UDP/TCP/PING/LwM2M/SNTP/COAP/COAPS/HTTP/HTTPS*/MQTT/MQTTs/SSL/TLS	UDP/TCP/PING/LwM2M/SNTP/COAP/COAPS/HTTP/HTTPS*/MQTT/MQTTs/SSL/TLS
Interfaces		
(U)SIM	× 1 (1.8V/3.0V)	× 1 (1.8V/3.0V)
UART	UART × 2 (for QuecOpen® version, × 3)	× 2 (QuecOpen® version, × 3, only one port for debug)
I2C	× 1 (for QuecOpen® version only)	× 1 (for QuecOpen® only, multiplexed with other pins)
ADC	× 1 (for QuecOpen® version, × 2)	× 1 (QuecOpen® version, × 4)
GPIO	× 4 (for QuecOpen® version, × 16)	Configurable (for QuecOpen® only, multiplexed with other pins)
RESET (RESET_N)	× 1	× 1
SPI	× 1 (for QuecOpen® version only)	× 1 (for QuecOpen® version only, multiplexed with other pins)
PWM	× 1 (for QuecOpen® version only)	× 1 (for QuecOpen® version only, multiplexed with other pins)
RI	× 1	× 1
PSM_EINT	× 1 (for QuecOpen® version, × 2)	× 1 (for QuecOpen® version, × 5)
I2S	/	/
NETLIGHT	× 1	× 1
WAKEUP_OUT	/	/
Antenna	× 1	× 1
Enhanced features		
QuecOpen®	•	•
DFOTA	•	•
BLE 5.0	/	/
Firmware update	via UART/DFOTA	via UART/DFOTA
RAI	•	•
Location based services	/	/
eSIM*	Optional	Optional
Electrical features		
Supply voltage range	2.2 V ~ 4.3 V, typ. 3.3 V	2.2 V ~ 4.3 V, typ. 3.6 V
Power consumption	800 nA @ PSM	800 nA @ PSM
Certifications	Vodafone/Deutsche Telekom/Telefónica/Orange/AT&T/T-Mobile/Telstra/Optus/Spark/KT/LGU+/CE/GCF/PTCRB/FCC/IC/Anatel/RCM/KC/JATE/TELEC/NBIC/IMDA/ICASA/NCC	Vodafone/Deutsche Telekom*/Telefónica*/Telstra/KT*/LGU+*/CE/GCF/Anatel*/RCM/KC/NBIC*/IMDA*/ICASA*
Recommended Applications	Gas detectors, soil PH testers, optical sensors, machinery alarm systems, irrigation controllers, elevators, asset tracking, electronics, pet tracking, water/gas metering, smart parking systems, fire hydrants, smoke alarms, smart bins, street lighting	

* Planning/ Under development/ In progress
• Supported

Product	BC680Z-EU	BC65	BC92	BC95-GR
				
Form factor	LCC	LCC	LCC	LCC
Dimensions (mm)	17.7 × 15.8 × 2.2	17.7 × 15.8 × 2.2	23.6 × 19.9 × 2.2	23.6 × 19.9 × 2.2
RAT	3GPP Rel-14, Cat NB2	LTE Cat NB2	LTE Cat NB2/GSM	LTE Cat NB2
Frequency bands (MHz)	B3/5/8/20/28	LTE Cat NB2: B1*/3/5/8/20/28	LTE Cat NB2: B3/5/8/20/28; GSM: 850/900/1800/1900MHz	B3/5/8/20/28
Weight (approx.) (g)	1.12 ±0.2	1.2±0.2	1.8±0.1	1.6 ±0.2
Operating temperature	-35°C ~ +75°C	-25°C ~ +75°C	-25°C ~ +75°C	-25°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Data transmission (Max.)				
LTE Cat NB1 data rates (Kbps)	/	Single-Tone: 25.5 (DL)/16.7 (UL) Multi-Tone: 25.5 (DL)/62.5 (UL)	Single-Tone: 25.5 (DL)/16.7 (UL) Multi-Tone: 25.5 (DL)/62.5 (UL)	Single-Tone: 25.5 (DL)/16.7 (UL) Multi-Tone: 25.5 (DL)/62.5 (UL)
LTE Cat NB2 data rates (Kbps)	126.5 (DL)/158.5 (UL)	127 (DL)/158.5 (UL)	127 (DL)/158.5 (UL)	127 (DL)/158.5 (UL)
GPRS data rates (Kbps)	/	/	GPRS Class 12: 85.6 (DL)/85.6 (UL)	/
SMS	•	•	•	/
Protocols	UDP/TCP/LwM2M/SNTP/IPv4/IPv6/NITZ/PING	UDP/TCP/SNTP/MQTT/CoAP/PPP/TLS/DTLS/ CoAPS/HTTP/HTTPS	UDP/TCP/SNTP/PPP/MQTT/CoAP/HTTP/HTTPS/FTP/ CoAPS	UDP/TCP/SNTP/MQTT/CoAP*/PPP/TLS/DTLS/HTTP/ HTTPS/SMS/DFOTA
Interfaces				
(U)SIM	× 1	× 1	× 1	× 1
UART	× 2	× 3 (MAIN, DEBUG, AUX)	× 2 (MAIN, DEBUG)	× 3 (MAIN, DEBUG, AUX)
I2C	× 2 (Open only)	/	/	/
ADC	× 1	× 1	× 1	× 1
GPIO	* (Open only)	/	/	/
RESET (RESET_N)	× 1	× 1	× 1	× 1
SPI	× 2 (Open only)	/	/	/
PWM	× 1 (Open only)	/	/	/
RI	RI*: × 1	× 1	× 1	× 1
PSM_EINT	× 1	× 1	× 1	× 1
I2S	/	/	/	/
NET_STATUS (NETLIGHT)	× 1*	/	/	× 1
WAKEUP_OUT	/	/	/	× 1
Antenna	× 2	× 1	× 1	× 1
Enhanced features				
QuecOpen*	•	/	/	*
DFOTA	•	•	•	•
BLE 5.0	/	/	/	/
Firmware update	via UART/DFOTA	via UART/DFOTA	via UART/DFOTA	•
RAI	•	•	•	•
Location based services	Supports GNSS	ECID, OTDOA	ECID, OTDOA	ECID, OTDOA
eSIM*	/	Optional	Optional	Optional
Electrical features				
Supply voltage range	2.2 V ~ 4.5 V	3.2 V ~ 4.2 V, typ. 3.8 V	3.4 V ~ 4.2 V, typ. 3.8 V	3.2 V ~ 4.2 V, typ. 3.6 V
Power consumption	2.8 µA @ PSM, 0.19 mA @ DRX in sleep mode, DRX = 2.56 s, ECL0, 0.11 mA @ eDRX in sleep mode, eDRX=10.24s, ECL0	4 µA @PSM	4 µA @PSM	3.8 µA @PSM 1.2 mA @ Idle, DRX = 2.56 s, ECL 0
Certifications ¹	Vodafone/Telefónica/CE/GCF/Anatel/RCM	Vodafone/Deutsche Telekom/Telefónica/CE/ GCF/RCM	Vodafone/Deutsche Telekom/Vodacom/CE/ GCF/Anatel/RCM/ICASA/MTN	CE/RCM/Anatel
Recommended applications	Gas detectors, soil PH testers, optical sensors, machinery alarm systems, irrigation controllers, elevators, asset tracking, electronics, pet tracking, water/gas metering, smart parking systems, fire hydrants, smoke alarms, smart bins, street lighting			

Note 1: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported



Satellite modules

Product	BG95-S5	BG770A-SN
		
Form factor	LGA	LGA
Dimensions (mm)	23.6 × 19.9 × 2.2	14.9 × 12.9 × 1.9
RAT	IoT-NTN/LTE Cat M1/Cat NB2/EGPRS	IoT-NTN/LTE Cat M1/Cat NB2
Frequency bands (MHz)	IoT-NTN: L-Band (B255)/ S-Band (B256/23); Cat M1: B1/2/3/4/5/8/12/13/18/19/20/25/26/27/28/66/85; Cat NB2: B1/2/3/4/5/8/12/13/18/19/20/25/26/66/71/85; EGPRS: GSM 850/EGSM 900/DCS 1800/PCS 1900	Cat M1: B1/2/3/4/5/8/12/13/18/19/20/25/26/27/28/66; Cat NB2: B1/2/3/4/5/8/12/13/17/18/19/20/25/28/66; IoT-NTN: L-Band (255)/S-Band (256/23)
Weight (approx.) (g)	2.15	0.8
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C
Data transmission (Max.)		
LTE Cat M1 data rate (Kbps)	588 (DL)/1119 (UL)	Rel-14 588 (DL)/1119 (UL)
LTE Cat NB1 data rate (Kbps)	32 (DL)/70 (UL)	Rel-13 27.2 (DL)/62.5 (UL)
LTE Cat NB2 data rate (Kbps)	127 (DL)/158.5 (UL)	Rel-14 127 (DL)/158 (UL)
EDGE data rate (Kbps)	296 (DL)/236.8 (UL)	/
GPRS data rate (Kbps)	107 (DL)/85.6 (UL)	/
SMS	SMS ¹ : Point-to-point M0 and MT; Text and PDU mode; SMS cell broadcast	Point-to-point M0 and MT; SMS Cell Broadcast; Text and PDU Mode
Protocols	PPP/TCP ² /UDP/SSL ² /TLS ² /FTP (S) ² /HTTP (S) ² /NITZ/NTP/PING/MQTT ² / LwM2M ² /CoAP ² /IPv6 ²	PPP/TCP ² /UDP/SSL ² /DTLS/FTP (S) ² /HTTP (S) ² /NITZ/PING/NIDD/MQTT ² /NTP/LwM2M ² /CoAP
Interfaces		
(U)SIM	× 1	•
UART	× 3	•
USB	× 1	•
I2C	× 1	/
GPIO	× 9	•
PCM	× 1	/
GRFC	× 2	•
Antenna	× 2	•
Enhanced features		
iSIM	/	•
DFOTA ³	•	•
SIM detection	•	•
GNSS	•	•
RAI	•	/
Firmware update	•	•
Electrical features		
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8V	VBAT_BB: 2.2-4.35 V, typ. 3.3 V VBAT_RF: 3.1-4.2 V, typ. 3.3 V
Power consumption	Power consumption @PSM (μA): 4.4; Power consumption @ LTE Cat M (mA): Sleep mode: 1.58 @ DRX = 1.28 s, 0.82 @ e-I-DRX = 81.92 s; Idle mode: 13.78 @ DRX = 1.28 s, 13.28 @ e-I-DRX = 81.92 s; Active mode: 216 @ 23 dBm, GNSS off; Power consumption @ LTE Cat NB (mA): Sleep mode: 1.56 @ DRX = 1.28 s, 0.83 @ e-I-DRX = 81.92 s; Idle mode: 13.73 @ DRX = 1.28 s, 13.35 @ e-I-DRX = 81.92 s; Active mode: 189 @ 23 dBm, GNSS off; Power consumption @ IoT-NTN (mA): Sleep mode: 2.19 @ DRX = 1.28 s, 0.9 @ e-I-DRX = 81.92 s; Idle mode: 14.46 @ DRX = 1.28 s, 13.34 @ e-I-DRX = 81.92 s; Active mode: 54 @ 24 dBm, GNSS off	Power saving mode 1.4 μA; Cat M1: Sleep mode: 1.3 mA @ DRX = 1.28 s; 0.07 mA @ e-I-DRX = 81.92 s Idle mode: 16.5 mA @ DRX = 1.28 s; 16.1 mA @ e-I-DRX = 81.92 s Active mode: Cat M1: 228 mA @ 23 dB, GNSS off Cat NB1: Idle mode: 17.5 mA @ DRX = 1.28 s; 17.5 mA @ e-I-DRX = 81.92 s; Active mode: Cat NB2: 411 mA @ 23 dB, GNSS off NB-IoT NTN : sleep mode: 3.5 mA @ DRX = 1.28 s; 0.2 mA @ e-I-DRX = 81.92 s; Idle mode: 17.1 mA @ DRX = 1.28 s; 17.1 mA @ e-I-DRX = 81.92 s; Active mode: NB-IoT NTN: 525 mA @ 23 dB, GNSS off
Max output power	Power class 3 23dBm	Power class 3 23dBm
Software features		
USB serial driver	•	•
GNSS driver	•	•
RIL driver	•	•
Certifications	Skylo/Verizon/AT&T/CE/GCF/FCC/PTRCB/IC/RCM	Skylo/CE/FCC/RCM/IC
Recommended applications	Vehicle tracking, asset tracking, chassis tracking, container tracking, oil & gas pipeline monitoring, mining, smart grid, vessel connection, maritime buoys, heavy equipment monitoring, construction fleet management, smart agriculture, environmental monitoring	

Note 1: SMS is not supported under IoT-NTN.

Note 2: Currently, due to NTN operator network limitations, those functions are not tested and verified under skylo real network.

Note 3: It is supported only on cellular networks, but not on NTN networks.

* Planning/ Under development/ In progress

• Supported



Automotive modules

Product		AG59xE-CN
		
Form factor		LGA
Dimensions (mm)		54.5 × 53.0 × 3.45
5G		Sub-6G
4G		LTE Cat 19
Frequency bands (MHz)	-CN (China)	5G SA: n1/3/5/8/28A ² /41/77/78/79 ¹ 5G NSA: n77/78/79 ¹ LTE-FDD: B1/3/5/7/8 LTE-TDD: B34/38/39/40/41 WCDMA: B1 ¹ /8 ¹ GSM: 900 ¹ /1800 ¹ MHz C-V2X B47: AG590E-CN
Weight (approx.) (g)		23
Operating temperature		-35°C ~ +75°C
Extended temperature		-40°C ~ +85°C
Data transmission (Max.)		
5G SA		2.1 Gbps (DL)/525 Mbps (UL)
5G NSA		2.5 Gbps (DL)/630 Mbps (UL)
LTE FDD data rates		1.6 Gbps (DL)/200 Mbps (UL)
LTE TDD data rates		1.2 Gbps (DL)/120 Mbps (UL)
DC-HSDPA/HSUPA data rates (Mbps)		AG591E: 42 (DL)/5.76 (UL); AG590E: 21 (DL)/5.76 (UL)
WCDMA data rates (Kbps)		384 (DL)/384 (UL)
EDGE data rates (Kbps)		296 (DL)/236.8 (UL)
GPRS data rates (Kbps)		107 (DL)/85.6 (UL)
C-V2X data rates (Mbps)		48 (DL)/48 (UL)
SMS		Point-to-point MO and MT, SMS cell broadcast, Text and PDU mode
Protocols		/
Interfaces		
(U)SIM		× 2
UART		× 5
USB 2.0/3.1		× 1
PCIe 3.0		× 2
I2C		× 2
I2S		× 2
RGMII		× 1
SGMII		× 1
SDIO		× 2
SPI		× 2
PCM		× 1
ADC		× 5
GPIO		× 15 (for QuecOpen® version)
RESET_N		× 1 (Reset the module)
Antenna		Main × 1; Diversity × 1; MIMO 3 × 1; MIMO 4 × 1; C-V2X × 2; GNSS × 1
Enhanced features		
QuecOpen® (Open Linux)		•
eCall		/
DFOTA		•
eSIM (eUICC)		/
(U)SIM detection		•
Temperature management		•
GNSS		/
ESD/EMI protection		Realized through internal specific circuits and components
Gigabit ethernet		SGMII/RGMII (optional)
C-V2X TDD B47		AG590E-CN
Dual SIM		DSSS (optional)
QDR 3.0 (External IMU required)		Optional
RTK/PPE		/
Multi-Frequency GNSS (L1/L5)		Optional
UART interface for BT function		/
Advanced security features		
TrustZone		•
Secure boot		•
SE-Linux		•
HSM		Optional
Software features		
USB serial driver		Windows 8.1/10/11, Linux 2.6-6.7
RIL driver/ GNSS driver		/
RNDIS driver		Windows 8.1/10/11, Linux 2.6-6.7
ECM driver		Linux 2.6-6.7
GobiNet driver		Linux 2.6-6.7
QMI_WWAN driver		Linux 3.4-6.7
Electrical features		
Supply voltage range		VBAT_BB/VBAT_RF: 3.3-4.3 V DC, typ. 3.8 V DC VBAT_C-V2X: 4.75-5.25 V DC, typ. 5.0 V DC
Power consumption		0.18mA @ Power off 2.2mA @ LTE Sleep (PF=128 typ.) 2.5mA @5G NR Sleep (PF=128 typ.) 80mA @ Idle (typ.)
Certifications ³		CCC
Recommended applications		Automotive

Note 1: Optional band, not supported by default.

Note 1: B28A/n28A supports Tx at 703-733 MHz and Rx at 758-788 MHz.

Note 3: May depend on modules' variant.

* Planning/ Under development/ In progress

• Supported

Automotive 5G modules

Product		AG55xQ
		
Form factor		LGA
Dimensions (mm)		54.5 × 53.0 × 3.45
5G		Sub-6G
4G		LTE Cat 19
Frequency bands (MHz)	-CN (China)	5G-FDD: n1 ¹ /3 ¹ /28 ¹ ; 5G-TDD: n41/78/79; LTE-FDD: B1/3/5/7/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/8; GSM: 900/1800 MHz; C-V2X: B47 (For AG550Q/AG553Q Series)
	-EU (EMEA/Australia/ South Korea/India/ Southeast Asia/Latin America exl. Mexico)	5G-FDD: n1/3/8/20/28; 5G-TDD: n41/78; LTE-FDD: B1/2/3/4/5/7/8/20/28/32 ² ; LTE-TDD: B38/40/41/42; WCDMA: B1/3/5/6/8; GSM: 900/1800/850/1900 MHz; C-V2X: B47 (For AG550Q/AG553Q Series)
	-NA (North America/ Mexico)	5G-FDD: n2/5/25/66/71; 5G-TDD: n41/48/77/78; LTE-FDD: B2/4/5/7/12/13/14/17/25/26/28/29 ³ /30 ² /66/71; LTE-TDD: B41/48; WCDMA: B2/4/5; GSM: 1900 MHz; C-V2X: B47 (For AG550Q/AG553Q Series)
	-ROW (Japan/ Latin America)	/
	-JP* (Japan)	5G-FDD: n1/3; 5G-TDD: n77/78/79; LTE-FDD: B1/3/5/7/8/9/11/19/21/28; LTE-TDD: B41; WCDMA: B1/3/5/8/9/19; C-V2X: B47 (For AG550Q/AG553Q Series)
Weight (approx.) (g)		21
Operating temperature		-40°C ~ +85°C (eCall: +95°C)
Data transmission (Max.)		
5G SA		2.0 Gbps (DL)/450 Mbps (UL)
5G NSA		2.4 Gbps (DL)/550 Mbps (UL)
LTE FDD data rates		1.6 Gbps (DL)/200 Mbps (UL)
LTE TDD data rates		1.4 Gbps (DL)/120 Mbps (UL)
DC-HSDPA/HSUPA data rates (Mbps)		42 (DL)/5.76 (UL)
WCDMA data rates (Kbps)		384 (DL)/384 (UL)
EDGE data rates (Kbps)		296 (DL)/236.8 (UL)
GPRS data rates (Kbps)		107 (DL)/85.6 (UL)
C-V2X data rates (Mbps)		48 (Tx)/48 (Rx)
SMS		Point-to-point MO and MT; SMS cell broadcast; Text and PDU mode
Protocols		TCP/UDP/PPP/PING/FTP (S)/HTTP (S)/SMTP/SSL/TLS/MMS/NTTP/DTMF*/FILE/QMI
Interfaces		
(U)SIM		× 2 (supports 1.8 V/ 3 V USIM/ SIM Cards)
UART		× 3 (Main/Debug/BT UART)
USB 2.0/3.1		× 1
PCIe 3.0		× 1
I2C		× 1
I2S		× 1
RGMII		× 1
SDIO		× 1 (for eMMC)
SPI		× 2
PCM		× 1
ADC		× 2 (15-bit)
GPIO		× 15 (For QuecOpen* version only)
RESET_N		× 1 (Reset the module)
Antenna		Main × 1; Diversity × 1; MIMO 3 × 1; MIMO 4 × 1; C-V2X × 2; GNSS × 1; DSDA × 2
Enhanced features		
QuecOpen* (Open Linux)		•
eCall		•
DFOTA		•
eSIM (eUICC)		Optional
(U)SIM detection		•
Temperature management		•
GNSS		GPS/ GLONASS/ BeiDou/ Galileo /QZSS
ESD/EMI protection		Realized through internal specific circuits and components (Electrostatic discharge conforms to ±12KV air discharge and ±8KV of contact discharge)
Gigabit ethernet		Optional
C-V2X TDD B47		Optional
DSDA (Dual SIM dual activation)		Optional
QDR 3.0 (External IMU required)		Optional
RTK/PPE		Optional
Multi-Frequency GNSS (L1/L5)		Optional
UART interface for BT function		Optional
Advanced security features		
TrustZone/ TPM*		•
Secure boot		•
SE-Linux		•
Software features		
RIL driver		/
GNSS driver		/
USB ECM driver		Linux 2.6~5.12
USB RNDIS driver		Windows 7/8/8.1/10, Linux 2.6~5.12
USB GobiNet driver		Linux 2.6~5.12
USB QMI_WWAN driver		Linux 3.4~5.12
USB serial driver		Windows 7/8/8.1/10, Linux 2.6~5.12
Electrical features		
Supply voltage range		VBAT_BB/VBAT_RF: 3.3 V ~ 4.3 V (typ. 3.8 V) ; VBAT_C-V2X: 4.75 V ~ 5.25 V (typ. 5.0 V)
Power consumption		0.04 mA @Power off; 1.4 mA @Sleep (Typ.); 25.0 mA @Idle
Certifications ³		CCC/SRRC/NAL/CE (AG5510-EU)/RCM (AG5510-EU)/GCF*/PTCRB*/FCC*/IC*/KC*/JATE*/TELEC*/AT&T*
Recommended applications		Automotive

Note 1: n1/n3/n28 for AG55xQ-CN supports SA only.

Note 2: LTE-FDD B29/B30/B32 supports Rx only.

Note 3: May depend on modules' variant.

* Planning/ Under development/ In progress

• Supported

Product		AG57xQ
		
Form factor		LGA
Dimensions (mm)		54.5 × 53.0 × 3.45
5G		Sub-6G
4G		LTE Cat 16
Frequency bands (MHz)	-CN (China)	5G-FDD: n1/3/5 ³ /28A ² ; 5G-TDD: n41 ³ /77 ³ /78/79 ³ ; LTE-FDD: B1/3/5/7/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/8; GSM: 900/1800MHz
	-EU (EMEA/Australia/ South Korea/India/ Southeast Asia/Latin America excl. Mexico)	5G-FDD: n1/3/5 ³ or n71 ³ /8/20/28A; 5G-TDD: n38 ³ /40 ³ /41/78; LTE-FDD: B1/3/5 ³ or B71 ³ /7/8/20/28A/32 ¹ ; LTE-TDD: B38/40/41/42 ³ ; WCDMA: B1/3/5 ³ /8; GSM: 900/1800MHz
	-NA (North America/ Mexico)	5G-FDD: n2/5/12/25/66/71; 5G-TDD: n41/78; LTE-FDD: B2/4/5/7/12/13/14/17/25/26/29 ¹ /30 ¹ /66/71; LTE-TDD: N41; WCDMA: B41
	-ROW (Japan/ Latin America)	5G-FDD: n1/3/28; 5G-TDD: n41/77/78/79 ³ ; LTE-FDD: B1/2/3/4/5/7/8/9/11 ³ /18/19/21/26/28; WCDMA: B1/3/5/6/7/8/9/19; GSM: 900/1800/850/1900MHz
	-JP* (Japan)	/
Weight (approx.) (g)		TBD
Operating temperature		-40°C ~ +85°C (eCall: +95°C)
Data transmission (Max.)		
5G SA		2.0 Gbps (DL)/450 Mbps (UL)
5G NSA		2.4 Gbps (DL)/550 Mbps (UL)
LTE FDD data rates(Mbps)		1.3 Gbps (DL)/100 Mbps (UL)
LTE TDD data rates (Mbps)		1.2 Gbps (DL)/60 Mbps (UL)
DC-HSDPA/HSUPA data rates (Mbps)		42 (DL)/5.76 (UL)
WCDMA data rates (Kbps)		384 (DL)/384 (UL)
EDGE data rates (Kbps)		296 (DL)/236.8 (UL)
GPRS data rates (Kbps)		107 (DL)/85.6 (UL)
C-V2X data rates (Mbps)		48 (Tx)/48 (Rx)
SMS		Point-to-point M0 and MT, SMS cell broadcast, Text and PDU mode
Protocols		TCP/UDP/PPP/PING/FTP (S)/HTTP (S)/SMTP/SSL/TLS/MMS/NTP/FILE/QMI
Interfaces		
(U)SIM		×2
UART		×3 (UART1/Debug UART/BT UART)
USB 2.0/3.1		×1
PCIe 3.0		×1
I2C		×1
I2S		×1
RGMII		×1
SDIO		×1 (for eMMC/SD)
SPI		×2
PCM		×1
ADC		×2 (15-bit)
GPIO		×15 (For QuecOpen® version only)
RESET_N		×1 (Reset the module)
Antenna		Main × 1; Diversity × 1; MIMO 3 × 1; MIMO 4 × 1; C-V2X × 2; GNSS × 1; DSDA × 2
Enhanced features		
QuecOpen® (Open Linux)		•
eCall		Optional
DFOTA		•
eSIM (eUICC)		Optional
(U)SIM detection		•
Temperature management		•
GNSS		GPS/GLONASS/BeiDou/Galileo/QZSS
ESD/EMI protection		Realized through internal specific circuits and components
Gigabit ethernet		Optional
C-V2X TDD B47		Optional
DSDA (Dual SIM dual activation)		Optional
QDR 3.0 (External IMU required)		Optional
RTK/PPE		Optional
Multi-Frequency GNSS (L1/L5)		Optional
UART interface for BT function		Optional
Advanced security features		
TrustZone/ TPM*		•
Secure boot		•
SE-Linux		•
Software features		
RIL driver		Android 4.x/5.x/6.x/7.x/8.x/9.x
GNSS driver		Android 4.x/5.x/6.x/7.x/8.x/9.x
USB ECM driver		Linux 2.6 ~ 6.7
USB RNDIS driver		Windows 10/11, Linux 2.6 ~ 6.7
USB GobiNet driver		Linux 2.6 ~ 6.7
USB QMI_WWAN driver		Linux 3.4 ~ 6.7
USB serial driver		Windows 10/11, Linux 2.6~6.7
Electrical features		
Supply voltage range		VBAT_BB/VBAT_RF: 3.3 V ~ 4.3 V (typ. 3.8 V) VBAT_C-V2X: 4.75 V ~ 5.25 V (typ. 5.0 V)
Power consumption		0.028mA@Power off 1.4mA @Sleep 25.0mA @Idle
Certifications ¹		CCC*/SRRC*/NAL*/CE*/GCF*/PTCRB*/FCC*/IC*/RCM*/KC*/JATE*/TELEC*/AT&T*
Recommended applications		Automotive

Note 1: LTE-FDD B29/B30/B32 supports Rx only.
Note 2: n28A supports Tx: 703~733 MHz, Rx:758~788 MHz.
Note 3: Optional.
Note 4: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

Automotive 5G modules

Product		AG56xN
		
Form factor		LGA
Dimensions (mm)		45.0 × 46.9 × 3.25
5G		Sub-6G
4G		LTE Cat 18
Frequency bands (MHz)	-CN (China)	5G-FDD: n1/3/5/8/28A ¹ ; 5G-TDD: n41/77/78/79; LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/5/8; GSM: 900/1800MHz
	-EU (EMEA/South Korea/ Australia/India/ Southeast Asia)	5G-FDD: n1/3/7/8/20/28A ¹ ; 5G-TDD: n77/78; LTE-FDD: B1/3/5/7/8/20/28A ¹ ; LTE-TDD: B38/40/41; WCDMA: B1/3/5/8; GSM: 850/900/1800MHz
	-NA (North America)	5G-FDD: n2/5/12/66; 5G-TDD: n77/78; LTE-FDD: B2/4/5/12/29 ² /66
	-ROW (Japan/ Latin America/ Brazil/ Mexico/...)	5G-FDD: n28; 5G-TDD: n77/78/79; LTE-FDD: B1/3/19/21 ³ /28; WCDMA: B1/3
Weight (approx.) (g)		16
Operating temperature		-40°C ~ +85°C (eCall: +95°C)
Data transmission (Max.)		
5G SA		3.8Gbps (DL 2CA)/480 Mbps (UL)
5G NSA		3.8Gbps (DL 2CA)/480 Mbps (UL)
LTE FDD data rates		1.5 Gbps (DL)/150 Mbps (UL)
LTE TDD data rates		650 Mbps (DL)/100 Mbps (UL)
DC-HSDPA/HSUPA data rates (Mbps)		42 (DL)/11 (UL)
WCDMA data rates (Kbps)		384 (DL)/384 (UL)
EDGE data rates (Kbps)		296 (DL)/236.8 (UL)
GPRS data rates (Kbps)		107 (DL)/85.6 (UL)
C-V2X data rates (Mbps)		/
SMS		Point-to-point MO and MT; SMS cell broadcast; Text and PDU mode
Protocols		TCP/UDP/PPP/PING/FTP (S)/HTTP (S)/SMTP/SSL/TLS/MMS/NTP/DTMF*/FILE
Interfaces		
(U)SIM		× 2
UART		× 4
USB 2.0/3.1		× 1
PCIe 3.0		× 1
I2C		× 2
I2S		× 1
RGMII		× 1
SGMII		× 1
SDIO		× 1
SPI		× 3
PCM		× 1
ADC		× 6
GPIO		× 24
RESET_N		× 1
Antenna		Main × 1; Diversity × 1; MIMO 3 × 1; MIMO 4 × 1; GNSS × 1
Enhanced features		
QuecOpen® (Open Linux)		•
eCall		•
DFOTA		•
Dual/ AB system		•
eSIM (eUICC)		•
(U)SIM detection		•
Temperature management		•
GNSS		GPS/ GLONASS/ BeiDou/ Galileo
ESD/ EMI protection		Realized through internal specific circuits and components (Electrostatic discharge conforms to ±12KV air discharge and ±8KV of contact discharge)
Gigabit ethernet		Optional
C-V2X TDD B47		/
RTK/ ADR		Optional
Multi-Frequency GNSS (L1/L5)		Optional
UART interface for BT function		Optional
Advanced security features		
TrustZone/ TPM		•
Secure boot		•
SE-Linux		•
Software features		
RIL driver		Android 4.x/ 5.x/ 6.x/ 7.x/ 8.x/ 9.x
GNSS driver		Android 4.x/ 5.x/ 6.x/ 7.x/ 8.x/ 9.x
RNDIS		Windows 7/8/8.1/10, Linux 2.6 ~ 5.0
ECM		Linux 2.6 ~ 5.0
Gobinet		Linux 2.6 ~ 5.0, Android 4.x/ 5.x/ 6.x/ 7.x/ 8.x/ 9.x
QMI_WWAN driver		Linux 3.4 ~ 5.0, Android 4.x/5.x/6.x/7.x/8.x/9.x
USB serial driver		Windows 7/8/8.1/10, Linux 2.6 ~ 5.0, Android 4.x/5.x/6.x/7.x/8.x/9.x
Electrical features		
Supply voltage range		VBAT_BB/VBAT_RF: 3.3 V ~ 4.3 V (typ. 3.8 V)
Power consumption		0.53mA @Power off, 4.6mA @Sleep, Typ., 140 @Idle, Typ.
Certifications ⁴		CCC/SRRC/NAL/CE/GCF/RCM/PTCRB/FCC/IC/KC*/JATE/TELEC/AT&T/DOCOMO
Recommended applications		Automotive

Note 1: 5G FDD n28A supports Tx at 703–733 MHz and Rx at 758–788 MHz.

Note 2: LTE-FDD B29 supports Rx only.

Note 3: LTE B21 only supports 2x2 MIMO.

Note 4: May depend on modules' variant.

* Planning/ Under development/ In progress

• Supported

Automotive LTE-A modules

Product	AG52xR (x=0, 1, 5, 9)
	
Form factor	LGA
Dimensions (mm)	38.0 × 42.0 × 2.65
4.5G	-CN Cat 6; -EU/NA/JP Cat 12, Cat 16, Cat 9, Cat 6 as option
Frequency bands (MHz)	-CN (China)
	-EU (EMEA/South Korea/ Brazil/India/ Australia)
	-NA (North America)
	-JP (Japan)
	-GL (Global)
Weight (approx.) (g)	9.23
Operating temperature	-40°C ~ +85°C (eCall: +95°C)
Data transmission (Max.)	
LTE data rates (Mbps)	AG521R series/AG525R series: LTE Cat 12: LTE-FDD: 600 (DL)/150 (UL), LTE-TDD: 410 (DL)/90 (UL) LTE Cat 6: LTE-FDD: 300 (DL)/50 (UL), LTE-TDD: 226 (DL)/28 (UL) AG520R series: LTE Cat 12: LTE-FDD: 600 (DL)/75 (UL), LTE-TDD: 410 (DL)/45 (UL) LTE Cat 6: LTE-FDD: 300 (DL)/50 (UL), LTE-TDD: 226 (DL)/28 (UL)
DC-HSPA+ data rates (Mbps)	42 (DL)/5.76 (UL)
WCDMA data rates (Kbps)	384 (DL)/384 (UL)
TD-SCDMA data rates (Mbps)	/
EDGE data rates (Kbps)	296 (DL)/236.8 (UL)
GPRS data rates (Kbps)	107 (DL)/85.6 (UL)
C-V2X data rates (Mbps)	30 (Tx)/30 (Rx)
SMS	Point-to-point MO and MT, SMS cell broadcast, Text and PDU mode
Protocols	TCP/UDP/PPP/PING/FTP (S)/HTTP (S)/SMTP/SSL/TLS/MMS/NTP/DTMF*/FILE/QMI
Interfaces	
(U)SIM	/
USIM	× 1 (default), × 2 (optional)
UART	3 × UARTs
USB	× 1
SDIO	× 1 (eMMC)
SPI	× 1
I2S/ PCM	× 1 I2S, × 1 PCM
I2C	× 1
RGMI	× 1
ADC	× 2
PCle	× 1
GPIO	× 8 (Only Open)
JTAG/ QDSS	Yes
RESET	Yes
Antenna	5 (2 × 2 MIMO), Reserve for 7 antennas (4 × 4 MIMO) as option
Enhanced features	
QuecOpen® (Open Linux)	•
PCle for WLAN function	•
Gigabit ethernet	Optional
eCall	•
Multi-APN	•
Temperature management	•
DFOTA	•
eSIM (eUICC)	Optional
(U)SIM detection	•
QDR	Optional
PPE (RTK)	Optional
GNSS	GPS/GLONASS/BeiDou/Galileo/QZSS
ESD/EMI protection	Realized through internal specific circuits and components (Electrostatic discharge conforms to ±10KV air discharge and ±6KV of contact discharge)
C-V2X	Optional
QDR 3.0 (External IMU required)	Optional
Multi-Frequency GNSS (L1/L5)	Optional
Advanced security features	
TrustZone	TrustZone®/ TPM*: •
Secure boot	Secure Boot*: •
SE-Linux	•
Code/User data backup	•
Software features	
RNDIS driver	Windows 7/8/8.1/10, Linux 2.6~5.12
ECM driver/ Gobinet driver	Linux 2.6~5.12
QMI_WWAN driver	Linux 3.4~5.12
USB serial driver	Windows 7/8/8.1/10, Linux 2.6~5.12
Electrical features	
Supply voltage range	VBAT_BB/VBAT_RF: 3.3 V ~ 4.3 V (typ. 3.8 V) , VBAT_C-V2X: 4.75 V ~ 5.25 V (typ. 5.0 V)
Power consumption	0.021 mA@Power off/ 2.03 mA@LTE sleep, PF=128/1.61 mA @LTE sleep, PF=256; 15.9 mA@idle, PF=64/27.2 mA@idle, PF=64, USB Active
Certifications ³	CCC/SRRC/NAL/CE/RCM/GCF/PTCRB/FCB/IC/UKCA/IFETEL/KC/NCC/JATE/TELEC/Verizon/AT&T/T-Mobile/Telus/KT/NTT DOCOMO/Telstra
Recommended applications	Automotive

Note 1: LTE-FDD B29, B30 and B32 support Rx only.
 Note 2: LTE-FDD B30 is subject to carrier's deployment.
 Note 3: May depend on modules' variant.

* Planning/ Under development/ In progress
 • Supported

Automotive LTE-A modules

Product		AG519M
		
Form factor		LGA
Dimensions (mm)		38.0 × 42.0 × 3.05
4G		LTE Cat 6
Frequency bands (MHz)	-CN (China/India)	LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/8; GSM: 900/1800MHz
	-EU (EMEA/South Korea/ Australia/Southeast Asia/ Brazil)	LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/41; WCDMA: B1/5/8; GSM: 900/1800MHz
	-NA (North America/ Mexico/Latin America)	LTE-FDD: B2/4/5/7/12/13/17/28; WCDMA: B2/4/5; GSM: 850/1900MHz
	-ROW(Japan/EMEA/ Southeast Asia)	LTE-FDD: B1/3/5/7/8/9/18/19/20/26/28; LTE-TDD: B38/B40/B41; WCDMA:B1/3/5/8/9/19; GSM: 850/1900MHz
Weight (approx.) (g)		10
Operating temperature		-40°C ~ +85°C (eCall: +95°C)
Data transmission (Max.)		
LTE FDD data rates (Mbps)		300 (DL)/50 (UL)
LTE TDD data rates (Mbps)		240 (DL)/30 (UL)
DC-HSDPA/HSUPA data rates (Mbps)		42 (DL)/5.76 (UL)
WCDMA data rates (Kbps)		384 (DL)/384 (UL)
EDGE data rates (Kbps)		236.8 (DL)/236.8 (UL)
GPRS data rates (Kbps)		85.6 (DL)/85.6 (UL)
SMS		Point-to-point MO and MT; SMS cell broadcast; Text and PDU mode
Protocols		TCP/UDP/PPP/PING/FTP (S)/HTTP (S)/SMTP/SSL/TLS/MMS/NTP/DTMF*/FILE
Interfaces		
(U)SIM		× 2
UART		× 3
USB 2.0/3.1		× 1
PCIe/USB 3.0 (PCIe by default)		× 1
I2C		× 2
RGMII		× 1
SDIO		× 1
SPI		× 3
ADC		× 3
GPIO		× 15
RESET_N		× 1
Antenna		Main × 1; Diversity × 1
Enhanced features		
QuecOpen® (Open Linux)		•
eCall		•
Dual/AB system		•
eSIM (eUICC)		•
(U)SIM detection		•
Temperature management		•
GNSS		/
ESD/EMI protection		Realized through internal specific circuits and components (Electrostatic discharge conforms to ±12KV air discharge and ±8KV of contact discharge)
Gigabit ethernet		Optional
RTK/ADR		Optional
Multi-Frequency GNSS (L1/L5)		Optional
UART interface for BT function		Optional
Advanced security features		
TrustZone/ TPM		•
Secure boot		•
SE-Linux		•
Software features		
RIL driver		Android 4.x/ 5.x/ 6.x/ 7.x/ 8.x/ 9.x
GNSS driver		Android 4.x/ 5.x/ 6.x/ 7.x/ 8.x/ 9.x
RNDIS		Windows 7/8/8.1/10, Linux 2.6~5.0
ECM		Linux 2.6~5.0
Gobinet		Linux 2.6~5.0, Android 4.x/ 5.x/ 6.x/ 7.x/ 8.x/ 9.x
QMI_WWAN driver		Linux 3.4~5.0, Android 4.x/5.x/6.x/7.x/8.x/9.x
USB serial driver		Windows 7/8/8.1/10, Linux 2.6~5.0, Android 4.x/5.x/6.x/7.x/8.x/9.x
Electrical features		
Supply voltage range		VBAT_BB/VBAT_RF: 3.8 V ~ 4.3 V (typ. 4.0 V)
Power consumption		0.08mA@Power off 1.85mA @Sleep, Typ. 35mA @Idle, Typ.
Certifications ¹		CCC/SRRC/NAL/CE/RCM/Anatel/GCF*/PTCRB*/FCC*/IC*/KC*/JATE*/TELEC*/AT&T*
Recommended applications		Automotive

Note 1: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

Product	AG35	
		
Form factor	LGA	
Dimensions (mm)	33.0 × 37.5 × 3.0	
4G	LTE Cat 4	
Frequency bands (MHz)	-E (EMEA/South Korea/Australia/India/Southeast Asia)	LTE-FDD: B1/3/5/7/8/20/28; LTE-TDD: B38/40; WCDMA: B1/5/8; GSM: B3/8
	-CE (China/India)	LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/8; TD-SCDMA: B34/39; CDMA2000 1X/EVDO (Optional): BC0; GSM: B3/8
	-NA (North America)	LTE-FDD: B2/4/5/7/12 (B17)/13; WCDMA: B2/4/5; GSM: B2/5
	-J (Japan)	LTE-FDD: B1/3/5/8/9/19/21/28; LTE-TDD: B41; WCDMA: B1/3/5/6/8/19
	-LA (Latin America)	LTE-FDD: B1/2/3/4/5/7/8/28; WCDMA: B1/2/3/4/5/8; GSM: B2/3/5/8
Weight (approx.) (g)	8.1	
Operating temperature	-35°C ~ +75°C	
Extended temperature	-40°C ~ +85°C	
Data transmission (Max.)		
LTE data rates (Mbps)	LTE-FDD: 150 (DL)/50 (UL) ; LTE-TDD: 130 (DL)/30 (UL)	
DC-HSPA+ data rates (Mbps)	42 (DL)/5.76 (UL)	
WCDMA data rates (Kbps)	384 (DL)/384 (UL)	
TD-SCDMA data rates (Mbps)	4.2 (DL)/2.2 (UL)	
EDGE data rates (Kbps)	296 (DL)/236.8 (UL)	
GPRS data rates (Kbps)	107 (DL)/85.6 (UL)	
SMS	Point-to-point MO/MT, SMS cell broadcast, Text and PDU mode	
Protocols	TCP/UDP/PPP/PING/FTP (S)/HTTP (S)/SMTP/SSL/TLS/MMS/NTP/FILE/QMI	
Interfaces		
SIM	1.8 V/3.0 V	
(U)SIM	× 1 (Support 1.8 V/ 3 V USIM/ SIM Cards)	
UART	× 3 (for main UART/ BT/ Debug functions)	
HSIC	× 1	
USB	USB 2.0 × 1 (with high speed up to 480Mbps)	
I2C	× 2 (1 for PCM)	
SGMII	× 1	
SDIO	× 2 for Wi-Fi and eMMC	
SPI	SPI > 1 (for QuecOpen® version only)	
PCM	× 1	
ADC	× 3, 15bits	
GPIO	GPIO >15 (for QuecOpen® Version only)	
Antenna	Main, Rx-diversity and GNSS	
Enhanced features		
QuecOpen® (Open Linux)	•	
eCall	•	
Era glonass	•	
Multi-APN	•	
Temperature management	•	
DFOTA	Optional	
Voice over USB (USB Audio)	•	
QDR	Optional	
PPE (RTK)	Optional (Support only in China)	
Wi-Fi/BT	•	
GNSS	GPS/GLONASS/Beidou/Galileo/QZSS	
Advanced security features		
TrustZone	•	
Secure boot	•	
Code/User data backup	•	
Software features		
RIL driver/ GNSS driver	Android 4.x~9.x	
RNDIS driver	Windows 7/8/8.1/10, Linux 2.6~5.4	
ECM driver/ GobiNet driver	Linux 2.6~5.4	
QMI_WWAN driver	Linux 3.4~5.4	
USB serial driver	Windows 7/8/8.1/10, Linux 2.6~5.4, Android 4.x~9.x	
Electrical features		
Supply voltage range	3.3 V ~ 4.3 V, typ. 3.8 V	
Power consumption	20 μA @Power off/ 1.9 mA @LTE sleep, PF=128/1.6 mA @LTE sleep, PF=256/ 22 mA @Idle, Typ.	
Certifications ¹	KT/STK®/Verizon/AT&T/T-Mobile/Rogers/NTT DOCOMO/LGU+*/GCF/CE/FCC/KC/RCM/CCC/SRRC/NAL*/PTCRB/IC/JATE/TELEC/Anatel	
Recommended applications	Automotive	

Note 1: May depend on modules' variant.

* Planning/ Under development/ In progress
• Supported

Automotive C-V2X modules

Product	AG15	AG18	AG190W
			
Form factor	LGA	LGA	LGA
Dimensions (mm)	28.0 × 32.0 × 2.85	28.0 × 32.0 × 2.85	35.6 × 29.6 × 3.3
C-V2X TDD	B47 for Global B46D for Japan (optional)	B47 for Global B47 for Global	B47 for Global B47 for Global
Frequency bands (MHz)	- (Global) /	B47	B47
Weight (approx.) (g)	5.735	TBD	6.0
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +85°C
Data transmission (Max.)			
LTE data rates (Mbps)	C-V2X TDD: 26 (TX)/26 (RX)	/	C-V2X TDD: 30 (TX)/26 (RX)
Interfaces			
UART	× 2	×2	×3
USB	×1 (USB 2.0/3.0)	×1 (USB 2.0/3.0)	×1 (USB 2.0)
PCIe	× 1	×1	/
SPI	× 1	×1	×1
I2C	× 2	×1	/
1PPS	× 1	×1	×1
ADC	× 2	×2	/
GPIO	× 4	×4	×4
Antenna	Main/Rx-diversity/GNSS antenna Interfaces	× 3 (C-V2X (× 2) and GNSS antenna Interfaces)	× 2 (C-V2X)
Enhanced features			
High security	•	*	/
Secure boot	•	•	/
SELinux	*	*	/
ESD/EMI protection	•	/	/
QDR (optional)	/	•	/
PPE (RTK) (optional)	/	*	/
Temperature management	/	•	/
DFOTA	/	•	/
GNSS	•	•	/
Code/User data back up	/	•	/
Realized through internal specific circuits and components	•	/	/
HSM	/	/	•
Software features			
USB serial driver	/	•	•
Windows 7/8/8.1/10, Windows CE 5.0/6.0/7.0*	/	•	•
Linux 2.6/3.x/4.1~4.14	/	•	•
PCIe driver	•	TBD	TBD
Protocol	QMI (Qualcomm MSM Interface)	/	/
Electrical features			
Output power	Class 3 (23dBm±2dB) for C-V2X	Class 3 (23dBm±2dB) for C-V2X	Class 3 (23dBm±2dB) for C-V2X
Supply voltage	VBAT_BB: 3.3 V ~ 4.3 V, typ. 3.8 V VBAT_RF: 4.75 V ~ 5.25 V, typ. 5.0 V	VBAT_BB: 3.3 V ~ 4.3 V, typ. 3.8 V VBAT_RF: 4.75 V ~ 5.25 V, typ. 5.0 V	VBAT: 4.8~5.2 V, typ. 5.0 V 3.15 V~3.45 V, typ. 3.3 V
Power consumption	80 µA@PowerOff	TBD	TBD
Sensitivity	C-V2X TDD B47: -96dBm; C-V2X TDD B46D: -96dBm	2RX: -97.5dBm SISO: TBD	SISO: -95.7
Certifications	SRRC	SRRC*, CE*	CE
Recommended applications	Automotive	V-BOX, T-BOX	V-BOX, T-BOX

* Planning/ Under development/ In progress
• Supported

Product	AG215S
	
Form factor	LGA
Dimensions (mm)	AG215S-CN/-GL: 33.5 × 33.0 × 3.25 ; AG215S-GLR: 33.5 × 35.0 × 3.25
Weight (approx.) (g)	7.07
Operating temperature	-40°C ~ +85°C
Application processor module	Based on automotive grade application Processor for C-V2X and telematics
Interfaces	
SDIO	•
PCIe	PCIe Gen2*
USB	USB 3.0*1 and USB2.0*1
RGMI	RGMI up to 1 Gbps
UART	•
SPI	•
I2C	•
1PPS (Input)	•
ADC	•
Enhanced features	
Powerful cores	64-bit ARM Cortex-A53 Microprocessor Cores, 1.4 GHz Dual-Core Processor (Quad-Core Processor Optional), Optimized communication performance with Quetel AG520R/AG550Q/AG553Q, Dedicated AP for ITS stack and applications
Embedded ECDSA hardware engine	Supports NIST p-384, NIST p-256, Brainpool p-384, Brainpool p-256, SM2 256 bit Curves
Scalable ECDSA capability	Up to 2500TPS through embedded engine and CPU (based on NIST p-256 and SM2)
Hardware crypto engine embedded (optional)	Secure key generation and storage, digital signature and verification, Up to 2000TPS ECDSA capability (based on NIST p-256 and SM2)

* Planning/ Under development/ In progress
• Supported

Automotive smart modules

Product	AG600K	AG855G
		
Form factor	LGA	SIP
Dimensions (mm)	45.0 × 46.9 × 3.35	52.0 × 50.0 × 4.51
LTE feature	LTE Cat 6 (AG600K-CN)	/
Frequency bands (MHz)	-CN (China) LTE-FDD: B1/3/5/8; LTE-TDD: B34/38/39/40/41; WCDMA: B1/8; GSM/EDGE: 900/1800 MHz -WF (Global) Only Wi-Fi/BT	/
CPU	QCM6125 Kryo Gold: high-performance quad-core processor @ 2.0 GHz; Kryo Silver: low-power quad-core processor @ 1.8 GHz	SA8155 Kryo 485 – 64-bit applications processor with a 2 MB L3 cache ■ Quad high-performance Kryo Gold cores Three Kryo Gold cores with a 256 KB L2 cache per core, targeting up to 2.1312 GHz, One Kryo Gold prime core with a 512 KB L2 cache, targeting 2.4192 GHz ■ Quad low-power Kryo Silver cores with a 128 KB L2 cache per core, targeting up to 1.7856 GHz
GPU	Qualcomm high-performance Adreno™ 610 graphics engine	Adreno 640 GPU OpenGL ES 3.2, Vulkan and Vulkan Compute, DX12.x OpenCL 2.0 full profile, DirectCompute
Memory	AG600K-CN: 64GB UFS+ 4GB LPDDR4X 64GB UFS+ 6GB LPDDR4X AG600K-WF: 64GB UFS+8GB LPDDR4X AG601K-WF: 64GB UFS+ 6GB LPDDR4X 128GB UFS+ 8GB LPDDR4X AG602K-WF: 64GB UFS+6GB LPDDR4X	Dual DDR configuration. 6+6GB/8+8GB is optional
Operating system	Android10/13	Hypervisor/QNX/Android
Supply voltage range	3.55 V ~ 4.4 V, typ. 3.8 V	3.13 V ~ 3.46 V, typ. 3.3V
Weight (approx.) (g)	15.5	21
Operating temperature	-35°C ~ +75°C	-40°C ~ 85°C
Data transmission (Max.)		
LTE	LTE-FDD: 150 (DL)/50 (UL); LTE-TDD: 1305 (DL)/30 (UL) (AG600K-CN)	/
UMTS	DC-HSDPA: 42 Mbps (DL); DC-HSUPA: 11.2 Mbps (UL); WCDMA: 384 Kbps (DL/UL) (AG600K-CN)	/
TD-SCDMA	N/A (AG600K-CN)	/
CDMA2000	N/A (AG600K-CN)	/
GSM (Kbps)	EDGE: 296 (DL)/ 236.8 (UL); GPRS: 107 (DL)/ 85.6 (UL) (AG600K-CN)	/
Interfaces		
LCM	One group of 4-lane MIPI DSI Up to FHD+ 1080 × 2520 @ 60 fps	× 2, MIPI DSI (4-lane) × 1, DisplayPort 1.4 over USB Type-C
Camera	3 groups of 4-lane MIPI CSI, up to 2.1 Gbps per lane	× 4, 4-lane MIPI CSI
Touch panel	One I2C interface used for TP	support
Audio	Analog audio: speakers, handsets, headphones, 3-way microphones	× 5 (Max), PCM/TDM/I2S
Video	Encode: 4K @ 30 fps; HEVC/ H.264/ VP8 Decode: 4K @ 30 fps; HEVC/ H.264/ VP8/ VP9 1080P @ 30 fps, MPEG-2	Encode: 4K 60 Decode: 4K 120 Supports 4K60 decoding and 4K30 encoding meanwhile × 2, USB1, USB 2.0, Support reuse as DisplayPort 1.4 USB2, USB 3.1 (1 × HS + 1 × SS)
USB	× 1, supports USB 3.1 Type-C interface, compatible with USB 2.0	× 20 (Max)
I2C	× 2	/
(U)SIM	× 2; supports 1.8/ 2.95 V (U)SIM cards; supports (U)SIM card hot swap detection and dual-SIM dual-standby	× 20 (Max)
UART	× 3 (Debug UART: 2-wire serial port, specialized for debugging use; UART03: 2-wire serial port; UART00: 4-wire serial port, supports RTS and CTS hardware flow control with maximum data rate of 4 Mbps)	× 1
SD card	× 1 (3.0, 4-bit SDIO)	× 3
PWRKEY	1.8V, Pulled up internally	× 5
SPI	× 1	× 175 (Max)
ADC	× 2	support
I2S	× 2	/
GPIO	× 38	/
PWM	× 1	/
Antenna	× 4, Main, Rx-diversity, GNSS, Wi-Fi & Bluetooth (AG600K-CN) × 1, Wi-Fi & Bluetooth (AG600K-WF)	/
Enhanced features		
BT	BT5.0	/
Wi-Fi	2.4G/5G, 802.11 a/b/g/n/a	/
GNSS	Single-band GNSS: L1 Constellation: GPS, GLONASS, BDS, Galileo, QZS	/
Charge function	Build-in Charge IC	/
Dual LCDs	support independent display for 2 LCDs	/
DSDS	support dual SIM dual standby	/
Firmware upgrade	Firmware upgrade via USB or OTA	/
Certifications	CCC/SRRC/NAL	AEC-Q104
Recommended applications	In-vehicle integrated machines, etc.	Autosmart cockpit

Automotive Wi-Fi & Bluetooth modules

	Automotive RF Wi-Fi & Bluetooth modules			
Product	AF20	AF50T	AF51Y	AF55C
				
Frequency bands	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
MIMO	/	2 × 2 + 2 × 2, Dual MAC, support DBS	2 × 2 + 1 × 1, Dual MAC	2 × 2
WLAN standard	IEEE 802.11a/b/g/n/ac	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac	IEEE 802.11a/b/g/n/ac/ax
BT standard	BT 5.0	BT 5.2	BT 5.2	BT 5.2
Form factor	LGA	LGA	LGA	LGA
Dimensions (mm)	17.2 × 15.2 × 2.26	19.5 × 21.5 × 2.3	19.5 × 21.5 × 2.5	19.5 × 21.5 × 2.85
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Weight (approx.) (g)	1.26	2.1	2.32	2.7
General features				
Modulation mode	CCK/BPSK/QPSK/16QAM/64QAM/256QAM	CCK/BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM	CCK/BPSK/QPSK/16QAM/64QAM/256QAM	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM
Encryption mode	WEP/TKIP/AES/WPA-PSK/WPA2-PSK	WPA3	WPA3	OPEN/WPA2/WPA3
AP (max access point)	16	32	32	8
Operator mode	AP/STA	AP/STA	AP/STA	AP/STA
I/O interfaces				
PCIe	/	× 1 (PCIe 2.0)	× 1 (PCIe 2.0)	× 1 (PCIe 2.0)
SDIO	× 1 (SDIO 3.0)	/	/	× 1 (optional)
UART	× 1	× 1	× 1	× 1
PCM	× 1	× 1	× 1	× 1
Wi-Fi antenna	/	× 1 (ANT_Wi-Fi1)	× 1 (ANT_Wi-Fi1)	× 1 (ANT_Wi-Fi1)
BT antenna	/	× 1 (ANT_BT) (optional)	× 1 (ANT_BT) (optional)	× 1 (ANT_BT) (optional)
Wi-Fi/BT antenna	× 1 (ANT_Wi-Fi1/BT)	× 1 (ANT_Wi-Fi0/BT)	× 1 (ANT_Wi-Fi0/BT)	× 1 (ANT_Wi-Fi0/BT)
Electrical characteristics				
Supply voltage range	Core supply voltage : 3.3 V; I/O supply voltage : 1.8 V	Core supply voltage : 0.95 V, 1.35 V, 1.95 V; I/O supply voltage : 1.8 V; RF supply voltage : 3.85 V	PA supply voltage: 2.2 V; I/O supply voltage: 1.8 V; Core supply voltage: 1.8 V	Core supply voltage: 3.3 V; I/O supply voltage: 1.8 V
Physical rate (max.)				
802.11a	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11b	11 Mbps	11 Mbps	11 Mbps	11 Mbps
802.11g	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11n	135 Mbps	600 Mbps	300 Mbps	600 Mbps
802.11ac	433 Mbps	866 Mbps	866 Mbps	866 Mbps
802.11ax	/	1774.5 Mbps	/	1.2 Gbps
BLE	1 Mbps	2 Mbps	2 Mbps	2 Mbps
Recommended applications	Automotive	Automotive	Automotive	Automotive

AF20 can work with Quectel AG35 module to provide Wi-Fi/BT function.
AF50T/AF51Y can work with Quectel AG52xR and AG55xQ module to provide Wi-Fi/BT function.


Automotive Wi-Fi & Bluetooth modules

	Automotive RF Wi-Fi & Bluetooth modules					
Product	AH20C	AF31G	AF66T	AF67E	AF68E	AF61Y
						
Frequency bands	2.4 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz/6 GHz	2.4 GHz/5 GHz
MIMO	/	2 × 2 MIMO	2 × 2 + 2 × 2, Dual MAC, support BDS	2 × 2 MIMO, dual MAC	2 × 2 + 2 × 2, Dual MAC, support BDS	2 × 2 + 1 × 1, Dual MAC
WLAN standard	/	IEEE 802.11 a/b/g/n/ac	IEEE 802.11 a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac
BT standard	BT 5.2	BT 5.0	BT 5.2	BT 5.3	BT 5.3	BT 5.2
Form factor	LGA	LGA	LGA	LGA	LGA	LGA
Dimensions (mm)	13.0 × 13.0 × 2.45	23.0 × 23.0 × 3.0	23.0 × 23.0 × 3.0	23.0 × 23.0 × 3.0	23.0 × 23.0 × 3.0	23.0 × 23.0 × 3.0
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Weight (approx.) (g)	0.71	3.11	3.42	3.3	3.39	3.58
General features						
Modulation mode	GFSK/π/4-DQPSK/8-DPSK/Gaussian	CCK/DSSS/OFDM/BPSK/QPSK/QAM	Wi-Fi: DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM; BT: GFSK/π/4 DQPSK/8DPSK	BPSK/QPSK/CCK/16QAM/64QAM/256QAM/1024QAM	CCK/BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/4096QAM	CCK/BPSK/QPSK/16QAM/64QAM/256QAM
Encryption mode	/	WPA 3	WPA 3	WPA3	WPA 3	WPA 3
AP (max access point)	/	10	32	32	32	32
Operator mode	/	AP/STA	AP/STA	AP/STA	AP/STA	AP/STA
I/O interfaces						
PCIe	/	× 1	× 1	× 1 (PCIe 2.0)	× 1 (PCIe 2.0)	× 1 (PCIe 2.0)
SDIO	/	/	/	/	/	/
UART	× 1	× 1	× 1	× 1	× 1	× 1
PCM	× 1	× 1	× 1	× 1	× 1	× 1
Wi-Fi antenna	/	× 1 (ANT_Wi-Fi1)	× 1 (ANT_Wi-Fi1)	× 1 (ANT_Wi-Fi1)	× 1 (ANT_Wi-Fi1)	× 1 (ANT_Wi-Fi1)
BT antenna	× 1 (ANT_BT)	/	× 1 (ANT_BT) (optional)	× 1 (ANT_BT) (optional)	× 1 (ANT_BT) (optional)	× 1 (ANT_BT) (optional)
Wi-Fi/BT antenna	/	× 1 (ANT_Wi-FiO/BT)	× 1 (ANT_Wi-FiO/BT)	× 1 (ANT_Wi-FiO/BT)	× 1 (ANT_Wi-FiO/BT)	× 1 (ANT_Wi-FiO/BT)
Electrical characteristics						
Supply voltage range	Core supply voltage: 3.3 V; I/O supply voltage: 1.8 V	VDD_RF: 3.14 V ~ 3.46 V, typ. 3.3 V; VDD_IO: 1.71 V ~ 1.89 V, typ. 1.8 V	VDD_RF: 3.3 V ~ 4.25 V, typ. 3.85 V; VDD_CORE: 1.90 V, 1.35 V, 0.95 V; VDD_IO: 1.71 V ~ 1.89 V, typ. 1.8 V	VDD_PA_A: 3.14 V ~ 4.25 V, typ. 3.3 V VDD_PA_B: 1.71 V ~ 2.1 V, typ. 1.8 V VDD_CORE: 1.90 V, 1.35 V, 0.95 V VDD_IO: 1.71 V ~ 1.89 V, typ. 1.8 V	VDD_PA_A: 3.8 V; VDD_PA_B: 1.8 V; VDD_CORE: 1.90 V, 1.35 V, 0.95 V	PA supply voltage: 2.2V; I/O supply voltage: 1.8 V; Core supply voltage: 1.8 V
Physical rate (max.)						
802.11a	/	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11b	/	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps
802.11g	/	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11n	/	300 Mbps	300 Mbps	300 Mbps	600 Mbps	600 Mbps
802.11ac	/	866 Mbps	866 Mbps	866 Mbps	866 Mbps	866 Mbps
802.11ax	/	/	26 : 573.5 Mbps, 56 : 1200 Mbps	1440 Mbps	3.6 Gbps	/
BLE	1Mbps	1Mbps	2 Mbps	2 Mbps	2 Mbps	2 Mbps
Recommended applications	Automotive	Automotive	Automotive	Automotive	Automotive	Automotive

Wi-Fi & Bluetooth modules



RF Wi-Fi & Bluetooth modules

	Wi-Fi 4					
Product	FC30R	FC909A	FCS940R	FCS945R	FCU741R	FCU743R
						
Frequency bands	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
MIMO	1 × 1	1 × 1	1 × 1	1 × 1	1 × 1	1 × 1
WLAN standard	IEEE 802.11b/g/n	IEEE 802.11b/g/n	IEEE 802.11b/g/n	IEEE 802.11a/b/g/n	IEEE 802.11a/b/g/n	IEEE 802.11a/b/g/n
BT standard	/	BT 5.2	BT 5.0	BT 5.2	/	BT 5.2
Form factor	LCC	LCC	LCC	LCC	LCC	LCC
Dimensions (mm)	12.0 × 12.0 × 2.1	12.0 × 12.0 × 1.95	12.0 × 12.0 × 2.0	12.0 × 12.0 × 2.15	13.0 × 12.2 × 2.25	13.0 × 12.2 × 2.0
Operating temperature	-40°C ~ +85°C	-30°C ~ +85°C	0°C ~ +70°C or -20°C ~ +80°C	-20°C ~ +70°C (-40°C ~ +85°C optional)	-20°C ~ +70°C	-20°C ~ +70°C
Weight (approx.) (g)	0.58	0.6	0.53	0.62	0.68	0.56
General features						
Modulation mode	DBPSK/DQPSK/BPSK/QPSK/ CCK/16QAM/64QAM	DSSS/OFDM/DBPSK/DQPSK/ CCK/BPSK/QPSK/16QAM/ 64QAM	OFDM/CCK/BPSK/QPSK/16QAM/ 64QAM	CCK/BPSK/QPSK/DQPSK/ 16QAM/64QAM	CCK/DBPSK/DQPSK/BPSK/ QPSK/16QAM/64QAM	CCK/DBPSK/DQPSK/BPSK/ QPSK/16QAM/64QAM
Encryption mode	WPA3	WPA3	WPA3	WPA3	WPA3	WPA3
I/O interfaces						
PCIe	/	/	/	/	/	/
SDIO	× 1 (SDIO 3.0)	× 1 (SDIO 2.0)	× 1 (SDIO 2.0)	× 1 (SDIO 2.0)	/	/
USB	/	/	/	/	× 1	× 1 (USB2.0)
SPI	/	/	/	/	/	/
UART	/	× 1	× 1	× 1	/	/
PCM	/	× 1	× 1	× 1	/	/
Wi-Fi antenna	× 1 (ANT_Wi-Fi1)	/	/	/	× 1 (ANT_Wi-Fi1)	/
BT antenna	/	/	/	× 1 (ANT_BT) (optional)	/	/
Wi-Fi/BT antenna	/	× 1 (ANT_Wi-Fi0/BT)	× 1 (ANT_Wi-Fi0/BT)	× 1 (ANT_Wi-Fi/BT)	/	× 1 (ANT_Wi-Fi0/BT)
Electrical characteristics						
Supply voltage range	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V; VDDIO: 1.75 V ~ 1.89 V, typ. 1.8 V 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 4.8 V, typ. 3.3 V; VDDIO: 1.71 V ~ 3.63 V, typ. 1.8/3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V; VDDIO: 1.62 V ~ 3.6 V, typ. 1.8/3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V; VDD_IO: 1.62 V ~ 1.98 V, typ. 1.8 V, 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V
Power consumption	OFF State: 31 µA @ VDD3V3 power supply 1 µA @ VDD_SDIO power supply Idle (no connection): 60 mA @ VDD3V3 power supply 2 mA @ VDD_SDIO power supply	Max. current at Tx mode: 300 mA @ VBAT 0.7 mA @ VIO	Max. current at Tx mode: 364.6 mA @ VBAT 26.6 mA @ VDDIO	Max. current at Tx mode: 335 mA @ VBAT 0.3 mA @ VDD_IO	Max. current at Tx mode: 400 mA @ VBAT	Max. current consumption : 410.2 mA @ 3.3 V
Physical rate (max.)						
802.11a	/	/	/	54 Mbps	54 Mbps	54 Mbps
802.11b	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps
802.11g	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11n	150 Mbps	72 Mbps	150 Mbps	150 Mbps	150 Mbps	150 Mbps
802.11ac	/	/	/	/	/	/
802.11ax	/	/	/	/	/	/
Certifications	SRRC/CE/FCC/IC/RCM/KC*/JATE/ TELEC	SRRC/CE/FCC/IC	SRRC/CE/FCC/IC/RCM/KC*/ JATE*/TELEC*	SRRC/CE/FCC/IC/RCM/KC*/JATE*/ TELEC*	SRRC/CE/FCC/IC/RCM/KC*/JATE/ TELEC	SRRC/CE/FCC/IC/RCM/KC*/ JATE*/TELEC*
Recommended applications	Telematics, smart metering, mobile POS terminals, gateways, safety, tracking and tracing, remote maintenance and control, networking, mobile computing, healthcare, etc.	OTT, smart speakers, projectors, POS, IPC	IPC, printers, POS, speakers, display, etc.	Printers, POS, attendance machines, vacuum cleaners, smart speakers, digital signage, set-top boxes/IPTV, smart home control screens, etc.	Printers, POS, attendance machines, vacuum cleaners, smart speakers, digital signage, set-top boxes/IPTV, smart home control screens, etc.	Video transmission, printers, POS, attendance machines, vacuum cleaners, smart speakers, digital signage, set-top boxes/IPTV, smart home control screens, etc.

FC30R can work with Quectel EC20-CE/EC21/EC25/EC200A module to provide Wi-Fi/BT function.

* Planning/ Under development/ In progress

RF Wi-Fi & Bluetooth modules

	Wi-Fi 5					
Product	FC20	FC21	FC900E	FC905A	FCS950R	FC906A
						
Frequency bands	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
MIMO	1 × 1	1 × 1	1 × 1	1 × 1	1 × 1	1 × 1
WLAN standard	IEEE 802.11a/b/g/n/ac	IEEE 802.11a/b/g/n/ac	IEEE 802.11a/b/g/n/ac	IEEE 802.11a/b/g/n/ac	IEEE 802.11a/b/g/n/ac	IEEE 802.11a/b/g/n/ac
BT standard	BT 5.0	BT 5.0	BT 5.0	BT 5.0	BT 5.3	BT 5.4
Form factor	LCC	LCC	LCC	LCC	LCC	LCC
Dimensions (mm)	16.6 × 13.0 × 2.05	16.6 × 13.0 × 2.05	12.0 × 12.0 × 2.05	12.0 × 12.0 × 1.55	12.0 × 12.0 × 2.35	12.0 × 12.0 × 1.55
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-30°C ~ +85°C	-20°C ~ +70°C (-40°C ~ +85°C Optional)	-20°C ~ +70°C
Weight (approx.) (g)	0.81	0.73	0.53	0.6	0.58	0.5
General features						
Modulation mode	DSSS/CCK/BPSK/QPSK/DBPSK/ DQPSK/16QAM/64QAM/ 256QAM	DSSS/CCK/BPSK/QPSK/DBPSK/ DQPSK/16QAM/64QAM/ 256QAM	BPSK/QPSK/CCK/16QAM/ 64QAM/256QAM	DSSS/CCK/BPSK/QPSK/DBPSK/ DQPSK/16QAM/64QAM/ 256QAM	DBPSK/DQPSK/CCK/BPSK/ QPSK/16QAM/64QAM/ 256QAM	DSSS/CCK/BPSK/QPSK/16QAM/ 64QAM/256QAM
Encryption mode	WPA3	WPA3	WEP/TKIP/AES/WPA-PSK/ WPA2-PSK	WPA3	WPA3	WPA3
I/O interfaces						
PCIe	/	/	/	/	/	/
SDIO	× 1 (SDIO 3.0)	× 1 (SDIO 3.0)	× 1 (SDIO 3.0)	× 1 (SDIO 3.0)	× 1 (SDIO 3.0)	× 1 (SDIO 3.0) (optional) ¹
USB	/	/	/	/	/	× 1 (USB2.0) (optional) ¹
SPI	/	/	/	/	/	/
UART	× 1	× 1	× 1	× 1	× 1	× 1 (optional)
PCM	× 1	× 1	× 1	× 1	× 1	× 1
Wi-Fi antenna	/	/	/	/	/	/
BT antenna	/	/	/	/	/	/
Wi-Fi/BT antenna	× 1 (ANT_Wi-Fi/BT)	× 1 (ANT_Wi-Fi/BT)	× 1 (ANT_Wi-Fi/BT)	× 1 (ANT_Wi-Fi/BT)	× 1 (ANT_Wi-Fi/BT)	× 1 (ANT_Wi-Fi/BT)
Electrical characteristics						
Supply voltage range	VBAT: 3.14 V ~ 3.46 V, typ. 3.3 V; VDDIO: 1.71 V ~ 3.46 V, typ. 1.8 V/3.3 V	VBAT: 3.14 V ~ 3.46 V, typ. 3.3 V; VDDIO: 1.71 V ~ 3.46 V, typ. 1.8 V/3.3 V	VBAT: 3.14 V ~ 3.46 V, typ. 3.3 V; VDDIO: 1.71 V ~ 3.46 V, typ. 1.8 V/3.3 V	VBAT: 3.13 V ~ 4.8 V, typ. 3.6 V; VDDIO: 1.71 V ~ 3.63 V, typ. 1.8 V/3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V; VDDIO: 1.62 V ~ 3.6 V, typ. 1.8 V/3.3 V	VBAT: 3.2 V ~ 4.8 V, typ. 3.6 V; VDDIO: 1.62 V ~ 3.63 V, typ. 1.8 V/3.3 V
Power consumption	OFF State (Wi-Fi is disabled): 2 µA @3.3 V WLAN power supply 554 µA @1.8 V I/O Pins power supply Idle (Wi-Fi is enabled without any device connected): 66 mA @3.3 V WLAN power supply 6.5 mA @1.8 V I/O Pins power supply	OFF State (Wi-Fi is disabled): 0 µA @3.3 V WLAN power supply 179 µA @1.8 V I/O Pins power supply Idle (Wi-Fi is enabled without any device connected): 31 mA @3.3 V WLAN power supply 2.8 mA @1.8 V I/O Pins power supply	Max. current at Tx mode: 404.7 mA @ VBAT 6.81 mA @ VIO	Max. current at Tx mode: 380 mA @ VBAT 0.7 mA @ VIO	Max. current at 802.11n/ac MIMO Tx mode: 375 mA @ 3.3 V 0.85 mA @ 1.8 V	Max. current at Tx mode: 315 mA @ VBAT 0.18 mA @ VIO
Physical rate (max.)						
802.11a	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11b	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps
802.11g	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11n	150 Mbps	150 Mbps	150 Mbps	150 Mbps	150 Mbps	150 Mbps
802.11ac	433 Mbps	433 Mbps	433 Mbps	433.3 Mbps	433 Mbps	433.3 Mbps
802.11ax	/	/	/	/	/	/
Certifications	SRRC/CE/FCC/IC/Anatel/RCM/ KC/JATE/TELEC	SRRC/CE/FCC/IC/RCM/JATE/ TELEC	SRRC/CE/FCC/IC/RCM/UKCA	SRRC/CE/FCC/IC/JATE/TELEC	SRRC/CE/FCC/IC/RCM/KC*/ JATE*/TELEC*	SRRC/CE/FCC/IC/RCM
Recommended applications	Telematics, smart metering, mobile POS terminals, gateways, safety, tracking and tracing, remote maintenance and control, networking, mobile computing, healthcare, etc.		Various industrial and commercial applications inc: smart speakers, set-top boxes, POS machines, etc.	Various commercial/ industrial applications e.g. POS machines and speaker boxes	POS, robot, printers, smart speaker, etc.	Smart homes, industrial applications

Note 1: The module can support SDIO interface or USB interface, but they cannot be utilized simultaneously. You can choose the corresponding module model according to the actual application. For details, please contact Quectel technical support.
FC20 can work with Quectel EC20 R2.0/EC20-DE/EC21/EC25 modules to provide Wi-Fi/BT function.
FC21 can work with Quectel EC20 R2.0/EC20-DE/EC21/EC25 modules to provide Wi-Fi/BT function.

* Planning/ Under development/
In progress

RF Wi-Fi & Bluetooth modules

	Wi-Fi 5		
Product	FC80A	FCS850R	FCS850R-B
			
Frequency bands	2.4 GHz+5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
MIMO	2 × 2 or 1 × 1 + 1 × 1 in RSDB (Real Simultaneous Dual Band) mode	2 × 2	2 × 2
WLAN standard	IEEE 802.11a/b/g/n/ac	IEEE 802.11a/b/g/n/ac	IEEE 802.11a/b/g/n/ac
BT standard	BT 5.1	BT 5.0	BT 5.0
Form factor	LCC	LCC	LCC
Dimensions (mm)	15.0 × 13.0 × 2.2	15.0 × 13.0 × 2.3	15.0 × 13.0 × 2.3
Operating temperature	-40°C ~ +85°C	-20°C ~ +70°C	-20°C ~ +70°C
Weight (approx.) (g)	0.86	0.79	0.79
General features			
Modulation mode	BPSK/QPSK/CCK/16QAM/64QAM/256QAM	DBPSK/DQPSK/BPSK/QPSK/CCK/16QAM/64QAM/256QAM	DBPSK/DQPSK/BPSK/QPSK/CCK/16QAM/64QAM/256QAM
Encryption mode	WPA3	WPA3	WPA3
I/O interfaces			
PCIe	/	/	/
SDIO	× 1 (SDIO 3.0)	× 1 (SDIO 3.0)	× 1 (SDIO 3.0)
USB	/	/	/
SPI	/	/	/
UART	× 1	× 1	× 1
PCM	× 1	× 1	× 1
Wi-Fi antenna	× 1 (ANT_Wi-Fi1) × 1 (ANT_Wi-Fi0)	× 1 (ANT_Wi-Fi1)	× 1 (ANT_Wi-Fi1) × 1 (ANT_Wi-Fi0)
BT antenna	/	/	× 1 (ANT_BT)
Wi-Fi/BT antenna	× 1 (ANT_Wi-Fi0/BT)	× 1 (ANT_Wi-Fi0/BT)	/
Electrical characteristics			
Supply voltage range	VBAT: 3.2 V ~ 4.5 V, typ. 3.3 V; VDDIO: 1.7 V ~ 3.6 V, typ. 1.8V/3.3 V	VBAT: 3.1 V ~ 3.6 V, typ. 3.3 V; VDDIO: 1.7 V ~ 3.6 V, typ. 1.8V/3.3 V	VBAT: 3.1V ~ 3.6 V, typ. 3.3 V; VDDIO: 1.7 V ~ 3.6 V, typ. 1.8V/3.3 V
Power consumption	Max. current at Tx mode: 627 mA @ VBAT 0.7 mA @ VIO	Max. current at 802.11n/ac MIMO Tx mode: 389.83 mA @ 3.3 V 16.26 µA @ 1.8 V	Max. current at 802.11n/ac MIMO Tx mode: 389.83 mA @ 3.3 V 16.26 µA @ 1.8 V
Physical rate (max.)			
802.11a	54 Mbps	54 Mbps	54 Mbps
802.11b	11 Mbps	11 Mbps	11 Mbps
802.11g	54 Mbps	54 Mbps	54 Mbps
802.11n	300 Mbps	300 Mbps	300 Mbps
802.11ac	866 Mbps	866.7Mbps	866.7Mbps
802.11ax	/	/	/
Certifications	SRRC/CE/FCC/IC/KC/JATE/TELEC/RCM	SRRC/CE/FCC/IC/RCM/KC*/TELEC*/JATE*	SRRC/CE/FCC/IC/RCM/KC*/TELEC*/JATE*
Recommended applications	Smart homes, industrial controls	Set-top boxes, smart speakers, digital signage, VR/AR, smart gateways, conference terminals, intelligent projectors, cloud computing, etc.	

* Planning/ Under development/ In progress

RF Wi-Fi & Bluetooth modules

	Wi-Fi 6							
Product	FC62E*/FC64E	FC06E	FCE863R	FCS866R	FGS060N	FGS061N	FCU865R	FCS962N-LP
								
Frequency bands	2.4 GHz/5 GHz (FC62E*); 2.4 GHz + 5 GHz (FC64E)	2.4 GHz + 5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
MIMO	2 × 2 (FC64E support DBS, FC62E* not support DBS)	2 × 2 + 2 × 2	2 × 2	2 × 2	1 × 1	1 × 1	/	1 × 1
WLAN standard	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax
BT standard	BT 5.2	BT 5.3	BT 5.2	BT 5.2	BT 5.2	BT 5.2	BT 5.3	BT 5.4
Form factor	LCC	LCC	LCC	LCC	LGA	LGA	LCC	LCC
Dimensions (mm)	18.0 × 19.9 × 2.1	25.5 × 22.0 × 2.25	15.0 × 13.0 × 2.0	15.0 × 13.0 × 2.0	14.0 × 13.0 × 2.0	14.0 × 13.0 × 2.0	15.0 × 13.0 × 2.0	12.0 × 12.0 × 1.55
Operating temperature	-30°C ~ +75°C	-30°C ~ +75°C	-20°C ~ +70°C (-40°C ~ +85°C Optional)	-20°C ~ +70°C	-40°C ~ +85°C	-40°C ~ +85°C	-20°C ~ +70°C	-40°C ~ +85°C
Weight (approx.) (g)	1.63	2.27	0.84	0.79	0.7	0.7	0.82	0.49
General features								
Modulation mode	DBPSK/DQPSK/CCK/BPSK/QPSK/QAM	DBPSK/DQPSK/CCK/BPSK/QPSK/QAM	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/OFDMA	DSSS/OFDM/DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM	DSSS/OFDM/DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM/OFDMA	DSSS/CCK/BPSK/QPSK/DBPSK/DQPSK/16QAM/64QAM/256QAM/1024QAM
Encryption mode	WPA3	WPA3	WPA3	WPA3	WPA3	WPA3	WPA3	WPA3
I/O interfaces								
PCIe	× 1 (PCIe 3.0)	× 1 (PCIe 3.0)	× 1	/	/	/	/	/
SDIO	/	/	/	× 1 (SDIO 3.0)	× 1 (SDIO 3.0)	× 1 (SDIO 3.0)	/	SDIO 3.0
USB	/	/	/	/	/	/	USB 2.0	/
SPI	/	/	/	/	× 1	/	/	/
UART	× 1	× 1	× 1	× 1	× 1	× 1	/	× 1
PCM	× 1	× 1	× 1	× 1	× 1	× 1	/	× 1
Wi-Fi antenna	× 1 (ANT_Wi-Fi1)	× 1 (ANT_Wi-Fi1) × 1 (ANT_Wi-Fi0)	× 1 (ANT_Wi-Fi0)	× 1 (ANT_Wi-Fi0)	/	/	/	/
BT antenna	/	× 1 (ANT_BT)	× 1 (ANT_BT) (Optional)	× 1 (ANT_BT) (Optional)	/	/	/	/
Wi-Fi/BT antenna	× 1 (ANT_Wi-Fi0/BT)	/	× 1 (ANT_Wi-Fi1/BT) (Optional)	× 1 (ANT_Wi-Fi1/BT) (Optional)	/	× 1 (ANT_Wi-Fi/BT)	× 1 (ANT_Wi-Fi0/BT)	× 1 (ANT_Wi-Fi0/BT)
Wi-Fi/BT/Thread antenna	/	/	/	/	× 1 (ANT_Wi-Fi/BT/Thread)	/	/	/
Electrical characteristics								
Supply voltage range	Core Supply Voltage: 0.95, 1.35, 1.95, 1.8, 2.2, 3.3 (Optional); I/O Supply Voltage: 1.8 V;	VDD_CORE_VL: 0.95 V; VDD_CORE_VM: 1.35 V; VDD_CORE_VH: 1.95 V; VDD_FEM: 5 V/ 3.3 V	VBAT: 3.0V ~ 3.6 V, typ. 3.3 V; VDD_IO: 1.7 V ~ 3.6 V, typ. 1.8/3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V; VDDIO: 1.62 V ~ 3.6 V, typ. 1.8/3.3 V	VBAT_3V3: 3.14 V ~ 3.46 V, typ. 3.3 V; VBAT_1V8: 1.71 V ~ 1.89 V, typ. 1.8 V	VBAT_3V3: 3.14 V ~ 3.46 V, typ. 3.3 V; VBAT_1V8: 1.71 V ~ 1.89 V, typ. 1.8 V	VBAT: 3.0~3.6 V, typ. 3.3 V	VBAT: 3.2 V ~ 4.8 V, typ. 3.3 V; VDD_IO: 1.62 V ~ 1.98 V, typ. 1.8 V
Power consumption	TBD	Max. current at non-signaling mode (DBS): 490 mA @ 0.95 V 320 mA @ 1.35 V 8 mA @ 1.8 V 151 mA @ 1.95 V 1350 mA @ 5 V	Max. current at 802.11n/ac/ax MIMO Tx mode: 413.1 mA @ 3.3 V 0.4mA @ 1.8 V	Max. current at 802.11n/ac/ax MIMO Tx mode: 292.29 mA @ 3.3 V 62.74 μA @ 1.8 V	Max. current at Tx mode: 368 mA @ VBAT_3V3 300 mA @ VBAT_1V8	Max. current at Tx mode: 300 mA @ VBAT_3V3 400 mA @ VBAT_1V8	Max. current at 802.11n HT40 non-signaling Tx mode: 576.5 mA	Maximum current consumption in transmit mode: 350mA @ VBAT 5mA @ VDDIO
Physical rate (max.)								
802.11a	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11b	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps
802.11g	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11n	600 Mbps	300 Mbps	300 Mbps	300 Mbps	150 Mbps	150 Mbps	150 Mbps	72.2 Mbps
802.11ac	866 Mbps	866 Mbps	866.7 Mbps	866.7 Mbps	433.3 Mbps	433.3 Mbps	433 Mbps	86.7 Mbps
802.11ax	1200 Mbps (FC62E*); 1774.5 Mbps (FC64E)	1774.5 Mbps	1201 Mbps	1201Mbps	600.4 Mbps	600.4 Mbps	600 Mbps	143.4 Mbps
802.11be	/	/	/	/	/	/	/	/
Certifications	FC62E*: SRRC*/CE*/FCC*/IC*/RCM*/KC*; FC64E: SRRC*/CE*/FCC*/IC*/RCM*/JATE*/TELEC	SRRC*/CE*/FCC*/IC*/RCM*/KC*/UKCA	SRRC*/CE*/FCC*/IC*/RCM*/KC*/JATE*/TELEC	SRRC*/CE*/RCM*/FCC*/IC*/KC*/JATE*/TELEC*	CE/FCC/IC/RCM	CE/FCC/IC/RCM/SRRC	SRRC*/CE*/RCM*/FCC*/IC*/JATE*/TELEC*/KC*	SRRC*/CE*/FCC*/IC*/RCM
Recommended applications	CPE, OTT, smart TVs	CPE, MiFi, OTT	Set-top boxes, smart speakers, digital signage, VR/AR, smart gateways, conference terminals, intelligent projectors, cloud computing, etc	Charging pile, Camera, Smart homes and industrial applications	Smart homes and industrial applications	Smart homes and industrial applications	IPTV, NVR, projectors, traffic recorder	Network cameras, video doorbells, smart homes, smart glasses, smart door locks, smart speakers, smart lighting, and household appliances, etc.

* Planning/ Under development/ In progress

RF Wi-Fi & Bluetooth modules

	Wi-Fi 6E		Wi-Fi 7		
Product	FC65E*/FC66E	FC66E-B	F6E573Q	F6E576Q	FME170Q-865
					
Frequency bands	2.4 GHz/5 GHz/6 GHz (FC65E*) ; 2.4 GHz + 5 GHz/6GHz (FC66E)	2.4 GHz + 5 GHz/6 GHz (FC66E-B)	2.4 GHz/5 GHz/6 GHz	2.4 GHz/5 GHz/6 GHz	2.4 GHz/ 5 GHz/ 6 GHz
MIMO	2 × 2 (FC66E support DBS, FC65E* not support DBS)	2 × 2 (FC66E-B support DBS)	2 × 2	2 × 2 (support DBS)	2 × 2 (support DBS and HBS)
WLAN standard	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax	IEEE 802.11a/b/g/n/ac/ax/be	IEEE 802.11a/b/g/n/ac/ax/be	IEEE 802.11a/b/g/n/ac/ax/be
BT standard	BT 5.2	BT 5.2	BT 5.3	BT 5.3	BT 5.4
Form factor	LCC	LCC	LGA	LGA	M.2
Dimensions (mm)	18.0 × 19.9 × 2.1	18.0 × 19.9 × 2.1	16.0 × 20.0 × 1.8	16.0 × 20.0 × 1.8	30.0 × 22.0 × 2.25
Operating temperature	-30°C ~ +75°C	-30°C ~ +75°C	-20°C ~ +70°C	-20°C ~ +70°C	-10°C ~ +85°C
Weight (approx.) (g)	1.63	1.6	1.25	1.25	2.57
General features					
Modulation mode	DBPSK/DQPSK/CCK/BPSK/QPSK/QAM	DBPSK/DQPSK/CCK/BPSK/QPSK/QAM	DBPSK/DQPSK/CCK/BPSK/QPSK/QAM	DBPSK/DQPSK/CCK/BPSK/QPSK/QAM	DBPSK/DQPSK/CCK/BPSK/QPSK/QAM
Encryption mode	WPA3	WPA3	WPA3	WPA3	WPA3
I/O interfaces					
PCIe	× 1 (PCIe 3.0)	× 1 (PCIe 3.0)	× 1 (for Wi-Fi)	× 1 (for Wi-Fi)	× 1 (for Wi-Fi)
SDIO	/	/	/	/	/
USB	/	/	× 1 (for Bluetooth)	× 1 (for Bluetooth)	× 1 (for Bluetooth)
SPI	/	/	/	/	/
UART	× 1	× 1	× 1 (for Bluetooth)	× 1 (for Bluetooth)	/
PCM	× 1	× 1	× 1 (for Bluetooth)	× 1 (for Bluetooth)	× 1 (for Bluetooth)
Wi-Fi antenna	× 1 (ANT_Wi-Fi1)	× 1 (ANT_Wi-Fi1) × 1 (ANT_Wi-Fi0)	/	/	/
BT antenna	/	× 1 (ANT_BT)	/	/	/
Wi-Fi/BT antenna	× 1 (ANT_Wi-Fi0/BT)	/	× 1 (ANT_Wi-Fi1/BT) × 1 (ANT_Wi-Fi0/BT)	× 1 (ANT_Wi-Fi1/BT) × 1 (ANT_Wi-Fi0/BT)	× 1 (ANT_Wi-Fi1/BT) × 1 (ANT_Wi-Fi0/BT)
Wi-Fi/BT/Thread antenna	/	/	/	/	/
Electrical characteristics					
Supply voltage range	Core Supply Voltage: 0.95, 1.35, 1.95, 1.8, 2.2, 3.3 (Optional); I/O Supply Voltage: 1.8 V;	VDD_CORE_VL: 1.0 V; VDD_CORE_VM: 1.8 V; VDD_CORE_VH: 2.0 V; VDD_RF: 2.0 V; I/O Supply Voltage: 1.8 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V
Power consumption	TBD	TBD	Max. current at Tx mode: 858mA @ VBAT	Max. current at Tx mode: 1373mA @ VBAT	Max. current at Tx mode: 1126.5 mA @ VCC
Physical rate (max.)					
802.11a	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11b	11 Mbps	11 Mbps	11 Mbps	11 Mbps	11 Mbps
802.11g	54 Mbps	54 Mbps	54 Mbps	54 Mbps	54 Mbps
802.11n	600 Mbps	600 Mbps	600 Mbps	600 Mbps	600 Mbps
802.11ac	1732 Mbps	1732 Mbps	1732 Mbps	1732 Mbps	1732 Mbps
802.11ax	2400 Mbps (FC65E*); 3000 Mbps (FC66E)	3000 Mbps	2400 Mbps	3000 Mbps	3000 Mbps
802.11be	/	/	2900 Mbps	3600 Mbps	5800 Mbps
Certifications	FC65E*: SRRC/CE/FCC/IC/RCM/KC; FC66E: SRRC/CE/FCC/IC/RCM/KC/JATE/ TELEC	SRRC/CE/FCC/IC/RCM/KC/JATE/TELEC	SRRC*/CE*/FCC*/IC*/RCM*/KC*/TELEC*	SRRC/CE/RCM/FCC/IC/KC*/TELEC*	CE/FCC/IC/RCM/SRRC
Recommended applications	CPE, OTT, smart TVs	CPE, MiFi, OTT, smart TVs	Cloud gaming, 8K A/V streaming, AR/VR, industrial IoT and telemedicine		Laptops computer

* Planning/ Under development/ In progress


MCU Wi-Fi & Bluetooth modules

	Wi-Fi 4						
Product	FC41D	FCM100D	FCM740D	FLM040D	FLM140D	FLM240D	FLM340D
							
Microcontroller (MCU)	ARM968 (120 MHz)	ARM968 (120 MHz)	ARM968 (120 MHz)	ARM968 (120 MHz)	ARM968 (120 MHz)	ARM968 (120 MHz)	ARM968 (120 MHz)
ChipSet	BK7231M	BK7231M	BK7231M	BK7231M	BK7231M	BK7231M	BK7231M
Frequency bands	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz
WLAN standard	IEEE 802.11 b/g/n	IEEE 802.11 b/g/n	IEEE 802.11 b/g/n	IEEE 802.11 b/g/n	IEEE 802.11 b/g/n	IEEE 802.11 b/g/n	IEEE 802.11 b/g/n
BT standard	BLE 5.2	BLE 5.2	BLE 5.2	BLE 5.2	BLE 5.2	BLE 5.2	BLE 5.2
Form factor	LCC	LCC	LCC+ DIP	DIP	DIP	DIP+LCC	DIP
Dimensions (mm)	20.0 × 18.0 × 2.6	24.0 × 16.0 × 2.6	20.3 × 15.8 × 2.7	15.0 × 16.8 × 1.85	17.91 × 14.99 × 2.8	17.3 × 15 × 2.8	12.7 × 8.5 × 2.6
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C/ -40°C ~ +105°C	-40°C ~ +105°C	-40°C ~ +105°C	-40°C ~ +85°C	-40°C ~ +105°C	-40°C ~ +105°C
Weight (approx. (g)	1.51	1.55	1.06	0.55	0.83	0.85	0.32
General features							
RAM	256KB	256KB	256KB	256KB	256KB	256KB	256KB
PSRAM	/	/	/	/	/	/	/
Flash	2MB/ 4MB	2MB/ 4MB	2MB/ 4MB	2MB/ 4MB	2MB/ 4MB	2MB/ 4MB	2MB/ 4MB
Codec	/	/	/	/	/	/	/
Modulation mode	PSK/QPSK/CCK/16QAM/64QAM	PSK/QPSK/CCK/16QAM/64QAM	PSK/QPSK/CCK/16QAM/64QAM	PSK/QPSK/CCK/16QAM/64QAM	PSK/QPSK/CCK/16QAM/64QAM	PSK/QPSK/CCK/16QAM/64QAM	PSK/QPSK/CCK/16QAM/64QAM
Encryption mode	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA-PSK/WPA2-PSK/WPA3-SAE
Working mode	STA/AP	STA/AP	STA/AP	STA/AP	STA/AP	STA/AP	STA/AP
Protocols	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs
I/O interfaces							
GPIO	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support
UART	× 2	× 2	× 2	/	× 1	/	/
SDIO	/	/	/	/	/	/	/
SPI	QuesOpen® support	/	QuesOpen® support	/	/	/	/
USB	/	/	/	/	/	/	/
I2C	QuesOpen® support	QuesOpen® support	QuesOpen® support	/	/	/	/
I2S	/	/	/	/	/	/	/
ADC	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support
PWM	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support	QuesOpen® support
DAC	/	/	/	/	/	/	/
PCM	/	/	/	/	/	/	/
Audio in	/	/	/	/	/	/	/
Audio out	/	/	/	/	/	/	/
LCD	/	/	/	/	/	/	/
EMAC	/	/	/	/	/	/	/
JTAG	/	/	/	/	/	/	/
SWD	/	/	/	/	/	/	/
Antenna	× 1 (RF coaxial connector, external antenna pin, PCB antenna) (optional)	× 1 (RF coaxial connector, external antenna pin, PCB antenna) (optional)	× 1 (RF coaxial connector, PCB antenna) (optional)	× 1 (Ceramic antenna)	× 1 (PCB antenna)	× 1 (RF coaxial connector, PCB antenna) (optional)	× 1 (external antenna pin)
Electrical characteristics							
Supply voltage range	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V
Power consumption	IDLE: 23.27 mA	IDLE: 23.27 mA	IDLE: 24.94 mA	IDLE: 24.21 mA	IDLE: 24.14 mA	IDLE: 24.14 mA	IDLE: 23.27 mA
Certification	SRRC/CE/FCC/IC/ANATEL/RCM/KC/TELEC/BQB	SRRC/CE/FCC/IC/ANATEL/RCM/TELEC	SRRC/CE/FCC/IC/RCM	SRRC/CE/FCC/IC/RCM/UKCA	SRRC/CE/FCC/IC/RCM/UKCA	SRRC/CE/FCC/IC/RCM	SRRC/CE/FCC/IC/RCM
Recommended applications	Smart homes, industrial controls	Smart homes, industrial controls	Smart homes, industrial controls	Smart homes, industrial controls	Smart homes, industrial controls	Smart homes, industrial controls	Smart homes, industrial controls

MCU Wi-Fi & Bluetooth modules

	Wi-Fi 4		Wi-Fi 6			
Product	FGM842D	FGM842D-P	FCM360W	FLM263D	FCM665D	FCMA62N
						
Microcontroller (MCU)	ARM968 (160MHz)	ARM968 (160MHz)	RISC processor (240 MHz)	RISC-V (320 MHz)	ARMv8-M Star Triple-Core (Up to 480 MHz)	ARM Cortex-M33 processor (260 MHz)
ChipSet	BK7238	BK7238	ECR6600-A40D	BK7235	BK7258	RW610
Frequency bands	2.4	2.4	2.4 GHz	2.4 GHz	2.4 GHz	2.4GHz & 5GHz
WLAN standard	IEEE 802.11 b/g/n	IEEE 802.11 b/g/n	IEEE 802.11 b/g/n/ax	IEEE 802.11 b/g/n/ax	/	IEEE 802.11a/b/g/n/ac/ax
BT standard	BLE 5.2	BLE 5.2	BLE 5.1	BLE 5.2	BLE 5.4	BLE 5.3
Form factor	LGA	LGA	LCC	DIP	LCC	LCC
Dimensions (mm)	12.5 × 13.2 × 1.8	16.6 × 13.2 × 1.8	25.5 × 18.0 × 3.2	17.3 × 15 × 2.8	18.0 × 31.4 × 2.15	38.3 × 21.6 × 4.8 (4pin header) 37.8 × 21.6 × 3.65 (no 4pin header)
Operating temperature	-40°C ~ +105°C	-40°C ~ +105°C	-40°C ~ +85°C/ -40°C ~ +105°C (optional)	-40°C ~ +105°C	-40°C ~ +85°C	-40°C ~ +85°C
Weight (approx.) (g)	1.05	1.14	1.65	0.85	1.96	3.6
General features						
RAM	288KB	288KB	512KB	512 KB	/	1.2 MB
PSRAM	/	/	/	/	8MB/16MB	/
Flash	2MB	2MB	4MB/8MB	4MB	8MB/16MB	8 MB
Codec	/	/	/	/	/	/
Modulation mode	DSSS/CCK/BPSK/QPSK/16QAM/64QAM	DSSS/CCK/BPSK/QPSK/16QAM/64QAM	PSK/QPSK/CCK/16QAM/64QAM	DSSS/CCK/BPSK/QPSK/16QAM/64QAM	BPSK/QPSK/CCK/16QAM/64QAM	DSSS/OFDM/DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM/256QAM
Encryption mode	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA-PSK/WPA2-PSK/WPA3-SAE	WPA/WPA2/WPA3 (Personal); AES/RSA/ECC	WPA-PSK/WPA2-PSK/WPA3-SAE/AES-128
Working mode	STA/AP	STA/AP	STA/AP	STA/AP	STA/AP	AP/ STA
Protocols	Wi-Fi: TCP/UDP/MQTT BLE: ATT/GATT/HID/HCI/SPP	Wi-Fi: TCP/UDP/MQTT BLE: ATT/GATT/HID/HCI/SPP	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs	Wi-Fi: TCP/UDP/MQTT BLE: ATT/GATT/HID/HCI/SPP	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs	TCP/UDP/MQTT/HTTP/HTTPS/MQTTs
I/O interfaces						
GPIO	QuesOpen® support	QuesOpen®support	QuesOpen® support	QuesOpen®support	/	QuesOpen® support
UART	× 2	× 2	× 3	× 2	/	× 2
SDIO	/	/	/	/	/	/
SPI	QuesOpen® support	QuesOpen®support	QuesOpen® support	QuesOpen®support	/	QuesOpen® support
USB	/	/	/	/	/	/
I2C	QuesOpen® support	QuesOpen®support	QuesOpen® support	QuesOpen®support	/	QuesOpen® support
I2S	QuesOpen® support	QuesOpen®support	QuesOpen® support	QuesOpen®support	/	QuesOpen® support
ADC	QuesOpen® support	QuesOpen®support	QuesOpen® support	QuesOpen®support	/	/
PWM	QuesOpen® support	QuesOpen®support	QuesOpen® support	QuesOpen®support	/	QuesOpen® support
DAC	/	/	/	/	/	/
PCM	/	/	/	/	/	/
Audio in	/	/	/	/	/	/
Audio out	/	/	/	/	/	/
LCD	/	/	/	/	/	/
EMAC	/	/	/	/	/	/
JTAG	/	/	/	/	/	/
SWD	/	/	/	/	/	× 1
Antenna	× 1 (3th RF coaxial connector, external antenna pin) (optional)	× 1 (PCB antenna)	× 1 (RF coaxial connector, external antenna pin, PCB antenna) (optional)	× 1 (RF coaxial connector, PCB antenna) (optional)	/	× 1 (RF coaxial connector, PCB antenna) (optional)
Electrical characteristics						
Supply voltage range	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V	/	VBAT: 4.5~ 5.5 V, typ. 5.0V
Power consumption	IDLE: 6.147 mA	IDLE: 6.147 mA	IDLE: 34.24 mA	IDLE: 23.02 mA	/	TBD
Certification	SRRC/CE/RCM/FCC/IC	SRRC/CE/RCM/FCC/IC	SRRC/CE/FCC/IC/RCM/UKCA/Anatel	SRRC/CE/FCC/IC/RCM/UKCA	SRRC/CE/FCC/IC/RCM	SRRC/CE/FCC/IC/RCM/BQB
Recommended applications	Smart homes, industrial IoT	Smart homes, industrial IoT	Smart homes, industrial controls	Smart homes, industrial IoT	AI-enabled toys/ home appliances/ massagers/ learning cameras/ speakers/ smart glasses/ aroma diffusers/ lighting, PV inverters, energy storage batteries, smart central control Hubs, doorbells & smart locks, two-wheeler dashboards, etc.	Smart homes, industrial IoT

MCU Bluetooth modules

Product	HCM111Z	HLM311Z	HCM010S	HCM010S-E	HCM511S	HCM511S-E	HCM512S	HCM320Z
								
Microcontroller (MCU)	ARM Cortex-M3 (48 MHz)	ARM Cortex-M3 (up to 48 MHz)	ARM Cortex-M33 (80 MHz)	ARM Cortex-M33	ARM Cortex-M33 (76.8 MHz)	ARM Cortex-M33 (76.8 MHz)	ARM Cortex-M33 (76.8 MHz)	ARM Cortex-M3 (48 MHz)
ChipSet	FR8016HA	FR8012HAQ-J	EFR32BG21	EFR32BG21	EFR32BG22	EFR32BG22	EFR32BG27	FR3036D-C
Frequency bands	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz	2.4 GHz
WLAN standard	/	/	/	/	/	/	/	/
BT standard	BLE 5.3	BLE 5.0	BLE 5.4	BLE 5.4	BLE 5.4	BLE 5.4	BLE 5.4	BLE 5.3
Form factor	LCC	DIP	LCC	LCC	LCC	LCC	LCC	LCC
Dimensions (mm)	15.0 × 12.0 × 2.25	18.0 × 10.16 × 8.5 (L-type); 24.78 × 10.0 × 5.0 (I-type)	20.0 × 15.6 × 2.35	20.0 × 15.6 × 2.4	16.6 × 11.2 × 2.1	16.6 × 11.2 × 2.1	16.6 × 11.2 × 2.1	16.5 × 13.3 × 2.5
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +105°C	-40°C ~ +105°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Weight (approx.) (g)	0.62	0.82 (L-type); 0.94 (I-type)	1.14	0.98	0.57	0.62	0.57	0.75
General features								
RAM	48 KB	48 KB	64 KB	64 KB	32 KB	32 KB	64 KB	128 KB
PSRAM	/	/	/	/	/	/	/	/
Flash	512 KB	512 KB	768 KB	768 KB	352 KB/512 KB	352 KB/512 KB	768 KB	1 MB
Codec	/	/	/	/	/	/	/	/
Modulation mode	GFSK	GFSK	GFSK	GFSK	GFSK	GFSK	GFSK	/
Encryption mode	TRNG/AES128 ECB	TRNG/AES128 ECB	AES128/256, SHA-1, SHA-2 (up to 256 bits), ECC (up to 256 bits), ECDSA (up to 256 bits), ECDH, J-Pak, TRNG, secure boot	AES128/256, SHA-1, SHA-2 (up to 256 bits), ECC (up to 256 bits), ECDSA (up to 256 bits), ECDH, J-Pak, TRNG, secure boot	AES128/192/256, SHA-1, SHA-2, ECC, ECDSA, ECDH, TRNG, secure boot	AES128/192/256, SHA-1, SHA-2, ECC, ECDSA, ECDH, TRNG, secure boot	AES128/256, SHA-1, SHA-2, ECC, ECDSA, ECDH, TRNG, secure boot	/
Working mode	Server/Client/Server + Client	Server	Server/Client/Server + Client	Server/Client/Server + Client	Server/Client/Server + Client	Server/Client/Server + Client	Server/ Client/ Server + Client	/
Protocols	ATT/GATT/HCI/HID	BLE: ATT/GATT/HCI	ATT/GATT/HID/HCI	ATT/GATT/HID/HCI	ATT/GATT/HID/HCI	ATT/GATT/HID/HCI	ATT/GATT/HID/HCI	/
I/O interfaces								
GPIO	QuecOpen® support	/	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support
UART	× 1	× 1	× 3	× 3	QuecOpen® support	QuecOpen® support	QuecOpen® support	× 1
SDIO	/	/	/	/	/	/	/	/
SPI	QuecOpen® support	/	QuecOpen® support	QuecOpen® support	/	/	/	QuecOpen® support
USB	/	/	/	/	/	/	/	/
I2C	QuecOpen® support	/	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support
I2S	/	/	QuecOpen® support	QuecOpen® support	/	/	/	/
ADC	QuecOpen® support	/	QuecOpen® support	QuecOpen® support	/	/	/	QuecOpen® support
PWM	QuecOpen® support	/	QuecOpen® support	QuecOpen® support	/	/	/	QuecOpen® support
DAC	/	/	/	/	/	/	/	/
PCM	/	/	/	/	/	/	/	/
Audio in	/	/	/	/	/	/	/	/
Audio out	/	/	/	/	/	/	/	/
LCD	/	/	/	/	/	/	/	/
EMAC	/	/	/	/	/	/	/	/
JTAG	/	/	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support	/
SWD	/	/	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support	QuecOpen® support	/
Antenna	× 1 (RF coaxial connector, external antenna pin, PCB antenna) (Optional)	× 1 (PCB antenna)	× 1 (PCB antenna)	× 1 (RF coaxial connector, PCB antenna, pin antenna interface*) (Optional)	× 1 (PCB antenna)	× 1 (RF coaxial connector, pin antenna (optional))	× 1 (PCB antenna)	× 1 (RF coaxial connector, external antenna pin, PCB antenna) (optional)
Electrical characteristics								
Supply voltage range	VBAT: 2.4 V ~ 4.3 V, typ. 3.3 V	VBAT: 2.4 V ~ 4.3 V, typ. 3.3 V	VBAT: 1.71 V ~ 3.8 V, typ. 3.3 V	VBAT: 1.71 V ~ 3.8 V, typ. 3.3 V	VBAT: 1.71 V ~ 3.8 V, typ. 3.3 V	VBAT: 1.71 V ~ 3.8 V, typ. 3.3 V	VBAT: 1.71 V ~ 3.8 V, typ. 3.3 V	VBAT: 2.1~3.6 V, typ. 3.3 V
Power consumption	IDLE: 5.487 mA	IDLE: 5.53 mA	IDLE: 6.443 mA	IDLE: 6.402 mA	IDLE: 1.918mA	IDLE: 1.871 mA	/	/
Certification	SRRC/CE/FCC/IC/RCM/KC/Bluetooth/TELEC*	SRRC/CE/FCC/IC/RCM/BQB	SRRC/CE/FCC/IC/RCM/Bluetooth	SRRC/CE*/RCM*/FCC*/IC*/Bluetooth	SRRC/CE/RCM/FCC/IC/Bluetooth/Anatel*/TELEC*	SRRC/CE/FCC/IC/RCM/Bluetooth/Anatel*/TELEC*	SRRC/CE/RCM/FCC/IC/BQB*	SRRC*/CE*/RCM*/FCC*/IC*/BQB*
Recommended applications	Smart homes, industrial controls	Smart homes, industrial controls	Smart homes, industrial controls	Smart homes, industrial controls	Suitable for asset tags and beacons, portable medical devices, Bluetooth mesh network low-power nodes, battery powered sensing products, etc.	Suitable for asset tags and beacons, portable medical devices, Bluetooth mesh network low-power nodes, battery powered sensing products, etc.	Suitable for asset tags and beacons, portable medical devices, Bluetooth mesh network low-power nodes, battery powered sensing products, etc.	Smart home, industrial control

* Planning/ Under development/ In progress

Sub-GHz modules

	Wi-Fi HaLow			Sub-1 GHz	
Product	FGH100M*	FGH100M-J*	FGH100M-H*	KG100S	KG200Z
					
Processor or microcontroller	/	/	/	ARM Cortex®-M33 (up to 80 MHz)	ARM Cortex-M4
ChipSet	/	/	/	EFR32BG21*	STM32WLE5JC16
Frequency bands	850 ~ 950 MHz	920.5 ~ 928.1 MHz	902 ~ 928 MHz	863M ~ 928M & 2.4G	470~510 MHz, 862~928 MHz LoRa
Form factor	LGA	LGA	LGA	LGA	LGA
Dimensions (mm)	13.0 × 13.0 × 2.2	13.0 × 13.0 × 2.2	13.0 × 13.0 × 2.2	15.0 × 15.0 × 2.25	12.0 × 12.0 × 1.8
Operating temperature	-30°C ~ +85°C	-30°C ~ +85°C	-30°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Weight (approx.) (g)	0.72	0.70	0.71	0.94	0.56
General features					
RAM	/	/	/	96KB	64 KB
PSRAM	/	/	/	/	/
Flash	/	/	/	1 MB	256 KB
Modulation mode	OFDM/BPSK/QPSK/16QAM/64QAM	OFDM/BPSK/QPSK/16QAM/64QAM	OFDM/BPSK/QPSK/16QAM/64QAM	FSK, GFSK, Sub-1 GHz CSS	LoRa/ (G)FSK/ (G)MSK/BPSK
Encryption mode	AES/SHA-256/SHA-384/SHA-512/ WPA3	AES/SHA-256/SHA-384/SHA-512/ WPA3	AES/SHA-256/SHA-384/SHA-512/ WPA3	/	AES Hardware Encryption
I/O interfaces					
GPIO	/	/	/	Amazon Sidewalk SDK	QuecOpen® support
PCIe	/	/	/	/	/
SDIO	× 1 (SDIO2.0)	× 1 (SDIO2.0)	× 1 (SDIO2.0)	/	/
SPI	× 1	× 1	× 1	Amazon Sidewalk SDK	QuecOpen® support
UART	/	/	/	× 1	QuecOpen® support
USART	/	/	/	/	QuecOpen® support
USB	/	/	/	/	/
Jlink	/	/	/	× 1	× 1
I2C	/	/	/	Amazon Sidewalk SDK	QuecOpen® support
PCM	/	/	/	/	/
SWD	/	/	/	/	QuecOpen® support
JTAG	/	/	/	/	/
Antenna	× 1 (Wi-Fi antenna)	× 1 (Wi-Fi antenna)	× 1 (Wi-Fi antenna)	× 2 (Sub-1 GHz CSS × 1, BLE × 1)	× 1 (Sub-1 GHz CSS × 1)
Electrical characteristics					
Supply voltage range	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V; VDDIO: 1.8 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V; VDDIO: 1.8 V ~ 3.6 V, typ. 3.3 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3 V; VDDIO: 1.82 ~ 3.6 V, typ. 3.3 V; VDD_FEM: 4.85 ~ 5.25 V, typ. 5.0 V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3V	VBAT: 3.0 V ~ 3.6 V, typ. 3.3V
Transmit power (Max.)	11 dBm, 21 dBm (Optional)	11 dBm	27 dBm	22 dBm	20 dBm
Power consumption	TBD	TBD	TBD	IDLE: 0.6mA	IDLE: 4.7µA
Certification	CE/FCC/IC/RCM	TELEC	FCC/RCM	CE/FCC/IC/BQB	CE/FCC/IC/Anatel* /RCM
Recommended applications	IPC, industrial automation, mobile devices, POS, smart building, home automation	IPC, industrial automation, mobile devices, POS, smart building, home automation	IPC, industrial automation, mobile devices, POS, smart building, home automation	Smart homes, industrial controls	Smart homes, industrial controls

* Planning/ Under development/ In progress



GNSS modules

GNSS modules

	DR and high precision GNSS						
Product	L26-ADR	L26-UDR	L26-DR (AA)	LC29H (BA)	LC29H (CA)	LC29H (DA)	LC29H (EA)
							
GNSS	GPS: L1 C/A GLONASS: L1 Galileo: E1 BDS: B1I QZSS: L1 C/A	GPS: L1 C/A GLONASS: L1 Galileo: E1 BDS: B1I QZSS: L1 C/A	GPS: L1 C/A; GLONASS: L1; Galileo: E1; BDS: B1I; QZSS: L1 C/A	GPS/QZSS: L1 C/A, L5; GLONASS: L1; Galileo: E1, E5a; BDS: B1I, B2a NavIC: L5*	GPS/QZSS: L1 C/A, L5; GLONASS: L1; Galileo: E1, E5a; BDS: B1I, B2a NavIC: L5*	GPS/QZSS: L1 C/A, L5; GLONASS: L1; Galileo: E1, E5a; BDS: B1I, B2a NavIC: L5*	GPS/QZSS: L1 C/A, L5; GLONASS: L1; Galileo: E1, E5a; BDS: B1I, B2a NavIC: L5*
Form factor	LCC	LCC	LCC	LCC	LCC	LCC	LCC
Dimensions (mm)	12.2 × 16.0 × 2.3	12.2 × 16.0 × 2.3	12.2 × 16.0 × 2.3	12.2 × 16.0 × 2.5	12.2 × 16.0 × 2.5	12.2 × 16.0 × 2.5	12.2 × 16.0 × 2.5
Weight (approx.) (g)	0.9	0.9	0.9	0.9	0.9	0.9	0.9
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Storage temperature	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C
General features							
Working mode	4wheels-ADR	4wheels-UDR	PVT	DR+RTK	DR	1Hz RTK	10Hz RTK+Heading ¹
Chip solution	Teseo III	Teseo III	Teseo III	AG3335A/T	AG3335A/T	AG3335A/T	AG3335AA/B
L1 band receiver (C/A code) channel number	48 Track/2 Fast Acq	48 Track/2 Fast Acq	48 Track/2 Fast Acq	Tracking and acquisition total: 135	Tracking and acquisition total: 135	Tracking and acquisition total: 135	Tracking and acquisition total: 135
L1 band receiver (C/A code) SBAS	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	Developing
A-GNSS	Supported	Supported	Supported	Supported	Supported	Supported	Supported
Sensitivity	Autonomous acquisition	-145 dBm	-145 dBm	-145 dBm	-147 dBm	-147 dBm	-147 dBm
	Reacquisition	-152 dBm	-152 dBm	-152 dBm	-157 dBm	-157 dBm	-157 dBm
	tracking	-162 dBm	-162 dBm	-162 dBm	-165 dBm	-165 dBm	-165 dBm
TTFF (time to first fix)	Cold start	32 s, Autonomous	32 s, Autonomous	26 s	26 s	26 s	26 s
	Warm start	25 s, Autonomous	25 s, Autonomous	16 s	16 s	16 s	16 s
	Hot start	2 s	2 s	1 s	1 s	1 s	1 s
Position accuracy (autonomous)	1.5 m CEP	1.5 m CEP	1.5 m CEP	Autonomous: 1 m	Autonomous: 1 m	Autonomous: 1 m	Autonomous: 1 m
Position accuracy (RTK)	/	/	/	RTK: < 0.1 m + 1 ppm	/	RTK: 1 cm + 1 ppm	RTK: 1 cm + 1 ppm
Velocity accuracy (without aid)	0.1m/s	0.1m/s	0.1m/s	0.03 m/s	0.03 m/s	0.03 m/s	0.03 m/s
Convergence time (RTK)	/	/	/	RTK: < 10 s	/	RTK: < 10 s	RTK: < 10 s
Maximum acceleration accuracy (without aid)	0.1 m/s²	0.1 m/s²	0.1 m/s²	/	/	/	/
Accuracy of 1PPS signal (RMS)	50 ns	50 ns	50 ns	20 ns	20 ns	20 ns	20 ns
Max update rate	10 Hz	10 Hz	10 Hz	GNSS: 1 Hz IMU: 100 Hz (MAX)	GNSS: 1 Hz IMU: 100 Hz (MAX)	GNSS: 1 Hz RTK: 1 Hz	GNSS: 1Hz RTK: 1~10Hz
Baud rate (default)	115200 bps	115200 bps	115200 bps	115200 bps	115200 bps	115200 bps	460800 bps
Geo-fence	/	/	/	•	•	•	•
Jamming detection	/	•	/	•	•	•	•
Anti-jamming	/	/	/	/	/	/	/
Built-in LNA	•	•	•	•	•	•	•
Electrical data							
Power supply (VCC)	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V, typ. 3.3 V	3.1 V ~ 3.6 V	3.1 V ~ 3.6 V	3.1 V ~ 3.6 V	3.1 V ~ 3.6 V
I/O voltage	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	Same as VCC	2.8 V	2.8 V	2.8 V	2.8 V
Power consumption (acquisition)	81 mA	84 mA	81 mA	32 mA	30 mA	30 mA	30 mA
Power consumption (tracking)	80 mA	81 mA	80 mA	32 mA	30 mA	30 mA	30 mA
Power consumption (backup)	8 µA	8 µA	8 µA	25 µA	25 µA	25 µA	25 µA
Interfaces							
UART	•	•	•	Adjustable: 9600-3000000 bps Default: 115200 bps	Adjustable: 9600-3000000 bps Default: 115200 bps	Adjustable: 9600-3000000 bps Default: 115200 bps	Adjustable: 9600-3000000 bps Default: 460800 bps
I2C (NMEA)	/	/	/	•	•	•	/
Reset	•	•	•	•	•	•	•
Time pulse	•	•	•	•	•	•	•
Antenna							
Short-circuit protection & open-circuit detection	•	•	•	/	/	/	/
Antenna type	Active or passive	Active or passive	Active or passive	Active or passive	Active or passive	Active or passive	Active or passive
Antenna power	External or internal	External or internal	External or internal	External or internal	External or internal	External or internal	External or internal
Certifications	CE	CE	CE	CE	CE	CE	CE
Recommended applications	Automotive tracking, OBD	Automotive tracking, OBD	Automotive tracking, OBD	Trackers, high-precision navigation, delivery robots	Trackers, high-precision navigation, delivery robots	Trackers, high-precision navigation, delivery robots	Trackers, high-precision navigation, delivery robots

Note 1: Heading function need 2pcs LC29H (EA) work together.

* Planning/ Under development/ In progress
• Supported

DR and high precision GNSS			
Product	LG290P (03)	LG580P (03)	LG680P (03)
			
GNSS	GPS: L1 C/A, L1C*, L5, L2C; GLONASS: L1, L2; Galileo: E1, E5a, E5b, E6; BDS: B1I, B1C, B2a, B2b, B2I, B3I; NavIC: L5; QZSS: L1 C/A, L1C*, L5, L2C; SBAS: L1	GPS: L1 C/A, L2C, L5 GLONASS: L1*, L2* Galileo: E1, E5a, E5b, E6* BDS: B1I, B1C, B2I, B2a, B2b, B3I* QZSS: L1 C/A, L2C, L5, L6* NavIC: L5 SBAS: L1	GPS: L1 C/A, L2C, L5 GLONASS: L1, L2 Galileo: E1, E5a, E5b, E6 BDS: B1I, B1C, B2I, B2a, B2b, B3I QZSS: L1 C/A, L2C, L5, L6 NavIC: L5 SBAS: L1
Form factor	LGA	LGA	LGA
Dimensions (mm)	12.2 × 16.0 × 2.6	21.0 × 16.0 × 2.7	22.0 × 17.0 × 2.7
Weight (approx.) (g)	0.9	1.4	1.7
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Storage temperature	-40°C ~ +95°C	-40°C ~ +95°C	-40°C ~ +95°C
General features			
Working mode	RTK	RTK+Heading	RTK
Chip solution	KT5030	KT5030	KT5030
L1 band receiver (C/A code) channel number	Tracking 1040	Tracking 1040	tracking 1040
L1 band receiver (C/A code) SBAS	WASS/EGNOS/BDSBAS/MSAS/GAGAN/KASS/ASECNA/SouthPAN/SDCM	WASS/EGNOS/BDSBAS/MSAS/GAGAN/KASS/ASECNA/SouthPAN/SDCM	WASS/EGNOS/BDSBAS/MSAS/GAGAN/KASS/ASECNA/SouthPAN/SDCM
A-GNSS	*	*	*
Sensitivity	Autonomous acquisition	-145dBm	-145 dBm
	Reacquisition	-155 dBm	-155 dBm
	tracking	-160 dBm	-160 dBm
TTFF (time to first fix)	Cold start	28 s	28 s
	Warm start	28 s	28 s
	Hot start	1.7 s	1.8s
Position accuracy	Autonomous: 0.7 m CEP RTK: 0.8 cm + 1 ppm	Autonomous: 1m CEP RTK: 0.8 cm + 1 ppm	Autonomous : 1 m CEP RTK: 0.8 cm + 1 ppm
Velocity accuracy (without aid)	0.03 m/s	0.03 m/s	0.03 m/s
Convergence time (RTK)	5 s	5 s	5s
Accuracy of 1PPS signal (1σ)	5 ns	5 ns	5 ns
Max update rate	20 Hz	20 Hz*	20 Hz
Baud rate (default)	460800 bps	460800 bps	460800 bps
Geo-fence	*	*	*
Jamming detection	*	*	*
Anti-jamming	*	*	*
Built-in LNA	/	/	/
Electrical data			
Power supply (VCC)	3.0 V ~ 3.6 V, typ. 3.3 V	3.0 V ~ 3.6 V, typ. 3.3 V	3.0 V ~ 3.6 V, typ. 3.3 V
I/O voltage	3.3 V	3.3 V	3.3 V
Power consumption (acquisition)	99 mA	98 mA	88 mA
Power consumption (tracking)	99 mA	116 mA	96 mA
Power consumption (backup)	12 μA	18 μA	18 μA
Interfaces			
UART	*	*	*
I2C (NMEA)	*	*	*
Reset	*	*	*
Time pulse	*	*	*
Antenna			
Short-circuit protection & open-circuit detection	*	/	*
Antenna type	Active	Active	Active
Antenna power	External	External	External or VDD_RF
Certifications	CE	CE*	CE*
Recommended applications	Intelligent robots, precision agriculture, surveying and mapping, automatic driving, etc.	Intelligent robots, precision agriculture, surveying and mapping, automatic driving, etc.	Intelligent robots, precision agriculture, surveying and mapping, automatic driving, etc.

* Planning/ Under development/ In progress
 • Supported

GNSS modules

			DR and high precision GNSS	
Product			LG695P (00)	LG690P (03)
				
GNSS			GPS: L1 C/A, L2C, L5 GLONASS: L1, L2 Galileo: E1, E5a, E5b, E6 BDS: B1I, B1C, B2I, B2a, B2b, B3I QZSS: L1 C/A, L2C, L5, L6 NavIC: L5 L-band SBAS: L1	GPS: L1 C/A, L2C, L5 GLONASS: L1 Galileo: E1, E5a, E5b BDS: B1I, B1C, B2I, B2a, B2b QZSS: L1 C/A, L2C, L5 NavIC: L5 SBAS: L1
Form factor			LGA	LGA
Dimensions (mm)			22.0 × 17.0 × 3.3	22.0 × 17.0 × 2.7
Weight (approx.) (g)			2.3	1.8
Operating temperature			-40°C ~ +105°C	-40°C ~ +105°C
Storage temperature			-40°C ~ +105°C	-40°C ~ +105°C
General features				
Working mode			GNSS Raw Data	RTK + GNSS Raw Data
Chip solution			KT5030A	KT5030A
L1 band receiver (C/A code) channel number			tracking 1040	tracking 1040
L1 band receiver (C/A code) SBAS			WASS/EGNOS/BDSBAS/MSAS/GAGAN/KASS/ASECNA/SouthPAN/SDCM	WASS/EGNOS/BDSBAS/MSAS/GAGAN/KASS/ASECNA/SouthPAN/SDCM
A-GNSS			*	*
Sensitivity	Autonomous acquisition	-145 dBm	-145 dBm	
	Reacquisition	-155 dBm	-155 dBm	
	tracking	-160 dBm	-160 dBm	
TTFF (time to first fix)	Cold start	30 s	30 s	
	Warm start	30 s	30 s	
	Hot start	2 s	2 s	
Position accuracy			Autonomous : 1 m CEP	Autonomous : 1 m CEP RTK: 0.8 cm + 1 ppm
Velocity accuracy (without aid)			0.03 m/s	0.03 m/s
Convergence time (RTK)			/	5 s
Maximum acceleration accuracy (without aid)			0.1 m/s²	0.1 m/s²
Accuracy of 1PPS signal (1σ)			5 ns	5 ns
Max update rate			20 Hz	20 Hz
Baud rate (default)			921600 bps	460800 bps
Geo-fence			*	*
Jamming detection			*	*
Anti-jamming			*	*
Built-in LNA			/	/
Electrical data				
Power supply (VCC)			3.0 V ~ 3.6 V, typ. 3.3 V	3.0 V ~ 3.6 V, typ. 3.3 V
I/O voltage			3.3 V	3.3 V
Power consumption (acquisition)			120 mA	95 mA
Power consumption (tracking)			120 mA	100 mA
Power consumption (backup)			50 μA	25 μA
Interfaces				
UART			*	*
I2C (NMEA)			/	/
Reset			*	*
Time pulse			*	*
Antenna				
Short-circuit protection & open-circuit detection			/	/
Antenna type			Active	Active
Antenna power			External or VDD_RF	External or VDD_RF
Certifications			CE*	CE*
Recommended applications			Intelligent robots, precision agriculture, surveying and mapping, automatic driving, etc.	Intelligent robots, precision agriculture, surveying and mapping, automatic driving, etc.

* Planning/ Under development/ In progress
• Supported

	DR and high precision GNSS								
Product	LG69T (AA)	LG69T (AD)	LG69T (AB)*	LG69T (AM)	LG69T (AJ)	LG69T (AF)	LG69T (AI)	LG69T (AP)	LG69T (AR)
	Compatible								
									
GNSS	GPS/QZSS: L1 C/A; L5 Galileo: E1; E5a BDS: B1I; B2a	GPS/QZSS: L1 C/A; L5 Galileo: E1; E5a BDS: B1I; B2a	GPS/QZSS: L1 C/A; L2C or L5 Galileo: E1; E5b or E5a BDS: B1I; B2I or B2a GLONASS: L1 or L2	GPS/QZSS: L1 C/A; L5 Galileo: E1; E5a BDS: B1I; B2a	GPS/QZSS: L1 C/A; L5 Galileo: E1; E5a BDS: B1I; B2a	GPS: L1 C/A; L5 Galileo: E1; E5a BDS: B1I; B2a QZSS: L1 C/A; L5	GPS/QZSS: L1 C/A; L2C or L5 Galileo: E1; E5b or E5a BDS: B1I; B2I or B2a GLONASS: L1 or L2	GPS/QZSS: L1 C/A; L5 Galileo: E1; E5a BDS: B1I; B2a	GPS/QZSS: L1 C/A; L5 Galileo: E1; E5a BDS: B1I; B2a
Form factor	LGA	LGA	LGA	LGA	LGA	LGA	LGA	LGA	LGA
Dimensions (mm)	22.0 × 17.0 × 3.1	22.0 × 17.0 × 3.1	22.0 × 17.0 × 3.3	22.0 × 17.0 × 3.3	22.0 × 17.0 × 3.3	22.0 × 17.0 × 3.3	22.0 × 17.0 × 3.3	22.0 × 17.0 × 3.3	22.0 × 17.0 × 3.3
Weight (approx.) (g)	1.9	1.9	2.7	2.6	2.5	2.7	2.7	2.7	2.4
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +105°C	-40°C ~ +85°C	-40°C ~ +105°C	-40°C ~ +105°C	-40°C ~ +105°C	-40°C ~ +85°C	-40°C ~ +105°C
Storage temperature	-40°C ~ +95°C	-40°C ~ +95°C	-40°C ~ +105°C	-40°C ~ +95°C	-40°C ~ +105°C	-40°C ~ +105°C	-40°C ~ +105°C	-40°C ~ +95°C	-40°C ~ +105°C
General features									
Working mode	IMU raw data + GNSS raw data	PVT/Raw	Raw	RTK+Heading ¹	RAW	DR & IMU	RAW	DR+RTK+Heading ¹	Raw
Chip solution	TESEO V	TESEO V	TESEO APP	TESEO V	TESEO V	TESEO V	TESEO V	TESEO V	TESEO V
L1 band receiver (C/A code) channel number	80 Tracking channels, 4 Fast acquisition channels	80 Tracking channels, 4 Fast acquisition channels	80 Tracking channels, 4 Fast acquisition channels	80 Tracking channels, 4 Fast acquisition channels	80 Tracking channels, 4 Fast acquisition channels	80 Tracking channels, 4 Fast acquisition channels	80 Tracking channels, 4 Fast acquisition channels	80 Tracking channels, 4 Fast acquisition channels	80 Tracking channels, 4 Fast acquisition channels
L1 band receiver (C/A code) SBAS	•	•	•	/	•	•	•	/	•
A-GNSS	•	•	/	•	•	•	•	•	•
Sensitivity TIFF (time to first fix)	Autonomous acquisition	-145 dBm	-145 dBm	-144 dBm*	-145 dBm	-145 dBm	-145 dBm	-145 dBm	-145 dBm
	Reacquisition	-153 dBm	-153 dBm	-153 dBm*	-153 dBm	-153 dBm	-153 dBm	-153 dBm	-153 dBm
	Tracking	-160 dBm	-160 dBm	-159 dBm*	-160 dBm	-160 dBm	-160 dBm	-160 dBm	-160 dBm
	Cold start	36 s	36 s	36 s*	36 s	36 s	36 s	36 s	36 s
	Warm start	30 s	30 s	30 s*	30 s	30 s	30 s	30 s	30 s
	Hot start	3 s	3 s	3 s*	3 s	3 s	3 s	3 s	3 s
Position accuracy (autonomous)	1.0 m CEP	1.0 m CEP	1.0 m CEP	1.0 m CEP	1.0 m CEP	1.0 m CEP	1.0 m CEP	1.0 m CEP	1.0 m CEP
Position accuracy (RTK)	cm ²	cm ²	cm ²	0.01 m+ppm CEP	cm ²	/	cm ²	0.01 m+ppm CEP	cm ²
Velocity accuracy (without aid)	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s
Convergence time (RTK)	/	/	/	<10 s	/	/	/	<10 s	/
Maximum acceleration accuracy (without aid)	0.1 m/s ²	0.1 m/s ²	0.1 m/s ²	0.1 m/s ²	0.1 m/s ²	0.1 m/s ²	0.1 m/s ²	0.1 m/s ²	0.1 m/s ²
Accuracy of 1PPS signal (RMS)	50 ns	50 ns	50 ns	50 ns	50 ns	50 ns	50 ns	50 ns	50 ns
Max update rate	RAW: 10 Hz IMU: 100 Hz	RAW: 10 Hz PVT: 1 Hz	RAW: 10 Hz	PVT: 10 Hz	RAW: 10 Hz IMU: 100 Hz	PVT: 10 Hz IMU: 100 Hz	RAW: 10 Hz	PVT: 10 Hz IMU raw data: 100 Hz	RAW: 10 Hz
Baud rate (default)	460800 bps	460800 bps	460800 bps	460800 bps	460800 bps	460800 bps	460800 bps	460800 bps	460800 bps
Geo-fence	/	/	/	•	/	•	/	•	/
Jamming detection	•	•	•	*	•	•	•	*	•
Built-in LNA	•	•	/	•	•	•	•	•	•
Electrical data									
Power supply (VCC)	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V
I/O voltage	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V
Power consumption (acquisition)	242 mA	235 mA	VCC: 55 mA, VCC_CORE: 230 mA	330 mA	245 mA	275 mA	295 mA	360 mA	245 mA
Power consumption (tracking)	237 mA	232 mA	VCC: 55 mA, VCC_CORE: 225 mA	335 mA	245 mA	274 mA	295 mA	360 mA	245 mA
Power consumption (backup)	55 µA	55 µA	55 µA	55 µA	55 µA	55 µA	55 µA	55 µA	55 µA
Interfaces									
UART	•	•	•	•	•	•	•	•	•
Reset	•	•	•	•	•	•	•	•	•
Time pulse	•	•	•	•	•	•	•	•	•
Antenna									
Antenna type	Active	Active	Active	Active	Active	Active	Active	Active	Active
Antenna power	External or internal	External or internal	External or internal	External or internal	External or internal	External or internal	External or internal	External or internal	External or internal
Certifications	CE	CE	CE/ASIL-B	CE	/	CE	/	CE	/
Recommended applications	Automotive, high-precision navigation, delivery robots	Automotive, high-precision navigation, delivery robots	Automotive, high-precision navigation, delivery robots	Automotive, high-precision navigation, delivery robots	Automotive, high-precision navigation, delivery robots	Automotive, high-precision navigation, delivery robots	Automotive, high-precision navigation, delivery robots	Automotive, high-precision navigation, delivery robots	Automotive, high-precision navigation, delivery robots

Note 1: Heading function need LG69T (AP) and LG69T (AM) work together.
Note 2: Depending on external precision positioning engine.

* Planning/ Under development/ In progress
• Supported

GNSS modules

		GNSS positioning and orientation
Product	LC02H (BA)	
		
GNSS	GPS/GLONASS/Galileo/BDS/QZSS	
Form factor	LCC	
Dimensions (mm)	24.0 × 22.0 × 2.55	
Weight (approx.) (g)	2.5	
Operating temperature	-40°C ~ +85°C	
Storage temperature	-40°C ~ +90°C	
General features		
Chip solution	AG3335M	
L1 band receiver (C/A code) channel number	75	
L1 band receiver (C/A code) SBAS	•*: WAAS/EGNOS/MSAS/GAGAN	
A-GNSS	Supported	
Sensitivity	Autonomous acquisition	-148 dBm
	Reacquisition	-160 dBm
	Tracking	-165 dBm
Orientation accuracy		Heading angle accuracy: 0.2°/m (1 m Baseline) Tilt angle accuracy: 0.3° Roll angle accuracy: 0.3°
TTFF (time to first fix)	Cold start	28 s, Autonomous
	Warm start	22 s, Autonomous
	Hot start	1 s
Position accuracy (autonomous)		Horizontal: 1.5 m CEP Vertical: 3.5 m CEP
Velocity accuracy (without aid)		/
Maximum acceleration accuracy (without aid)		/
Accuracy of 1PPS signal (RMS)		/
Max update rate		1 Hz
Baud rate (default)		115200 bps
Geo-fence		•
Jamming detection		•
Anti-jamming		•
Built-in LNA		•
Electrical data		
Power supply (VCC)		3.1 V ~ 3.6 V, typ. 3.3 V
I/O voltage		2.8 V
Power consumption (acquisition)		83 mA
Power consumption (tracking)		83 mA
Power consumption (backup)		50 μA
Interfaces		
UART		•
I2C (NMEA)		*
Reset		•
Time pulse		•
Antenna		
Short-circuit protection & open-circuit detection		/
Antenna type		Active or passive
Antenna power		Internal
Certifications		CE*
Recommended applications		Communication station antennas, precision agriculture, construction machinery attitude control, vehicle/ship positioning & orientation, etc.

* Planning/ Under development/ In progress
• Supported

	Timing			
Product	L26-T	LC29T	LC98S	LC26G-T
				
GNSS	GPS/Galileo/GLONASS/BDS/QZSS	GPS/Galileo/GLONASS/BDS/QZSS	GPS/BDS/GLONASS/Galileo/QZSS	GPS/GLONASS/Galileo/BDS/QZSS
Form factor	LCC	LCC	LCC	LCC
Dimensions (mm)	12.2 × 16.0 × 2.3	12.2 × 16.0 × 3.1	22.4 × 17.0 × 2.6	12.2 × 16.0 × 2.4
Weight (approx.) (g)	0.9	1.1	1.68	0.85
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Storage temperature	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C
General features				
Working mode	Timing static mode	Timing static mode	Timing static mode	Timing static mode
Chip solution	Teseo III	Teseo V	Teseo III	AG3352
L1 band receiver (C/A code) channel number	48 Track/2 Fast Acq	80 Track/4 Fast Acq	48 Track/2 Fast Acq	47 Track
L1 band receiver (C/A code) SBAS	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN
A-GNSS	Supported	Supported	Supported	Supported
Sensitivity	Autonomous acquisition	-147 dBm	-145 dBm ¹	-148 dBm ¹
	Reacquisition	-153 dBm	-153 dBm ¹	-160 dBm ¹
	Tracking	-162 dBm	-161 dBm ¹	-165 dBm ¹
TTFF (time to first fix)	Cold start	32 s, Autonomous	35 s, Autonomous	29 s, Autonomous
	Warm start	30 s, Autonomous	24 s, Autonomous	28 s, Autonomous
	Hot start	2 s	2 s, Autonomous	2 s
Position accuracy (autonomous)	1.5 m CEP	1.5 m CEP	1.5 m CEP	1.5 m CEP
1PPS timing accuracy (1σ)	< 13.6 (±6.8) ns	< 13.6 (±6.8) ns	< 13.6 (±6.8) ns	≤ 16 (±8) ns
Frequency reference	/	10 MHz	/	/
Max update rate	5 Hz	10 Hz	10 Hz	1 Hz
Baud rate (default)	9600/115200 bps	115200 bps	115200 bps	115200 bps
Geo-fence	/	/	/	•
Jamming detection	•	•	•	•
Anti-jamming	/	/	/	•
Built-in LNA	•	•	/	•
Electrical data				
Power supply (VCC)	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	1.75 V ~ 1.98 V, typ. 1.8 V
I/O voltage	typ. 3.3 V	3.0 V ~ 3.6 V	3.0 V ~ 3.6 V	1.8 V
Power consumption (acquisition)	80 mA (GPS+GLONASS+Galileo)	222 mA (GPS+BDS+GLONASS+Galileo+QZSS)	78 mA (GPS + GLONASS)	36 mA
Power consumption (tracking)	73 mA (GPS+GLONASS+Galileo)	232 mA (GPS+BDS+GLONASS+Galileo+QZSS)	74 mA (GPS + GLONASS)	36 mA
Power consumption (backup)	7 μA	55 μA	/	13 μA
Interfaces				
UART	•	•	•	•
I2C (NMEA)	/	*	*	•
Reset	•	•	•	•
Time pulse	•	•	•	•
Antenna				
Short-circuit protection & open-circuit detection	•	•	•	•
Antenna type	Active or passive	Active	Active or passive	Active or passive
Antenna power	External or internal	External or internal	External or internal	Internal
Certifications	CE	/	CE	CE
Recommended applications	High-precision timing	High-precision timing for base stations	High-precision timing for base stations	High-precision timing; financial services, power synchronization, communication base stations, railway dispatching

Note 1: Demonstrated with a good external LNA.

* Planning/ Under development/ In progress
• Supported

GNSS modules

	Standard precision GNSS - single band								
Product	LG77L (IC)	L76-L	LC760Z (00)	LC76G (AB)	LC76G (PA)	LC76G (PB)	LS550G (00)*	LC26G (AB)	LC260Z (00)
	Compatible								
									
GNSS	GPS/GLONASS/ Galileo/BDS/QZSS	GPS/GLONASS/ Galileo/BDS/QZSS	GPS/Galileo/ GLONASS/QZSS	GPS/GLONASS/ Galileo/BDS/QZSS	GPS/GLONASS/ Galileo/BDS/QZSS	GPS/GLONASS/ Galileo/BDS/QZSS	GPS/GLONASS/ Galileo/BDS/QZSS	GPS/GLONASS/ Galileo/BDS/QZSS	GPS/Galileo/BDS/ QZSS/SBAS
Form factor	LCC	LCC	LCC	LCC	LCC	LCC	LGA	LCC	LCC
Dimensions (mm)	7.0 × 7.0 × 2.0	10.1 × 9.7 × 2.5	10.1 × 9.7 × 2.3	10.1 × 9.7 × 2.4	10.1 × 9.7 × 2.4	10.1 × 9.7 × 2.4	5.0 × 5.0 × 1.05	12.2 × 16.0 × 2.4	12.2 × 16.0 × 2.4
Weight (approx.) (g)	0.2	0.6	0.5	0.5	0.6	0.6	0.07	0.5	1
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-30°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Storage temperature	-40°C ~ +90°C	-40°C ~ +90°C	-45°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-30°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C
General features									
Working mode	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Chip solution	MT3333	MT3333	HD8120	AG3352Q	AG3352Q	AG3352Q	AG3352B	AG3352Q	HD8120
L1 band receiver (C/A code) channel number	33 Track / 99 Acq	33 Track / 99 Acq.	24 Track / 64 Acq.	47 Track	47 Track	47 Track	47 Track	47 Track	24 Track / 64 Acq.
L1 band receiver (C/A code) SBAS	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	Supported	Supported	Supported	Supported	Supported	Supported	Supported
A-GNSS	Supported	Supported	Supported	Supported	Supported	Supported	Supported	Supported	Supported
Sensitivity	Autonomous acquisition	-146 dBm	-149 dBm	-149 dBm	-147 dBm	-147 dBm	-147 dBm	-147 dBm	-148 dBm
	Reacquisition	-156 dBm	-161 dBm	-158 dBm	-159 dBm	-159 dBm	-158 dBm	-159 dBm	-158 dBm
	Tracking	-163 dBm	-167 dBm	-160 dBm	-166 dBm	-166 dBm	-165 dBm	-166 dBm	-159 dBm
TTFF (time to first fix)	Cold start	25 s, Autonomous 17 s, with EASY™	32 s, Autonomous 15 s, with EASY™	28 s, Autonomous 15 s, with AGNSS	28s, Autonomous 15s, with EASY™ 5s, with EP0™	28 s, Autonomous 15 s, with EASY™ 5 s, with EP0™	28 s	28 s, Autonomous 15 s, with EASY™ 5 s, with EP0™	28 s, Autonomous 15 s, with AGNSS 5 s, with EP0™
	Warm start	23 s, Autonomous 5 s, with EASY™	30 s, Autonomous 5 s, with EASY™	26 s, Autonomous 4 s, with AGNSS	25s, Autonomous 2s, with ESAY™	25 s, Autonomous 2 s, with ESAY™	25 s	25 s, Autonomous 2 s, with ESAY™	26 s, Autonomous 4 s, with AGNSS
	Hot start	2 s	2 s	1 s	1 s	1 s	1 s	1 s	1 s
	Position accuracy (autonomous)	2.5 m CEP	2.5 m CEP	2.0 m CEP	1.5 m CEP	1.5 m CEP	1.5 m CEP	1.5 m CEP	2 m CEP
Velocity accuracy (without aid)	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s
Maximum acceleration accuracy (without aid)	0.1 m/s²	0.1 m/s²	0.1 m/s²	0.1 m/s²	0.1 m/s²	0.1 m/s²	0.1 m/s²	0.1 m/s²	0.1 m/s²
Accuracy of 1PPS signal (RMS)	35 ns	100 ns	100 ns	30 ns	30 ns	30 ns	30 ns	20 ns	100 ns
Max update rate	10 Hz	10 Hz	5 Hz	10 Hz	1 Hz	1 Hz	1 Hz	10 Hz	5 Hz
Baud rate (default)	9600 bps	9600 bps	115200 bps	115200 bps	115200 bps	115200 bps	115200 bps	115200 bps	115200 bps
Geo-fence	•	•	•	•	•	•	•	•	/
Jamming detection	•	•	•	•	•	•	•	•	•
Anti-jamming	•	•	•	•	•	•	•	•	/
Built-in LNA	/	•	•	•	•	•	•	•	•
Electrical data									
Power supply (VCC)	2.8 V ~ 4.3 V	2.8 V ~ 4.3 V	2.8 V ~ 3.6 V	2.55 V ~ 3.6 V	2.55 V ~ 3.6 V	1.75 V ~ 1.98 V	1.75 V ~ 1.98 V, typ. 1.8 V	2.55 V ~ 3.6 V	2.8 V ~ 3.6 V, typ. 3.3 V
I/O voltage	1.7 V ~ 1.9 V / 2.7 V ~ 2.9 V	2.7 V ~ 2.9 V	Same as VCC	2.55 V ~ 3.6 V	2.55 V ~ 3.6 V	1.75 V ~ 1.98 V	Typ. 1.8 V	typ. 3.3 V	2.8 V ~ 3.6 V, typ. 3.3 V
Power consumption (acquisition)	24 mA (GPS + GLONASS)	31 mA (GPS + GLONASS)	23 mA (GPS + Galileo + GLONASS)	36 mA (G3B)	10 mA (G3B)	15 mA (G3B)	17.2 mA	36 mA (G3B)	20 mA (G2B)
Power consumption (tracking)	23 mA (GPS + GLONASS)	31 mA (GPS + GLONASS)	22 mA (GPS + Galileo + GLONASS)	36 mA (G3B)	10 mA (G3B)	15 mA (G3B)	16.3 mA	36 mA (G3B)	20 mA (G2B)
Power consumption (backup)	6 µA	8 µA	13 µA	13 µA	13 µA	13 µA	11.5 µA	15 µA	13 µA
Interfaces									
UART	•	•	•	•	•	•	•	•	•
I2C (NMEA)	•	•	•	•	•	•	•	•	•
Reset	•	•	•	•	•	•	•	•	•
Time pulse	•	•	•	•	•	•	•	•	•
Antenna									
Short-circuit protection & open-circuit detection	•	/	•	/	/	/	/	•	•
Antenna type	Active or passive	Active or passive	Active or passive	Active or passive	Active or passive	Active or passive	Active or passive	Active or passive	Active or passive
Antenna power	External	External or internal	External or internal	External or internal	External or internal	External or internal	External or internal	External or internal	External or internal
Certifications	CE	CE	CE	CE	CE	CE	/	CE	/
Recommended applications	Vehicle trackers, asset trackers, safety, industrial PDAs & PNDs, digital cameras	Vehicle trackers, asset trackers, safety, industrial PDAs & PNDs, digital cameras	Vehicle trackers, asset trackers, safety, industrial PDAs & PNDs, digital cameras	Vehicle trackers, asset trackers, safety, industrial PDAs & PNDs, digital cameras	Vehicle trackers, asset trackers, safety, industrial PDAs & PNDs, digital cameras	Vehicle trackers, asset trackers, safety, industrial PDAs & PNDs, digital cameras	Portable and wearable devices	Vehicle trackers, asset trackers, safety, industrial PDAs & PNDs, digital cameras	Fleet management, tracker, T-BOX, safety driving assistant

* Planning/ Under development/ In progress
• Supported

	Standard precision GNSS - dual band			
Product	LC79H (AL)	LC29H (AA)	LC29H (AI)	LG695H (06)
				
GNSS	GPS/QZSS: L1 C/A, L5 GLONASS: L1 Galileo: E1, E5a BDS: B1I, B2a NavIC: L5	GPS/QZSS: L1 C/A, L5 GLONASS: L1 Galileo: E1, E5a BDS: B1I, B2a NavIC: L5	GPS/GLONASS/Galileo/BDS/QZSS/NavIC/SBAS	GPS + GLONASS + BDS+ Galileo + QZSS
Form factor	LCC	LCC	LCC	LGA
Dimensions (mm)	10.1 × 9.7 × 2.4	12.2 × 16.0 × 2.5	12.2 × 16.0 × 2.5	22.0 × 17.0 × 3.3
Weight (approx.) (g)	0.5	0.9	0.9	2.25
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +105°C
Storage temperature	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +105°C
General features				
working mode	Standard mode	Standard mode	Standard mode	IMU & GNSS Raw data
Chip solution	AG3335M	AG3335M	AG3335M	AG3335
L1 band receiver (C/A code) channel number	Tracking and acquisition total: 135	Tracking and acquisition total: 135	Tracking and acquisition total: 75	/
L1 band receiver (C/A code) SBAS	WAAS, EGNOS, MSAS, GAGAN	WAAS, EGNOS, MSAS, GAGAN	WAAS, EGNOS, MSAS, GAGAN	WAAS/EGNOS/MSAS/GAGAN
A-GNSS	Supported	Supported	Supported	Supported
Sensitivity	Autonomous acquisition	-148 dBm	-147 dBm	-150 dBm
	Reacquisition	-159 dBm	-159 dBm	-160 dBm
	Tracking	-166 dBm	-165 dBm	-165 dBm
TTFF (time to first fix)	Cold start	26 s	26 s	29 s
	Warm start	18 s	16 s	24 s
	Hot start	1 s	1 s	1 s
Position accuracy (autonomous)	1.0 m CEP	1.0 m CEP	1.8 m CEP	1.0 m CEP
Velocity accuracy (without aid)	0.03 m/s	0.03 m/s	0.1 m/s	0.1 m/s
Maximum acceleration accuracy (without aid)	/	/	/	0.1 m/s²
Accuracy of 1PPS signal (RMS)	20 ns	20 ns	80 ns	50 ns
Max update rate	PVT: 1 Hz	PVT: 1 Hz	PVT: 1 Hz	10 Hz
Baud rate (default)	115200 bps	115200 bps	115200 bps	460800 bps
Geo-fence	•	•	•	/
Jamming detection	•	•	•	/
Anti-jamming	•	/	/	/
Built-in LNA	•	•	•	/
Electrical data				
Power supply (VCC)	1.75 V ~ 1.98 V	3.1 V ~ 3.6 V	3.1 V ~ 3.6 V, typ. 3.3 V	typ. 3.3V
I/O voltage	2.8 V	2.8 V	Typ. 2.8 V	Same as VCC
Power consumption (acquisition)	33 mA	24 mA	16 mA	25 mA
Power consumption (tracking)	33 mA	24 mA	16 mA	25 mA
Power consumption (backup)	20 µA	25 µA	51 µA	60 µA (198 µW)@ Backup mode (VCC is not disconnected) 85 µA (280.5 µW)@ Backup mode (VCC is disconnected)
Interfaces				
UART	9600~921600 bps (Default:115200 bps)	9600~3000000 bps (Default:115200 bps)	•	•
I2C (NMEA)	•	•	•	/
Reset	•	•	•	•
Time pulse	•	•	•	•
Antenna				
Antenna type	Active or passive	Active or passive	Active or passive	Active
Antenna power	External or internal	External or internal	External or internal	External
Certifications	CE	CE	CE	CE*
Recommended applications	Shared mobility, delivery robots, GIS	Shared mobility, delivery robots, GIS	Application areas include trackers, asset preservation, vehicle navigation, etc.	Shared mobility, delivery robots, GIS


* Planning/ Under development/ In progress
• Supported

GNSS modules

	Integrated antenna							
Product	LC86L (C)	LC86G (AA)	LC86G (AB)	LC86G (LA)	LC86G (PA)	L86	L89 R2.0	L96
	Compatible							
								
GNSS	GPS/GLONASS/Galileo/BDS/QZSS	GPS/BDS/Galileo	GPS/GLONASS/Galileo	GPS/GLONASS/BDS/Galileo/QZSS	GPS/GLONASS/Galileo/BDS/QZSS	GPS/GLONASS/BDS/Galileo/QZSS	GPS/GLONASS/BDS/Galileo/IRNSS/QZSS	GPS/GLONASS/BDS/Galileo/QZSS
Form factor	LCC	LCC	LCC	LCC	LCC	LCC	LCC	LCC
Dimensions (mm) ¹	16.0 × 16.0 × 6.95	16.0 × 16.0 × 6.95	16.0 × 16.0 × 6.95	18.4 × 18.4 × 6.95	16.0 × 16.0 × 6.95	18.4 × 18.4 × 6.95	26.4 × 18.4 × 7.4	14.0 × 9.6 × 2.0
Weight (approx.) (g)	6	5.9	5.9	8	5.9	7.6	8.2	0.6
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Storage temperature	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C	-40°C ~ +90°C
General features								
Chip solution	MT3333	AG3352	AG3352	AG3352	AG3352	MT3333	AG3335	MT3333
L1 band receiver (C/A code) channel number	33 Track/ 99 Acq	47 Track	47 Track	47 Track	47 Track	33 Track/ 99 Acq	33 Track/ 99 Acq	33 Track/ 99 Acq.
L1 band receiver (C/A code) SBAS	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	Supported	WAAS/EGNOS/MSAS/GAGAN	Supported	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN	WAAS/EGNOS/MSAS/GAGAN
A-GNSS	Supported	Supported	Supported	Supported	Supported	Supported	Supported	Supported
Sensitivity	Autonomous acquisition	-148 dBm	-148 dBm	-148 dBm	-148 dBm	-149 dBm	-148 dBm	-148 dBm
	Reacquisition	-162 dBm	-160 dBm	-160 dBm	-160 dBm	-161 dBm	-157 dBm	-160 dBm
	Tracking	-166 dBm	-166 dBm	-166 dBm	-166 dBm	-167 dBm	-165 dBm	-165 dBm
TTFF (time to first fix)	Cold start	35 s, Autonomous 15 s, with AGNSS	30 s, Autonomous 12 s, with EASY™	30 s, Autonomous 12 s, with EASY™	30 s, Autonomous 12 s, with EASY™	35 s, Autonomous 15 s, with AGNSS	<35 s, Autonomous <15 s, with EASY™	35 s, Autonomous 15 s, with EASY™
	Warm start	30 s, Autonomous 5 s, with AGNSS	28 s, Autonomous 2 s, with EASY™	28 s, Autonomous 2 s, with EASY™	28 s, Autonomous 2 s, with EASY™	30 s, Autonomous 5 s, with AGNSS	<30 s, Autonomous <5 s, with EASY™	30 s, Autonomous 5 s, with EASY™
	Hot start	2 s	1 s	1 s	1 s	1 s	<1 s	1 s
Position accuracy (autonomous)	2.5 m CEP	1.5 m CEP	1.5 m CEP	1.5 m CEP	1.5 m CEP	2.5 m CEP	1.8 m CEP	2.5 m CEP
Velocity accuracy (without aid)	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.1 m/s	0.03 m/s	0.1 m/s
Maximum acceleration accuracy (without aid)	0.1 m/s²	0.1 m/s²	0.1 m/s²	0.1 m/s²	0.1 m/s²	0.1 m/s²	/	0.1 m/s²
Accuracy of 1PPS signal (RMS)	100 ns	30 ns	30 ns	30 ns	30 ns	100 ns	100 ns	100 ns
Max update rate	10 Hz	10 Hz	10 Hz	10 Hz	1 Hz	10 Hz	1 Hz	10 Hz
Baud rate (default)	9600 bps	115200 bps	115200 bps	115200 bps	115200 bps	9600 bps	9600 bps	9600 bps
Geo-fence	•	•	•	•	•	•	•	•
Jamming detection	•	•	•	•	•	•	•	•
Anti-jamming	•	•	•	•	•	•	/	•
Built-in LNA	•	•	•	•	•	•	•	•
Electrical data								
Power supply (VCC)	2.8 V ~ 4.3 V	2.55 V ~ 3.6 V	2.55 V ~ 3.6 V	2.55 V ~ 3.6 V	2.55 V ~ 3.6 V	2.8 V ~ 4.3 V	3.1 V ~ 4.3 V	2.8 V ~ 4.3 V
I/O voltage	2.7 V ~ 2.9 V	2.55 V ~ 3.6 V	2.55 V ~ 3.6 V	2.55 V ~ 3.6 V	2.55 V ~ 3.6 V	2.7 V ~ 2.9 V	3.0 V	2.7 V ~ 2.9 V
Power consumption (acquisition)	32 mA (GPS+GLONASS)	30 mA	33 mA	34 mA	11 mA	32 mA (GPS+GLONASS)	32 mA	25 mA
Power consumption (tracking)	30 mA (GPS+GLONASS)	30 mA	33 mA	34 mA	11 mA	30 mA (GPS+GLONASS)	32 mA	20 mA
Power consumption (backup)	7 µA	13 µA	13 µA	13 µA	13 µA	7 µA	51 µA	7 µA
Interfaces								
UART	•	•	•	•	•	•	•	•
I2C (NMEA)	/	/	/	/	/	/	•	•
Reset	•	•	•	•	•	•	•	•
Time pulse	•	•	•	•	•	•	•	•
Antenna								
Short-circuit protection & open-circuit detection	•	•	•	•	•	•	•	/
Antenna automatic switch	•	•	•	•	•	•	•	/
Antenna type	Embedded patch antenna or external active antenna	Embedded patch antenna or external active antenna	Embedded patch antenna or external active antenna	Embedded patch antenna or external active antenna	Embedded patch antenna or external active antenna	Embedded patch antenna or external active antenna	Embedded patch antenna and chip antenna, external active antenna	Embedded chip antenna or external active antenna
Antenna power	Internal	Internal	Internal	Internal	Internal	Internal	Internal	Internal
Certifications	CE	CE	CE	CE	CE	CE	CE	CE
Recommended applications	Vehicle or asset trackers, DVRs, connected PNDs & PDAs, safety, digital cameras, etc.	Vehicle or asset trackers, DVRs, connected PNDs & PDAs, safety, digital cameras, etc.	Vehicle or asset trackers, DVRs, connected PNDs & PDAs, safety, digital cameras, etc.	Vehicle or asset trackers, DVRs, connected PNDs & PDAs, safety, digital cameras, etc.	Vehicle or asset trackers, DVRs, connected PNDs & PDAs, safety, digital cameras, etc.	Vehicle or asset trackers, DVRs, connected PNDs & PDAs, safety, digital cameras, etc.	(Dedicated for India market) standard tracking	Asset tracking, digital cameras

Note 1: Please refer to the design document for footprint size.

• Supported

	IMU module	
Product	LUA600A	LUA300C
		
Dimensions (mm)	25.0 × 25.0 × 12.5	10.4 × 18.8 × 11.1
Weight (approx.) (g)	11.3	2.4
Operating temperature	-40°C ~ +105°C	-40°C ~ +105°C
Storage temperature	-40°C ~ +105°C	-40°C ~ +105°C
General features		
Chip solution	SCHA634	ASM330LHB
Update rate	10–400 Hz; Default: 100 Hz	/
Gyroscope specifications		
Range	±300 °/s	±250 °/s
Bias instability	Typ. 1.8 °/h (X/Y axis), 1.4 °/h (Z axis) Max. 2.6 °/h (X/Y axis), 2.1 °/h (Z axis)	2.5 °/h
Angular random walk	Typ. 0.09 °/√h (X/Y axis), 0.1 °/√h (Z axis) Max. 0.13 °/√h (X/Y axis), 0.15 °/√h (Z axis)	0.2 °/√h
Bias Error over Temperature (-40 °C to +105 °C)	Typ. 0.01 °/s Max. 0.02 °/s	0.03 °/s
Scale factor error	Typ. 0.04 % Max. 0.15 %	0.3%
Non-Linearity	Typ. 0.003 % FS Max. 0.01 % FS	0.005 % FS
Misalignment error	Typ. 0.004° Max. 0.01°	0.003°
Accelerometer specifications		
Range	±6g	±8 g
Bias instability	Typ. 15 µg Max.18 µg	30 µg
Velocity random walk	Typ. 0.035 m/s/√h Max. 0.05 m/s/√h	0.025 m/s/√h
Bias error over temperature (-40 °C to +105 °C)	Typ. 0.05 mg (X/Y axis); 1mg (Z axis) Max. 0.1 mg (X/Y axis); 2mg (Z axis)	0.8 mg
Scale factor error	Typ. 0.02% (X/Y axis); 0.03 % (Z axis) Max. 0.05% (X/Y axis); 0.12 % (Z axis)	0.02%
Non-Linearity	Typ. 0.008%FS (X/Y axis); 0.008 %FS (Z axis) Max. 0.02%FS (X/Y axis); 0.02 %FS (Z axis)	0.006 %
Misalignment Error	Typ. 0.002° (X/Y axis); 0.004 ° (Z axis) Max. 0.01° (X/Y axis); 0.017 ° (Z axis)	0.01°
Electrical features		
Power supply (VCC)	3.0 V ~ 3.6 V, typ. 3.3 V	3.0 V ~ 3.6 V, typ. 3.3 V
I/O voltage	Following VCC	Following VCC
Power consumption (@ 3.3 V)	75 mA	2.6 mA
Interfaces		
UART	Baud rate: 115200–921600 bps; Default: 460800 bps	/
SPI	Max. clock frequency: 8 MHz	Max. clock frequency: 10 MHz ¹
CAN	Max. Baud Rate (CAN): 1 Mbps Max. Baud Rate (CAN FD): 2 Mbps	/
Recommended applications	Automated driving, high-precision navigation, robotics, etc.	Automated driving, high-precision navigation, robotics, etc.

Note1:The module contains 3 SPI slave devices, so the host should be able to support 3 SPI slave devices.

	Smart antenna	
Product	QLM29HBAA-GM	QLM29HCAA-GM
		
GNSS	GPS/QZSS: L1 C/A, L5 GLONASS: L1 Galileo: E1, E5a BDS: B11, B2a	GPS/QZSS: L1 C/A, L5 GLONASS: L1 Galileo: E1, E5a BDS: B11, B2a
Form factor	/	/
Dimensions (mm)	72 × 57.6 × 22.3	72 × 57.6 × 22.3
Weight (approx.) (g)	220	220
Operating temperature	-40°C ~ +85°C	-40°C ~ +85°C
Storage temperature	-40°C ~ +105°C	-40°C ~ +105°C
General features		
Working mode	DR+RTK	DR
Chip solution	AG3335A/T	AG3335A/T
L1 band receiver (C/A code) channel number	Tracking and acquisition total: 135	Tracking and acquisition total: 135
L1 band receiver (C/A code) SBAS	• (WAAS/EGNOS/MSAS/GAGAN)	• (WAAS/EGNOS/MSAS/GAGAN)
A-GNSS	Supported	Supported
Sensitivity	Autonomous acquisition	-147 dBm
	Reacquisition	-157 dBm
	Tracking	-165 dBm
TTFF (time to first fix)	Cold start	26 s
	Warm start	16 s
	Hot start	1 s
Position accuracy (autonomous)	Autonomous: 1 m	Autonomous: 1 m
Position accuracy (RTK)	RTK: < 0.1 m + 1 ppm	/
Velocity accuracy (without aid)	0.03 m/s	0.03 m/s
Convergence time (RTK)	RTK: < 10 s	/
Maximum acceleration accuracy (without aid)	/	/
Accuracy of 1PPS signal (RMS)	20 ns	20 ns
Max update rate	GNSS : 1 Hz IMU : 100 Hz (MAX)	GNSS : 1 Hz IMU : 100 Hz (MAX)
Baud rate (default)	115200 bps	115200 bps
Geo-fence	•	•
Jamming detection	•	•
Anti-jamming	/	/
Built-in LNA	•	•
Electrical data		
Power supply (VCC)	4 V ~ 5.5 V, typ. 5 V	4 V ~ 5.5 V, typ. 5 V
Power Consumption	39.8 mA	42 mA
Interfaces		
RS232	115200 bps	115200 bps
UART	/	/
I2C (NMEA)	/	/
Antenna		
Short-circuit protection & open-circuit detection	/	/
Antenna type	Active	Active
Antenna power	Internal	Internal
Certifications	CE	CE
Recommended applications	Car sharing, vehicle navigation	Car sharing, vehicle navigation

• Supported

UMTS/HSPA (+) modules



UMTS/HSPA (+) modules

Product	UC200A-GL
	
Form factor	LCC
Dimensions (mm)	29.0 × 32.0 × 2.4
3G	UMTS/HSPA+
Frequency bands (MHz)	UMTS: B1/2/5/8; GSM: 850/900/1800/1900MHz
Region	Global
Weight (approx.) (g)	4.3
Operating temperature	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C
Data transmission (Max.)	
HSPA data rates (Mbps)	21 (DL)/5.76 (UL)
UMTS data rates (Kbps)	384 (DL/UL)
GPRS data rates (Kbps)	85.6 (DL/UL)
EDGE data rates (Kbps)	236.8 (DL/UL)
SMS	•
CSD	•
Protocols	TCP/UDP/PPP/NTP/NITZ/FTP/HTTP/PING/CMUX/HTTPS/FTPS/SSL/FILE/MQTT/MMS/SMTP/SMTPS
Interfaces	
SIM	1.8 V/ 3 V
UART	2
USB	2.0 hi-speed
Audio digital (PCM)	•
RTC backup	•
ADC	× 2, 12bits
Antenna	Pads for primary
Enhanced features	
DTMF	•
QuecFOTA®	•
DFOTA	•
SIM detection	•
Firmware update	via USB/ DFOTA
Electrical features	
Supply voltage range	3.4 V ~ 4.5 V, typ. 3.8 V
Power consumption	17 µA @ Power Off 1 mA @ Sleep
Software features	
USB serial driver	Windows 7/8/8.1/10/11, Linux 2.6 ~ 5.15, Android 4.x ~ 12.x
RIL driver	Android 4.x ~ 12.x
Certifications	CE/FCC/Anatel/RCM
Recommended applications	Telematics, smart metering, mobile POS terminals, gateways, safety, tracking and tracing, remote maintenance and control, networking, mobile computing, healthcare, etc.

• Supported

A close-up photograph showing a hand holding a white handheld barcode scanner over a white smartphone held by another hand. The scanner is positioned above the phone, and the phone's screen is dark. The background is blurred, showing a wooden surface.

**GSM/GPRS
modules**


GSM/GPRS modules

Product	M66	M65	M95	M95-R	MC60/ MC60E
					
Form factor	LCC	LCC	LCC	LCC	LCC
Dimensions (mm)	17.7 × 15.8 × 2.3	17.7 × 15.8 × 2.3	23.6 × 19.9 × 2.65	23.6 × 19.9 × 2.65	18.7 × 16.0 × 2.1
Frequency range (MHz)	850/900/1800/1900	850/900/1800/1900	850/900/1800/1900	850/900/1800/1900	850/900/1800/1900
Weight (approx.) (g)	1.3	1.1	3.0	3.0	1.3
Operating temperature	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C	-35°C ~ +75°C
Extended temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Data transmission (Max.)					
GPRS multi-slot class	12, 1-12 configurable	12, 1-12 configurable	12, 1-12 configurable	12, 1-12 configurable	12, 1-12 configurable
Data rate (kbps)	85.6 (DL & UL)	85.6 (DL & UL)	85.6 (DL & UL)	85.6 (DL & UL)	85.6 (DL & UL)
SMS	•	•	•	•	•
Protocols	TCP/UDP/PPP/FTP/HTTP/SMTP/NITZ/PING/NTP/SSL/MQTT/HTTPS/SMTPS	TCP/UDP/PPP/FTP/HTTP/NITZ/PING/NTP/SSL/MQTT/HTTPS	TCP/UDP/PPP/FTP/HTTP/SMTP/NITZ/PING/NTP/SSL/MQTT	TCP/UDP/PPP/FTP/HTTP/NITZ/PING/NTP/SSL/MQTT	TCP/UDP/PPP/FTP/HTTP/NITZ/PING/NTP/SSL/HTTPS/MQTT
Specifications for voice					
Speech codec modes	HR/FR/EFR/AMR	HR/FR/EFR/AMR	HR/FR/EFR/AMR	HR/FR/EFR/AMR	HR/FR/EFR/AMR
Echo arithmetic	Echo cancellation Echo suppression Noise reduction	Echo cancellation Echo suppression Noise reduction	Echo cancellation Echo suppression Noise reduction	Echo cancellation Echo suppression Noise reduction	Echo cancellation Echo suppression Noise reduction
Interfaces					
SIM	1.8 V/3 V	1.8 V/3 V	1.8 V/3 V	1.8 V/3 V	1.8 V/3 V
Audio analog	1 input/2 outputs	1 input/2 outputs	2 inputs/ 2 outputs	2 inputs/ 2 outputs	1 input/ 2 outputs
Audio digital (PCM)	•	/	•	•	•
RTC backup	•	•	•	•	•
UART	3	3	2	2	4
ADC	× 1, 10bit	× 1, 10bit	/	/	× 1, 10bit
SD card interface	•	/	/	/	•
GPIO	/	/	/	/	•
Temperature detection	/	/	•	/	•
Enhanced features					
eCall	•	/	•	/	•
Jamming detection	•	/	•	/	•
DTMF	•	/	•	•	•
Audio playback/Audio recording	•	•	•	•	•
Dual-SIM	/	/	•	/	•
QuecCell	/	•	/	/	/
QuecFile	•	•	/	/	/
MUX	•	•	•	•	•
Bluetooth	•	/	/	/	BT 3.0 (MC60) BT 3.0/ BT4.0 (MC60E)
GNSS	/	/	/	/	BEIDOU/GPS/GLONASS/Galileo/QZSS
Electrical features					
Power supply	3.3 V ~ 4.6V	3.45 V ~ 4.25 V	3.3 V ~ 4.6 V	3.45 V ~ 4.25 V	3.3 V ~ 4.6 V
Low power consumption	1.3mA @DRX=5 1.2mA @DRX=9	1.2mA @DRX=5 1.1mA @DRX=9	1.3mA @DRX=5 1.2mA @DRX=9	1.4mA @DRX=5 1.3mA @DRX=9	1.2mA @DRX=5 0.8mA @DRX=9
Certifications	Vodafone/Deutsche Telekom/CE/GCF/FCC/Anatel/ICASA/UCRF	CE/Anatel	Vodafone/CE/GCF/PTCRB/FCC/IC/Rogers/Anatel/RCM/ICASA/NCC/UCRF/Telenor	CE/Anatel	CE/GCF/FCC/Anatel/ICASA/UCRF
Recommended applications	Telematics, smart metering, mobile POS terminals, gateways, safety, tracking and tracing, remote maintenance and control, networking, mobile computing, healthcare, etc.				

• Supported



The industry's **most** **comprehensive** IoT portfolio



IoT modules

Cellular, GNSS, Wi-Fi/BT and satellite modules to suit a huge range of IoT applications



IoT antennas

Embedded and external antennas, including design, testing and certification services and post-deployment technical support



Testing and certification

Use our expert testing and certification services to speed time to market



YECT004W1A

5G terminal mount rubber dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–6000 MHz
Efficiency	20%–70%
Peak gain	5.6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
IP rating	IP67
Operation temperature	–40°C to +85°C



YECT004W5AM

5G terminal mount whip dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–6000 MHz
Efficiency	20%–70%
Peak gain	5.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	140 × 15.6 × 13 mm
Form factor	Whip
Mounting type	Terminal
Connector type	Fakra female Code Z
IP rating	IP67
Operation temperature	–40°C to +85°C



YECT104WAAM

5G terminal mount rubber dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–6000 MHz
Efficiency	20%–68%
Peak gain	5.6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø20 × 145 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	N type male
IP rating	IP67
Operation temperature	–40°C to +85°C



YECT005W1A

5G terminal mount rubber dipole external antenna

Compliant

RoHS

Electrical data

Frequency range	600–6000 MHz
Efficiency	52% AVG.
Peak gain	3.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
Operation temperature	–40°C to +85°C



YECT005WFA

5G terminal mount whip dipole external antenna

Compliant

RoHS

Electrical data

Frequency range	600–6000 MHz
Efficiency	50% AVG.
Peak gain	4.6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Whip
Mounting type	Terminal
Connector type	RP SMA male
Operation temperature	–40°C to +85°C



YECN009AA

5G terminal mount rubber dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–6000 MHz
Efficiency	30%–80%
Peak gain	3.4 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	200 × 21 × 8 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
Operation temperature	–40°C to +85°C



YECN028AA

5G terminal mount rubber dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	410–470 MHz, 617–960 MHz, 1427–6000 MHz
Efficiency	25%–80%
Peak gain	5.8 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	225 × 54.5 × 13 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
IP rating	IP66
Operation temperature	–40°C to +85°C



YECT000WBA

5G screw mount stubby monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–960 MHz, 1400–2690 MHz, 3300–6000 MHz
Efficiency	20%–90%
Peak gain	8.3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø40.6 × 104 mm
Form factor	Stubby
Mounting type	Screw
Connector type	N type female
IP rating	IP67 & IP69K
IK rating	IK10
Operation temperature	–40°C to +85°C



YECT101W7AH

5G terminal mount stubby monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–960 MHz, 1400–2690 MHz, 3300–6000 MHz
Efficiency	20%–90%
Peak gain	8.3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø40.6 × 78 mm
Form factor	Stubby
Mounting type	Terminal
Connector type	N type male
IP rating	IP67 & IP69K
IK rating	IK10
Operation temperature	–40°C to +85°C



YECT028W1A

5G terminal mount rubber dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–960 MHz, 1710–2690 MHz, 3300–6000 MHz
Efficiency	45%–85%
Peak gain	5.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	225 × 54,5 × 13 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
IP rating	IP66
Operation temperature	–40°C to +80°C



YECT102WAAH

5G terminal mount rubber dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–960 MHz, 1710–2690 MHz, 3300–6000 MHz
Efficiency	45%–85%
Peak gain	5.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	231 × 54,5 × 14,5 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	TNC male
IP rating	IP66
Operation temperature	–40°C to +85°C



YECT103W7AH

5G terminal mount rubber dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–960 MHz, 1710–2690 MHz, 3300–6000 MHz
Efficiency	45%–85%
Peak gain	5.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	233 × 54,5 × 20 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	N type male
IP rating	IP66
Operation temperature	–40°C to +85°C



YECA001L1AH

5G adhesive mount whip monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–6000 MHz
Efficiency	30%–65%
Peak gain	6.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø30 × 83.2mm
Form factor	Whip
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174LL
Cable length	1000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YECM001L1AH

5G magnetic mount whip monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–6000 MHz
Efficiency	30%–65%
Peak gain	6.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø30 × 82.2 mm
Form factor	Whip
Mounting type	Magnetic
Connector type	SMA male
Cable type	RG174LL
Cable length	1000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YECN001J1A

5G screw mount stubby PIFA external antenna

Compatible with ECE-R118 cables under demand

Compliant

RoHS & REACH

Electrical data

Frequency range	600–960 MHz, 1400–2690 MHz, 3300–6000 MHz
Efficiency	30%–90%
Peak gain	8.3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø40.6 × 104 mm
Form factor	Stubby
Mounting type	Screw
Connector type	SMA male
Cable type	ALSR200
Cable length	300 mm
IP rating	IP67 & IP69K
IK rating	IK10
Operation temperature	–40°C to +85°C



YECT001W1AM

5G terminal mount rubber monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698–960 MHz, 1710–2690 MHz, 3300–6000 MHz
30%–75%
2.9 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
IP rating
Operation temperature

52.6 × 18.6 × 9 mm
Rubber
Terminal
Right angle SMA male
IP53
–40°C to +85°C



YECT001W1BM

5G terminal mount rubber monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698–960 MHz, 1710–2690 MHz, 3300–6000 MHz
35%–80%
4.1 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
IP rating
Operation temperature

Ø9 × 54.9 mm
Rubber
Terminal
SMA male
IP53
–40°C to +85°C



YECA000G1AM

5G adhesive mount low profile dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698–960 MHz, 1710–2690 MHz, 3300–6000 MHz
35%–80%
4.2 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
Cable type
Cable length
Operation temperature

116.5 × 21.7 × 5.6 mm
Low profile
Adhesive
SMA male
RG174
215 mm
–40°C to +85°C



YECT002W1A

5G terminal mount rubber dipole external antenna
Compatible with Japan market

Compliant

RoHS & REACH

Electrical data

Frequency range	600–5000 MHz
Efficiency	55% AVG.
Peak gain	2.8 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	209 × 42 × 6 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
Operation temperature	–20°C to +60°C



YFCX001WWAH

5G adhesive mount transparent film + cable dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	700–960 MHz, 1450–2690 MHz, 3300–6000 MHz
Efficiency	30%–70%
Peak gain	6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	118.2 × 42.7 mm
Form factor	Transparent film + cable
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174
Cable length	300 mm
Operation temperature	–40°C to +85°C



YECA000J1AM

4G adhesive mount low profile monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	698-960 MHz, 1710-2690 MHz
Efficiency	35%-80%
Peak gain	4.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	60 × 16 × 6.3 mm
Form factor	Low profile
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174
Cable length	213 mm
Operation temperature	-40°C to +85°C



YEMN117L1B

4G screw mount low profile monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	410-470 MHz, 698-2690 MHz
Efficiency	30%-70%
Peak gain	4.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø108 × 45 mm
Form factor	Low profile
Mounting type	Screw
Connector type	SMA male
Cable type	RG174
Cable length	1000 mm
IP rating	IP67 & IP69K
IK rating	IK09
Operation temperature	-40°C to +85°C



YECN001L1A

4G screw mount stubby IFA external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	450-470 MHz, 698-960 MHz, 1710-2690 MHz
Efficiency	22%-64%
Peak gain	2.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø40.6 × 104 mm
Form factor	Stubby
Mounting type	Screw
Connector type	SMA male
Cable type	RG174
Cable length	1000 mm
IP rating	IP67 & IP69K
IK rating	IK10
Operation temperature	-40°C to +85°C



YECT003W1A

4G terminal mount rubber monopole external antenna
Compatible with Japan market

Compliant

RoHS & REACH

Electrical data

Frequency range	698-960 MHz; 1450-2690 MHz; 3300-3800 MHz
Efficiency	25%-80%
Peak gain	3.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø12.4 × 50.8 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
IP rating	IP67
Operation temperature	-40°C to +85°C



YECT011W1AM

4G terminal mount rubber dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	698-960 MHz, 1710-2690 MHz
Efficiency	20%-70%
Peak gain	4.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Rubber
Mounting type	Terminal
Connector Type	SMA male
IP Rating	IP67
Operation temperature	-40°C to +85°C



YECT012W1AM

4G terminal mount rubber dipole external antenna

Compliant

RoHS

Electrical data

Frequency range	698-960 MHz, 1710-2690 MHz
Efficiency	52% AVG.
Peak gain	3.6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA Male
Operation temperature	-40°C to +85°C



YE0013CA

4G terminal mount rubber monopole external antenna
Compatible with Japan market

Compliant

RoHS

Electrical data

Frequency range	698–2700 MHz
Efficiency	45%–95%
Peak gain	4.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø10.2 × 115.4 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
IP rating	IP66
Operation temperature	–40°C to +85°C



YCN001AA

4G terminal mount rubber monopole external antenna
Compatible with Japan market

Compliant

RoHS

Electrical data

Frequency range	698–960 MHz, 1560–1610 MHz, 1710–2700 MHz
Efficiency	48% AVG.
Peak gain	0 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø13 × 144 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
IP rating	IP66
Operation temperature	–40°C to +85°C



YECA000M1A

4G adhesive mount low profile monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	698–960 MHz 1710–2690 MHz
Efficiency	36% AVG.
Peak gain	2.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø99.98 × 17.46 mm
Form factor	Low profile
Mounting type	Adhesive
Connector type	SMA male
Cable type	ALSR100
Cable length	1460 mm
IP rating	IP68
IK rating	IK10
Operation temperature	–40°C to +85°C



YE0010AA

4G adhesive mount low profile dipole external antenna
Compatible with Japan market

Compliant

RoHS

Electrical data

Frequency range	698–2700 MHz
Efficiency	30%–80%
Peak gain	2.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	152 × 18 × 11.1 mm
Form factor	Low profile
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174
Cable length	1000 mm
IP rating	IP66
Operation temperature	–40°C to +85°C



YECW000N1A

4G screw mount low profile PIFA external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	450–470 MHz, 698–960 MHz, 1710–2690 MHz
Efficiency	20%–60%
Peak gain	3.6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	150 × 50 × 36.5 mm
Form factor	Low profile
Mounting type	Screw
Connector type	SMA male
Cable type	ALSR100
Cable length	2000 mm
Operation temperature	–40°C to +85°C



YECM002L1AH

4G magnetic mount whip monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	698–960 MHz, 1710–2690 MHz
Efficiency	37% - 65%
Peak gain	4.4 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø30 × 82.2 mm
Form factor	Whip
Mounting type	Magnetic
Connector type	SMA male
Cable type	RG174LL
Cable length	1000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YECA002L1AH

4G adhesive mount whip monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	698–960 MHz, 1710–2690 MHz
Efficiency	37%–65%
Peak gain	4.4 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Φ30 × 83.2 mm
Form factor	Whip
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174LL
Cable length	1000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YE0006AA

4G magnetic mount whip monopole external antenna

Compatible with Japan market

Compliant

RoHS

Electrical data

Frequency range	698–960 MHz, 1710–2690 MHz
Efficiency	25%–60%
Peak gain	4.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Φ30 × 318 mm
Form factor	Whip
Mounting type	Magnetic
Connector type	SMA male
Cable type	RG174
Cable length	1500 mm
IP rating	IP65
Operation temperature	–40°C to +85°C



YECT007AA

4G pole mount fiberglass dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	698–2690 MHz
Efficiency	40%–95%
Peak gain	1.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Φ20 × 300 mm
Form factor	Fiberglass
Mounting type	Pole
Connector type	N type male
IP rating	IP65
Operation temperature	–40°C to +85°C



YECT010W7AM

5G terminal mount fiberglass dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600-960 MHz, 1400-2700 MHz, 3300-5000 MHz
Efficiency	45%-85%
Peak gain	7.3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø25.5 × 300 mm
Form factor	Fiberglass
Mounting type	Terminal
Connector type	N type male
IP rating	IP67
Operation temperature	-40°C to +85°C



YECT001W1CM

4G terminal mount rubber monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	698-960 MHz, 1710-2690 MHz
Efficiency	30%-70%
Peak gain	3.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	52.6 × 18.6 × 9 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	Right angle SMA male
IP rating	IP53
Operation temperature	-40°C to +85°C



YECT001W1DM

4G terminal mount rubber monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	698-960 MHz, 1710-2690 MHz
Efficiency	35%-75%
Peak gain	2.6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø9 × 54.9 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
IP rating	IP53
Operation temperature	-40°C to +85°C



YECT009W1AM

4G terminal mount rubber monopole
external antenna

Compatible with Japan market

Compliant

RoHS

Electrical data

Frequency range

600–960 MHz, 1710–2690 MHz

Efficiency

20%–65%

Peak gain

2.6 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

Ø10.22 × 69.5 mm

Form factor

Rubber

Mounting type

Terminal

Connector type

SMA male

Operation temperature

–40°C to +85°C



YEBT001W1AM

Wi-Fi terminal mount rubber monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500MHz, 5150–5850MHz, 5925–7125 MHz
Efficiency	45%–70%
Peak gain	4.1 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	RP SMA male
IP rating	IP67
Operation temperature	–40°C to +85°C



YEBT002W1AM

Wi-Fi Terminal mount rubber monopole external antenna

Compliant

RoHS

Electrical data

Frequency range	2400–2500MHz, 5150–5850MHz, 5925–7125 MHz
Efficiency	45%–75%
Peak gain	4.1 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	RP SMA male
Operation temperature	–40°C to +85°C



YEBA000J1AM

Wi-Fi adhesive mount low profile dipole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500MHz, 5150–5850MHz, 5925–7125 MHz
Efficiency	45%–65%
Peak gain	2.1 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	60 × 16 × 6.3 mm
Form factor	Low profile
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174
Cable length	209 mm
Operation temperature	–40°C to +85°C



YEBA001L1AH

Wi-Fi adhesive mount whip monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	30%–65%
Peak gain	4.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø30 × 83.2 mm
Form factor	Whip
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174LL
Cable length	1000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEBM001L1AH

Wi-Fi magnetic mount whip monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	30%–65%
Peak gain	4.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø30 × 82.2 mm
Form factor	Whip
Mounting type	Magnetic
Connector type	SMA male
Cable type	RG174LL
Cable length	1000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEBT001WFAM

Wi-Fi terminal mount rubber monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	30%–65%
Peak gain	2.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	52.6 × 18.6 × 9mm
Form factor	Rubber
Mounting type	Terminal
Connector type	Right angle RP SMA male
IP rating	IP53
Operation temperature	–40°C to +85°C



YEBT001WFBM

Wi-Fi terminal mount rubber monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	35%–70%
Peak gain	4.3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø9 × 54.9 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	RP SMA male
IP rating	IP53
Operation temperature	–40°C to +85°C



YEBT010W1AM

Wi-Fi terminal mount rubber monopole external antenna

Compliant

RoHS

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	38%–65%
Peak gain	4.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø10.22 × 69.5 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	RP SMA male
Operation temperature	–40°C to +85°C



YB0027AA

5G & GNSS L1 & L5 9in1 screw mount Combo external antenna

Compatible with ECE-R118 cables under demand

Compliant

RoHS & REACH

Electrical data

Frequency range

5G × 4: 600–960 MHz, 1400–6000 MHz; 5G × 4: 1400–6000 MHz
GNSS × 1: 1164–1189 MHz, 1559–1606 MHz

Efficiency

5G × 4: 25%–60%; 5G × 4: 30%–70%
GNSS × 1: L1: 45%–66%, L5: 80%–85%

Peak gain

5G × 4: 4.9 dBi; 5G × 4: 4.1 dBi
GNSS × 1: L1: 3.8 dBi, L5: 4.7 dBi

Radiation pattern

5G × 4: omni-directional; 5G × 4: omni-directional
GNSS × 1: Directional

Polarization

5G × 4: Linear; 5G × 4: Linear
GNSS × 1: RHCP

LNA gain

22 ± 3 dB

Mechanical data

Dimensions

Ø162 × 56 mm

Form factor

Low profile

Mounting type

Screw

Connector type

SMA male

Cable type

ALS302 & RG174

Cable length

300 mm

IP rating

IP67 & IP69K

IK rating

IK09

Operation temperature

–40°C to +85°C



YEMN701J1AH

5G & GNSS L1 & L5 7in1 screw mount Combo external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

5G × 4: 600–6000MHz; 5G × 2: 1400–6000MHz
GNSS × 1: 1164–1189MHz, 1559–1606MHz

Efficiency

5G × 4: 25%–60%; 5G × 2: 30%–70%
GNSS × 1: L1: 45%–66%, L5: 80%–85%

Peak gain

5G × 4: 4.9 dBi; 5G × 2: 4.1 dBi
GNSS × 1: L1: 3.8dBi, L5: 4.7dBi

Radiation pattern

5G × 4: omni-directional; 5G × 2: omni-directional
GNSS × 1: Directional

Polarization

5G × 4: Linear; 5G × 2: Linear
GNSS × 1: RHCP

LNA gain

28 dB

Mechanical data

Dimensions

Ø162 × 56mm

Form factor

Low profile

Mounting type

Screw

Connector type

SMA male

Cable type

ALS302 & RG174

Cable length

300 mm

IP rating

IP67 & IP69K

IK Rating

IK 09

Operation temperature

–40°C to +85°C



YB0031AA

4G & GNSS L1 2in1 adhesive mount Combo external antenna

Compliant

RoHS

Electrical data

Frequency range	4G × 1: 698–960 MHz; 1710–2690 MHz GNSS × 1: 1559–1592 MHz
Efficiency	4G × 1: 20%–65% GNSS × 1: 53% AVG.
Peak gain	4G × 1: 2.3 dBi GNSS × 1: 2.4 dBi
Radiation pattern	4G × 1: omni-directional GNSS × 1: Directional
Polarization	4G × 1: Linear GNSS × 1: RHCP
LNA gain	26 ± 3 dB

Mechanical data

Dimensions	Ø84×17.5 mm
Form factor	Low profile
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174
Cable length	300 mm
IP rating	IP66
Operation temperature	–40°C to +85°C



YB0008AA

4G & GNSS L1 3in1 adhesive mount Combo external antenna

Compliant

RoHS

Electrical data

Frequency range	4G × 2: 698–960 MHz, 1710–2690 MHz GNSS × 1: 1556–1581 MHz
Efficiency	4G × 2: 20%–65% GNSS × 1: 54% AVG.
Peak gain	4G × 2: 3.5 dBi GNSS × 1: 3.2 dBi
Radiation pattern	4G × 2: omni-directional GNSS × 1: Directional
Polarization	4G × 2: Linear GNSS × 1: RHCP
LNA gain	26 ± 3 dB

Mechanical data

Dimensions	Ø84 × 17.5 mm
Form factor	Low profile
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174
Cable length	300 mm
IP rating	IP66
Operation temperature	–40°C to +85°C



YEMD301L1A

4G & GNSS L1 3in1 multiple mount Combo external antenna

Compliant

RoHS & REACH & POPS & CE

Electrical data

Frequency range	4G × 2: 698–960 MHz, 1710–2690 MHz GNSS × 1: 1565–1606 MHz
Efficiency	4G × 2: 40%–70% GNSS × 1: 76%–79%
Peak gain	4G × 2: 5.5 dBi GNSS × 1: 2.18 dBi
Radiation pattern	4G × 2: omni-directional GNSS × 1: Directional
Polarization	4G × 2: Linear GNSS × 1: RHCP
LNA gain	18 ± 3 dB

Mechanical data

Dimensions	109.28 × 89 × 25.8 mm
Form factor	Low profile
Mounting type	Multiple
Connector type	SMA male
Cable type	ALS302 & RG174
Cable length	1025 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEMD301L1B

4G & GNSS L1 3in1 multiple mount Combo external antenna

Compliant

RoHS & REACH & POPS & CE

Electrical data

Frequency range	4G × 2: 698–960 MHz, 1710–2690 MHz GNSS × 1: 1565–1606 MHz
Efficiency	4G × 2: 40%–70% GNSS × 1: 76%–79%
Peak gain	4G × 2: 5.5 dBi GNSS × 1: 2.18 dBi
Radiation pattern	4G × 2: omni-directional GNSS × 1: Directional
Polarization	4G × 2: Linear GNSS × 1: RHCP
LNA gain	28 ± 3 dB

Mechanical data

Dimensions	109.28 × 89 × 25.8 mm
Form factor	Low profile
Mounting type	Multiple
Connector type	SMA male
Cable type	ALS302 & RG174
Cable length	1025 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEMD302L1A

4G & Wi-Fi & GNSS L1 3in1 multiple mount
Combo external antenna

Compliant

RoHS & REACH & POPS & CE

Electrical data

Frequency range	4G × 1: 698–960 MHz, 1710–2690 MHz Wi-Fi × 1: 2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz GNSS × 1: 1565–1606 MHz
Efficiency	4G × 1: 30%–75% Wi-Fi × 1: 33%–58% GNSS × 1: 76%–79%
Peak gain	4G × 1: 5.1 dBi Wi-Fi × 1: 5.8 dBi GNSS × 1: 2.18 dBi
Radiation pattern	4G × 1: omni-directional Wi-Fi × 1: omni-directional GNSS × 1: Directional
Polarization	4G × 1: Linear Wi-Fi × 1: Linear GNSS × 1: RHCP
LNA gain	18 ± 3 dB

Mechanical data

Dimensions	109.28 × 89 × 25.8 mm
Form factor	Low profile
Mounting type	Multiple
Connector type	SMA male
Cable type	ALS302 & RG174
Cable length	1025 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEMD302L1B

4G & Wi-Fi & GNSS L1 3in1 multiple mount
Combo external antenna

Compliant

RoHS & REACH & POPS & CE

Electrical data

Frequency range	4G × 1: 698–960 MHz, 1710–2690 MHz Wi-Fi × 1: 2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz GNSS × 1: 1565–1606 MHz
Efficiency	4G × 1: 30%–75% Wi-Fi × 1: 33%–58% GNSS × 1: 76%–79%
Peak gain	4G × 1: 5.1 dBi Wi-Fi × 1: 5.8 dBi GNSS × 1: 2.18 dBi
Radiation pattern	4G × 1: omni-directional Wi-Fi × 1: omni-directional GNSS × 1: Directional
Polarization	4G × 1: Linear Wi-Fi × 1: Linear GNSS × 1: RHCP
LNA Gain	28 ± 3 dB

Mechanical data

Dimensions	109.28 × 89 × 25.8 mm
Form factor	Low profile
Mounting type	Multiple
Connector type	SMA male
Cable type	ALS302 & RG174
Cable length	1025 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEMA004AA

4G & Wi-Fi 2in1 screw mount Combo external antenna

Compliant

RoHS

Electrical data

Frequency range	4G × 1: 698–960 MHz, 1710–2690 MHz Wi-Fi × 1: 2400–2500 MHz
Efficiency	4G × 1: 25%–50% Wi-Fi × 1: 35%–45%
Peak gain	4G × 1: 2.8 dBi Wi-Fi × 1: 2.6 dBi
Radiation pattern	4G × 1: omni-directional Wi-Fi × 1: omni-directional
Polarization	4G × 1: Linear Wi-Fi × 1: Linear

Mechanical data

Dimensions	Ø81 × 14.5 mm
Form factor	Low profile
Mounting type	Screw
Connector type	SMA male
Cable type	RG174
Cable length	900 mm
IP rating	IP66
Operation temperature	–40°C to +85°C



YB0014AA

4G & GNSS L1 3in1 screw mount Combo external antenna
Compatible with Japan market

Compliant

RoHS

Electrical data

Frequency range	4G × 2: 698–960 MHz, 1710–2690 MHz GNSS × 1: 1559–1586 MHz
Efficiency	4G × 2: 10%–20% GNSS × 1: 36%–44%
Peak gain	4G × 2: –2.2 dBi GNSS × 1: 1.75dBi
Radiation pattern	4G × 2: omni-directional GNSS × 1: Directional
Polarization	4G × 2: Linear GNSS × 1: RHCP
LNA gain	22 ± 3 dB

Mechanical data

Dimensions	Ø81×14.5 mm
Form factor	Low profile
Mounting type	Screw
Connector type	SMA male
Cable type	RG174
Cable length	3000 mm
IP rating	IP66
Operation temperature	–40°C to +85°C



YEMN302Q1A

4G & GNSS L1 3in1 screw mount Combo external antenna

Compliant

RoHS & REACH & CE

Electrical data

Frequency range	4G × 2: 698–960 MHz, 1710–2690 MHz GNSS × 1: 1565–1606 MHz
Efficiency	4G × 2: 30%–55% GNSS × 1: 66% AVG.
Peak gain	4G × 2: 3.3 dBi GNSS × 1: 2.57 dBi
Radiation pattern	4G × 2: omni-directional GNSS × 1: Directional
Polarization	4G × 2: Linear GNSS × 1: RHCP
LNA gain	18 ± 3 dB

Mechanical data

Dimensions	Ø81.4 × 16.5 mm
Form factor	Low profile
Mounting type	Screw
Connector type	SMA male
Cable type	ALSR100 & RG174
Cable length	1000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEMN210J1AH

5G & Wi-Fi 2in1 screw mount Combo external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	5G × 1: 600–960 MHz & 1400–6000 MHz Wi-Fi × 1: 2400–2500 MHz
Efficiency	5G × 1: 20%–80% Wi-Fi × 1: 53–62%
Peak gain	5G × 1: 5.9 dBi Wi-Fi × 1: 4.4 dBi
Radiation pattern	5G × 1: omni-directional Wi-Fi × 1: omni-directional
Polarization	5G × 1: Linear Wi-Fi × 1: Linear

Mechanical data

Dimensions	Ø40.6 × 104 mm
Form factor	Stubby
Mounting type	Screw
Connector type	SMA male
Cable type	RG174LL
Cable length	300 mm
IP rating	IP67 & IP69K
IK rating	IK10
Operation temperature	–40°C to +85°C



YEMN017AA

5G & GNSS L1 & L5 5in1 screw mount Combo external antenna

Compatible with ECE-R118 cables under demand

Compliant

RoHS & REACH & CE

Electrical data

Frequency range

5G × 2: 600–960 MHz, 1400–6000 MHz; 5G × 2: 1400–6000 MHz

Efficiency

GNSS × 1: 1164–1189 MHz, 1559–1606 MHz

5G × 2: 50% AVG.; 5G × 2: 30%–70%

Peak gain

GNSS × 1: L1: 40%–42%, L5: 45%–47%

5G × 2: 5 dBi; 5G × 2: 4.9 dBi

Radiation pattern

GNSS × 1: L1: –1.2 dBi, L5: 0 dBi

5G × 2: omni-directional; 5G × 2: omni-directional

Polarization

GNSS × 1: Directional

5G × 2: Linear; 5G × 2: Linear

LNA gain

GNSS × 1: RHCP

28 dB

Mechanical data

Dimensions

Ø103.5 × 42.5 mm

Form factor

Low profile

Mounting type

Screw

Connector type

SMA male

Cable type

RG405 & RG174

Cable length

300 mm

IP rating

IP67 & IP69K

IK rating

IK09

Operation temperature

–40°C to +85°C



YEMN400J1AH

5G 4in1 screw mount Combo external antenna

Compliant

RoHS & REACH & CE

Electrical data

Frequency range

5G × 2: 600–6000 MHz, 5G × 2: 1400–6000 MHz

Efficiency

5G × 2: 50% AVG.; 5G × 2: 30%–70%

Peak gain

5G × 2: 5.0 dBi, 5G × 2: 4.9 dBi

Radiation pattern

5G × 2: omni-directional, 5G × 2: omni-directional

Polarization

5G × 2: Linear, 5G × 2: Linear

Mechanical data

Dimensions

Ø103.5 × 42.5 mm

Form factor

Low profile

Mounting type

Screw

Connector type

SMA male

Cable type

RG405

Cable length

300 mm

IP rating

IP67 & IP69K

IK rating

IK09

Operation temperature

–40°C to +85°C



YEMN301J1AH

5G & GNSS L1 & L5 3in1 screw mount Combo external antenna

Compliant

RoHS & REACH & CE

Electrical data

Frequency range

5G × 2: 600-6000 MHz

GNSS L1 & L5 × 1: 1164-1189 MHz, 1559-1606 MHz

Efficiency

5G × 2: 50% AVG.

GNSS L1 & L5 × 1: L1: 40%-42%, L5: 45%-47%

Peak gain

5G × 2: 5.0 dBi

GNSS L1 & L5 × 1: L1: -1.2 dBi, L5: 0 dBi

Radiation pattern

5G × 2: omni-directional

GNSS L1 & L5 × 1: L1: -1.2 dBi, L5: 0 dBi

Polarization

5G × 2: Linear

GNSS L1 & L5 × 1: RHCP

LNA gain

28 dB

Mechanical data

Dimensions

Ø103.5 × 42.5 mm

Form factor

Low profile

Mounting type

Screw

Connector type

SMA male

Cable type

RG405 & RG174

Cable length

300 mm & 300 mm

IP rating

IP67 & IP69K

IK rating

IK09

Operation temperature

-40°C to +85°C



YEMN926J1A

5G & GNSS L1 & L5 9in1 screw mount Combo external antenna

Compatible with ECE-R118 cables under demand

Compliant

RoHS & REACH & CE

Electrical data

Frequency range

5G × 4: 600-960 MHz, 1400-6000 MHz; 5G × 4: 1400-6000 MHz

GNSS × 1: 1164-1189 MHz, 1559-1606 MHz

Efficiency

5G × 4: 46% AVG.; 5G × 4: 30%-60%

GNSS × 1: L1: 45%-66%, L5: 80%-85%

Peak gain

5G × 4: 4.3 dBi; 5G × 4: 5.4 dBi

GNSS × 1: L1: 3.8 dBi, L5: 4.7 dBi

Radiation pattern

5G × 4: omni-directional; 5G × 4: omni-directional

GNSS × 1: Directional

Polarization

5G × 4: Linear; 5G × 4: Linear

GNSS × 1: RHCP

LNA gain

22 ± 3 dB

Mechanical data

Dimensions

Ø167 × 57 mm

Form factor

Low profile

Mounting type

Screw

Connector type

SMA male

Cable type

ALS302 & RG174

Cable length

300 mm

IP rating

IP67 & IP69K

IK rating

IK09

Operation temperature

-40°C to +85°C



YEMN016AA

5G & GNSS L1 & L5 5in1 screw mount Combo external antenna
Compatible with ECE-R118 cables under demand

Compliant

RoHS & REACH & CE

Electrical data

Frequency range

5G × 2: 600–960 MHz, 1400–6000 MHz; 5G × 2: 1400–6000 MHz

Efficiency

GNSS × 1: 1164–1189 MHz, 1559–1606 MHz

5G × 2: 20%–70%; 5G × 2: 20%–60%

Peak gain

GNSS × 1: L1: 50%–52%, L5: 75%–78%

5G × 2: 5.9 dBi; 5G × 2: 4.7 dBi

Radiation pattern

GNSS × 1: L1: 2.7 dBi, L5: 4.3 dBi

5G × 2: omni-directional; 5G × 2: omni-directional

Polarization

GNSS × 1: Directional

LNA gain

5G × 2: Linear, 5G × 2: Linear, GNSS × 1: RHCP

28 dB

Mechanical data

Dimensions

204.4 × 86.7 × 32 mm

Form factor

Low profile

Mounting type

Screw

Connector type

SMA male

Cable type

ALS302 & RG174

Cable length


300 mm

IP rating

IP67 & IP69K

Operation temperature

–40°C to +85°C



YEMA013AA

5G & GNSS L1 & L5 9in1 adhesive mount Combo external antenna
Compatible with ECE-R118 cables under demand

Compliant

RoHS & REACH & CE

Electrical data

Frequency range

5G × 4: 600–960 MHz, 1400–6000 MHz; 5G × 4: 1400–6000 MHz

Efficiency

GNSS × 1: 1166–1186 MHz, 1559–1606 MHz

5G × 4: 30%–75%; 5G × 4: 30%–70%

Peak gain

GNSS × 1: L1: 50%–53%, L5: 55%–60%

5G × 4: 5.6 dBi; 5G × 4: 6.3 dBi

Radiation pattern

GNSS × 1: L1: 4.2 dBi, L5: 2.8 dBi

5G × 4: omni-directional; 5G × 4: omni-directional

Polarization

GNSS × 1: Directional

5G × 4: Linear; 5G × 4: Linear

LNA gain

GNSS × 1: RHCP

28 dB

Mechanical data

Dimensions

264.6 × 161.2 × 30.6 mm

Form factor

Low profile

Mounting type

Adhesive

Connector type

SMA male

Cable type

ALSR200 & RG174

Cable length

300 mm

IP rating

IP67 & IP69K

IK rating

IK09

Operation temperature

–40°C to +85°C



YEMX223J1A

5G 2in1 multiple mount Combo external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

410–470 MHz, 617–960 MHz, 1420–1520 MHz,
1710–2690 MHz, 3300–3800 MHz, 4000–6000 MHz

Efficiency

50% AVG.

Peak gain

5.1 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

186 × 176 × 100.5 mm

Form factor

Low profile

Mounting type

Multiple

Connector type

SMA male

Cable type

ALSR200

Cable length

450 mm

IP rating

IP67

IK rating

IK09

Operation temperature

–40°C to +85°C



YEMA300QXA

4G & Wi-Fi & GNSS L1 3in1 adhesive mount Combo external antenna

Compliant

RoHS & REACH & CE

Electrical data

Frequency range

4G × 1: 698–960 MHz, 1710–2690 MHz
Wi-Fi × 1: 2400–2500 MHz, 5150–5850 MHz
GNSS × 1: 1559–1606MHz

Efficiency

4G × 1: 25%–60%
Wi-Fi × 1: 47%–53%
GNSS × 1: 50%–75%

Peak gain

4G × 1: 4.1 dBi
Wi-Fi × 1: 2.7 dBi
GNSS × 1: 2.4 dBi

Radiation pattern

4G × 1: omni-directional
Wi-Fi × 1: omni-directional
GNSS × 1: Directional

Polarization

4G × 1: Linear
Wi-Fi × 1: Linear
GNSS × 1: RHCP

LNA gain

18 ± 3 dB

Mechanical data

Dimensions

143.73 × 51.33 × 15 mm

Form factor

Low profile

Mounting type

Adhesive

Connector type

SMA male & RP SMA male

Cable type

RG174LL & RG174

Cable length

1028 mm

IP rating

IP68

Operation temperature

–40°C to +85°C



YEMX425J1A

5G 4in1 multiple mount Combo external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	410–470 MHz, 617–2690 MHz, 3300–6000 MHz
Efficiency	50% AVG.
Peak gain	5.3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	186 × 176 × 150 mm
Form factor	Low profile
Mounting type	Multiple
Connector type	SMA male
Cable type	ALSR200
Cable length	450 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEWN004AA

Wi-Fi 2in1 screw mount Combo external antenna

Compliant

RoHS

Electrical data

Frequency range	2400–2500 MHz; 5150–5850 MHz
Efficiency	40%–60%
Peak gain	5.1 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø46 × 15 mm
Form factor	Low profile
Mounting type	Screw
Connector type	SMA male
Cable type	RG174
Cable length	300 mm
IP rating	IP66
Operation temperature	–40°C to +85°C



YEGB000Q1A

GNSS L1 & L5 adhesive & magnetic mount
low profile active external antenna
Compatible with ECE-R118 cables
under demand

Compliant

RoHS & REACH & CE

Electrical data

Frequency range	1164–1189 MHz, 1559–1606 MHz
Efficiency	L1: 40%–70%, L5: 50%–60%
Peak gain	L1: 3.4 dBi, L5: 1.4 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	17 dB

Mechanical data

Dimensions	62 × 56 × 23 mm
Form factor	Low profile
Mounting type	Adhesive & magnetic
Connector type	SMA male
Cable type	RG174
Cable length	3000 mm
IP rating	IP67
IK rating	IK09
Operation temperature	–40°C to +85°C



YEGN000Q1A

GNSS L1 & L5 bracket mount low profile
active external antenna
Compatible with ECE-R118 cables
under demand

Compliant

RoHS & REACH & CE

Electrical data

Frequency range	1164–1189 MHz, 1559–1606 MHz
Efficiency	L1: 40%–70%, L5: 50%–60%
Peak gain	L1: 3.4 dBi, L5: 1.4 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	17 dB

Mechanical data

Dimensions	62 × 56 × 23 mm
Form factor	Low profile
Mounting type	Bracket
Connector type	SMA male
Cable type	RG174
Cable length	3000 mm
IP rating	IP67
IK rating	IK09
Operation temperature	–40°C to +85°C



YEGB001Q1A

GNSS L1 & L5 adhesive & magnetic mount
low profile active external antenna
Compatible with ECE-R118 cables
under demand

Compliant

RoHS & REACH & CE

Electrical data

Frequency range	1165–1189 MHz, 1559–1606 MHz
Efficiency	L1: 32%–52%, L5: 50%–52%
Peak gain	L1: 1.2 dBi, L5: 1 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	17 dB

Mechanical data

Dimensions	55.2 × 48 × 20.5 mm
Form factor	Low profile
Mounting type	Adhesive & magnetic
Connector type	SMA male
Cable type	RG174
Cable length	3000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEGN001Q1A

GNSS L1 & L5 bracket mount low profile active external antenna
Compatible with ECE-R118 cables under demand

Compliant

RoHS & REACH & CE

Electrical data

Frequency range	1164–1189 MHz, 1559–1606 MHz
Efficiency	L1: 32%–52%, L5: 50%–52%
Peak gain	L1: 1.2 dBi, L5: 1 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	17 dB

Mechanical data

Dimensions	55.2 × 48 × 20.5 mm
Form factor	Low profile
Mounting type	Bracket
Connector type	SMA male
Cable type	RG174
Cable length	3000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEGB000Q1C

GNSS L1 adhesive & magnetic mount low profile active external antenna
Compatible with ECE-R118 cables under demand

Compliant

RoHS & REACH & CE

Electrical data

Frequency range	1565–1606 MHz
Efficiency	70%–73%
Peak gain	1.7 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	17 ± 3 dB

Mechanical data

Dimensions	46 × 36 × 15.8 mm
Form factor	Low profile
Mounting type	Adhesive & magnetic
Connector type	SMA male
Cable type	RG174
Cable length	3000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YEGT000W8A

GNSS L1 & L5 screw mount low profile active external antenna

Compliant

RoHS

Electrical data

Frequency range	1164–1189 MHz, 1559–1606 MHz
Efficiency	L1: 27%–36%, L5: 45%–48%
Peak gain	L1: –0.5 dBi, L5: –0.5 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	28 dB

Mechanical data

Dimensions	Ø65 × 45 mm
Form factor	Low profile
Mounting type	Screw
Connector type	TNC female
IP rating	IP67
Operation temperature	–40°C to +85°C



YEGN103W8A

GNSS L1 & L2 & L5 & E6 & L-band magnetic mount low profile active external antenna

Compliant

RoHS & REACH & CE

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization
LNA gain

1164–1300 MHz, 1525–1606 MHz
Lower band: 67%, L-band: 49%, Upper band: 77%
Lower band: 5.4 dBi, L-band: 3.3 dBi, Upper band: 5.5 dBi
Directional
RHCP
40 ± 4 dB

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
Cable Type
Cable Length
IP rating
Operation temperature

Ø146.4 × 71.43 mm
Low profile
Magnetic
SMA male
RG174
3000 mm
IP67
–40°C to +85°C



YEGR001W8AH

GNSS L1 & L2 & L5 & E6 & L-band terminal mount low profile active external antenna

Compliant

RoHS & REACH & CE

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization
LNA gain

1164–1300 MHz, 1525–1606 MHz
L2/L5/E6/B3: 30%~67%, L1: 58%~76%
L2/L5/E6/B3: 5.4 dBi, L1: 5.5 dBi
Directional
RHCP
40 ± 4 dB

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
IP rating
Operation temperature

Ø146.4 × 71.43 mm
Low profile
Terminal
TNC female
IP67
–40°C to +85°C



YEGN002W8AH

GNSS full band screw mount low profile active external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization
LNA gain

1164–1300 MHz, 1525–1606 MHz
Lower Band: 62%; L-band: 69%; Upper Band: 89.8%
Lower Band: 4.5 dBi; L-band: 4.7 dBi; Upper Band: 6.1 dBi
Directional
RHCP
37 ± 4 dB

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
IP rating
Operation temperature

Ø146.4 × 71.43 mm
Low profile
Screw
TNC female
IP67
–40°C to +85°C



YEGD006U1A

GNSS full band adhesive & magnetic & screw mount low profile active external antenna

Compliant

RoHS & REACH & POPS & CE

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

LNA Gain

Lower band: 1164-1300 MHz; L-band: 1525-1559 MHz; Upper band: 1559-1606 MHz

Lower band: 63%; L-band: 51%; Upper band: 80%

Lower band: 3.27 dBi; L-band: 2.46 dBi; Upper band: 4.77 dBi

Directional

RHCP

30 ± 4 dB

Mechanical data

Dimensions

109.28 × 89 × 25.8 mm

Form factor

Low profile

Mounting type

Adhesive & magnetic & screw

Connector type

SMA male

Cable type

RG174

Cable length

5055 mm

IP rating

IP68

Operation temperature

-40°C to +85°C



YEGT002W1AM

GNSS L1 terminal mount rubber passive external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

1559-1606 MHz

Efficiency

57%-62%

Peak gain

2.2 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

52.6 × 18.6 × 9 mm

Form factor

Rubber

Mounting type

Terminal

Connector type

SMA male 90

IP rating

IP53

Operation temperature

-40°C to +85°C



YEGT003W1AM

GNSS L1 terminal mount rubber passive external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

1559-1606 MHz

Efficiency

52%-56%

Peak gain

1.7 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

Ø9 × 54.9 mm

Form factor

Rubber

Mounting type

Terminal

Connector type

SMA male

IP rating

IP53

Operation temperature

-40°C to +85°C



YEGT010W1AM

GNSS L1 magnetic mount rubber passive external antenna

Compliant

RoHS

Electrical data

Frequency range	1559–1606 MHz
Efficiency	75.5%–78.2%
Peak gain	3.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø10.22 × 69.5 mm
Form factor	Rubber
Mounting type	Magnetic
Connector type	SMA male
Operation temperature	–40°C to +85°C



YEGT001W1AM

GNSS L1 terminal mount rubber passive external antenna

Compliant

RoHS

Electrical data

Frequency range	1559–1606 MHz
Efficiency	70%–76%
Peak gain	2.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø13 × 135 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
Operation temperature	–40°C to +85°C



YETN001L1A

L-Band & GNSS L1 & Iridium screw mount low profile passive external antenna

Compliant

RoHS & REACH & CE

Electrical data

Frequency range	GNSS: 1559–1606 MHz L-Band: 1518–1559 MHz,1626–1660 MHz,1668–1675 MHz Iridium: 1616–1626 MHz
Efficiency	GNSS: 60%–65% L-Band: 45%–72% Iridium: 68%–70%
Peak gain	GNSS: 4.3 dBi L-Band: 4.2 dBi Iridium: 4.2 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	106.15 × 87.21 × 26.5 mm
Form factor	Low profile
Mounting type	Screw
Connector type	SMA male
Cable type	ALS302
Cable length	524 mm
IP rating	IP67 & IP69K
IK rating	IK09
Operation temperature	–40°C to +85°C



YENA001L1AH

LPWA/ISM adhesive mount whip monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	433–435 MHz, 450–470 MHz
Efficiency	35%–40%
Peak gain	3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø30 × 83.2 mm
Form factor	Whip
Mounting type	Adhesive
Connector type	SMA male
Cable type	RG174
Cable length	1000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YENM001L1AH

LPWA/ISM magnetic mount whip monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	433–435 MHz, 450–470 MHz
Efficiency	35%–40%
Peak gain	3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Ø30 × 82.2 mm
Form factor	Whip
Mounting type	Magnetic
Connector type	SMA male
Cable type	RG174
Cable length	1000 mm
IP rating	IP67
Operation temperature	–40°C to +85°C



YENTO00W1AM

LPWA/ISM terminal mount rubber monopole external antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	410–470 MHz
Efficiency	24%–83%
Peak gain	1.3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Rubber
Mounting type	Terminal
Connector type	SMA male
IP rating	IP67
Operation temperature	–40°C to +85°C



YENT001W1AM

LPWA/ISM terminal mount whip
monopole external antenna

Compliant

RoHS

Electrical data

Frequency range	410-470 MHz
Efficiency	57%~70%
Peak gain	1.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Whip
Mounting type	Terminal
Connector type	SMA male
Operation temperature	-40°C to +85°C



YENT002W1AM

LPWA/ISM terminal mount whip
dipole external antenna

Compliant


RoHS

Electrical data

Frequency range	850-950 MHz
Efficiency	41-57%
Peak gain	1.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	135 × 15.6 × 13 mm
Form factor	Whip
Mounting type	Terminal
Connector type	RP SMA male
Operation temperature	-40°C to +85°C



YC0018CA

5G SMT mount PCB chip IFA
embedded antenna

EVB

YC0018CAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

617–960 MHz, 1420–1520 MHz, 1710–2690 MHz, 3300–4200 MHz,
4400–5000 MHz, 5150–5850 MHz

Efficiency

20%–75%

Peak gain

5.9 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

Antenna: 40 × 7 × 3 mm; EVB: 141 × 40.4 × 0.8 mm

Form factor

PCB chip

Mounting type

SMT

Operation temperature

–40°C to +85°C



YPCS001AA

5G SMT mount PCB chip monopole
embedded antenna

EVB

YPCS001AAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

1427–5850 MHz

Efficiency

20%–65%

Peak gain

2.6 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

Antenna: 20 × 10 × 3 mm, EVB: 60 × 20 × 0.8 mm

Form factor


PCB chip

Mounting type

SMT

Operation temperature

–40°C to +85°C



YF0017FA

5G adhesive mount FPC + cable dipole
embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

1500–6000 MHz

Efficiency

45%–75%

Peak gain

4.4 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

49 × 13 mm

Form factor

FPC + cable

Mounting type

Adhesive

Connector type

IPEX MHF4L

Cable type


RF1.13

Cable length

201 mm

Operation temperature

–40°C to +85°C



YF0017GA

5G adhesive mount FPC + cable dipole embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1100–6000 MHz
Efficiency	53% AVG.
Peak gain	6.4 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	49 × 13 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF4L
Cable type	RF1.13
Cable length	201 mm
Operation temperature	–40°C to +85°C



YF0020EA

5G adhesive mount FPC + cable dipole embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–6000 MHz
Efficiency	30%–90%
Peak gain	4.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	90.3 × 15.3 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF4L
Cable type	RF1.13
Cable length	202 mm
Operation temperature	–40°C to +85°C



YFCA010AA

5G adhesive mount FPC + cable dipole embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	410–470 MHz; 698–960 MHz; 1400–6000 MHz
Efficiency	23%–68%
Peak gain	3.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	138.8 × 16.2 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	101 mm
Operation temperature	–40°C to +85°C



YP0009NA

5G adhesive mount PCB + cable dipole embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1100–6000 MHz
Efficiency	30%–80%
Peak gain	5.4 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	49 × 13 × 0.8 mm
Form factor	PCB + cable
Mounting type	Adhesive
Connector type	IPEX MHF4L
Cable type	RF1.13
Cable length	202 mm
Operation temperature	–40°C to +85°C



YP0009OA

5G adhesive mount PCB + cable dipole embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–6000 MHz
Efficiency	30%–75%
Peak gain	5.4 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	78.5 × 14.2 × 0.8 mm
Form factor	PCB + cable
Mounting type	Adhesive
Connector type	IPEX MHF4L
Cable type	RF1.13
Cable length	202 mm
Operation temperature	–40°C to +85°C



YPCA006AA

5G adhesive mount PCB + cable dipole embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	410–470 MHz; 698–960 MHz; 1400–6000 MHz
Efficiency	16%–75%
Peak gain	3.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	150 × 16.2 × 0.6 mm
Form factor	PCB + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	101 mm
Operation temperature	–40°C to +85°C



YFCA011AA

5G adhesive mount FPC + cable dipole
embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	600–960 MHz, 1520–6000 MHz
Efficiency	20%–75%
Peak gain	7.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	120 × 47 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.37
Cable length	150 mm
Operation temperature	–40°C to +85°C



YFCP001WWA

5G SMT mount PCB chip monopole
embedded antenna
Compatible with Japan market

EVb

YFCP001WWAEVB

Compliant


RoHS & REACH

Electrical data

Frequency range	1427–5850 MHz
Efficiency	45% AVG.
Peak gain	2.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 20 × 10 × 3 mm, EVB: 60 × 20 mm
Form factor	PCB chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YFCP018WWA

5G SMT mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVb

YFCP018WWAEVB

Compliant


RoHS & REACH

Electrical data

Frequency range	617–960 MHz, 1420–1520 MHz, 1710–2690 MHz, 3300–4200 MHz, 4400–5000 MHz, 5150–5850 MHz
Efficiency	43% AVG.
Peak gain	2.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 40 × 7 × 3 mm, EVB: 141 × 40.4 mm
Form factor	PCB chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YC0002BA

4G SMT mount PCB chip IFA
embedded antenna

EVB

YC0002BAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

698–960 MHz, 1710–2690 MHz

30%–75%

4.1 dBi

omni-directional

Linear

Mechanical data

Dimensions

Form factor

Mounting type


Operation temperature

Antenna: 42 × 10 × 3 mm, EVB: 131 × 60 mm

PCB chip

SMT

–40°C to +85°C



YC0003BA

4G SMT Mount PCB chip IFA
embedded antenna

EVB

YC0003BAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

698–960 MHz, 1710–2690 MHz

30%–60%

3.1 dBi

omni-directional

Linear

Mechanical data

Dimensions

Form factor

Mounting type

Operation temperature

Antenna: 40 × 7 × 3 mm, EVB: 136.5 × 43 × 1 mm

PCB chip

SMT

–40°C to +85°C



YC0017DA

4G SMT mount PCB chip IFA
embedded antenna

EVB

YC0017DAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

698–960 MHz, 1710–2690 MHz, 3300–3800 MHz

25%–75%

3.1 dBi

omni-directional

Linear

Mechanical data

Dimensions

Form factor

Mounting type


Operation temperature

Antenna: 25 × 7 × 3 mm, EVB: 140 × 36 × 0.8 mm

PCB chip

SMT

–40°C to +85°C



YC0017EA

4G SMT mount PCB chip IFA
embedded antenna

EVB

YC0017EAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

698–960 MHz, 1710–2690 MHz, 3300–3800 MHz

20%–75%

3.1 dBi

omni-directional

Linear

Mechanical data

Dimensions

Form factor

Mounting type

Operation temperature

Antenna: 25 × 7 × 3 mm, EVB: 140 × 36 × 0.8 mm

PCB chip

SMT

–40°C to +85°C



YPCP001AA

4G SMT mount PCB chip IFA
embedded antenna

EVB

YPCP001AAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

600–960 MHz, 1710–2690 MHz

20%–75%

3.1 dBi

omni-directional

Linear

Mechanical data

Dimensions

Form factor

Mounting type

Operation temperature

Antenna: 36 × 9 × 3 mm, EVB: 110 × 45.5 × 0.8 mm

PCB chip

SMT

–40°C to +85°C



YPCP003AA

4G SMT mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVB

YPCP003AAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

698–960 MHz, 1695–2200 MHz, 2300–2700 MHz

50% AVG.

3.3 dBi

omni-directional

Linear

Mechanical data

Dimensions

Form factor

Mounting type


Operation temperature

Antenna: 28 × 8 × 3 mm, EVB: 130 × 36 mm

PCB chip

SMT

–40°C to +85°C



YPCP003BA

4G SMT mount PCB chip IFA
embedded antenna

EVB

YPCP003BAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

698–960 MHz, 1695–2200 MHz, 2300–2700 MHz

46% AVG.

3.7 dBi

omni-directional

Linear

Mechanical data

Dimensions

Form factor

Mounting type

Operation temperature

Antenna: 28 × 8 × 3 mm, EVB: 130 × 36 mm

PCB chip

SMT

–40°C to +85°C



YMCP001AA

4G screw mount sheet metal + holder PIFA
embedded antenna
Compatible with Japan market

EVB

YMCP001AAEVBAA

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

698–960 MHz, 1710–2700 MHz

48% AVG.

2.2 dBi

omni-directional

Linear

Mechanical data

Dimensions

Form factor

Mounting type

Operation temperature


Antenna: 43.19 × 12.73 × 8.15 mm

YMCP001AAEVBAA: 145 × 75 mm

Sheet metal + holder

Screw

–40°C to +85°C



YMCP002AA

4G SMT mount sheet metal PIFA
embedded antenna

EVB

YMCP002AAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

600–960 MHz, 1710–2690 MHz

40%–75%

3.9 dBi

omni-directional

Linear

Mechanical data

Dimensions

Form factor

Mounting type

Operation temperature

Antenna: 40 × 7.23 × 7.6 mm, EVB: 40 × 136.5 mm

Sheet metal

SMT

–40°C to +85°C



YFCA002HA

4G adhesive mount FPC + cable monopole
embedded antenna
Compatible with Japan market

Compliant

RoHS & REACH

Electrical data

Frequency range	698–960 MHz, 1710–2690 MHz
Efficiency	20%–75%
Peak gain	3.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	30 × 20 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	86.5 mm
Operation temperature	–40°C to +85°C



YF0006PA

4G adhesive mount FPC + cable monopole
embedded antenna
Compatible with Japan market

Compliant


RoHS & REACH

Electrical data

Frequency range	698–2700 MHz
Efficiency	52% AVG.
Peak gain	3.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	50 × 25 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	90 mm
Operation temperature	–40°C to +85°C



YF0003FA

4G adhesive mount FPC + cable monopole
embedded antenna

Compliant

RoHS

Electrical data

Frequency range	824–960 MHz, 1710–2690 MHz
Efficiency	25%–70%
Peak gain	3.3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	62 × 19 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	150 mm
Operation temperature	–40°C to +85°C



YF0028AA

4G adhesive mount FPC + cable dipole
embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	698–2690 MHz
Efficiency	30%–75%
Peak gain	3.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	94 × 21 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.37
Cable length	150 mm
Operation temperature	–40°C to +85°C



YF0022DA

4G adhesive mount PCB + cable monopole
embedded antenna
Compatible with Japan market

Compliant

RoHS & REACH

Electrical data

Frequency range	698–960 MHz, 1710–2690 MHz
Efficiency	46% AVG.
Peak gain	2.6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	15 × 40 × 0.8 mm
Form factor	PCB + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	74.5 mm
Operation temperature	–40°C to +85°C



YF0007KA

4G adhesive mount PCB + cable monopole
embedded antenna
Compatible with Japan market

Compliant

RoHS & REACH

Electrical data

Frequency range	600–960 MHz, 1427.9–1495.9 MHz 1710–2690 MHz
Efficiency	58% AVG.
Peak gain	3.1 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	50 × 25 × 0.8 mm
Form factor	PCB + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.37
Cable length	74.5 mm
Operation temperature	–40°C to +85°C



YC0002AA

4G SMT mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVB

YC0002AAEVB

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698-960 MHz, 1710-2690 MHz
30%-80%
3.5 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 42 × 10 × 3 mm, EVB: 131 × 60 × 0.8 mm
PCB chip
SMT
-40°C to +85°C



YPCA004AA

4G adhesive mount PCB + cable monopole
embedded antenna
Compatible with Japan market

Compliant

RoHS

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698-960 MHz, 1710-2690 MHz
43% AVG.
2.2 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
Cable type
Cable length
Operation temperature

40 × 10 × 1.15 mm
PCB + cable
Adhesive
IPEX MHF1
RF1.13
100 mm
-40°C to +85°C



YFCP002WWA

4G SMT mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVB

YFCP002WWAEVB

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698-960 MHz, 1710-2690 MHz
35%~72%
3.9 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 42 × 10 × 3 mm, EVB: 131 × 60 × 0.8 mm
PCB chip
SMT
-40°C to +85°C



YFCP004WWA

4G SMT mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVB

YFCP004WWAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698–960 MHz, 1710–2690 MHz
27%–68%
2.9 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 40 × 7 × 3 mm, EVB: 136.5 × 43 × 1 mm
PCB chip
SMT
–40°C to +85°C



YFCP017WWA

4G SMT mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVB

YFCP017WWAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698–960 MHz, 1710–2690 MHz, 3300–3800 MHz
26%–66%
2.9 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 25 × 7 × 3 mm, EVB: 140 × 36 × 0.8 mm
PCB chip
SMT
–40°C to +85°C



YFCP017WWB

4G SMT mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVB

YFCP017WWBEVB

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698–960 MHz, 1710–2690 MHz, 3300–3800 MHz
29%–73%
2.9 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 25 × 7 × 3 mm, EVB: 140 × 36 × 0.8 mm
PCB chip
SMT
–40°C to +85°C



YFCP005WWA

4G SMT Mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVB

YFCP005WWAEVB

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

600-960 MHz, 1710-2690 MHz
45% AVG.
2.9 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 36 × 9 × 3 mm, EVB: 126.5 × 45.5 × 0.8 mm
PCB chip
SMT
-40°C to +85°C



YFCP006WWA

4G SMT mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVB

YFCP006WWAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698-960 MHz, 1695-2200 MHz, 2300-2690 MHz
48% AVG.
2.9 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 28 × 8 × 3 mm, EVB: 130 × 36 mm
PCB chip
SMT
-40°C to +85°C



YFCH001WWA

4G Screw mount sheet metal + holder PIFA
embedded antenna
Compatible with Japan market

EVB

YFCH001WWAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

698-960 MHz, 1710-2700 MHz
45% AVG.
2.3 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 43.19 × 12.73 × 8.15 mm, EVB: 145 × 75 mm
Sheet metal + holder
Screw
-40°C to +85°C



YFCH002WWA

4G SMT mount sheet metal PIFA
embedded antenna
Compatible with Japan market

EVB

YFCH002WWAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

600–960 MHz, 1710–2690 MHz

Efficiency

22%–64%

Peak gain

2.6 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

Antenna: 40 × 7.23 × 7.6 mm, EVB: 136.5 × 43 mm

Form factor


Sheet metal

Mounting type

SMT

Operation temperature

–40°C to +85°C



YC0001CA

4G SMT mount PCB chip IFA
embedded antenna
Compatible with Japan market

EVB

YC0001CAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

698–960 MHz, 1710–2700 MHz

Efficiency

42% AVG.

Peak gain

2.7 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

Antenna: 35 × 8.5 × 3 mm, EVB: 121.4 × 65 × 1 mm

Form factor

PCB chip

Mounting type

SMT

Operation temperature

–40°C to +85°C



YC0009AA

Wi-Fi SMT mount ceramic chip IFA
embedded antenna

EVB

YC0009AAEVB

Compliant

RoHS

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

2400–2500 MHz
55%–70%
0.1 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 3.2 × 1.6 × 0.5 mm, EVB: 91 × 51 mm
Ceramic chip
SMT
–40°C to +85°C



YFBP001WWA

Wi-Fi SMT mount PCB chip IFA
embedded antenna

EVB

YFBP001WWAEVB

Compliant

RoHS

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

2400–2500 MHz
55%–70%
1.1 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 3.2 × 1.6 × 0.6 mm, EVB: 80 × 40 × 0.6 mm
PCB chip
SMT
–40°C to +85°C



YFBP001WWB

Wi-Fi SMT mount PCB chip IFA
embedded antenna

EVB

YFBP001WWBEVB

Compliant

RoHS

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

2400–2500 MHz
65%–80%
1.7 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 5 × 3.6 × 0.5 mm, EVB: 80 × 40 × 0.6 mm
PCB chip
SMT
–40°C to +85°C



YFBP001WWC

Wi-Fi SMT mount PCB chip IFA
embedded antenna

EVB

YFBP001WWCEVB

Compliant

RoHS

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

2400–2500 MHz, 5150–5850 MHz
65%–83%
3.4 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 5 × 3.6 × 0.5 mm, EVB: 80 × 40 × 0.6 mm
PCB chip
SMT
–40°C to +85°C



YC0010AA

Wi-Fi SMT mount ceramic chip monopole
embedded antenna

EVB

YC0010AAEVB

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

2400–2500 MHz
55%–70%
3.8 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 5.2 × 2 × 1.2 mm, EVB: 90 × 50 mm
Ceramic chip
SMT
–40°C to +85°C



YFBC001WWA

Wi-Fi SMT mount ceramic chip loop
embedded antenna

EVB

YFBC001WWAEVB

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
25%–65%
2.3 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 1.6 × 0.8 × 0.4 mm, EVB: 60 × 50 × 1 mm
Ceramic chip
SMT
–40°C to +85°C

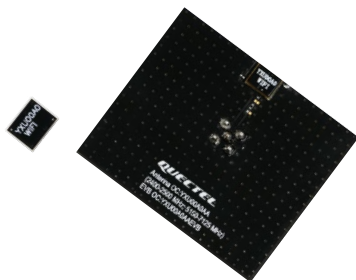

YXU00A0AA

Wi-Fi SMT mount PCB chip loop
embedded antenna
Compatible with Japan market

EVB

YXU00A0AAEVB

Compliant

RoHS

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

2400–2500 MHz; 5150–7125 MHz
45%–70%
3.6 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 8 × 6.6 × 1.6 mm, EVB: 60 × 50 × 1.6 mm
PCB chip
SMT
–40°C to +85°C



YF0011KA

Wi-Fi adhesive mount FPC + cable dipole
embedded antenna
Compatible with Japan market

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

2400–2500 MHz, 5150–5850 MHz
60%–80%
3.3 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
Cable type
Cable length
Operation temperature

38.9 × 9 mm
FPC + cable
Adhesive
IPEX MHF1
RF1.13
50.5 mm
–40°C to +85°C



YF0011SA

Wi-Fi adhesive mount FPC + cable dipole
embedded antenna

Compliant

RoHS

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

2400–2500 MHz, 5150–5850 MHz
40%–75%
3.1 dBi
omni-directional
Linear

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
Cable type
Cable length
Operation temperature

38.9 × 9 mm
FPC + cable
Adhesive
IPEX MHF4L
RF1.13
100 mm
–40°C to +85°C



YF0026AA

Wi-Fi adhesive mount FPC + cable PIFA
embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	50%–80%
Peak gain	6.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	28.9 × 11 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.37
Cable length	100 mm
Operation temperature	–40°C to +85°C



YF0026LA

Wi-Fi adhesive mount FPC + cable PIFA
embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	50%–80%
Peak gain	5.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	28.9×11 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF4L
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YF0027AA

Wi-Fi adhesive mount FPC + cable PIFA
embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	45%–85%
Peak gain	6.4 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	38 × 7 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.37
Cable length	100 mm
Operation temperature	–40°C to +85°C



YF0027CA

Wi-Fi adhesive mount FPC + cable PIFA
embedded antenna

Compliant

RoHS

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	35%~70%
Peak gain	5.1 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	38×7 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF4L
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YF0029AA

Wi-Fi adhesive mount FPC + cable PIFA
embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	40%–80%
Peak gain	7.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	29.98×30.85 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.37
Cable length	100 mm
Operation temperature	–40°C to +85°C



YF0029CA

Wi-Fi adhesive mount FPC + cable PIFA
embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	40%–75%
Peak gain	6.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	29.98 × 30.85 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF4L
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YF0023HA

Wi-Fi adhesive mount FPC + cable monopole embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 4900–5850 MHz, 5925–7125 MHz
Efficiency	45%–80%
Peak gain	6.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	22.7×11.9 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YF0023IA

Wi-Fi adhesive mount FPC + cable monopole embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 4900–5850 MHz, 5925–7125 MHz
Efficiency	45%–85%
Peak gain	5.6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	22.7×11.9 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF4L
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YF0023FA

Wi-Fi adhesive mount FPC + cable monopole embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 4900–5850 MHz, 5925–7125 MHz
Efficiency	55%–90%
Peak gain	7.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	37.8 × 7.5 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YF0023GA

Wi-Fi adhesive mount FPC + cable monopole
embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	50%–85%
Peak gain	7.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	37.8 × 7.5 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF4L
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFWO001AA

Wi-Fi 2in1 adhesive mount combo embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	2400–2500 MHz; 5150–7150 MHz
Efficiency	45%–75%
Peak gain	5.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	78.6 × 21.4 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFCO002AA

5G 2in1 adhesive mount Combo embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	600–6000 MHz
Efficiency	35%–70%
Peak gain	5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	237 × 22 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	150 mm
Operation temperature	–40°C to +85°C



YFMA200E3AM

5G & Wi-Fi 2in1 adhesive mount Combo embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	5G × 1: 600–6000 MHz Wi-Fi × 1: 2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Efficiency	5G × 1: 33–76%; Wi-Fi × 1: 47–66%
Peak gain	5G × 1: 5 dBi; Wi-Fi × 1: 3.7 dBi
Radiation pattern	5G × 1: omni-directional; Wi-Fi × 1: omni-directional
Polarization	5G × 1: Linear; Wi-Fi × 1: Linear

Mechanical data

Dimensions	124.2 × 36.4 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	125 mm
Operation temperature	–40°C to +85°C



YFMP200WWA

Wi-Fi & GNSS L1 2in1 SMT mount Combo
embedded antenna

EVB

YFMP200WWAEVB

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

Wi-Fi × 1: 2400–2500 MHz, GNSS × 1: 1560–1580 MHz
Wi-Fi × 1: 50%–70%, GNSS × 1: 45%–55%
Wi-Fi × 1: 1.3 dBi, GNSS × 1: 1.5 dBi
Wi-Fi × 1: omni-directional, GNSS × 1: omni-directional
Wi-Fi × 1: Linear, GNSS × 1: Linear

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

Antenna: 3.2 × 1.6 × 0.6 mm, EVB: 80 × 40 × 0.6 mm
PCB chip
SMT
–40°C to +85°C



YC0013AA

GNSS L1 SMT mount ceramic chip passive embedded antenna

EVB

YC0013AAEVB

Compliant


RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	55%–65%
Peak gain	0.8 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 3.2 × 1.6 × 0.6 mm, EVB: 90 × 50 mm
Form factor	Ceramic chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YPGS001AA

GNSS L1 SMT mount PCB chip passive embedded antenna

EVB

YPGS001AAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	51%–54%
Peak gain	1.7 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 7 × 5.8 × 0.8 mm, EVB: 80 × 35 × 0.8 mm
Form factor	PCB chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YCGS010AA

GNSS L1 & L2 & L5 & E6 SMT mount ceramic chip passive embedded antenna

EVB

YCGS010AAEVB

Compliant


RoHS & REACH

Electrical data

Frequency range	1164–1300 MHz, 1565–1586 MHz
Efficiency	L2/L5/E6/B3: 42%–50%, L1: 70%–74%
Peak gain	L2/L5/E6/B3: 1.3 dBi, L1: 2.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 5 × 3 × 0.5 mm, EVB: 80 × 40 mm
Form factor	Ceramic chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YFGA003AA

GNSS L1 cable passive FPC + cable passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	53%–55%
Peak gain	1.6 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	39.45 × 13.25 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	RF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFGA005AA

GNSS L1 adhesive mount FPC + cable passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	60%–65%
Peak gain	3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	61.15 × 11.24 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100.5 mm
Operation temperature	–40°C to +85°C



YFGA006AA

GNSS L1 & L2 & L5 & E6 adhesive mount FPC + cable passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1164–1300 MHz, 1559–1606 MHz
Efficiency	40%–75%
Peak gain	3.9 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	74.5 × 24.5 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	143 mm
Operation temperature	–40°C to +85°C



YFGC009WWB

GNSS L1 SMT mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	42%–68%
Peak gain	2.1 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	18 × 18 × 4 mm
Form factor	Ceramic patch
Mounting type	SMT
Operation temperature	–40°C to +85°C



YFGC009WWC

GNSS L1 SMT mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	70%–75%
Peak gain	3.9 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	25 × 25 × 4 mm
Form factor	Ceramic patch
Mounting type	SMT
Operation temperature	–40°C to +85°C



YFGC009WWA

GNSS L1 SMT mount ceramic patch passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	23%–57%
Peak gain	0.9 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	15 × 15 × 4 mm
Form factor	Ceramic patch
Mounting type	SMT
Operation temperature	–40°C to +85°C



YFGC010WWA

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	20%-33%
Peak gain	0.1 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	10.2 × 10.2 × 4 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	-40°C to +85°C



YFGC012WWA

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	20%-37%
Peak gain	-2.4 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	12 × 12 × 4 mm
Form factor	Ceramic patch
Mounting type	Adhesive & Soldering
Operation temperature	-40°C to +85°C



YFGC012WWB

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	28%-30%
Peak gain	-1 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	12 × 12 × 4 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	-40°C to +85°C



YFGC015WWA

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	25%–65%
Peak gain	2.1 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	15 × 15 × 4 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC015WWB

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	35%–60%
Peak gain	1.8 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	15 × 15 × 4mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC018WWA

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	32%–68%
Peak gain	2.3 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	18 × 18 × 4 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC020WWA

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	25%–70%
Peak gain	2.9 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	20 × 20 × 4 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC025WWA

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	30%–58%
Peak gain	0.8 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	25 × 25 × 2 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC025WWB

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	23%–60%
Peak gain	2.1 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	25 × 25 × 2 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC025WWC

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	60%–80%
Peak gain	3.6 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	25 × 25 × 4 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC025WWD

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	50%–80%
Peak gain	3.6 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	25 × 25 × 4 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC041WWAM

GNSS L1 & L5 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1164–1189 MHz, 1559–1606 MHz
Efficiency	L1: 39.2%, L5: 23.4%
Peak gain	L1: -0.6 dBi, L5: -2.5 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	25 × 25 × 2 + 18 × 18 × 2 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC225WWA

GNSS L1 & L5 adhesive & soldering mount
ceramic patch passive embedded antenna
with 2 pins

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

1164-1189 MHz, 1559-1606 MHz
L1: 55%-59%, L5: 50%-53%
L1: 1.2 dBi, L5: 1.1 dBi
Directional
RHCP

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

25 × 25 × 4 + 18 × 18 × 4 mm
Ceramic patch
Adhesive & soldering
-40°C to +85°C



YFGC000WWAM

GNSS L1 & L5 adhesive & soldering mount
ceramic patch passive embedded antenna
with 1 pin

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

1164-1189 MHz, 1559-1606 MHz
L1: 65%, L5: 44%
L1: 0.58 dBi, L5: -0.31 dBi
Directional
RHCP

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

25 × 25 × 4 + 18 × 18 × 4 mm
Ceramic patch
Adhesive & soldering
-40°C to +85°C



YFGC233WWA

GNSS L1 & L5 adhesive & soldering mount
ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

1164-1189 MHz, 1559-1606 MHz
L1: 45%-60%, L5: 40%-44%
L1: 2.3 dBi, L5: 0.7 dBi
Directional
RHCP

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

33 × 33 × 4 + 25 × 25 × 4 mm
Ceramic patch
Adhesive & soldering
-40°C to +85°C

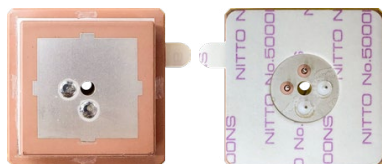

YFGC235WWA

GNSS L1 & L5 adhesive & soldering mount
ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

1164-1189 MHz, 1559-1606 MHz
L1: 44%-53%, L5: 45%-50%
L1: 2.9 dBi, L5: 1.2 dBi
Directional
RHCP

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

35 × 35 × 6 + 28 × 28 × 4 mm
Ceramic patch
Adhesive & soldering
-40°C to +85°C

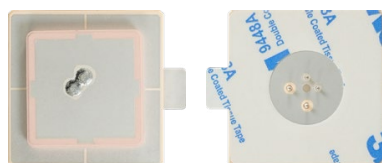

YFGC238WWA

GNSS L1 & L5 adhesive & soldering mount
ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

1164-1189 MHz, 1559-1606 MHz
L1: 45%-63%, L5: 40%-50%
L1: 3.9 dBi, L5: 1.4 dBi
Directional
RHCP

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

38 × 38 × 6 + 28 × 28 × 4 mm
Ceramic patch
Adhesive & soldering
-40°C to +85°C



YFGC035WWA

GNSS L1 adhesive & soldering mount ceramic
patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization

1559-1606 MHz
72%-82%
4.4 dBi
Directional
RHCP

Mechanical data

Dimensions
Form factor
Mounting type
Operation temperature

35 × 35 × 4 mm
Ceramic patch
Adhesive & soldering
-40°C to +85°C



YFGC035WWB

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	78%–83%
Peak gain	3.6 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	35 × 35 × 6 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC035WWC

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	63%–69%
Peak gain	3.8 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	35 × 35 × 6 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C

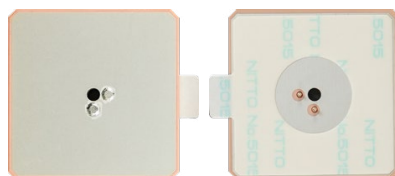

YFGC040WWA

GNSS L1 adhesive & soldering mount ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559–1606 MHz
Efficiency	66%–73%
Peak gain	4.3 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	40 × 40 × 4 mm
Form factor	Ceramic patch
Mounting type	Adhesive & soldering
Operation temperature	–40°C to +85°C



YFGC245WWA

GNSS L1 & L5 adhesive & soldering mount
ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

1164-1189 MHz, 1559-1606 MHz

Efficiency

L1: 45%-60%, L5: 45%-50%

Peak gain

L1: 3.6 dBi, L5: 1 dBi

Radiation pattern

Directional

Polarization

RHCP

Mechanical data

Dimensions

45 × 45 × 6 + 40 × 40 × 4 mm

Form factor

Ceramic patch

Mounting type

Adhesive & soldering

Operation temperature

-40°C to +85°C



YFGC245WWB

GNSS L1 & L5 adhesive & soldering mount
ceramic patch passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

1164-1189 MHz, 1559-1606 MHz

Efficiency

L1: 52%-64%, L5: 55%-60%

Peak gain

L1: 4.4 dBi, L5: 2.9 dBi

Radiation pattern

Directional

Polarization

RHCP

Mechanical data

Dimensions

45 × 45 × 8 + 40 × 40 × 4 mm

Form factor

Ceramic patch

Mounting type

Adhesive & soldering

Operation temperature

-40°C to +85°C



YFGA010E3BM

GNSS L1 buckle mount ceramic patch +
cable passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

1559-1606 MHz

Efficiency

14%-16%

Peak gain

-4.5 dBi

Radiation pattern

Directional

Polarization

RHCP

Mechanical data

Dimensions

10.2 × 10.2 × 7.5 mm

Form factor

Ceramic patch + cable

Mounting type

Buckle

Connector type

IPEX MHF1

Cable type

RF1.13

Cable length

100 mm

Operation temperature

-40°C to +85°C



YFGA015E3BM

GNSS L1 buckle mount ceramic patch + cable passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	30%-46%
Peak gain	-1 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	15 × 15 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA018E3BM

GNSS L1 buckle mount ceramic patch + cable passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	44%-53%
Peak gain	-0.3 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	18 × 18 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA020E3BM

GNSS L1 buckle mount ceramic patch + cable passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	53.8% ~ 58.7%
Peak gain	0.4 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	20 × 20 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA025E3CM

GNSS L1 buckle mount ceramic patch + cable active embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	65%–74%
Peak gain	0.7 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	16 dB

Mechanical data

Dimensions	25 × 25 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFGA025E3DM

GNSS L1 buckle mount ceramic patch + cable passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	65%–74%
Peak gain	0.7 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	25 × 25 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFGA010E3AM

GNSS L1 buckle mount ceramic patch + cable active embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	14%–16%
Peak gain	–4.5 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	16 dB

Mechanical data

Dimensions	10.2 × 10.2 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFGA012E3AM

GNSS L1 buckle mount ceramic patch + cable active embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	36% AVG.
Peak gain	-1.7 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	16 dB

Mechanical data

Dimensions	12 × 12 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA012E3BM

GNSS L1 buckle mount ceramic patch + cable passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	36%
Peak gain	-1.7 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	12 × 12 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA015E3AM

GNSS L1 buckle mount ceramic patch + cable active embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	30%-46%
Peak gain	-1 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	16 dB

Mechanical data

Dimensions	15 × 15 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA018E3AM

GNSS L1 buckle mount ceramic patch + cable active embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	44%–53%
Peak gain	–0.3 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	16 dB

Mechanical data

Dimensions	18 × 18 × 7.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFGA025E3AM

GNSS L1 buckle mount ceramic patch + cable active embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	45%–47%
Peak gain	–0.45 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	16 dB

Mechanical data

Dimensions	25 × 25 × 5.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFGA025E3BM

GNSS L1 buckle mount ceramic patch + cable passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	47%
Peak gain	–0.4 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	25 × 25 × 5.5 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFGA035E3BM

GNSS L1 buckle mount ceramic patch + cable passive embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	1559 - 1606 MHz
Efficiency	75% ~ 81%
Peak gain	1.21 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	35 × 35 × 7.9 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA035E3DM

GNSS L1 buckle mount ceramic patch + cable passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1559-1606 MHz
Efficiency	78% ~ 83%
Peak gain	1.39 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	35 × 35 × 9.9 mm
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C

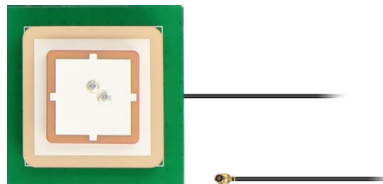

YFGC007E3A

GNSS L1 & L5 buckle mount ceramic patch + cable active embedded antenna

Compliant


RoHS

Electrical data

Frequency range	1164-1189 MHz, 1559-1606 MHz
Efficiency	L1: 32%-50%, L5: 50%-53%
Peak gain	L1: 1.2 dBi, L5: 1.1 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	17 dB

Mechanical data

Dimensions	50 × 50 × 14.5 mm (38 × 38 × 6 + 25 × 25 × 4 mm)
Form factor	Ceramic patch + cable
Mounting type	Buckle
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C

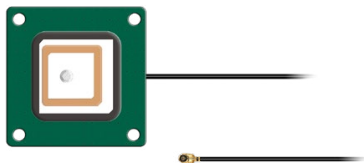

YFGA225E3AM

GNSS L1 & L5 screw mount ceramic patch + cable active embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1164-1189 MHz, 1559-1606 MHz
Efficiency	L1: 55%-57%, L5: 35%-39%
Peak gain	L1: -0.2 dBi, L5: -1 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	14 dB

Mechanical data

Dimensions	39 × 39 × 12.1 mm (25 × 25 × 4 + 18 × 18 × 4 mm)
Form factor	Ceramic patch + cable
Mounting type	Screw
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA225E3BM

GNSS L1 & L5 screw mount ceramic patch + cable passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1164-1189 MHz, 1559-1606 MHz
Efficiency	L1: 65%, L5: 44%
Peak gain	L1: 0.6 dBi, L5: -0.3 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	39 × 39 × 12.1 mm (25 × 25 × 4 + 18 × 18 × 4 mm)
Form factor	Ceramic patch + cable
Mounting type	Screw
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA233E3AM

GNSS L1 & L5 screw mount ceramic patch + cable active embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1164-1189 MHz, 1559-1606 MHz
Efficiency	L1: 28-59%, L5: 38.8%
Peak gain	2.64 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	17 dB

Mechanical data

Dimensions	50 × 50 × 12.2 mm (33 × 33 × 4 + 25 × 25 × 4 mm)
Form factor	Ceramic patch + cable
Mounting type	Screw
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA235E3CM

GNSS L1 & L5 screw mount ceramic patch + cable passive embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1164-1189 MHz, 1559-1606 MHz
Efficiency	78%
Peak gain	2.69 dBi
Radiation pattern	Directional
Polarization	RHCP

Mechanical data

Dimensions	50 × 50 × 12.2 mm (35 × 35 × 4 + 25 × 25 × 4 mm)
Form factor	Ceramic patch + cable
Mounting type	Screw
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA245E3AM

GNSS L1 & L5 screw mount ceramic patch + cable active embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1164-1189 MHz, 1559-1606 MHz
Efficiency	L1: 48.9-74%, L5: 54.9%
Peak gain	2.17 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	17 dB

Mechanical data

Dimensions	59 × 59 × 14.2 mm (45 × 45 × 6 + 40 × 40 × 4 mm)
Form factor	Ceramic patch + Cable
Mounting type	Screw
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA245E3BM

GNSS L2 & L5 screw mount ceramic patch + cable active embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	1217-1238 MHz, 1559-1606 MHz
Efficiency	L1: 46%-73%, L2: 58%-61%
Peak gain	L1: 3.5 dBi, L2: 2 dBi
Radiation pattern	Directional
Polarization	RHCP
LNA gain	17 dB

Mechanical data

Dimensions	59 × 59 × 14.2 mm (45 × 45 × 6 + 40 × 40 × 4 mm)
Form factor	Ceramic patch + Cable
Mounting type	Screw
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +85°C



YFGA245E3CM

GNSS L1 & L2 & L5 screw mount ceramic patch + cable active embedded antenna

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization
LNA gain

1164–1238 MHz, 1559–1606 MHz
L1: 50%–76%, L2/L5: 28%–35%
L1: 3.6 dBi, L2/L5: –1 dBi
Directional
RHCP
17 dB

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
Cable type
Cable length
Operation temperature

59 × 59 × 16.2 mm (45 × 45 × 8 + 40 × 40 × 4 mm)
Ceramic patch + cable
Screw
IPEX MHF1
RF1.13
100 mm
–40°C to +85°C

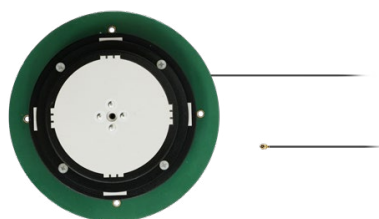

YFGN001H3AM

GNSS full band screw mount PPO patch + cable active embedded antenna

Compliant

RoHS & REACH

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization
LNA gain

1164–1300 MHz, 1525–1606 MHz
Lower Band: 58%; L-band: 45.2%; Upper Band: 67%
Lower Band: 5.6 dBi; L-band: 3.1 dBi; Upper Band: 5.4 dBi
Directional
RHCP
40 ±4 dB

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
Cable type
Cable length
Operation temperature

Ø122 × 24.2 mm
PPO Patch + cable
Screw
IPEX MHF1
RF1.13
220 mm
–40°C to +85°C



YFGD000AA

GNSS full band screw mount PPO patch + cable active embedded antenna

Compliant

RoHS & REACH & POPS

Electrical data


Frequency range
Efficiency
Peak gain
Radiation pattern
Polarization
LNA gain

1164–1300 MHz, 1525–1606 MHz
Lower Band: 50%; L-band: 38%; Upper Band: 53%
Lower Band: 3.7 dBi; L-band: 1.5 dBi; Upper Band: 3.5 dBi
Directional
RHCP
38 ±4 dB

Mechanical data

Dimensions
Form factor
Mounting type
Connector type
Cable type
Cable length
Operation temperature

78.6 × 75.6 × 16.2 mm
PPO Patch + cable
Screw
IPEX MHF1
RF1.13
89 mm
–40°C to +85°C



YFGD000BA

GNSS L1 & L2 & L5 screw mount PPO patch + cable active embedded antenna

Compliant

RoHS & REACH & POPS

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

LNA gain

1164–1238 MHz, 1559–1606 MHz

L1: 51.8%–65.1%; L2: 45.7%; L5: 63.2%–71.3%

L1: 1.87 dBi; L2: 2.07 dBi; L5: 2.15 dBi

Directional

RHCP

38 ±4 dB

Mechanical data

Dimensions

Form factor

Mounting type

Connector type

Cable type

Cable length

Operation temperature

78.6 × 75.6 × 16.2 mm

PPO Patch + Cable

Screw

IPEX MHF1

RF1.37

89 mm

–40°C to +85°C



YFGN000H1AC

GNSS full band screw mount Air Dielectric + cable active embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

LNA gain

1164–1300 MHz, 1525–1606 MHz

Lower Band: 38.8%–54.9%; L-band: 58.5%; Upper Band: 52.9%–65.6%

Lower Band: 5.02 dBi; L-band: 5.02 dBi; Upper Band: 5.54 dBi

Directional

RHCP

35 ±4 dB

Mechanical data

Dimensions

Form factor

Mounting type

Connector type

Cable type

Cable length

Operation temperature

Ø122 × 24.2 mm

Air Dielectric + Cable


Screw

SMA male

RG174

300 mm

–40°C to +85°C

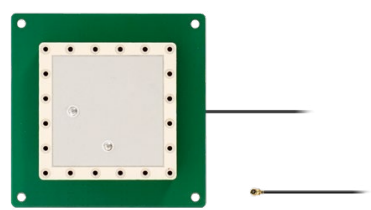

YFTA009E3AM

L-Band & GNSS L1 & Iridium screw mount
ceramic patch + cable passive
embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range

Efficiency

Peak gain

Radiation pattern

Polarization

GNSS: 1559–1606 MHz,
L-Band: 1518–1559 MHz,1626–1660 MHz,1668–1675 MHz
Iridium: 1616–1626.5 MHz
GNSS: 75%-80%, L-Band: 60%-91%, Iridium: 87%
GNSS: 5.3 dBi, L-Band: 5.6 dBi, Iridium: 2.38 dBi
Directional
RHCP

Mechanical data

Dimensions

Form factor

Mounting type


Connector type

Cable type

Cable length

Operation temperature

80 × 80 × 13.3 mm (50 × 50 × 10 mm)
Ceramic patch + cable
Screw
IPEX MHF1
RF1.13
100 mm
–40°C to +85°C



YFNP001WWB

LPWA/ISM SMT mount PCB chip loop embedded antenna

EVB

YFNP001WWBEVB

Compliant


RoHS

Electrical data

Frequency range	855–880 MHz
Efficiency	35%–45%
Peak gain	0 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 10 × 3.2 × 0.6 mm, EVB: 90 × 45 × 0.6 mm
Form factor	PCB chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YFNP001WWA

LPWA/ISM SMT mount PCB chip loop embedded antenna

EVB

YFNP001WWAEVB

Compliant


RoHS

Electrical data

Frequency range	900–930 MHz
Efficiency	30%–45%
Peak gain	0.4 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 10 × 3.2 × 0.6 mm, EVB: 90 × 45 × 0.6 mm
Form factor	PCB chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YCIS003AA

LPWA/ISM SMT mount ceramic chip IFA embedded antenna

EVB

YCIS003AAEVB

Compliant


RoHS

Electrical data

Frequency range	902–928 MHz
Efficiency	35%~70%
Peak gain	1 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 10 × 3.2 × 0.5 mm, EVB: 80 × 40 mm
Form factor	Ceramic chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YCIS002AA

LPWA/ISM SMT mount ceramic chip IFA embedded antenna

EVB

YCIS002AAEVB

Compliant

RoHS

Electrical data

Frequency range

863–870 MHz

Efficiency

40%~60%

Peak gain

0.7 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

Antenna: 10 × 3.2 × 0.5 mm, EVB: 80 × 40 mm

Form factor

Ceramic chip

Mounting type

SMT

Operation temperature

–40°C to +85°C



YSIS001AA

LPWA/ISM SMT mount spring + holder monopole embedded antenna

EVB

YSIS001AAEVBAA

Compliant

RoHS & REACH & TSCA

Electrical data

Frequency range

412–427 MHz, 433–435 MHz, 450–470 MHz

Efficiency

25% AVG.

Peak gain

0.4 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

Antenna: 30 × 7 × 7 mm, EVB: 185 × 90 × 1 mm

Form factor


Spring + holder

Mounting type

SMT

Operation temperature

–40°C to +85°C



YFNP017WWA

LPWA/ISM SMT mount PCB chip monopole embedded antenna

EVB

YFNP017WWAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range

790–960 MHz

Efficiency

40%–60%

Peak gain

0.5 dBi

Radiation pattern

omni-directional

Polarization

Linear

Mechanical data

Dimensions

Antenna: 25 × 7 × 3 mm, EVB: 105.53 × 25 × 0.8 mm

Form factor


PCB chip

Mounting type

SMT

Operation temperature

–40°C to +85°C

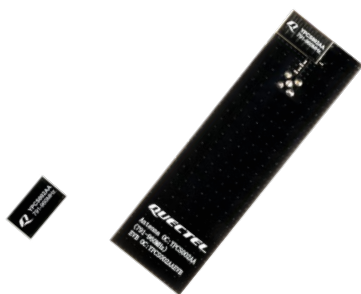

YPCS002AA

LPWA/ISM SMT mount PCB chip monopole embedded antenna

EVB

YPCS002AAEVB

Compliant

RoHS & REACH

Electrical data

Frequency range	791–960 MHz
Efficiency	20%–35%
Peak gain	1.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 20 × 11 × 1.6 mm, EVB: 115 × 35 × 0.8 mm
Form factor	PCB chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YMCP003AA

LPWA/ISM SMT mount sheet metal PIFA embedded antenna

EVB

YMCP003AAEVBAA

Compliant

RoHS & REACH

Electrical data

Frequency range	790–960 MHz
Efficiency	60%–70%
Peak gain	1.1 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	Antenna: 40.99 × 6.68 × 3.99 mm, EVB: 135 × 45 mm
Form factor	Sheet metal
Mounting type	SMT
Operation temperature	–40°C to +85°C



YFOA004AA

LPWA/ISM adhesive mount FPC + cable monopole embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	410–470 MHz
Efficiency	45%–54%
Peak gain	0.2 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	100×20 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	–40°C to +85°C



YFNF915F3AM

LPWA/ISM adhesive mount FPC + cable dipole embedded antenna

Compliant


RoHS & REACH

Electrical data

Frequency range	915 MHz
Efficiency	70%–73%
Peak gain	2.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	120.2 × 25 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF 1
Cable type	RF1.13
Cable length	150 mm
Operation temperature	–40°C to +85°C



YFNF868F3AM

LPWA/ISM adhesive mount FPC + cable PIFA embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	868 MHz
Efficiency	65%–70%
Peak gain	1.3 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	70 × 40 mm
Form factor	FPC + cable
Mounting type	Adhesive
Connector type	IPEX MHF 1
Cable type	RF1.13
Cable length	150 mm
Operation temperature	–40°C to +85°C



YFVP001WWA

UWB SMT mount PCB chip monopole
embedded antenna

Compliant

RoHS & REACH

Electrical data

Frequency range	3000 – 8000 MHz
Efficiency	52% AVG.
Peak gain	2.5 dBi
Radiation pattern	omni-directional
Polarization	Linear

Mechanical data

Dimensions	8 × 6 × 1 mm
Form factor	PCB chip
Mounting type	SMT
Operation temperature	–40°C to +85°C



YSAN025AA

DC~6GHz SMA female to
IPEX MHF1 cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +80°C



YSAN025BA

DC~6GHz SMA female to
IPEX MHF1 cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	150 mm
Operation temperature	-40°C to +80°C



YSAN025CA

DC~6GHz SMA female to
IPEX MHF1 cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	200 mm
Operation temperature	-40°C to +80°C



YSAN025DA

DC~6GHz SMA female to
IPEX MHF1 cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	250 mm
Operation temperature	-40°C to +80°C



YSAN025EA

DC~6GHz SMA female to
IPEX MHF1 cable

Compliant


RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	300 mm
Operation temperature	-40°C to +80°C



YSAN026AA

DC~6GHz RP SMA female to
IPEX MHF1 cable

Compliant


RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-20°C to +85°C



YSAN026BA

DC~6GHz RP SMA female to
IPEX MHF1 cable

Compliant


RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	150 mm
Operation temperature	-20°C to +85°C



YSAN026CA

DC~6GHz RP SMA female to
IPEX MHF1 cable

Compliant


RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	200 mm
Operation temperature	-20°C to +85°C



YSAN026DA

DC~6GHz RP SMA female to
IPEX MHF1 cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	250 mm
Operation temperature	-20°C to +85°C



YSAN026EA

DC~6GHz RP SMA female to
IPEX MHF1 cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF1
Cable type	RF1.13
Cable length	300 mm
Operation temperature	-20°C to +85°C



YSAN027AA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA female

Connector type2

IPEX MHF4L

Cable type

RF1.13

Cable length

100 mm

Operation temperature

-40°C to +80°C



YSAN027BA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA female

Connector type2

IPEX MHF4L

Cable type

RF1.13

Cable length

150 mm

Operation temperature

-40°C to +80°C



YSAN027CA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA Female

Connector type2

IPEX MHF4L

Cable type

RF1.13

Cable length

200 mm

Operation temperature

-40°C to +80°C



YSAN027DA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA female

Connector type2

IPEX MHF4L

Cable type


RF1.13

Cable length

250 mm

Operation temperature

-40°C to +80°C



YSAN027EA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA female

Connector type2

IPEX MHF4L

Cable type

RF1.13

Cable length

300 mm

Operation temperature

-40°C to +80°C



YSAN027FA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant


RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	150 mm
Operation temperature	-40°C to +80°C



YSAN027GA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant


RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	200 mm
Operation temperature	-40°C to +80°C



YSAN027HA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	250 mm
Operation temperature	-40°C to +80°C



YSAN027IA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	300 mm
Operation temperature	-40°C to +80°C



YSAN027JA

DC~6GHz SMA female to
IPEX MHF4L cable

Compliant


RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	500 mm
Operation temperature	-40°C to +80°C



YSAN028AA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	100 mm
Operation temperature	-40°C to +80°C



YSAN028BA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	150 mm
Operation temperature	-40°C to +80°C



YSAN028CA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	200 mm
Operation temperature	-40°C to +80°C



YSAN028DA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	250 mm
Operation temperature	-40°C to +80°C



YSAN028EA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	RP SMA female
Connector type2	IPEX MHF4L
Cable type	RF1.13
Cable length	300 mm
Operation temperature	-40°C to +80°C



YSAN028FA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

RP SMA female

Connector type2

IPEX MHF4L

Cable type

RF1.13

Cable length

100 mm

Operation temperature

-40°C to +80°C



YSAN028GA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

RP SMA female

Connector type2

IPEX MHF4L

Cable type

RF1.13

Cable length

150 mm

Operation temperature

-40°C to +80°C



YSAN028HA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

RP SMA female

Connector type2

IPEX MHF4L

Cable type

RF1.13

Cable length

200 mm

Operation temperature

-40°C to +80°C



YSAN028IA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

RP SMA female

Connector type2

IPEX MHF4L

Cable type

RF1.13

Cable length

250 mm

Operation temperature

-40°C to +80°C



YSAN028JA

DC~6GHz RP SMA female to
IPEX MHF4L cable

Compliant

RoHS

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

RP SMA female

Connector type2

IPEX MHF4L

Cable type

RF1.13

Cable length

300 mm

Operation temperature

-40°C to +80°C



YLUX013XQA

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX013XQB

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX013XQC

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX013XQD

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX013XQE

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX013XQF

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX013XQG

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX013XQH

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX013XQJ

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX013XQK

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX013XQL

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX013XQM

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALSR200

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX013XQN

DC~2GHz SMA male to
SMA female cable with
GNSS mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-2000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG174

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX013XQP

DC~2GHz SMA male to
SMA female cable with
GNSS mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-2000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG174

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX013XQQ

DC~2GHz SMA male to
SMA female cable with
GNSS mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-2000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG174

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX013XQR

DC~2GHz SMA male to
SMA female cable with
GNSS mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-2000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG174

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX016XQA

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX016XQB

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX016XQC

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX016XQD

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX016XQE

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX016XQF

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX016XQG

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX016XQH

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX016XQJ

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

ALS302

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX016XQK

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA male
Connector type2	SMA female
Cable type	ALS302
Cable length	4700 mm
Operation temperature	-40°C to +85°C



YLUX016XQL

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA male
Connector type2	SMA female
Cable type	ALS302
Cable length	4700 mm
Operation temperature	-40°C to +85°C



YLUX016XQM

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA male
Connector type2	SMA female
Cable type	ALS302
Cable length	4700 mm
Operation temperature	-40°C to +85°C



YLUX017XQA

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA male
Connector type2	SMA female
Cable type	RG405
Cable length	700 mm
Operation temperature	-40°C to +85°C



YLUX017XQB

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range
DC-6000 MHz

Mechanical data

Connector type1	SMA male
Connector type2	SMA female
Cable type	RG405
Cable length	700 mm
Operation temperature	-40°C to +85°C



YLUX017XQC

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

700 mm

Operation temperature

-40°C to +85°C



YLUX017XQD

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX017XQE

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX017XQF

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

1700 mm

Operation temperature

-40°C to +85°C



YLUX017XQG

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX017XQH

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX017XQJ

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

2700 mm

Operation temperature

-40°C to +85°C



YLUX017XQK

DC~6GHz SMA male to
SMA female cable with
LMH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX017XQL

DC~6GHz SMA male to
SMA female cable with
MH mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX017XQM

DC~6GHz SMA male to
SMA female cable with
Wi-Fi mark

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

SMA female

Cable type

RG405

Cable length

4700 mm

Operation temperature

-40°C to +85°C



YLUX030LLAM

DC~6GHz fakra female
Code C to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code C

Connector type2

SMA female

Cable type

RG174

Cable length

700mm

Operation temperature

-40°C to +85°C



YLUX031NLAM

DC~6GHz fakra female
Code C to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code C

Connector type2

SMA female

Cable type

RG174

Cable length

1700mm

Operation temperature

-40°C to +85°C



YLUX032QLAM

DC~6GHz fakra female
Code C to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code C

Connector type2

SMA female

Cable type

RG174

Cable length

2700mm

Operation temperature

-40°C to +85°C



YLUX033ULAM

DC~6GHz fakra female
Code C to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code C

Connector type2

SMA female

Cable type

RG174

Cable length

4700mm

Operation temperature

-40°C to +85°C



YLUX034LLAM

DC~6GHz fakra female
Code D to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code D

Connector type2

SMA female

Cable type

RG174

Cable length

700mm

Operation temperature

-40°C to +85°C



YLUX035NLAM

DC~6GHz fakra female
Code D to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code D

Connector type2

SMA female

Cable type

RG174

Cable length

1700mm

Operation temperature

-40°C to +85°C



YLUX036QLAM

DC~6GHz fakra female
Code D to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code D

Connector type2

SMA female

Cable type

RG174

Cable length

2700mm

Operation temperature

-40°C to +85°C



YLUX037ULAM

DC~6GHz fakra female
Code D to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code D

Connector type2

SMA female

Cable type

RG174

Cable length

4700mm

Operation temperature

-40°C to +85°C



YLUX038LLAM

DC~6GHz fakra female
Code D to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code D

Connector type2

SMA female

Cable type

ALSR100

Cable length

700mm

Operation temperature

-40°C to +85°C



YLUX039NLAM

DC~6GHz fakra female
Code D to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code D

Connector type2

SMA female

Cable type

ALSR100

Cable length

1700mm

Operation temperature

-40°C to +85°C



YLUX040QLAM

DC~6GHz fakra female
Code D to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code D

Connector type2

SMA female

Cable type

ALSR100

Cable length

2700mm

Operation temperature

-40°C to +85°C



YLUX041ULAM

DC~6GHz fakra female
Code D to SMA female
cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC~6GHz

Mechanical data

Connector type1

Fakra female Code D

Connector type2

SMA female

Cable type

ALSR100

Cable length

4700mm

Operation temperature

-40°C to +85°C



YEGX000Q1AM

DC~6GHz SMA male to TNC
male cable

Compliant

RoHS & REACH

Electrical data

Frequency range

DC-6000 MHz

Mechanical data

Connector type1

SMA male

Connector type2

TNC male

Cable type

RG174

Cable length

3000 mm

Operation temperature

-40°C to +85°C



YAXX001XXA

Accessory-Bracket

Compliant

RoHS & REACH


Mechanical data

Dimensions

82.2 × 60.31 × 48 mm

Operation temperature

-40°C to +85°C



YBY00A0IA

Accessory-Bracket

Compliant

RoHS

Mechanical data

Dimensions

80 × 60 × 86 mm

Operation temperature

-20°C to +85°C



YEGM003WWAM

Accessory-Bracket

Compliant

RoHS

Mechanical data

Dimensions

Φ108×123mm

Operation temperature

-40°C to +85°C

Europe

Czech Republic: Prague
Denmark: Copenhagen
France: Nice/Paris
Germany: Augsburg/Berlin/Hannover/Munich
Ireland: Navan
Italy: Casatenovo/Milan
Poland: Gdynia/Warsaw/Wroclaw
Serbia: Belgrade

Slovenia: Ljubljana
Spain: Barcelona
Sweden: Sollentuna/Stockholm
Switzerland: Zurich
The Netherlands: Eindhoven
Turkey: Istanbul
UK: Birmingham/London/Manchester/Oxford

North America

Canada:
 Mississauga/Toronto, ON
 Vancouver, B.C

United States:
 Alpharetta, GA
 Chicago, IL
 Houston/Round Rock/San Marcos, TX
 Irvine/Orange County/San Diego/
 Scotts Valley/Silicon Valley, CA
 Point Roberts, WA



China
 Shanghai Headquarters

Israel / Africa

Israel: Tel Aviv
South Africa: Gauteng/Johannesburg
Egypt: Cairo

Asia Pacific

Australia: Melbourne/Sydney
India: Bangalore/Delhi/Hyderabad/Mumbai
Indonesia: Bandung/Jakarta
Japan: Tokyo
Korea: Seoul
Malaysia: Penang

Pakistan: Lahore
Philippines: Manila/Pasay City
Singapore
Thailand: Bangkok/Samutprakarn
Vietnam: Hanoi/Ho Chi Minh City

Latin America

Argentina: Buenos Aires
Brazil: Sao Paulo
Mexico: Mexico City / Queretaro

50+ sales offices, 8 R&D centers globally
 90+ distributors
 Serving 7000+ customers
 Modules are sold to 150+ countries and regions

Overseas

Africa
 Email: africa-sales@quectel.com

ANZ
 Email: anz-sales@quectel.com

Benelux
 Email: benelux-sales@quectel.com

Brazil
 Email: brazil-sales@quectel.com

CIS
 Email: cis-sales@quectel.com

DACH
 Email: dach-sales@quectel.com

East-Europe
 Email: east-europe-sales@quectel.com

France
 Email: france-sales@quectel.com

Iberia
 Email: iberia-sales@quectel.com

India
 Email: india-sales@quectel.com

Israel
 Email: israel-sales@quectel.com

Italy
 Email: italy-sales@quectel.com

Japan
 Email: japan-sales@quectel.com

Korea
 Email: korea-sales@quectel.com

Latin America
 Email: latin-america-sales@quectel.com

Middle East
 Email: middle-east-sales@quectel.com

Nordic
 Email: nordic-sales@quectel.com

North America
 Email: north-america-sales@quectel.com

S.E.A
 Email: sea-sales@quectel.com

South East Europe
 Email: see-sales@quectel.com

Turkey
 Email: turkey-sales@quectel.com

UK & Ireland
 Email: uk-sales@quectel.com

Headquarters

Building 5, Shanghai Business Park Phase III (Area B),
 No.1016 Tianlin Road, Minhang District, Shanghai 200233, China
 Tel: +86 21 5108 6236

Hefei R&D Center

Building 1-C, China Speech Valley Area A, 3335 Xiyu Road,
 High-tech Zone, Hefei, Anhui 230088, China
 Tel: +86 551 6586 9386

Vancouver R&D Center

13551 Commerce Pkwy Unit 100,
 Richmond, BC Canada

Shanghai R&D Center

Building 13, Shanghai Business Park Phase III (Area B),
 No.1016 Tianlin Road, Minhang District, Shanghai 200233, China
 Tel: +86 21 5108 6236

Foshan R&D Center

Floor 9, Building 2, Sanshan Science and Technology Innovation Center, No. 12,
 Gangkou Road, Sanshan New City, Guicheng Street, Nanhai District, Foshan,
 Guangdong 528200, China
 Tel: +86 757 6863 6236

Belgrade R&D Center

3rd Floor, Danube Business Center, Bulevar Mihaila Pupina 10L,
 11070 New Belgrade, Serbia

Guilin R&D Center

Floor 4, Building 9, Guilin Electric Valley, Chaoyang Road,
 Qixing District, Guilin, Guangxi 541004, China
 Tel: +86 773 5886 236

Wuhan R&D Center

Floor 4-5, A2 Huaxiang Center, 776 Gaoxin Avenue, Donghu New Technology
 Development Zone, Hongshan District, Wuhan City, Hubei 430074, China
 Tel: +86 027 6552 5933

Penang R&D Center

1C-1-01 One Precinct, Lengkok Mayang Pasir, 11900 Bayan Lepas, Pulau
 Pinang, Malaysia
 Tel: +60 4 611 6538