



Antenna Datasheet

Product OC: YEMA200L1AH

Version: 1.0

Date: 2025-10-15

Status: Released

Product Name: 4G 2in1 Adhesive Mount Combo Antenna

Key Features:

Frequency Band: 4G × 2: 698–960 MHz, 1710–2690 MHz

Dimensions: 143.73 mm × 51.33 mm × 15 mm

Efficiency: Up to 56% (LTE 1_FS)

RoHS and REACH Compliant

IP68 (1 meter of water depth, for 1 hour)

Overview

YEMA200L1AH is a 4G 2in1 Monopole antenna measuring 143.73 mm × 51.33 mm × 15 mm. This ultra-wide-band 4G antenna provides broad coverage from 698–960 MHz, 1710–2690 MHz whilst offering backward-compatibility to support 3G and 2G networks as well as LTE Cat-M and narrowband IoT (NB-IoT). The antenna is available with connection via 2 cable lengths from 1000 mm, terminated with SMA Male connectors. Ideal for applications where the antenna is required to be discrete, this low profile, screw mount omni-directional antenna is easy to install with maximum durability assured thanks to its IP68 rated enclosure. It is compatible with Quectel's RM520x Series modules.

YEMA200L1AH has 2 × 4G antennas. It allows high efficiency, stable signal transmission and 4G bands from 698–960 MHz and 1710–2690 MHz. In the meantime, this product also offers high isolation between antennas to avoid self-interference. All in all, this unique product is designed to provide stable and high-speed data connection to 4G applications. YEMA200L1AH can be used in harsh environments thanks to its robust UV resistant (UL 746c f1) and flame resistant (UL 94 V-0) enclosure.

Typical Applications Include:

- Telematics
- Transportation
- Remote monitoring applications.

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

Overview	1
Contents	2
1 Specification	3
1.1. Electrical	3
1.1.1. LTE 1	4
1.1.2. LTE 2	5
1.2. Mechanical & Environmental	6
2 Drawing	7
3 Detailed Performance	8
3.1. S-Parameter Test	8
3.1.1. VSWR	8
3.1.2. Return Loss	10
3.1.3. Isolation	12
3.2. Radiation Performance Test	13
3.2.1. Efficiency	13
3.2.2. Average Gain	15
3.2.3. Peak Gain	17
3.2.4. 3D & 2D Radiation Pattern	19
3.2.4.1 Test Status: In Free Space	19
3.2.4.2 Test Status: On 300 mm × 300 mm Metal Plane	28
4 Packaging	37
5 Installation	39
Contact Us	40
Legal Notices	41
Revision History	43

1 Specification

Test Condition: In Free Space & On 300 mm × 300 mm Metal Plane

1.1. Electrical

Electrical Specifications		
Frequency Range	LTE 1	698–960 MHz, 1710–2690 MHz
	LTE 2	698–960 MHz, 1710–2690 MHz
Radiation Pattern	LTE 1	Omni-directional
	LTE 2	Omni-directional
Polarization	LTE 1	Linear
	LTE 2	Linear
Impedance		50 Ω
Isolation	FS	≤ -6.6 dB
	MP	≤ -4.6 dB

Note:

FS: In Free Space

MP: On 300 mm × 300 mm Metal Plane

1.1.1. LTE 1

SPEC \ Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850
Max VSWR	FS	-	3.2	3.7	-	2.0	1.9	2.0	2.1	-	-	-
	MP	-	1.8	4.8	-	3.3	2.1	2.1	2.8	-	-	-
Max Return Loss (dB)	FS	-	-5.6	-4.8	-	-9.5	-10.2	-9.7	-9.2	-	-	-
	MP	-	-10.9	-3.7	-	-5.4	-8.9	-9.1	-6.6	-	-	-
AVG Eff. (%)	FS	-	32.3	31.6	-	51.6	49.5	45.3	47.0	-	-	-
	MP	-	24.0	23.1	-	30.7	42.2	36.2	29.8	-	-	-
AVG.AVG Gain (dB)	FS	-	-5.0	-5.0	-	-2.9	-3.1	-3.4	-3.3	-	-	-
	MP	-	-6.3	-6.4	-	-5.3	-3.7	-4.4	-5.3	-	-	-
Max Peak Gain (dBi)	FS	-	-0.1 (810)	0.9 (930)	-	3.1 (1870)	1.6 (2310)	1.4 (2400)	1.3 (2640)	-	-	-
	MP	-	-0.5 (720)	0.7 (960)	-	2.4 (1860)	3.2 (2390)	3.2 (2400)	2.3 (2550)	-	-	-
VSWR	FS	≤ 3.7										
	MP	≤ 4.8										
Return Loss	FS	≤ -4.8 dB										
	MP	≤ -3.7 dB										
Peak Gain	FS	≤ 3.1 dBi										
	MP	≤ 3.2 dBi										

Note:

FS: In Free Space

MP: On 300 mm × 300 mm Metal Plane

1.1.2. LTE 2

SPEC \ Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850
Max VSWR	FS	-	6.7	6.2	-	2.4	2.3	2.1	2.0	-	-	-
	MP	-	4.3	7.3	-	3.7	3.6	3.3	2.9	-	-	-
Max Return Loss (dB)	FS	-	-2.6	-2.8	-	-7.7	-7.9	-9.0	-9.6	-	-	-
	MP	-	-4.1	-2.4	-	-4.8	-5.0	-5.4	-6.4	-	-	-
AVG Eff. (%)	FS	-	16.2	21.1	-	42.9	39.6	39.7	42.4	-	-	-
	MP	-	11.9	3.8	-	17.5	19.1	21.8	34.2	-	-	-
AVG.AVG Gain (dB)	FS	-	-8.1	-7.5	-	-3.7	-4.0	-4.0	-3.7	-	-	-
	MP	-	-9.3	-16.1	-	-7.6	-7.2	-6.6	-4.7	-	-	-
Max Peak Gain (dBi)	FS	-	-0.9 (810)	-0.5 (870)	-	2.4 (1740)	1.9 (2320)	2.1 (2500)	2.4 (2530)	-	-	-
	MP	-	-4.8 (770)	-5.9 (820)	-	0.8 (1750)	1.7 (2400)	3.0 (2500)	5.4 (2620)	-	-	-
VSWR	FS	≤ 6.7										
	MP	≤ 7.3										
Return Loss	FS	≤ -2.6 dB										
	MP	≤ -2.4 dB										
Peak Gain	FS	≤ 2.4 dBi										
	MP	≤ 5.4 dBi										

Note:


FS: In Free Space

MP: On 300 mm × 300 mm Metal Plane

1.2. Mechanical & Environmental

Mechanical		
Antenna Dimensions		143.73 mm × 51.33 mm × 15 mm
Casing Material & Color		PC & Black
Cable Type & Color & Length	LTE 1	RG174LL & Black & 1028 ±28 mm
	LTE 2	RG174LL & Black & 1028 ±28 mm
Connector Type	LTE1	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
	LTE2	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
Mounting Type		Adhesive
Weight		Typ. 92.6 g
Environmental		
Operation Temperature		-40 °C to +85 °C
Storage Temperature		-40 °C to +85 °C
Ingress Protection (IP) Rating		IP68 (1 meter of water depth, for 1 hour)
RoHS & REACH Compliant		Yes
Housing Flame Rating		UL 94 V-0
Housing UV Resistant		UL 746c f1


2 Drawing

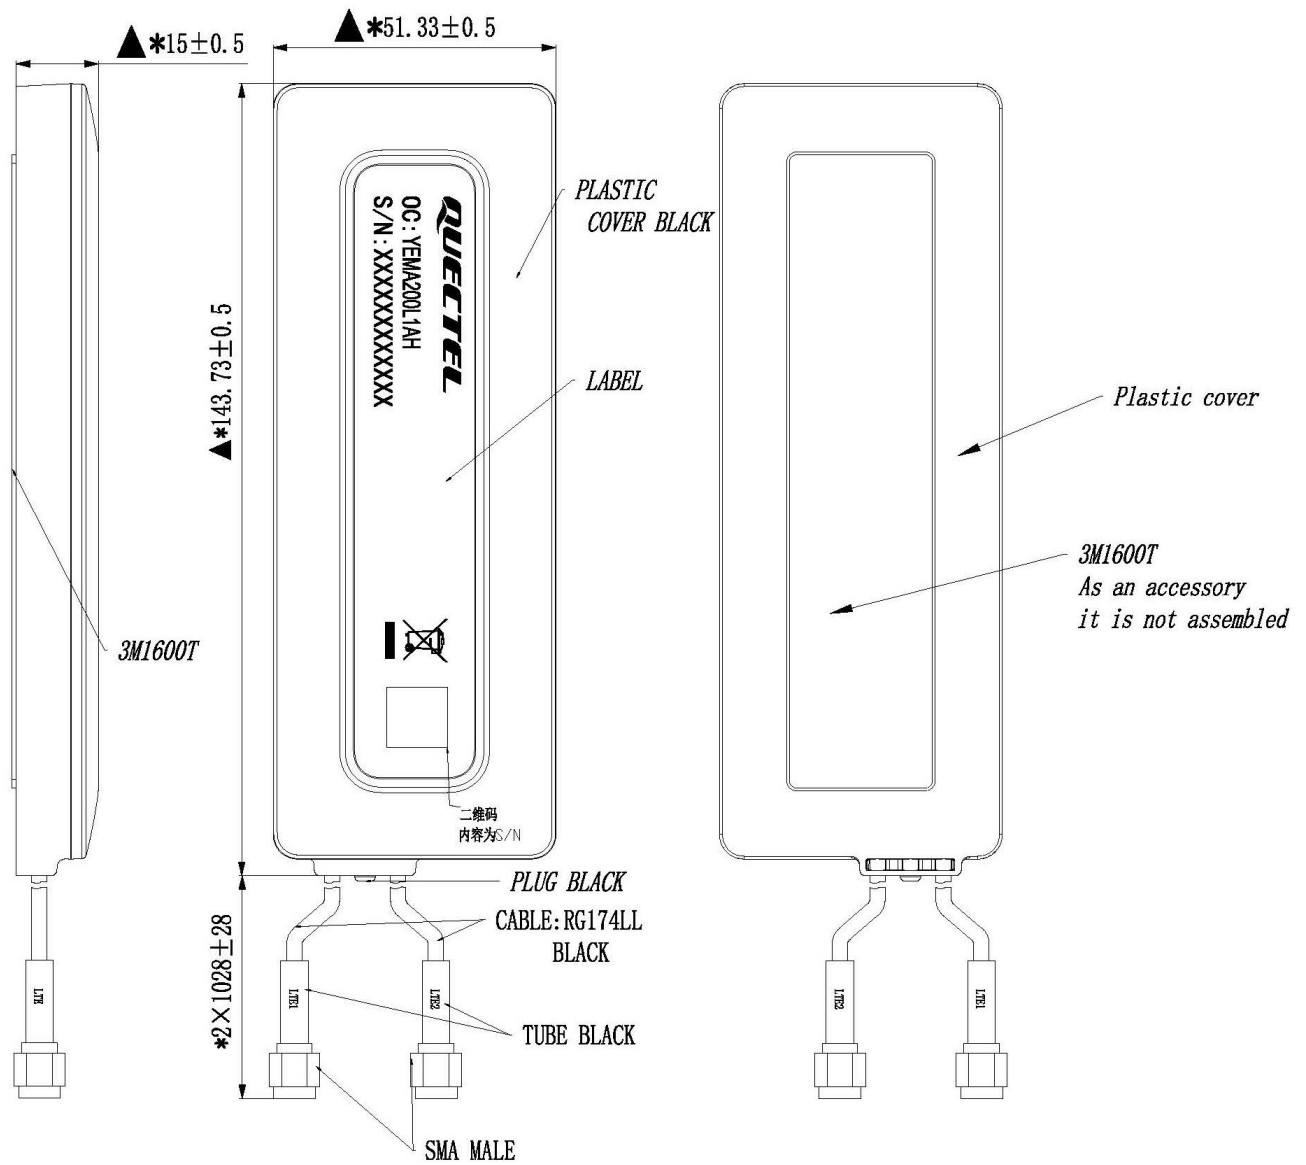

3 Detailed Performance


3.1. S-Parameter Test

3.1.1. VSWR

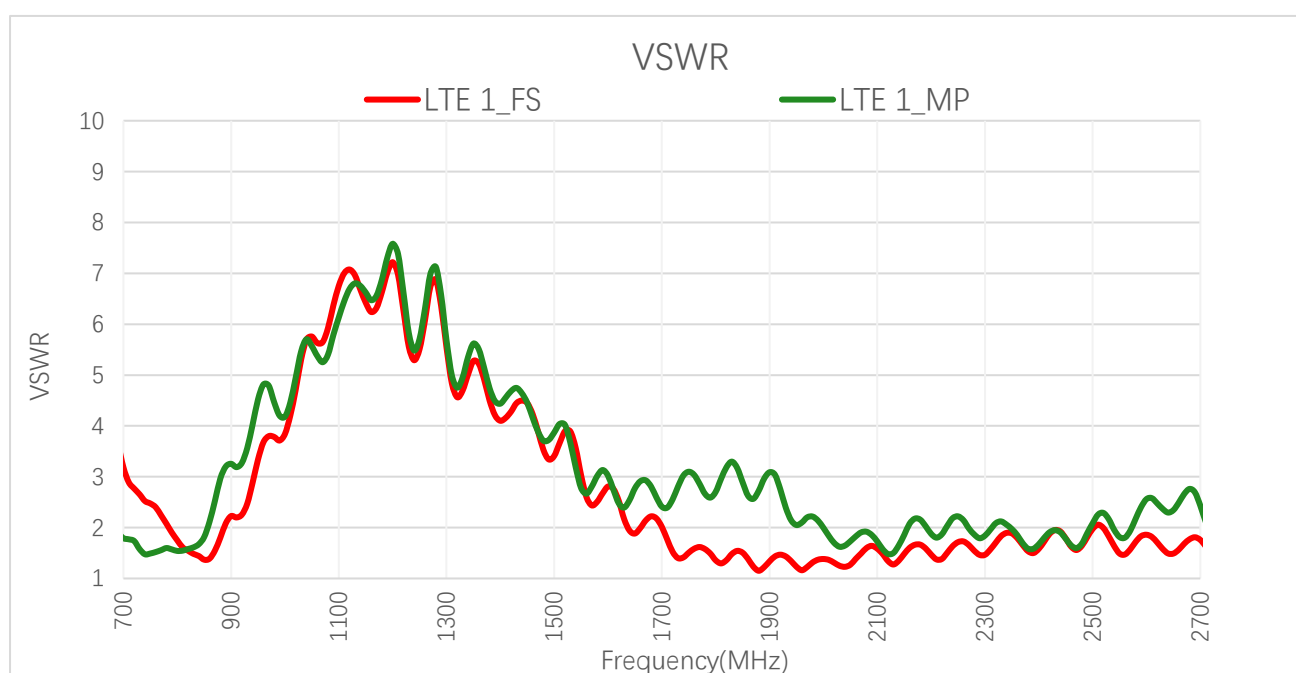

VSWR – LTE 1


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	2.9	1.5	2.2	3.7	-	1.8	1.4	1.2
MP	-	-	1.8	1.6	3.3	4.8	-	2.4	3.0	2.7
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	1.2	1.4	1.9	1.8	1.9	1.8	-	-	-	-
MP	2.1	1.7	2.0	1.8	2.6	2.7	-	-	-	-

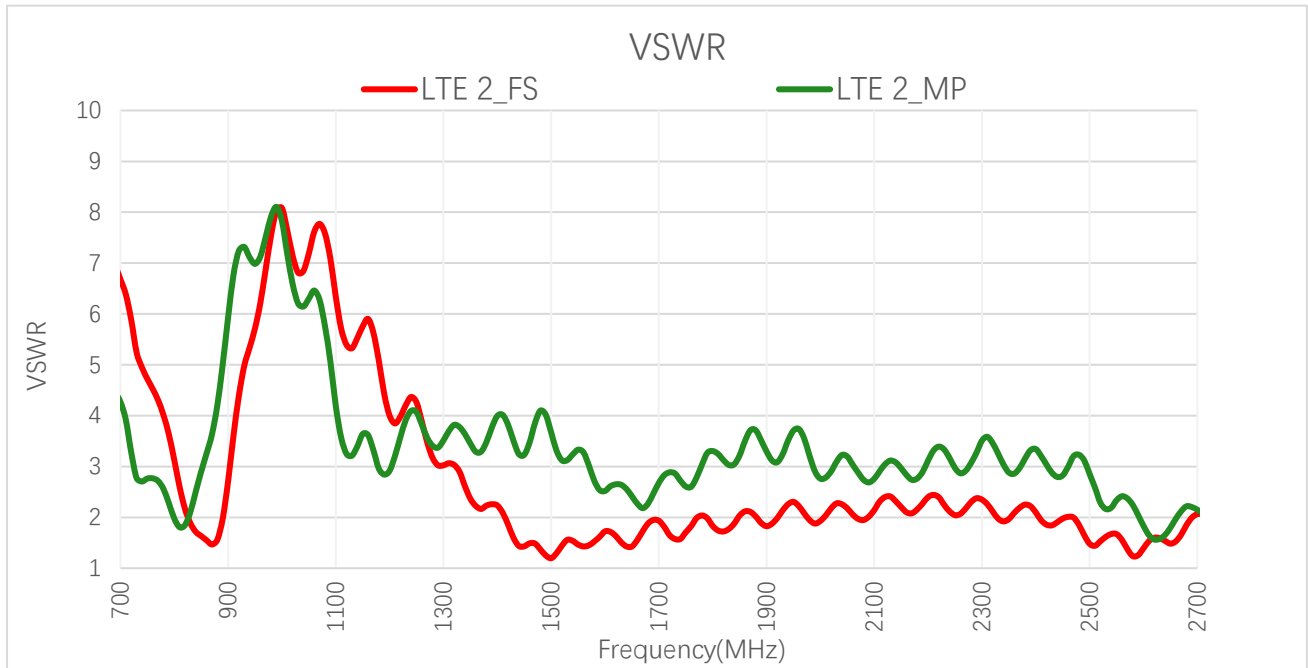

VSWR – LTE 2


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	6.4	1.9	2.7	6.2	-	1.8	1.6	2.0
MP	-	-	3.9	2.1	5.9	7.1	-	2.8	2.7	3.7
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	2.3	2.3	2.0	2.0	1.4	2.0	-	-	-	-
MP	3.7	3.1	2.9	2.8	1.8	2.2	-	-	-	-

3.1.2. Return Loss

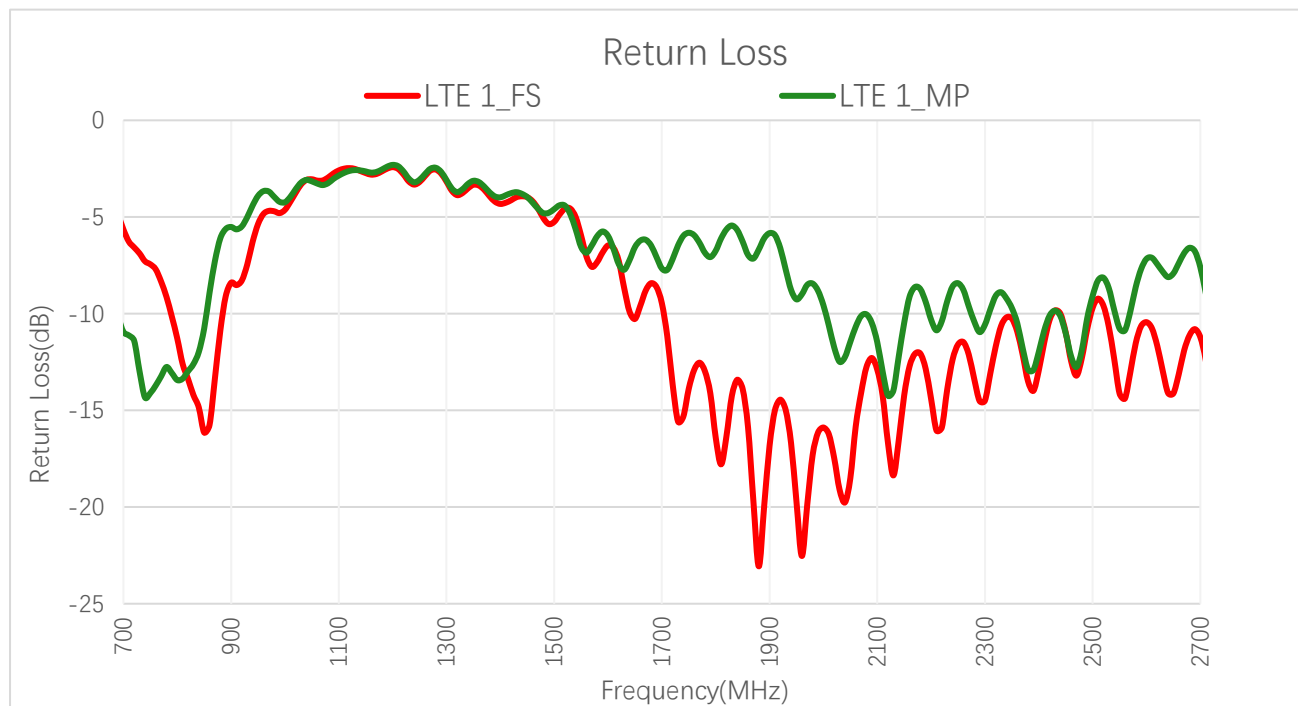

Return Loss (dB) – LTE 1


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	-6.3	-14.2	-8.4	-4.8	-	-11.2	-15.3	-23.1
MP	-	-	-11.1	-12.6	-5.5	-3.7	-	-7.7	-6.0	-6.7
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	-19.7	-16.5	-10.3	-11.0	-10.4	-10.8	-	-	-	-
MP	-9.3	-12.2	-9.7	-11.0	-7.2	-6.8	-	-	-	-

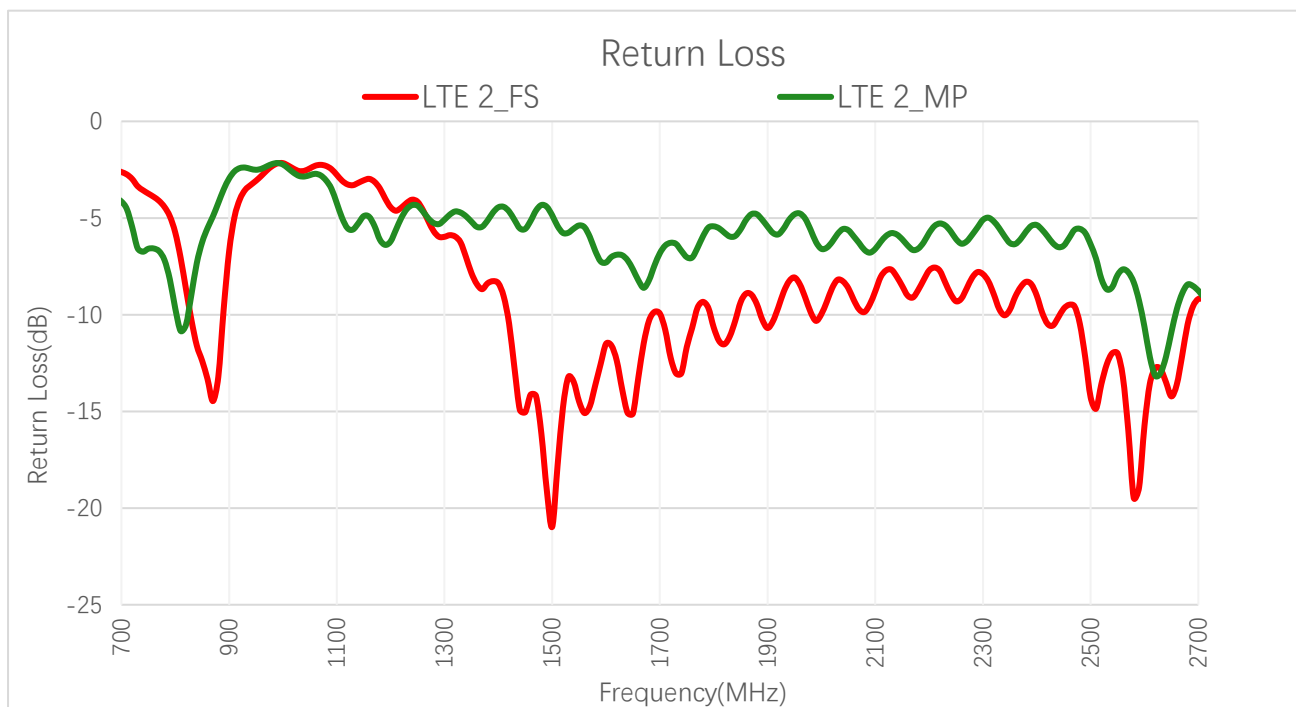

Return Loss (dB) – LTE 2

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	-2.7	-10.3	-6.7	-2.8	-	-10.8	-13.0	-9.4
MP	-	-	-4.5	-9.0	-3.0	-2.5	-	-6.4	-6.7	-4.8
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	-8.1	-8.0	-9.7	-9.7	-15.7	-9.6	-	-	-	-
MP	-4.8	-5.9	-6.3	-6.4	-10.6	-8.5	-	-	-	-


3.1.3. Isolation

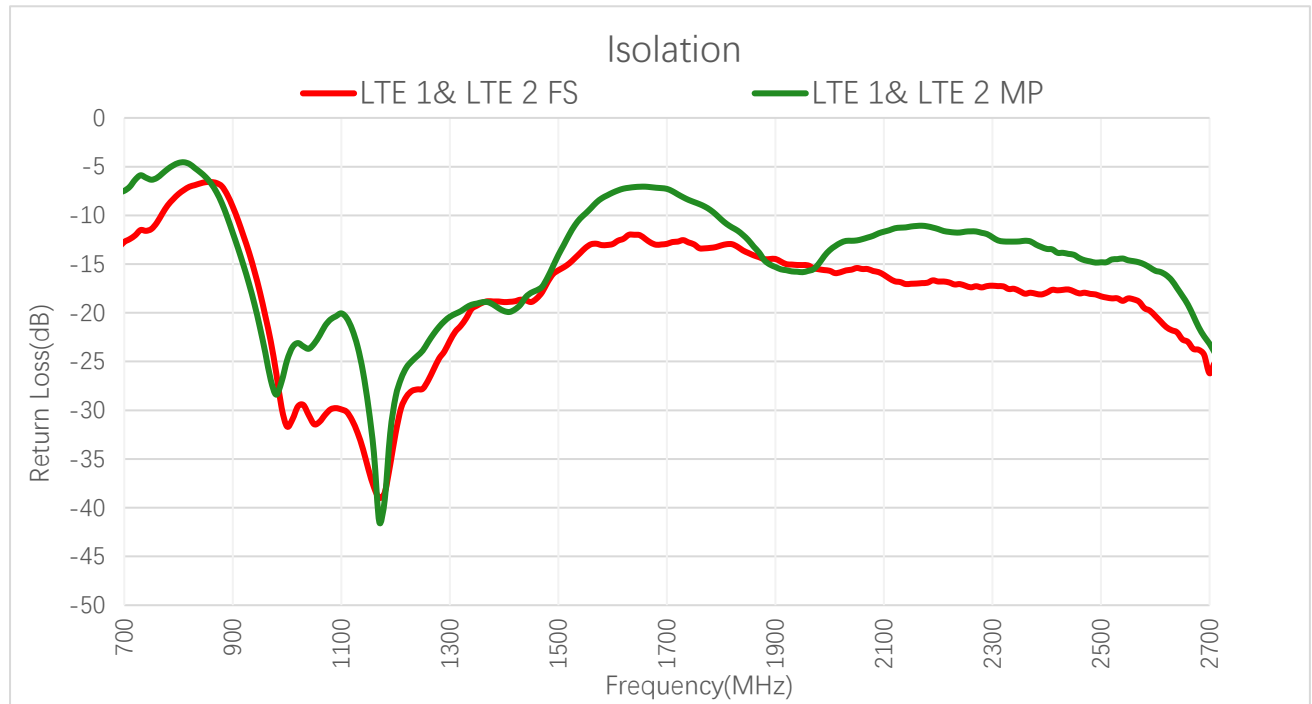

Band	B71	B12/ B13/ B28	B5/ B8/ B26	n74/ n75/ n76	B1/ B2/ B3	B40	Wi-Fi 2G	B38/ B41	Wi-Fi 5G
Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	5150– 5850
FS	-	-7.4	-6.6	-	-12.5	-17.2	-17.6	-18.3	-
MP	-	-4.6	-4.7	-	-7.3	-12.3	-13.4	-14.4	-


3.2. Radiation Performance Test

3.2.1. Efficiency

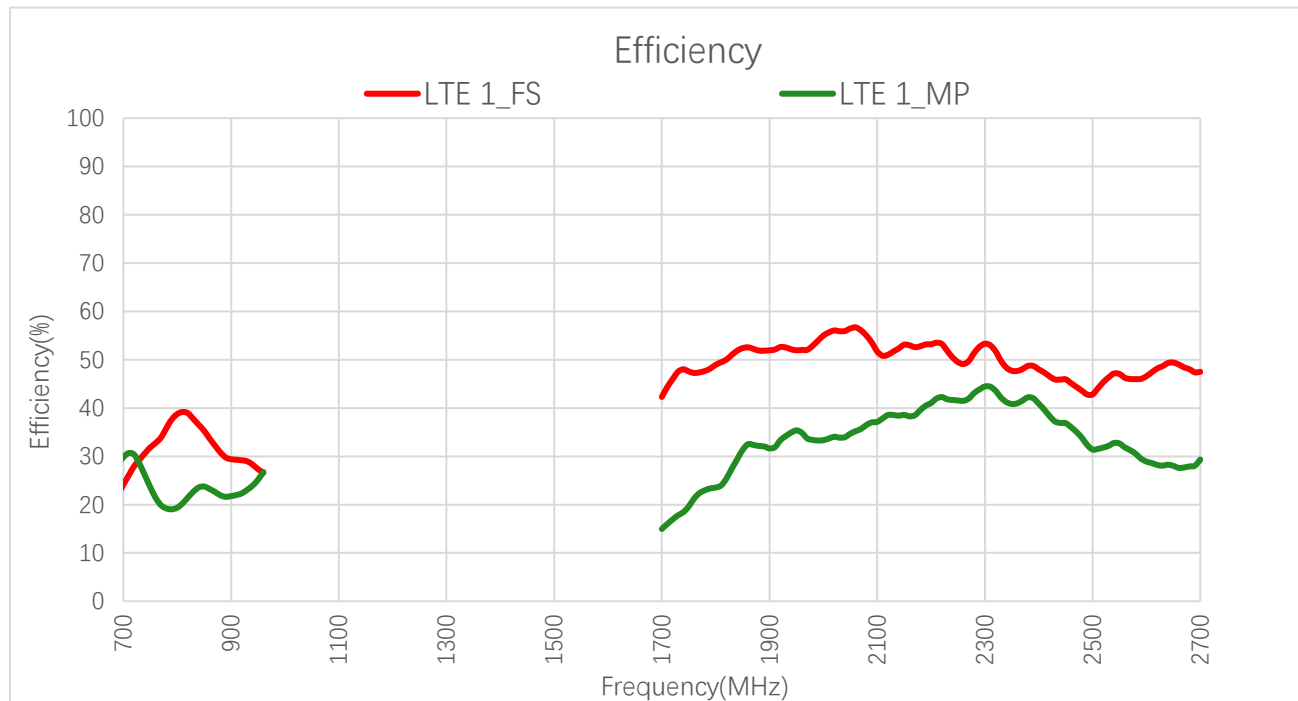

Efficiency (%) – LTE 1


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	26.1	37.7	29.4	26.6	-	44.3	48.0	51.9
MP	-	-	30.7	22.7	21.8	26.7	-	16.0	18.5	32.2
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	52.0	52.3	47.7	45.9	46.6	47.4	-	-	-	-
MP	35.4	38.4	40.8	36.9	28.9	28.1	-	-	-	-

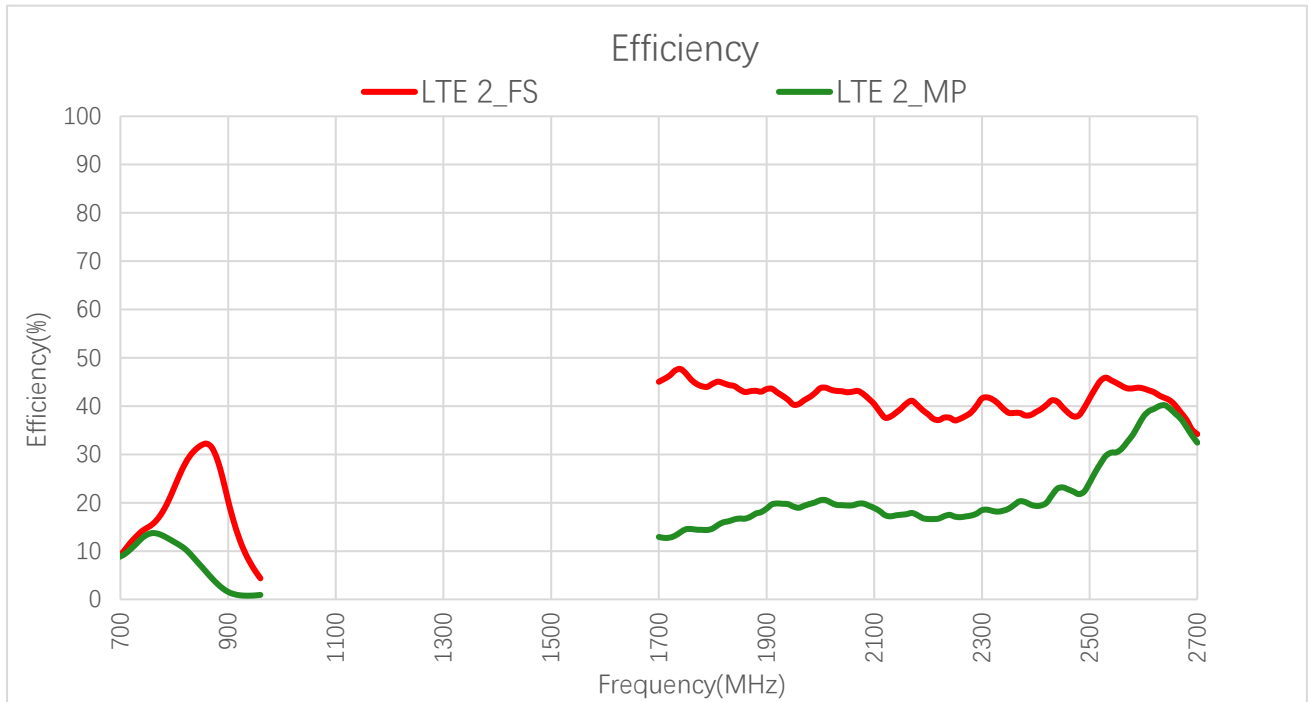

Efficiency (%) – LTE 2


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	10.5	29.8	20.5	4.4	-	45.6	47.7	43.2
MP	-	-	9.6	9.4	1.6	0.9	-	12.7	13.9	17.8
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	40.3	38.6	38.6	39.8	43.7	35.2	-	-	-	-
MP	19.2	17.4	18.8	23.2	37.9	34.0	-	-	-	-

3.2.2. Average Gain

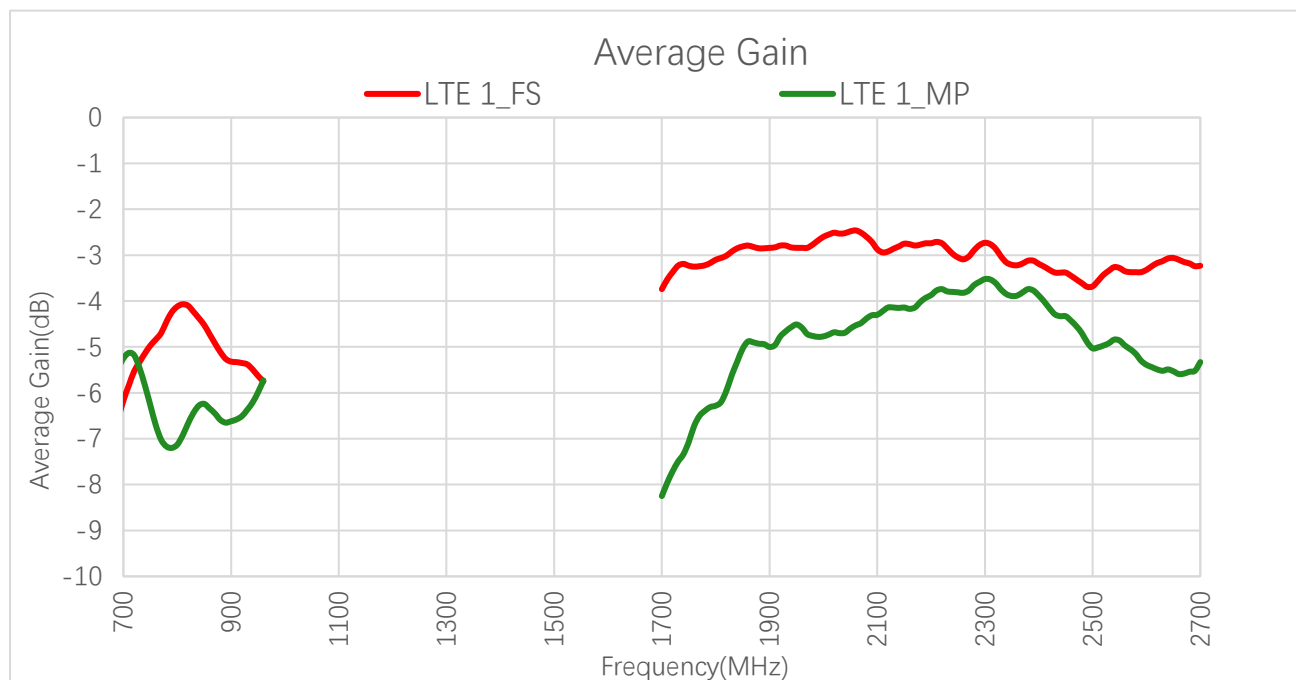

Average Gain (dB) – LTE 1


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	-5.8	-4.2	-5.3	-5.8	-	-3.5	-3.2	-2.9
MP	-	-	-5.1	-6.4	-6.6	-5.7	-	-8.0	-7.3	-4.9
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	-2.8	-2.8	-3.2	-3.4	-3.3	-3.2	-	-	-	-
MP	-4.5	-4.2	-3.9	-4.3	-5.4	-5.5	-	-	-	-

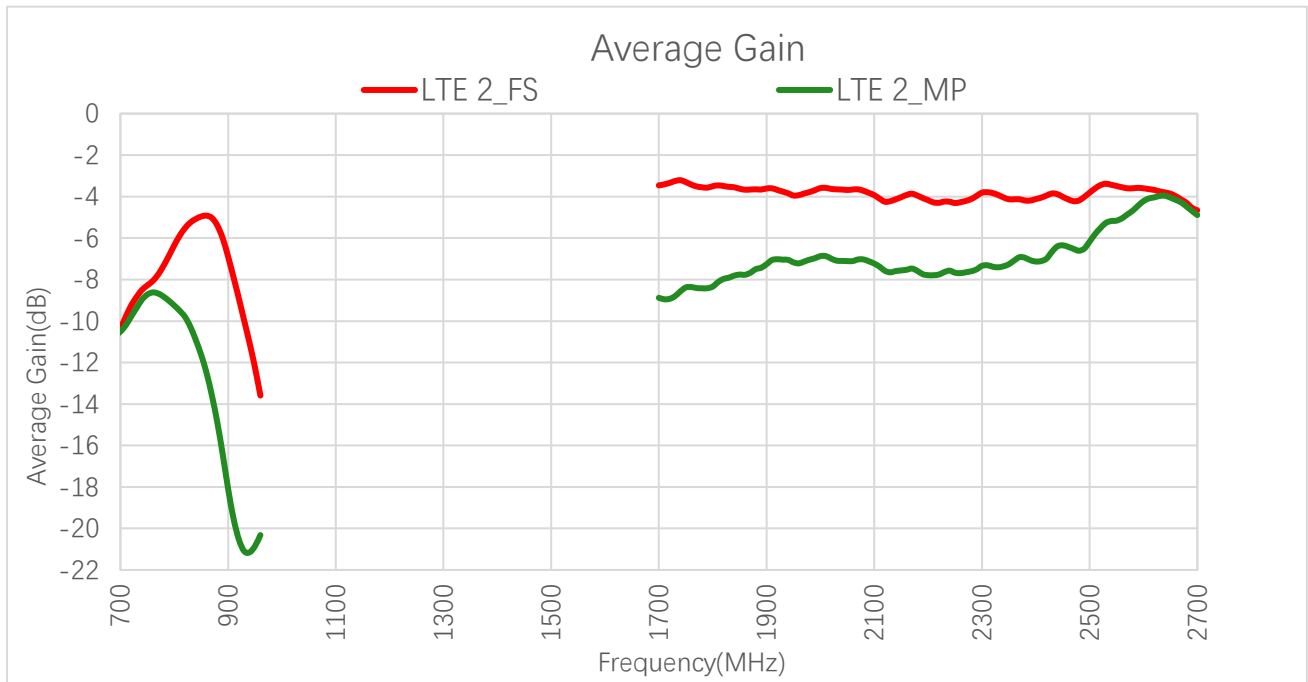

Average Gain (dB) – LTE 2


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	-9.8	-5.3	-6.9	-13.6	-	-3.4	-3.2	-3.7
MP	-	-	-10.2	-10.3	-18.1	-20.3	-	-9.0	-8.6	-7.5
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	-4.0	-4.1	-4.1	-4.0	-3.6	-4.5	-	-	-	-
MP	-7.2	-7.6	-7.3	-6.4	-4.2	-4.7	-	-	-	-

3.2.3. Peak Gain

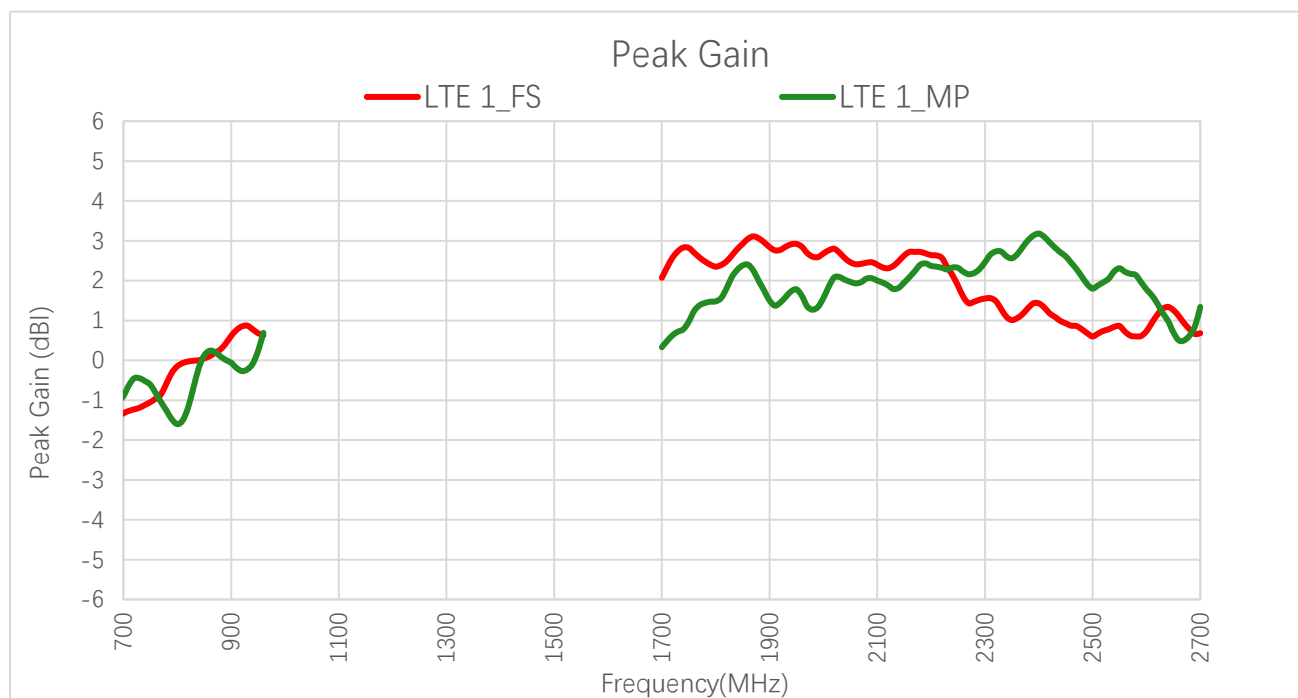

Peak Gain (dBi) – LTE 1

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	-1.3	0.0	0.6	0.6	-	2.3	2.8	3.1
MP	-	-	-0.6	-0.7	-0.1	0.7	-	0.5	0.8	2.0
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	2.9	2.5	1.0	0.9	0.7	0.7	-	-	-	-
MP	1.8	1.8	2.6	2.6	1.8	0.9	-	-	-	-

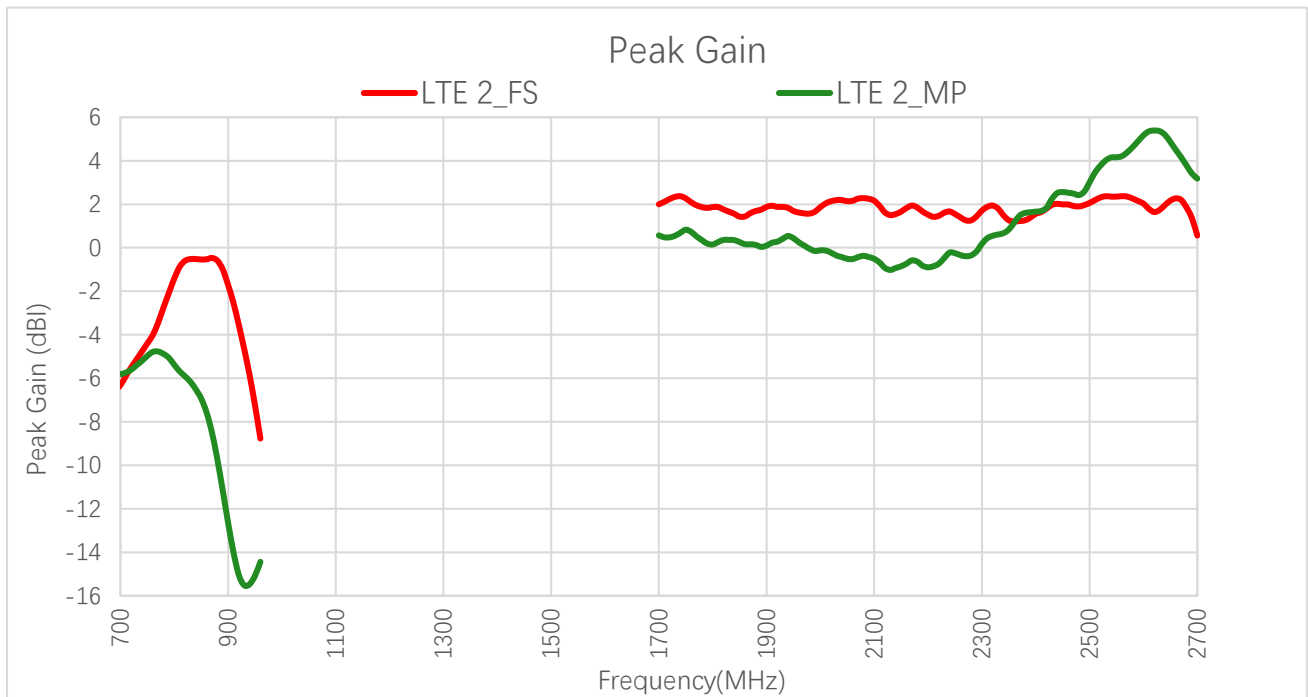


Peak Gain (dBi) – LTE 2

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	-5.9	-0.5	-1.7	-8.8	-	2.1	2.4	1.7
MP	-	-	-5.7	-6.2	-12.6	-14.4	-	0.5	0.7	0.1
Frequency (MHz)	1950	2140	2350	2450	2600	2690	4700	5000	5500	6000
FS	1.7	1.6	1.3	2.0	2.0	1.4	-	-	-	-
MP	0.4	-0.9	0.8	2.6	5.2	3.4	-	-	-	-

3.2.4. 3D & 2D Radiation Pattern



3.2.4.1 Test Status: In Free Space

- Test Chamber: HF-S-1


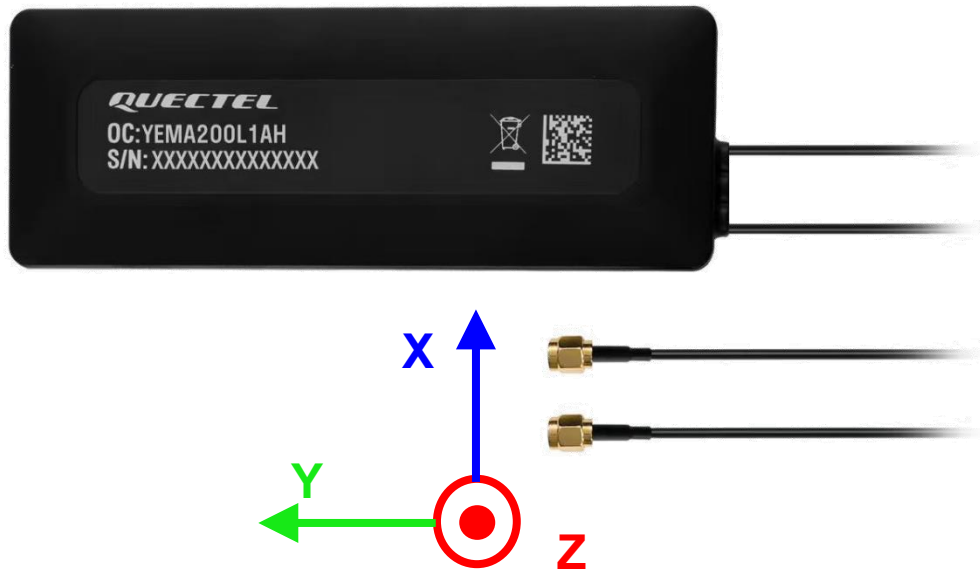


● **LTE 1**


710 MHz




830 MHz




Phi=0




Phi=90





Phi=0





Phi=90




900 MHz




1740 MHz




Phi=0




Phi=90





Phi=0




Phi=90



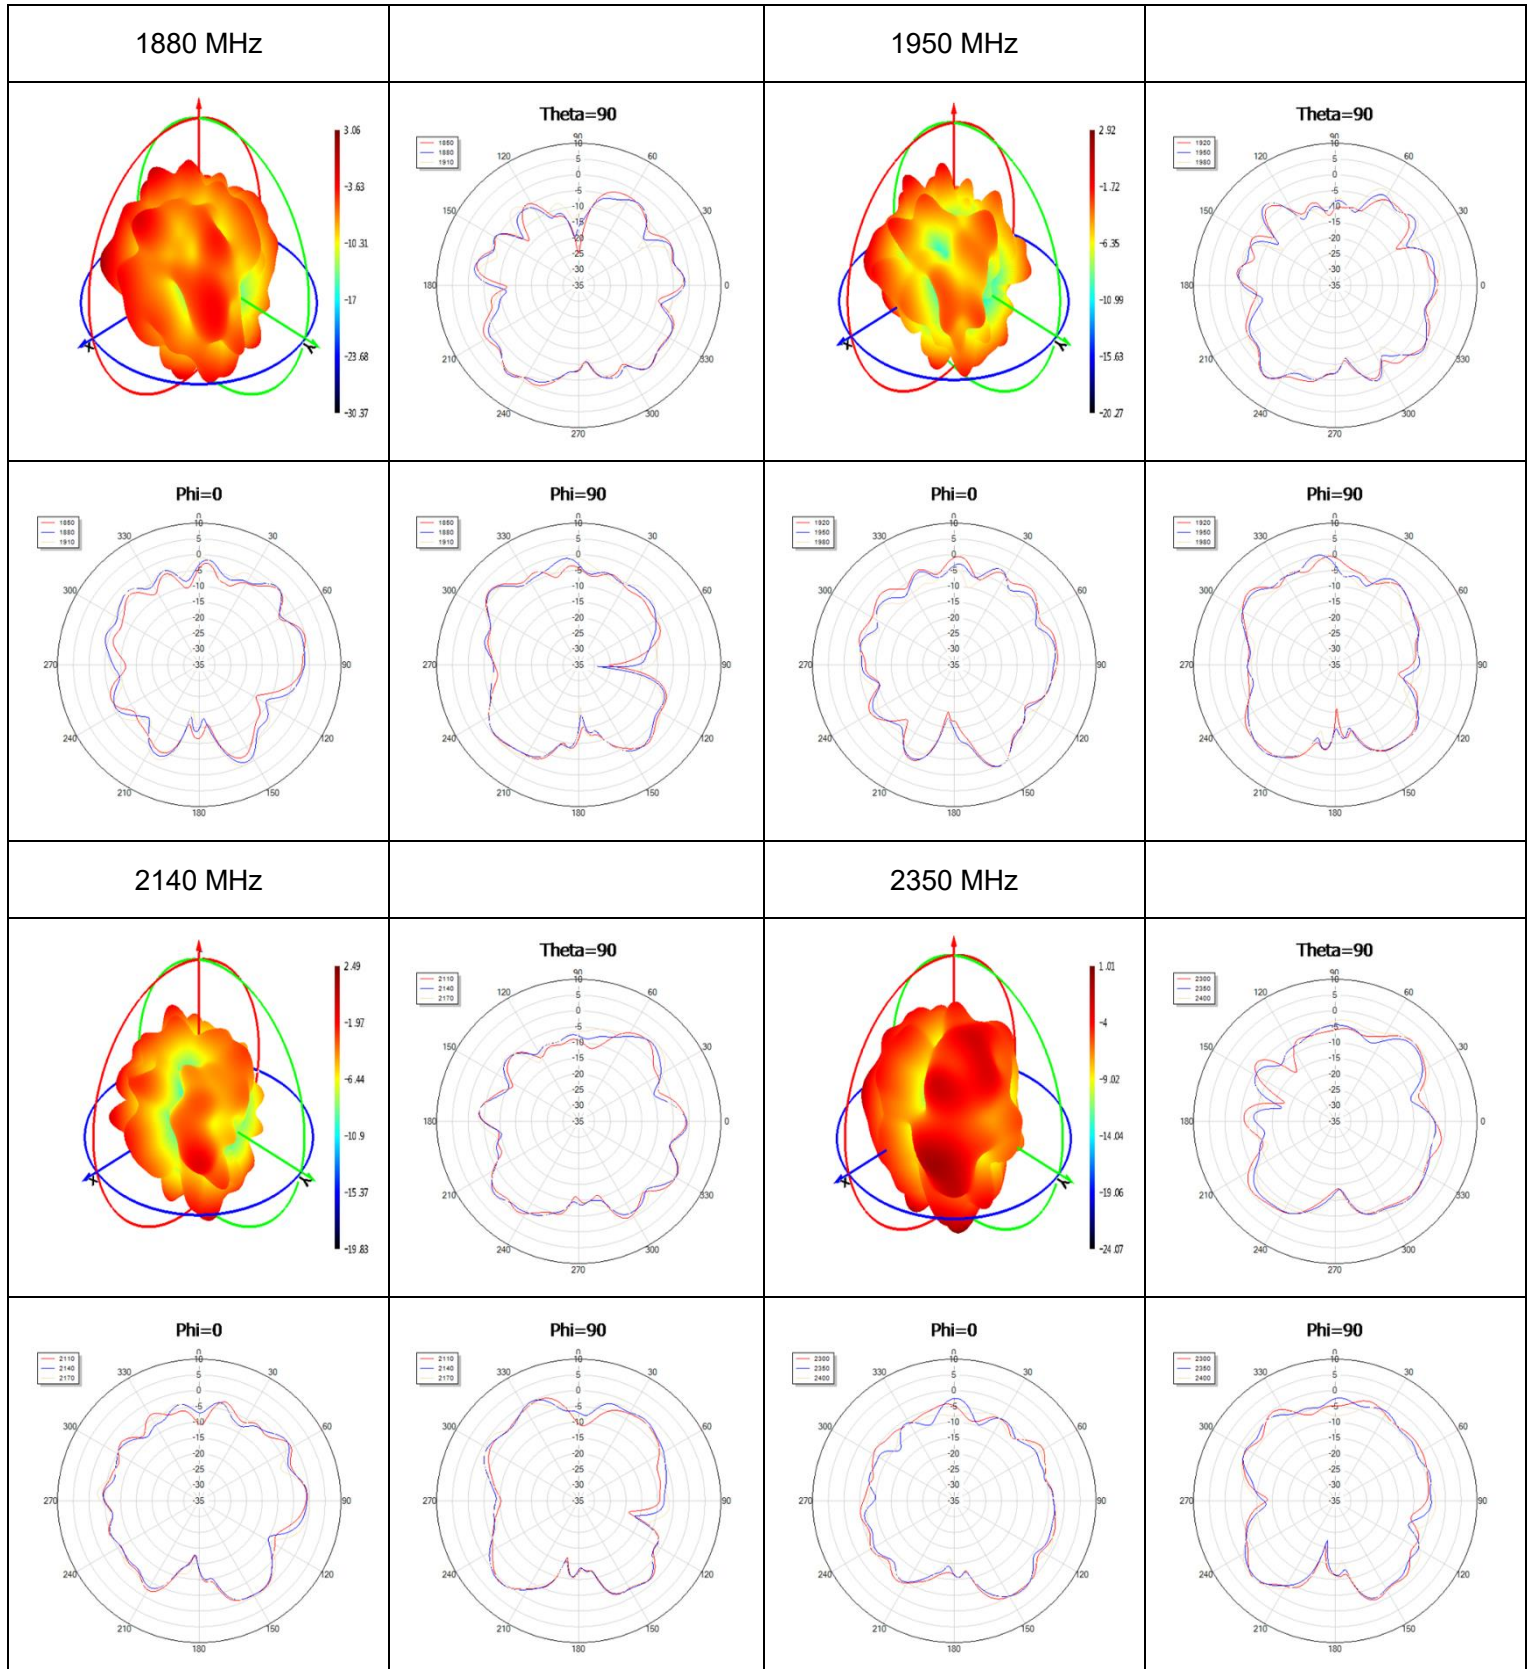


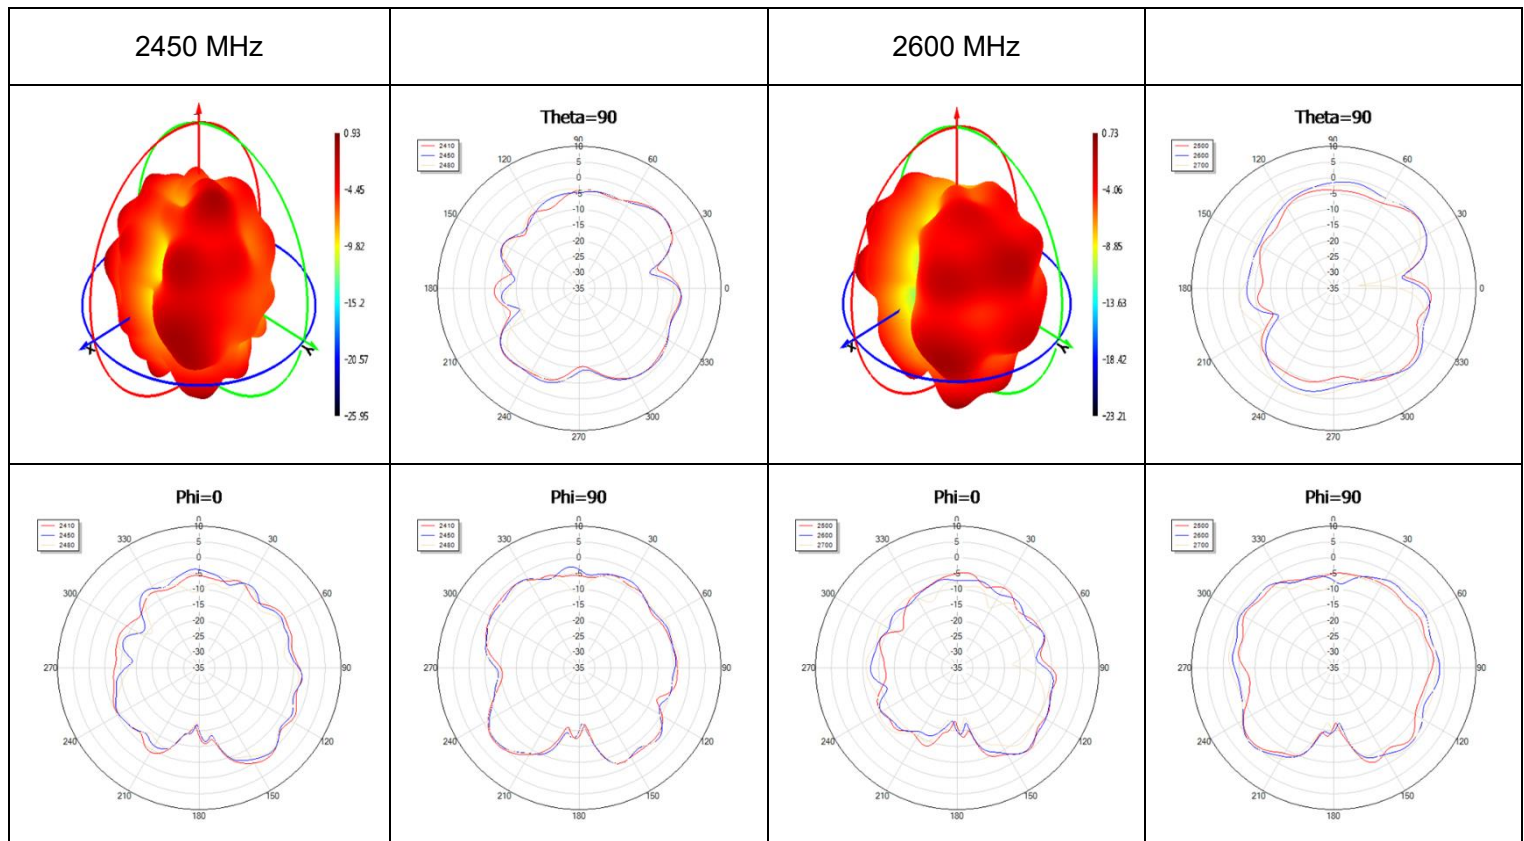


● **LTE 1 Max Peak Gain**

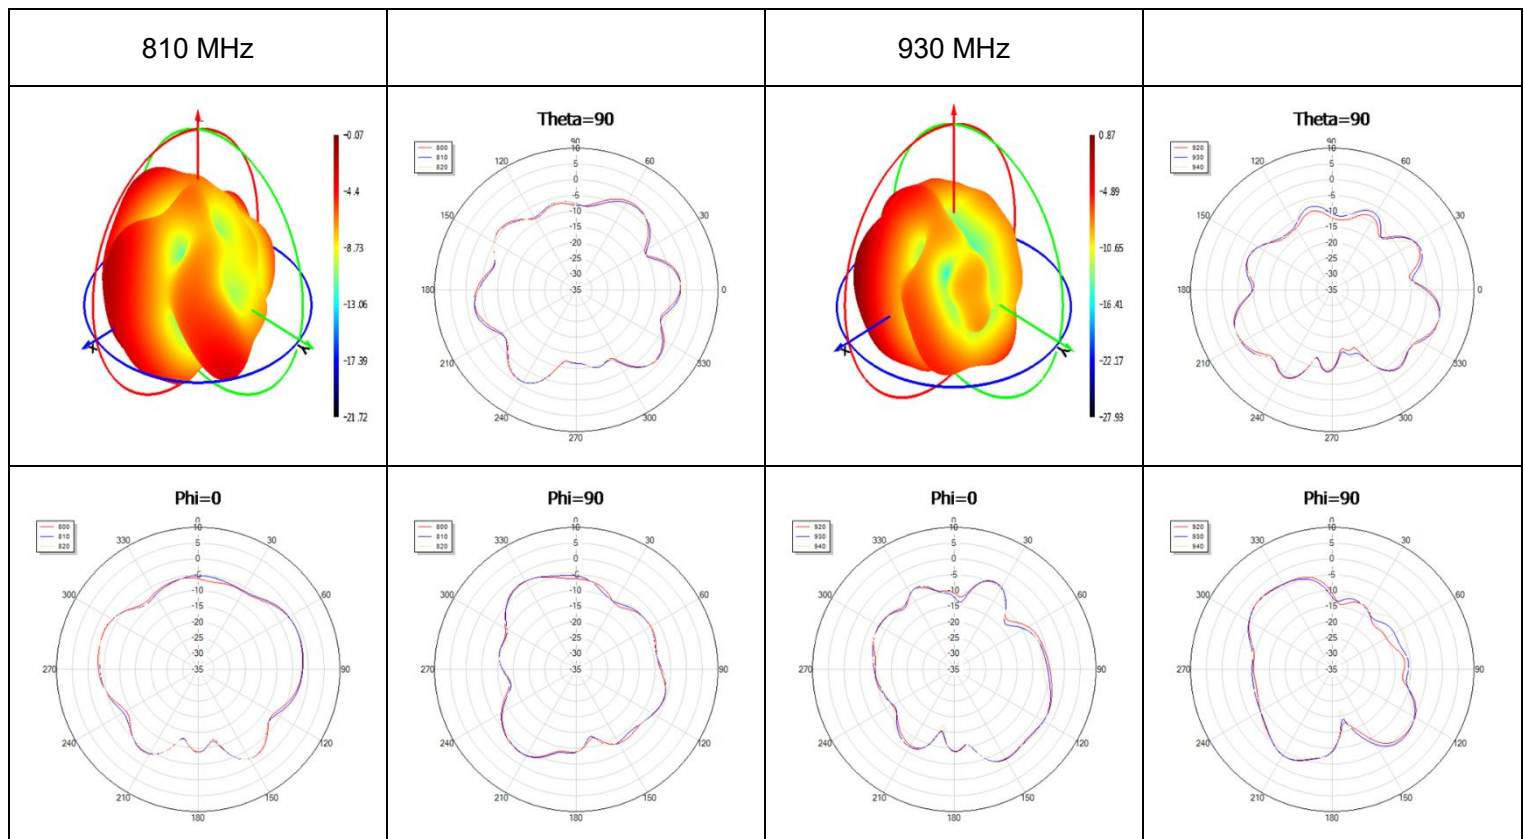


1870 MHz




Theta=90




2310 MHz




Theta=90




Phi=0




Phi=90




Phi=0




Phi=90




2400 MHz




Theta=90




2640 MHz




Theta=90




Phi=0




Phi=90



Phi=0





Phi=90





● **LTE 2**


710 MHz




830 MHz




Phi=0




Phi=90





Phi=0





Phi=90




900 MHz




1740 MHz




Phi=0




Phi=90





Phi=0




Phi=90



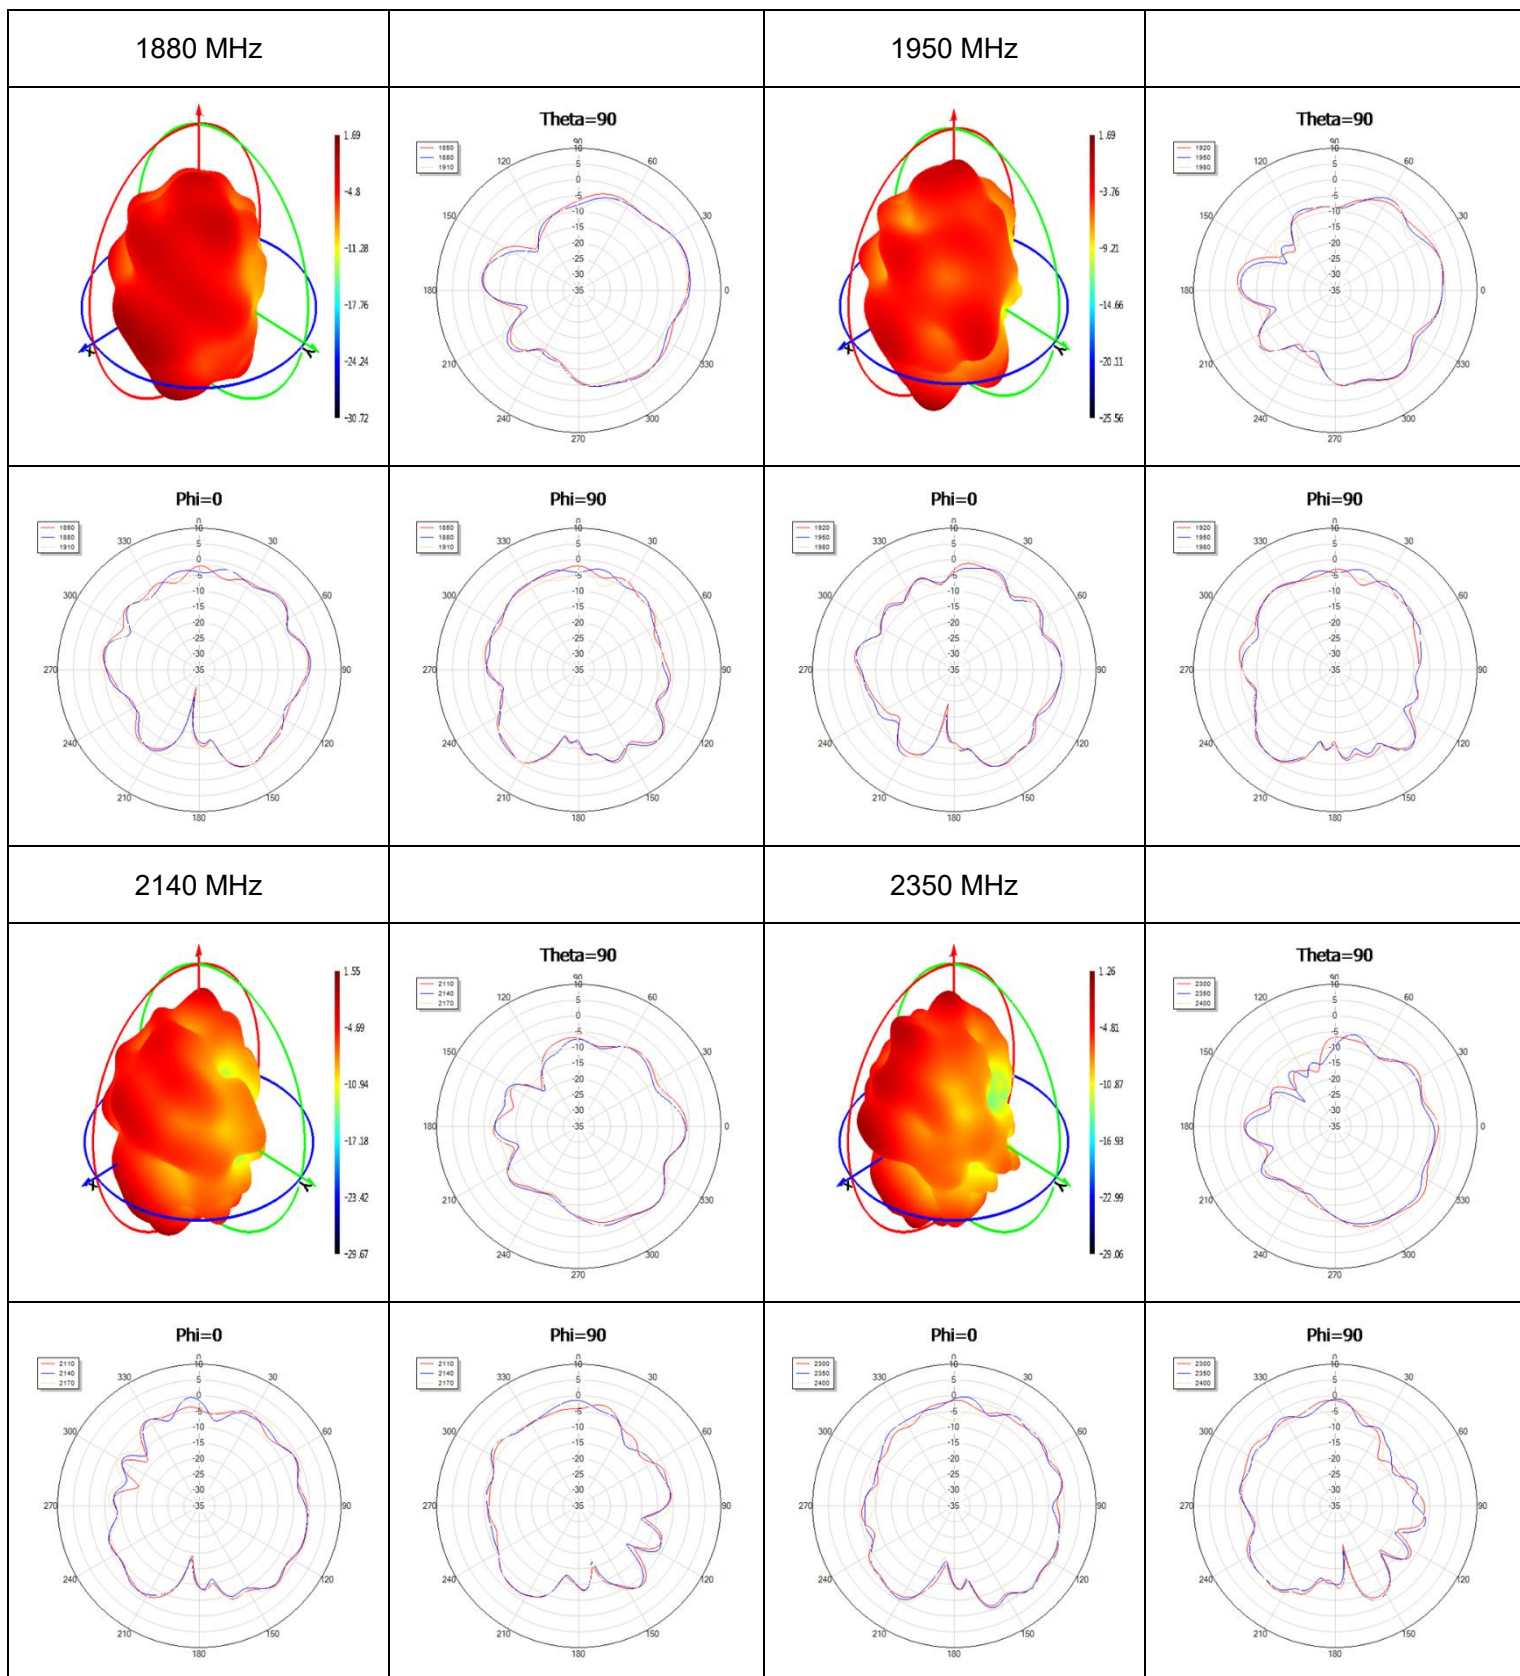


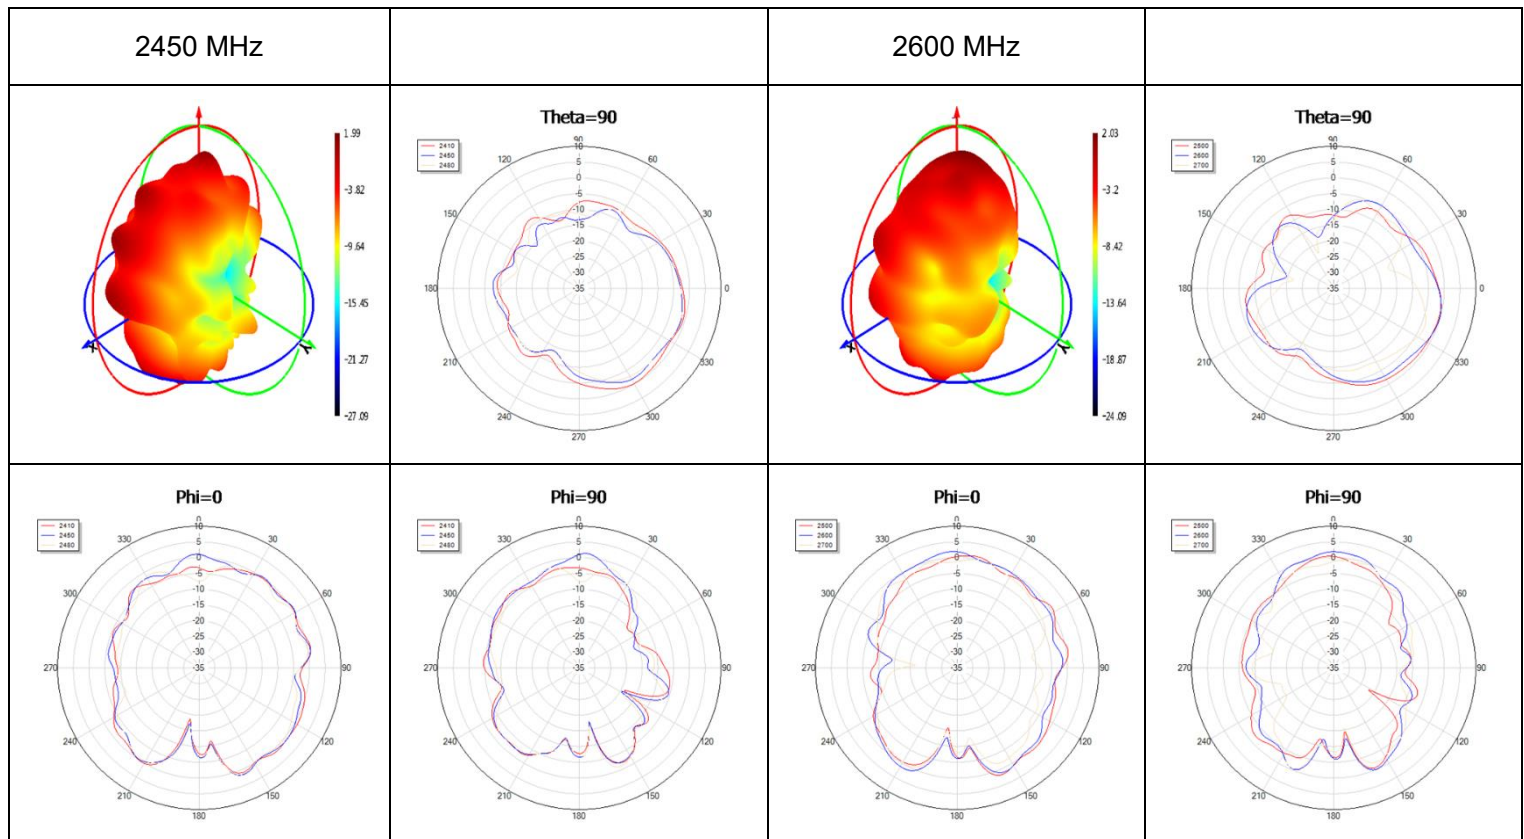


● **LTE 2 Max Peak Gain**

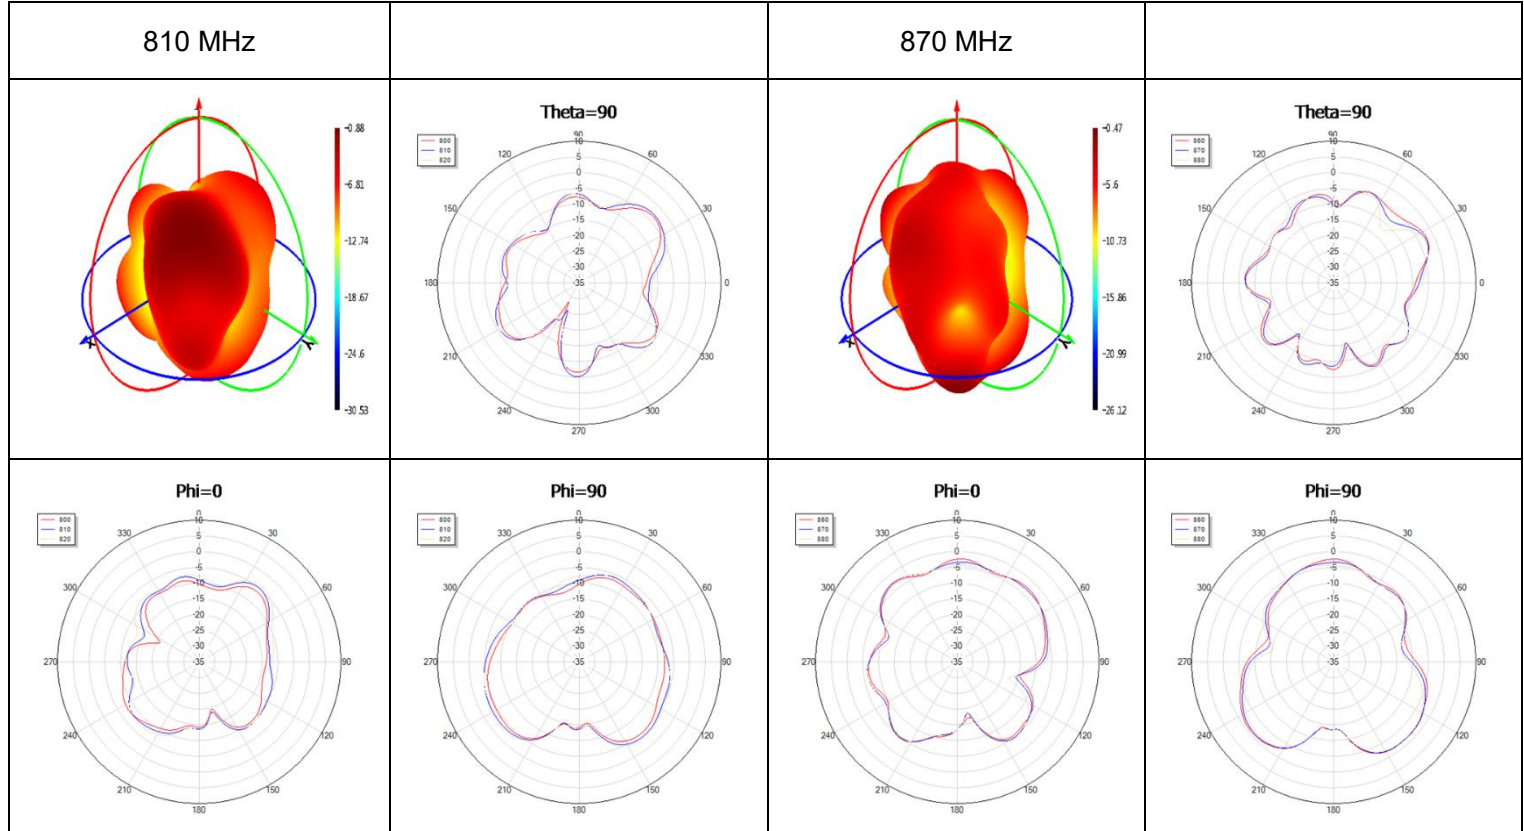


1740 MHz




Theta=90




2320 MHz




Theta=90




Phi=0




Phi=90




Phi=0




Phi=90




2500 MHz




Theta=90




2530 MHz




Theta=90




Phi=0




Phi=90



Phi=0




Phi=90





3.2.4.2 Test Status: On 300 mm × 300 mm Metal Plane

- Test Chamber: HF-S-1


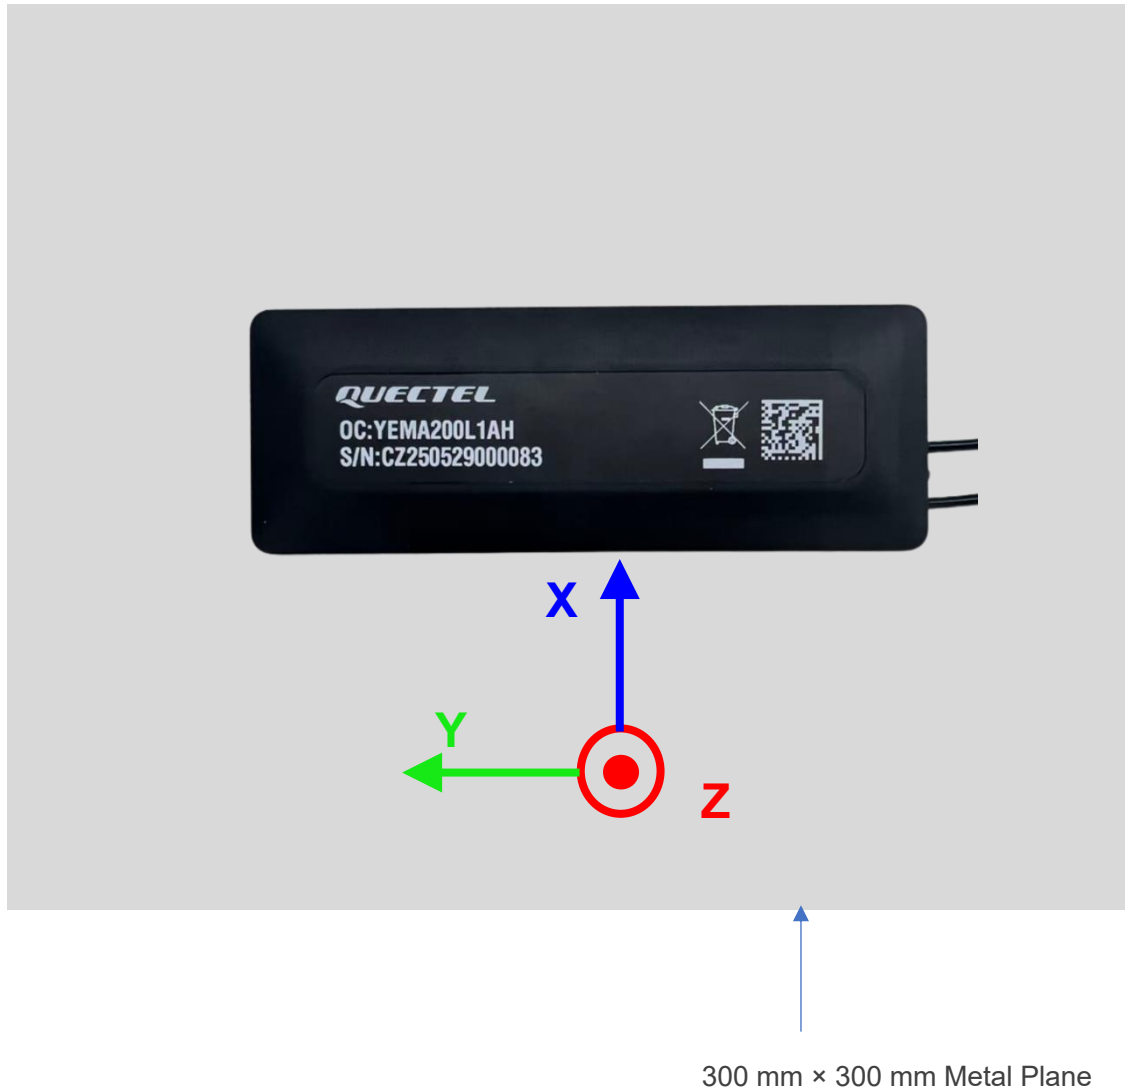


● **LTE 1**


710 MHz




830 MHz




Phi=0




Phi=90





Phi=0





Phi=90




900 MHz




1740 MHz




Phi=0




Phi=90





Phi=0




Phi=90




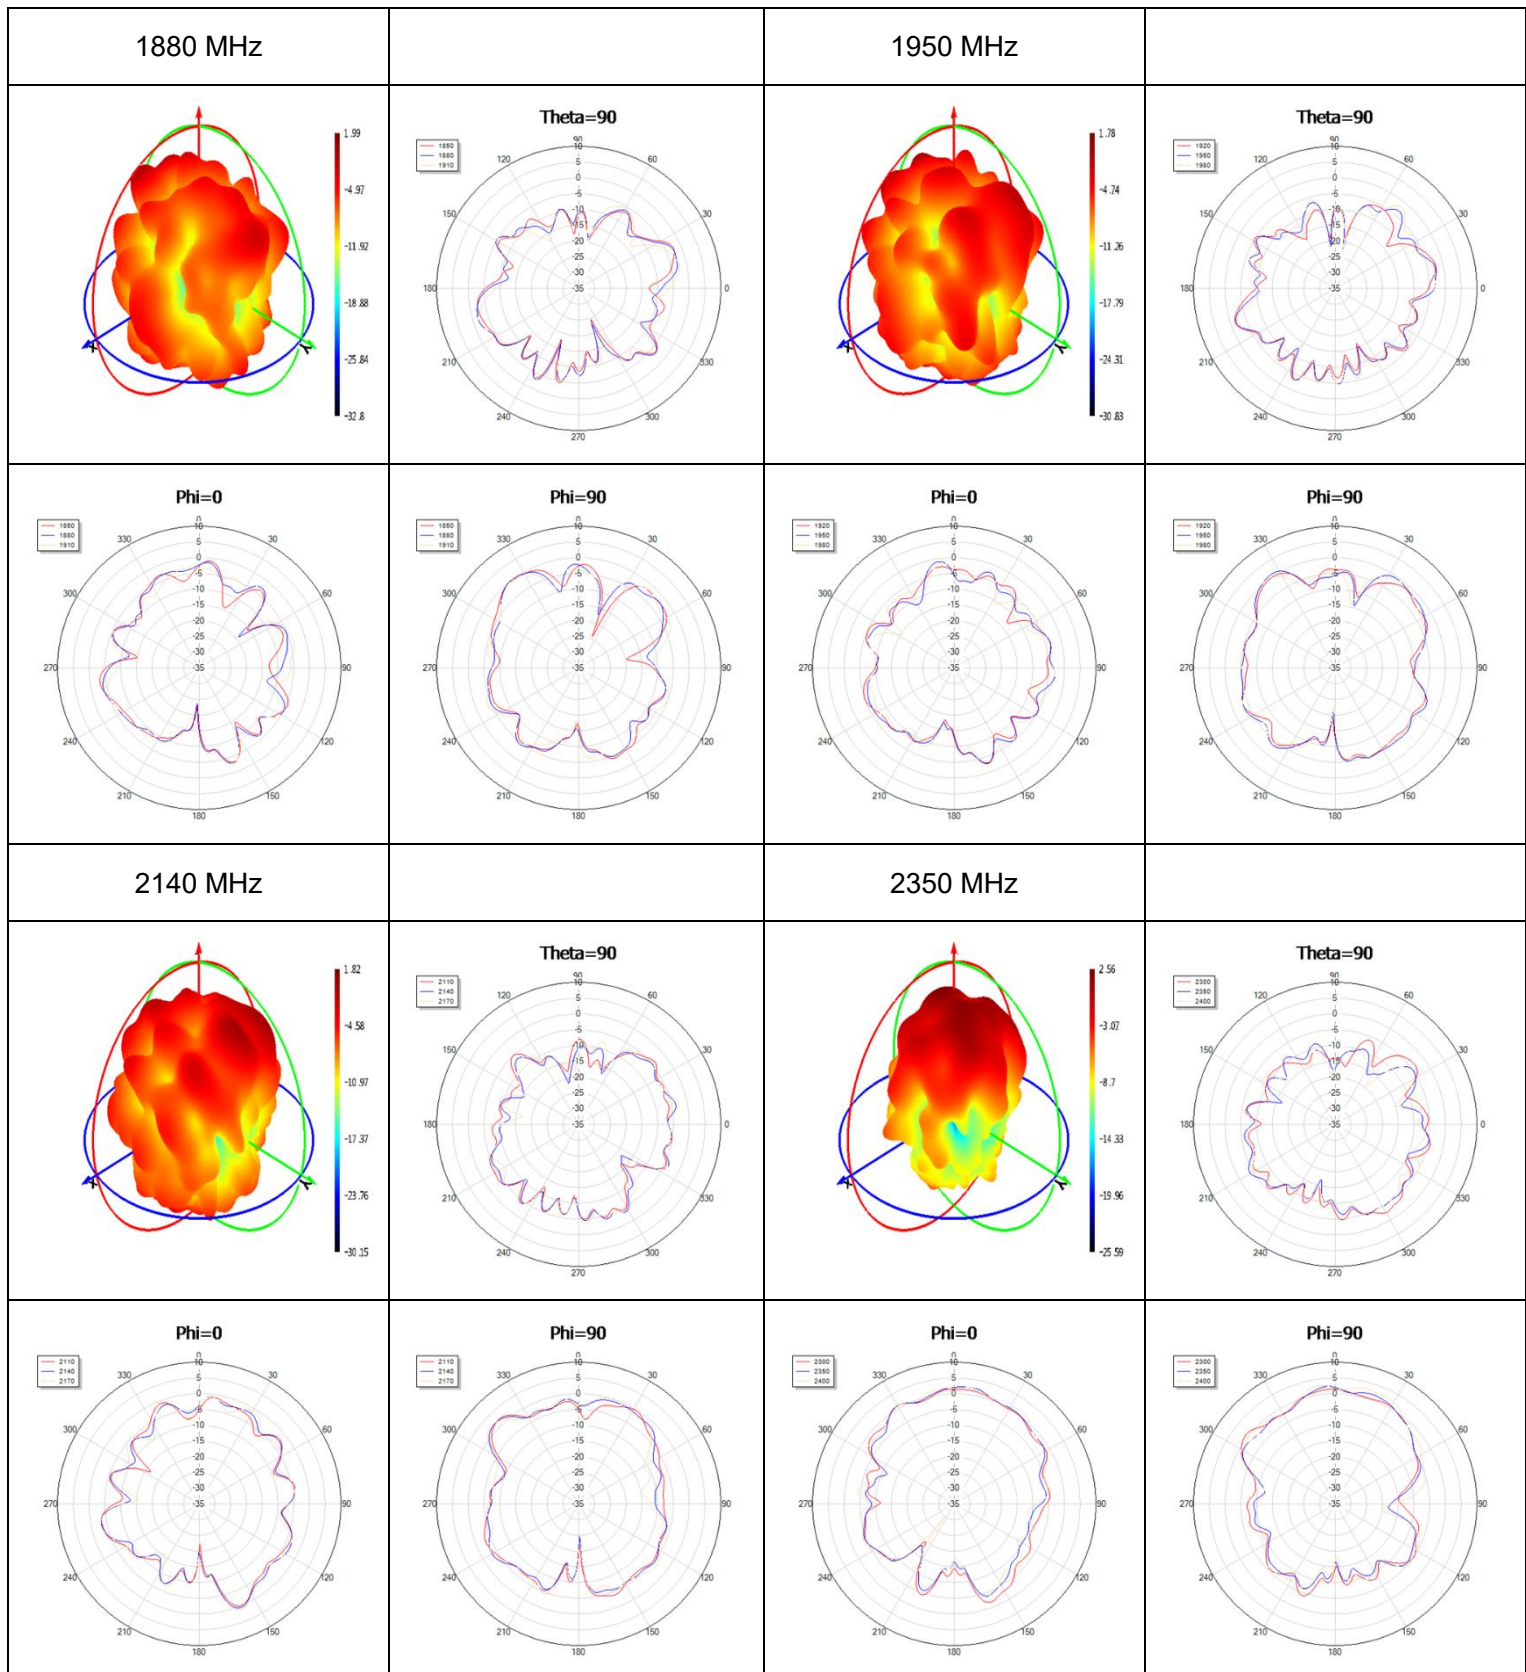


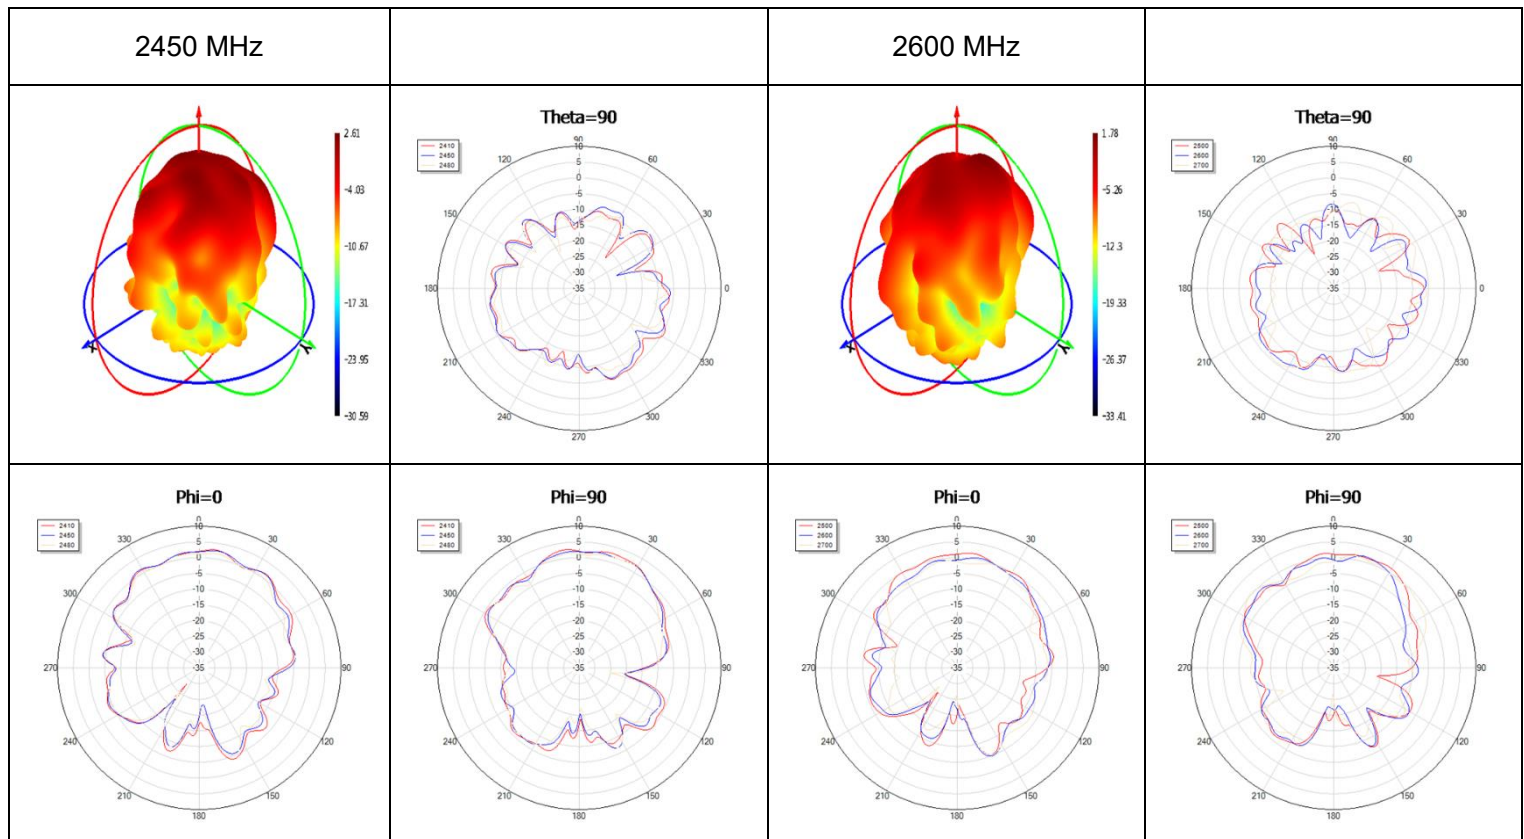



● **LTE 1 Max Peak Gain**

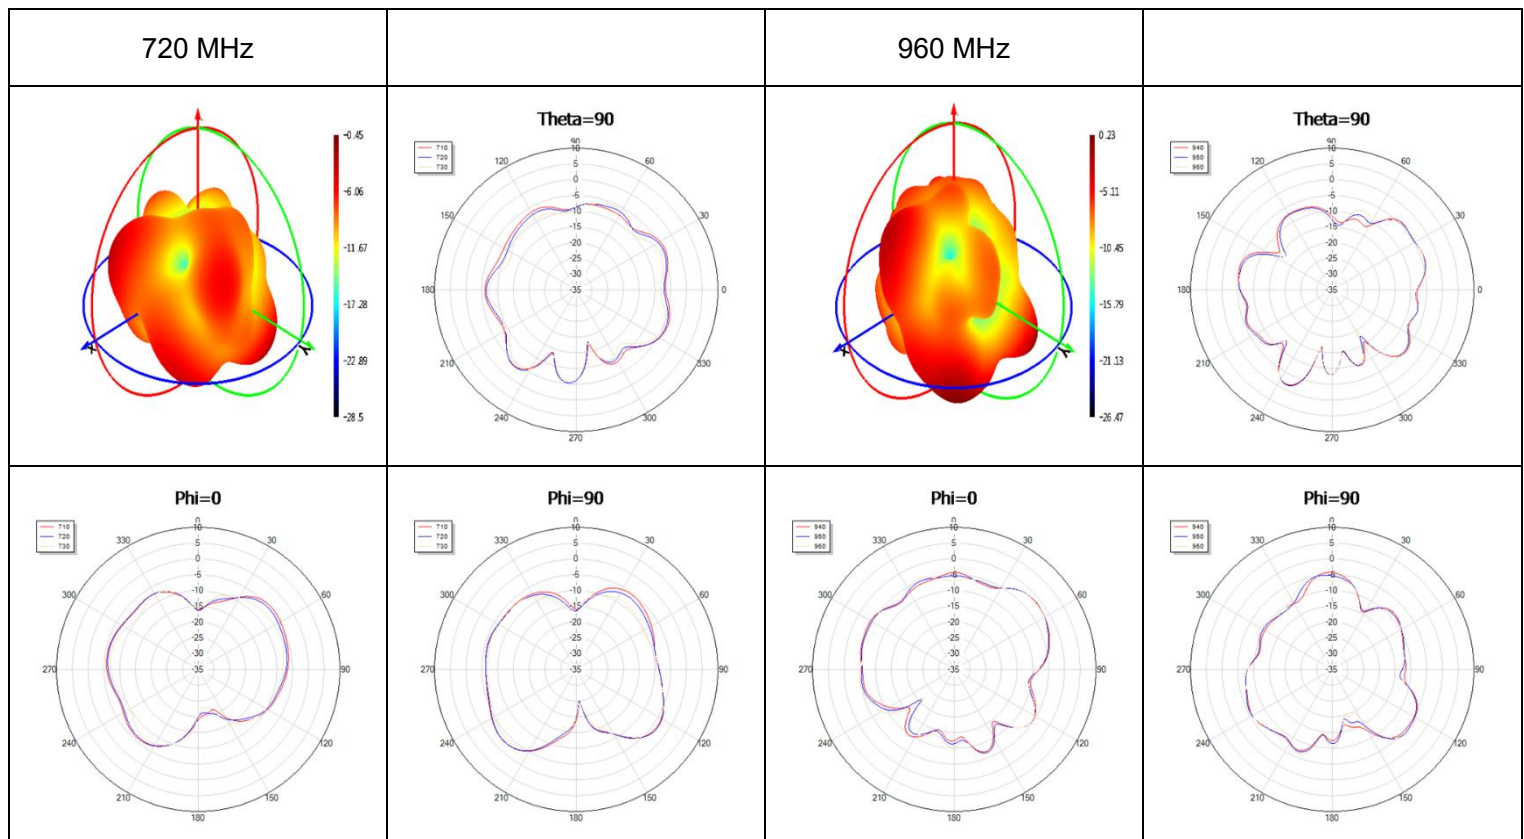


1860 MHz




2390 MHz




Phi=0




Phi=90





Phi=0





Phi=90




2400 MHz




2550 MHz




Phi=0




Phi=90



Phi=0





Phi=90





● **LTE 2**


710 MHz




830 MHz




Phi=0




Phi=90





Phi=0





Phi=90




900 MHz




1740 MHz




Phi=0




Phi=90





Phi=0




Phi=90




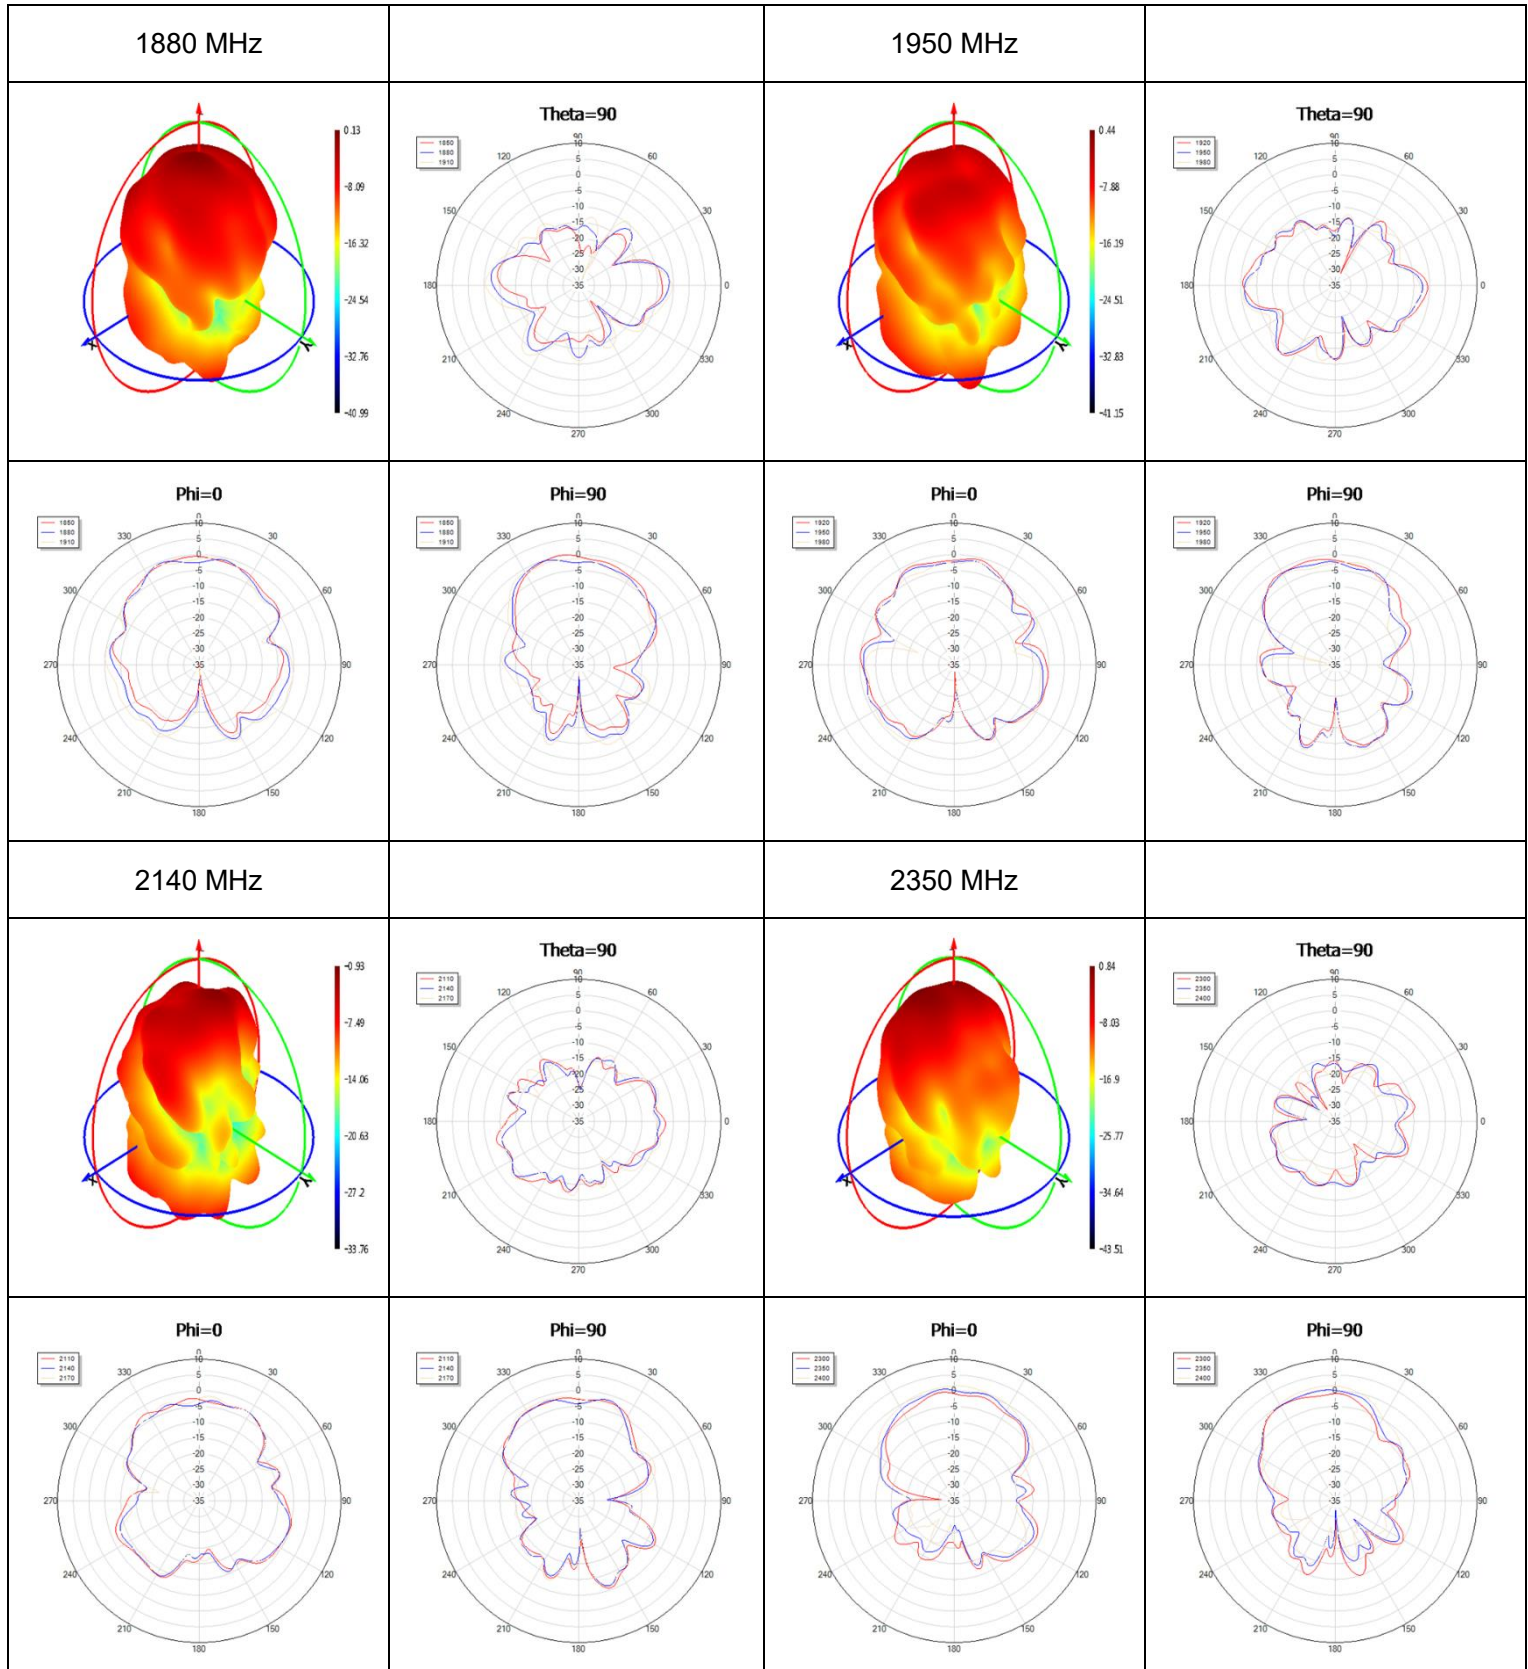


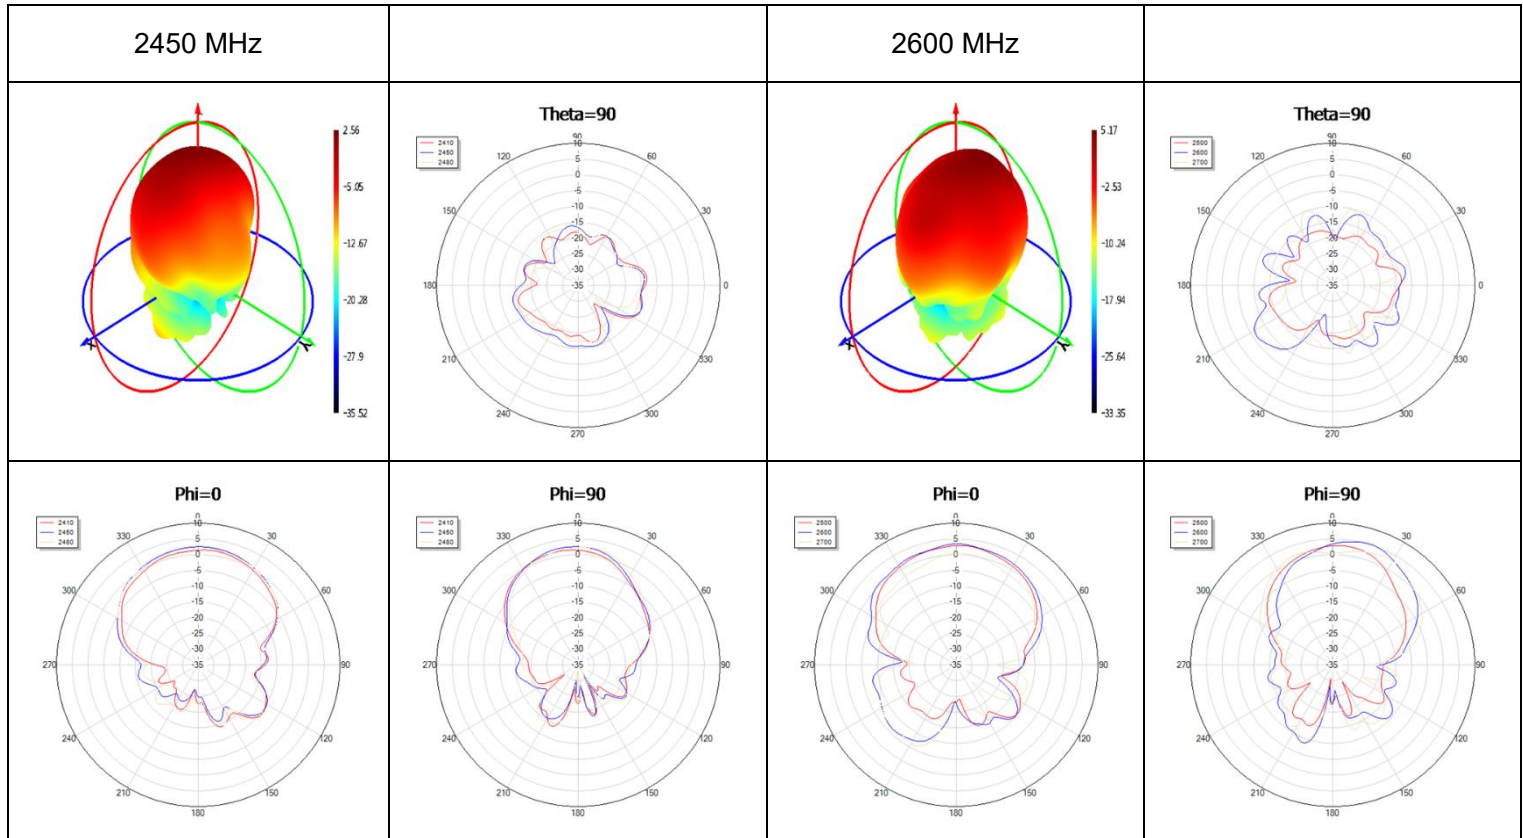



● **LTE 2 Max Peak Gain**

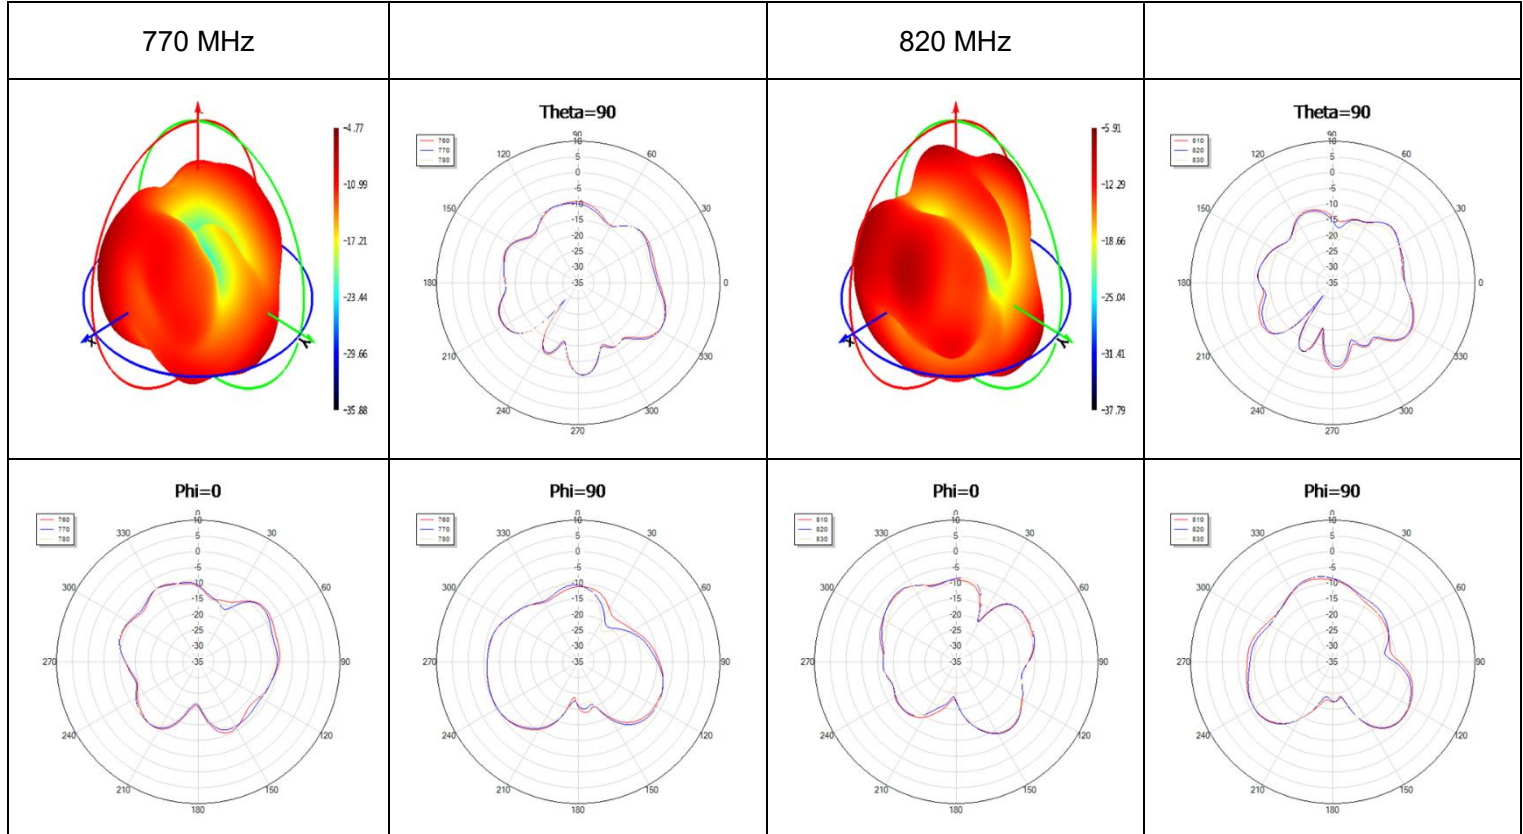


1750 MHz




2400 MHz




Phi=0




Phi=90





Phi=0





Phi=90




2500 MHz




2620 MHz




Phi=0




Phi=90




Phi=0




Phi=90




4 Packaging

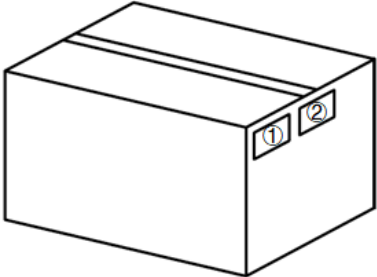Step	Packaging Picture / 2D Picture	Description
1		1 antenna product in a small PE bag. (1 Antenna / Small PE Bag)
2		8 antenna products in a big PE bag. (8 Antennas / Big PE Bag)
3		(5 PE Bags / Carton Box) (40 Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. <u>Carton Size:</u> <u>L × W × H = 405 × 293 × 185 mm</u>
4		Position for Attaching Labels ① Carton Label ② Quality Label

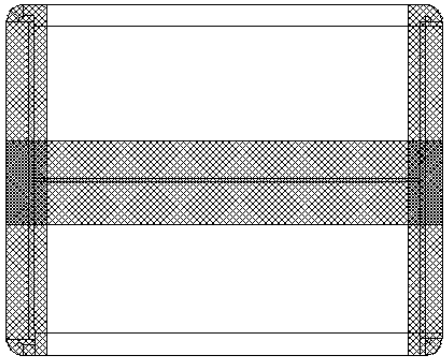5		Sealing Cartons H-shaped sealing cartons
Note	The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.	

5 Installation

- Recommended clean surface size and material as below view (adhesive).

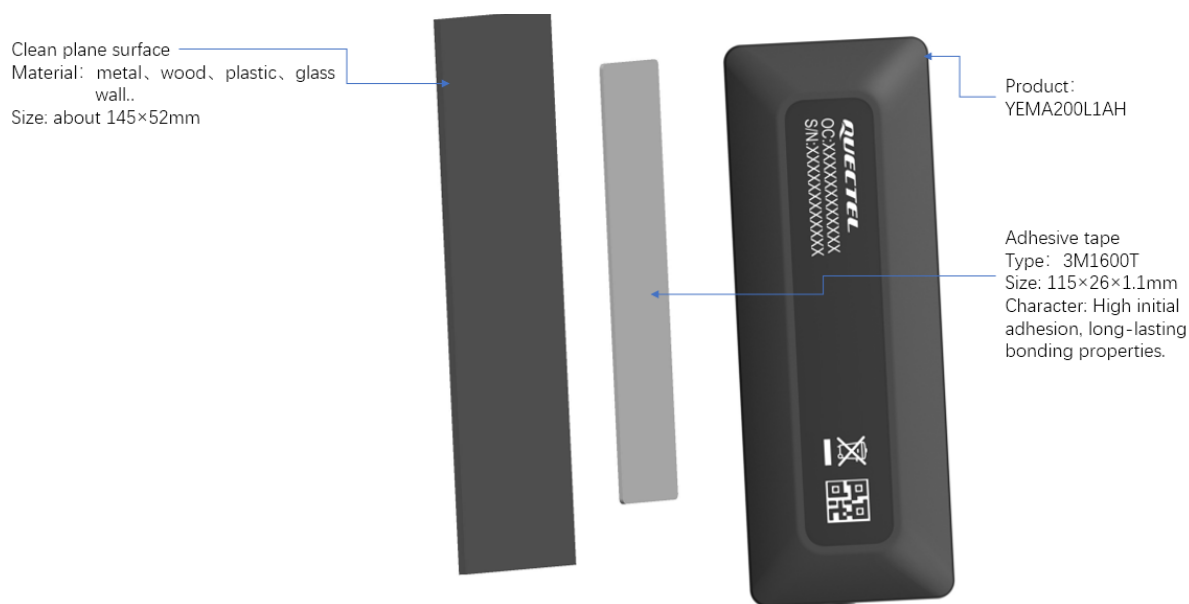

Installation Instructions					
Tube Mark	Tube Color	Cable	Connector	Frequency (MHz)	Technology
LTE1	Black	RG174LL	SMA Male	698–960 MHz, 1710–2690 MHz	LTE
LTE2	Black	RG174LL	SMA Male	698–960 MHz, 1710–2690 MHz	LTE

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2025. All rights reserved.

Revision History

Version	Date	Author	Note
-	2025-10-15	Christopher Yao/ Rojin Luo/ Riva Ren/ Rainey Liao	Creation of the document
1.0	2025-10-15	Christopher Yao/ Rojin Luo/ Riva Ren/ Rainey Liao	First official release



www.quectel.com