


# Quectel FCS960K-N

## Wi-Fi 6 & Bluetooth 5.4 Module Ultra-compact LCC Package

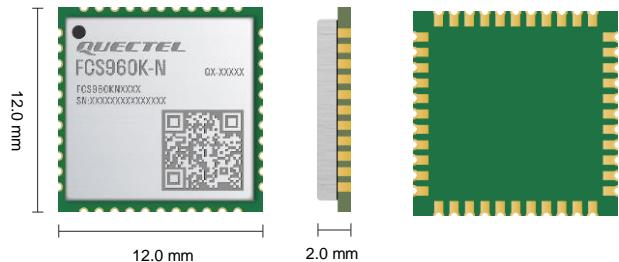

FCS960K-N is a high-performance Wi-Fi 6 and Bluetooth 5.4 LCC package module launched by Quectel, which can be used for WLAN and Bluetooth connections. The module complies with IEEE 802.11a/b/g/n/ac/ax protocol, supporting up to 11ax MCS 11 rate at 40 MHz channel, and the transmission rate can reach 286.8 Mbps. FCS960K-N adopts reliable SDIO 3.0 interface, and provides 2.4 GHz and 5 GHz power amplifiers and low noise amplifiers.

With an ultra-compact size of 12.0 mm × 12.0 mm × 2.0 mm, FCS960K-N optimizes the size and cost for end-products, which fully meets the demands of size-sensitive applications.

Surface-mount Technology (SMT) makes FCS960K-N an ideal solution for durable and rugged designs. The low profile and small size of LCC package ensure that FCS960K-N can be easily embedded into size-constrained applications and provide reliable connectivity with these applications. The advanced package, integrated shielding cover and the laser-engraved label with better heat dissipation and indelible markings allow for large-scale automated manufacturing that has strict requirements on cost and efficiency. Coupled with its compact size and wide operating temperature range, FCS960K-N can meet various needs of commercial and industrial applications.



## Key Features

- ✓ 2.4 GHz/5 GHz Wi-Fi bands and Bluetooth 5.4
- ✓ Wi-Fi/Bluetooth antenna 1 × 1
- ✓ SDIO 3.0 interface that supports higher data transmission rate and enables lower power consumption
- ✓ LCC package, convenient for welding
- ✓ Faster time-to-market: simple design minimizes design-in time and development efforts
- ✓ Wide operating temperature range: -20 °C to +80 °C



IEEE 802.11  
a/b/g/n/ac/ax



Bluetooth 5.4



LCC Package



SDIO 3.0  
Interface



Operating Temperature  
Range: -20 °C to +80 °C



Ultra-compact  
Size

# Quectel FCS960K-N

Wi-Fi 6 & Bluetooth 5.4	FCS960K-N
WLAN Protocol	IEEE 802.11a/b/g/n/ac/ax
Wi-Fi Frequency Band	2.4 GHz/ 5 GHz
Wi-Fi/Bluetooth Antenna	1 × 1
Wi-Fi Modulation Mode	DSSS/ CCK/ BPSK/ QPSK/ 16QAM/ 64QAM/ 256QAM/ 1024QAM
2.4 GHz Channel Bandwidth	20 MHz/ 40 MHz
5 GHz Channel Bandwidth	20 MHz/ 40 MHz
Encryption Mode	WEP/ WPA/ WPA2/ WPA3-SAE
Wi-Fi Operating Mode	AP/ STA
Bluetooth Protocol	Bluetooth 5.4
Dimensions	12.0 mm × 12.0 mm × 2.0 mm
Weight	Approx. 0.59 g
Temperature Range	
Operating Temperature	-20 °C to +80 °C
Storage Temperature	-25 °C to +90 °C
Physical Rate (Max.)	
802.11b	11 Mbps
802.11a/g	54 Mbps
802.11n	150 Mbps
802.11ac	200 Mbps
802.11ax	286.8 Mbps
Interfaces	
SDIO 3.0	× 1 (for Wi-Fi)
UART	× 1 (for Bluetooth)
PCM	× 1 (for Bluetooth)
Wi-Fi/Bluetooth Antenna Interface	× 1 (ANT_WIFI/BT <sup>①</sup> )
Bluetooth Antenna Interface*	× 1 (ANT_BT) (Optional)
Electrical Features	
Power Supply Voltage	VBAT: 3.0–3.6 V, Typ. 3.3 V
I/O Power Supply Voltage	VIO: 1.7–3.6 V, Typ. 1.8 V/ 3.3 V
Power Consumption	Max. current at Tx mode: 309.4 mA @ VBAT
Certifications	
Regulatory	Europe: CE America: FCC Canada: IC China: SRRC Australia/New Zealand: RCM

## NOTE:

1. \*: Under development.

2. ①: ANT\_WIFI/BT serves as a Wi-Fi and Bluetooth antenna interface in single antenna solution and only Wi-Fi antenna interface in two-antenna solution.

# Quectel FCS960K-N

Wi-Fi 6 & Bluetooth 5.4		FCS960K-N	
Wi-Fi Performance		Transmit Power (Typ.)	Receiver Sensitivity (Typ.)
2.4 GHz	802.11b/1 Mbps	19 dBm	-96 dBm
	802.11b/11 Mbps	19 dBm	-88 dBm
	802.11g/6 Mbps	17 dBm	-93 dBm
	802.11g/54 Mbps	15 dBm	-77 dBm
	802.11n/HT20 MCS 0	17 dBm	-90 dBm
	802.11n/HT20 MCS 7	15 dBm	-76 dBm
	802.11n/HT40 MCS 0	17 dBm	-90 dBm
	802.11n/HT40 MCS 7	15 dBm	-72 dBm
	802.11ax/HT20 MCS 0	17 dBm	-94 dBm
	802.11ax/HT20 MCS 11	14 dBm	-67 dBm
	802.11ax/HT40 MCS 0	17 dBm	-92 dBm
	802.11ax/HT40 MCS 11	14 dBm	-63 dBm
	802.11a/6 Mbps	17 dBm	-93 dBm
5 GHz	802.11a/54 Mbps	15 dBm	-76 dBm
	802.11n/HT20 MCS 0	17 dBm	-93 dBm
	802.11n/HT20 MCS 7	15 dBm	-74 dBm
	802.11n/HT40 MCS 0	17 dBm	-89 dBm
	802.11n/HT40 MCS 7	15 dBm	-71 dBm
	802.11ac/VHT20 MCS 0	17 dBm	-92 dBm
	802.11ac/VHT20 MCS 8	14 dBm	-70 dBm
	802.11ac/VHT40 MCS 0	17 dBm	-89 dBm
	802.11ac/VHT40 MCS 9	12 dBm	-65 dBm
	802.11ax/HT20 MCS 0	16 dBm	-93 dBm
	802.11ax/HT20 MCS 11	12 dBm	-65 dBm
	802.11ax/HT40 MCS 0	16 dBm	-90 dBm
	802.11ax/HT40 MCS 11	12 dBm	-61 dBm
Bluetooth Performance		Transmit Power (Typ.)	Receiver Sensitivity (Typ.)
BR		4.5 dBm	-87 dBm
EDR (π/4-DQPSK)		4.5 dBm	-85 dBm
EDR (8-DPSK)		4.5 dBm	-85 dBm
BLE (1 Mbps)		4.5 dBm	-87 dBm
BLE (2 Mbps)		4.5 dBm	-85 dBm

Model	Ordering Code	Antenna	DBS	Coexistence with Cellular Module	Development Board (Only for Debugging)
FCS960K-N	FCS960KNAAMD	Single antenna: Wi-Fi and Bluetooth share one antenna	-	-	FCS960KNAAM2