Antenna Datasheet

Product OC: YEMN105J1AM
Version: 1.0
Date: 2025-11-07
Status: Released

Product Name: 4G Screw Mount Low Profile Monopole External Antenna
Key Features:
Frequency Band: 698–960 MHz, 1710–2690 MHz
Dimensions: Φ 46 mm × 16 mm
Efficiency: Up to 65 % (FS)
RoHS Compliant
IP67

Overview

YEMN105J1AM is a 4G external antenna measuring Φ 46 mm × 15 mm. This ultra-wide-band 4G antenna provides broad coverage from 698–960 MHz & 1710–2690 MHz whilst offering backward-compatibility to support 3G and 2G networks as well as LTE Cat-M and narrowband IoT (NB-IoT). The antenna is terminated with SMA Male connector. Ideal for applications where the antenna is required to be discrete, this low profile, terminal mount omni-directional antenna is easy to install with maximum durability assured thanks to its IP67 rated, ABS enclosure.

The antenna is designed as monopole type to work with various GND plane sizes or in free space for ease of integration with a SMA Male connector to achieve the optimum position. Flexible cable linkage enables terminal-mounted antennas to dynamically evade obstructions through multi-axis steering. This omni-directional antenna is ideally suited for Gateways & Routers, Smart Metering, Vending Machines, Industrial IoT, Smart Home, Connected Enterprise, offering great performance with its high gain and efficiency.

Typical applications include:

- Gateways & Routers
- Smart Metering
- Vending Machines
- Industrial IoT
- Smart Home
- Connected Enterprise

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

1 Specification

Test Condition: In Free Space & 300 mm × 300 mm Metal Plane

1.1. Electrical

Electrical	
Frequency Range	698–960 MHz, 1710–2690 MHz
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni-directional
Antenna Type	Monopole

Electrical – Detail												
Band / SPEC	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600–700	700–810	820–960	1420–1520	1700–2170	2300–2400	2400–2500	2500–2690	3300–4200	4400–5000	5150–5850
Max. VSWR	FS	-	3.2	3.0	-	3.3	3.0	3.0	3.2	-	-	-
	MP	-	5.2	4.2	-	7.8	6.6	7.0	6.2	-	-	-
Max. Return Loss (dB)	FS	-	-5.7	-6.0	-	-5.5	-6.0	-6.0	-5.7	-	-	-
	MP	-	-3.4	-4.2	-	-2.2	-2.7	-2.5	-2.8	-	-	-
AVG Eff. (%)	FS	-	30.0	44.5	-	54.7	51.2	45.6	49.3	-	-	-
	MP	-	23.1	31.3	-	18.1	15.4	17.3	26.9	-	-	-
AVG AVG Gain (dB)	FS	-	-5.3	-3.5	-	-2.7	-2.9	-3.4	-3.1	-	-	-
	MP	-	-6.5	-5.1	-	-7.5	-8.2	-7.7	-5.7	-	-	-
Max. Peak Gain (dBi)	FS	-	-0.1 (810)	1.5 (890)	-	3.6 (2170)	4.3 (2310)	4.1 (2400)	5.0 (2590)	-	-	-
	MP	-	1.3 (810)	2.7 (890)	-	2.7 (1760)	-1.7 (2310)	-0.2 (2500)	2.7 (2610)	-	-	-

VSWR	FS	≤ 3.3
	MP	≤ 7.8
Return Loss	FS	≤ -5.5 dB
	MP	≤ -2.2 dB
Peak Gain	FS	≤ 5.0 dBi
	MP	≤ 2.7 dBi

- **FS: In Free Space**
- **MP: On 300 mm × 300 mm Metal Plane**

1.2. Supported Bands

5G NR / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / GPRS / GSM / NB-IoT							
Band	**Frequency (MHz)**	**Uplink (MHz)**	**Downlink (MHz)**	**FS**	**MP**	**Max Peak Gain (dBi) FS**	**Max Peak Gain (dBi) MP**
1	2100	1920–1980	2110–2170	√	√	3.6	-0.5
2	1900	1850–1910	1930–1990	√	√	3.2	1.4
3	1800	1710–1785	1805–1880	√	√	3.4	2.7
4	1700	1710–1755	2110–2155	√	√	2.6	2.6
5	850	824–849	869–894	√	√	1.5	2.7
7	2600	2500–2570	2620–2690	√	√	4.7	2.7
8	900	880–915	925–960	√	√	1.5	2.7
9	1800	1749.9–1784.9	1844.9–1879.9	√	√	3.2	2.7
11	1500	1427.9–1447.9	1475.9–1495.9	-	-	-	-
12	700	699–716	729–746	√	√	-3.0	-2.0
13	700	777–787	746–756	√	√	-1.0	0.0
14	700	788–798	758–768	√	√	-0.9	0.4
17	700	704–716	734–746	√	√	-3.0	-2.0
18	850	815–830	860–875	√	√	0.6	2.2
19	850	830–845	875–890	√	√	1.5	2.7
20	800	832–862	791–821	√	√	0.5	2.0
21	1500	1447.9–1462.9	1495.9–1510.9	-	-	-	-
22	3500	3410–3490	3510–3590	-	-	-	-
23	2100	2000–2020	2180–2200	√	√	3.7	-0.8
24	1600	1626.5–1660.5	1525–1559	-	-	-	-
25	1900	1850–1915	1930–1995	√	√	3.2	1.4

5G NR / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / GPRS / GSM / NB-IoT							
Band	**Frequency (MHz)**	**Uplink (MHz)**	**Downlink (MHz)**	**FS**	**MP**	**Max Peak Gain (dBi) FS**	**Max Peak Gain (dBi) MP**
26	850	814–849	859–894	√	√	1.5	2.7
28	700	703–748	758–803	√	√	-0.4	0.9
31	450	452.5–457.5	462.5–467.5	-	-	-	-
34	2100	2010–2025		√	√	3.0	-0.8
38	2600	2570–2620		√	√	5.0	2.7
39	1900	1880–1920		√	√	3.1	0.4
40	2300	2300–2400		√	√	4.3	-1.7
41	2500	2496–2690		√	√	5.0	2.7
42	3500	3400–3600		-	-	-	-
48	3500	3550–3700		-	-	-	-
66	1700	1710–1780	2110–2200	√	√	3.7	2.7
71	600	663–698	617–652	√	√	-2.0	-2.4
74	1500	1427–1470	1475–1518	-	-	-	-
77	3500	3300–4200		-	-	-	-
78	3500	3300–3800		-	-	-	-
79	4500	4400–5000		-	-	-	-

1.3. Mechanical & Environmental

Mechanical	
Antenna Dimensions	Φ 46 mm × 16 mm
Casing Material & Color	ABS & Black
Cable Type & Color & Length	RG174 & Black & 300 mm
Connector Type	SMA Male
Mounting Type	Screw
Weight	Typ. 24 g
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
Ingress Protection (IP) Rating	IP67
RoHS Compliant	Yes

2 Drawing

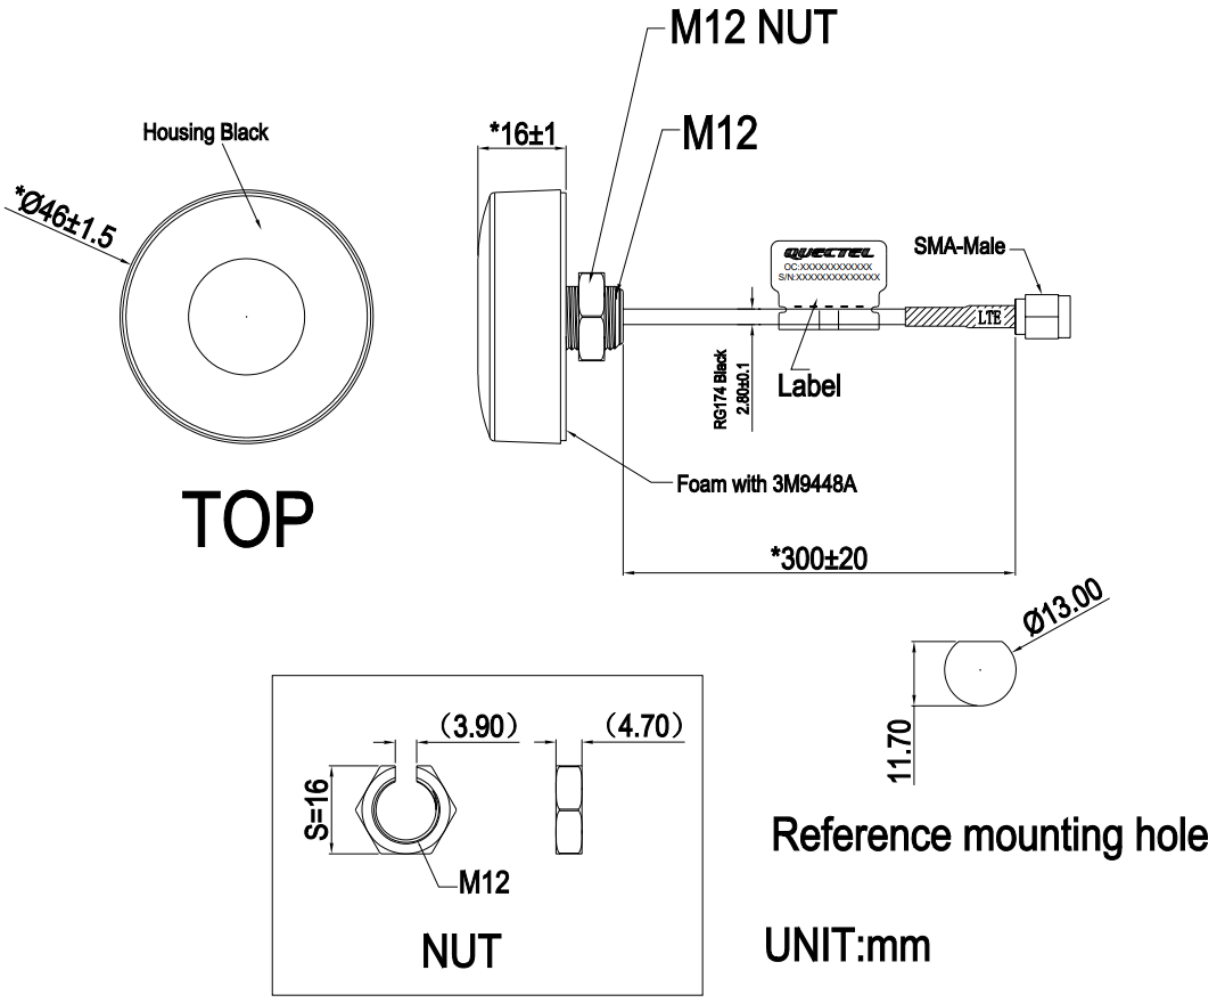
M12 NUT
M12
Housing Black
*Ø46±1.5
*16±1
SMA-Male
LTE
RG174 Black
2.80±0.1
Label
Foam with 3M9448A
*300±20
TOP
Ø13.00
11.70
(3.90)
(4.70)
S=16
M12
NUT
Reference mounting hole
UNIT:mm

3 Detailed Performance

3.1. S-Parameter Test

3.1.1. VSWR

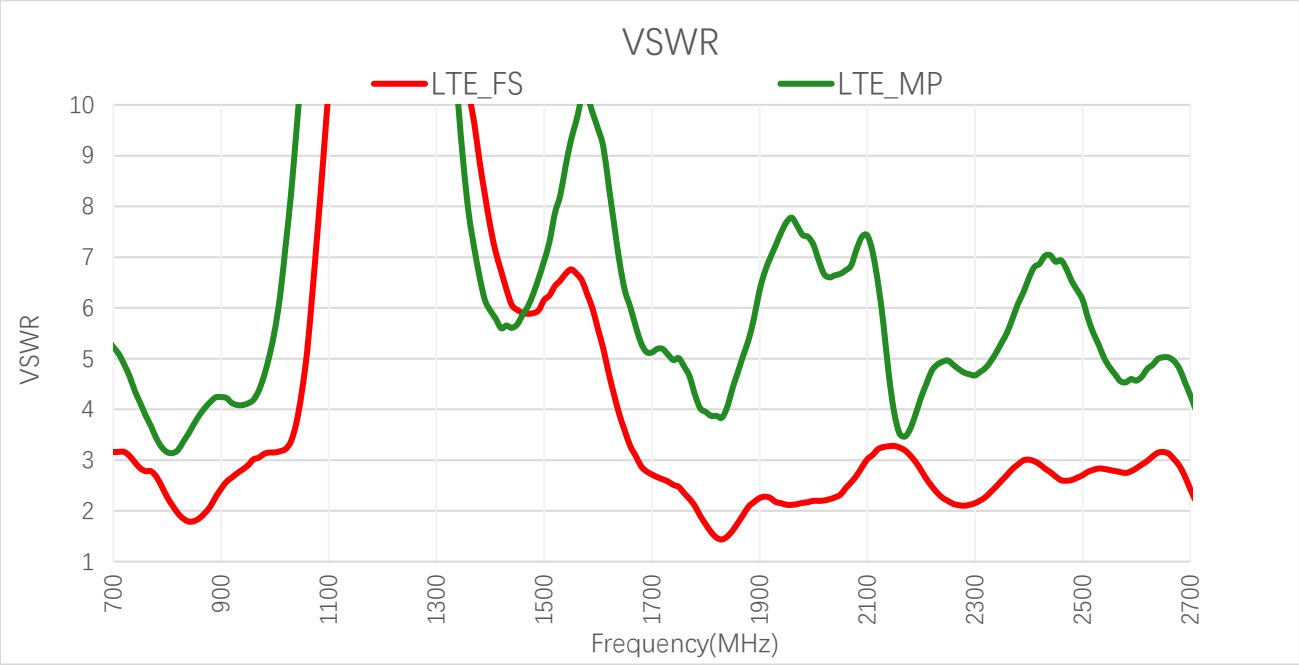

VSWR

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	3.2	1.8	2.4	3.0	-	2.7	2.5	2.1
MP	-	-	5.1	3.4	4.2	4.2	-	5.2	5.0	5.4
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	2.1	3.3	2.6	2.7	2.8	2.7	-	-	-	-
MP	7.7	4.7	5.3	6.9	4.6	4.5	-	-	-	-

3.1.2. Return Loss

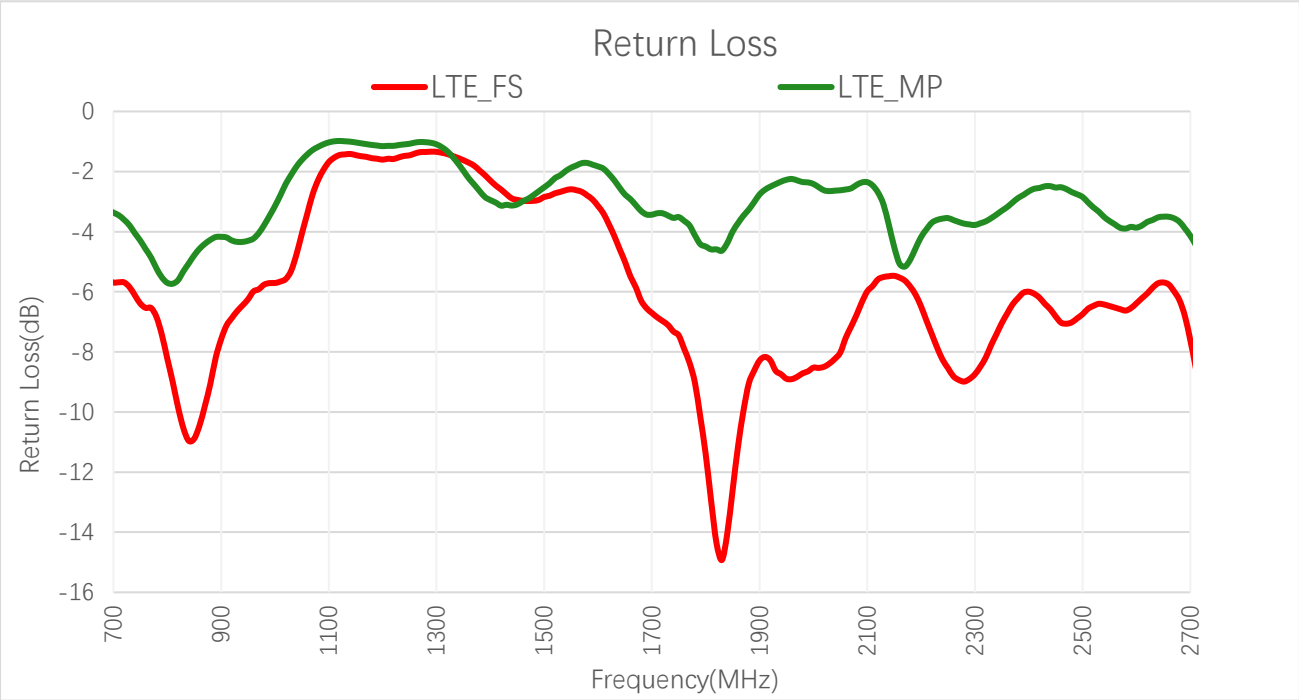

Return Loss (dB)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	-5.7	-10.5	-7.6	-6.0	-	-6.9	-7.3	-9.1
MP	-	-	-3.5	-5.3	-4.2	-4.2	-	-3.4	-3.5	-3.3
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	-8.9	-5.5	-7.0	-6.8	-6.4	-6.8	-	-	-	-
MP	-2.3	-3.8	-3.3	-2.5	-3.9	-3.9	-	-	-	-

3.2. Radiation Performance Test

3.2.1. Efficiency

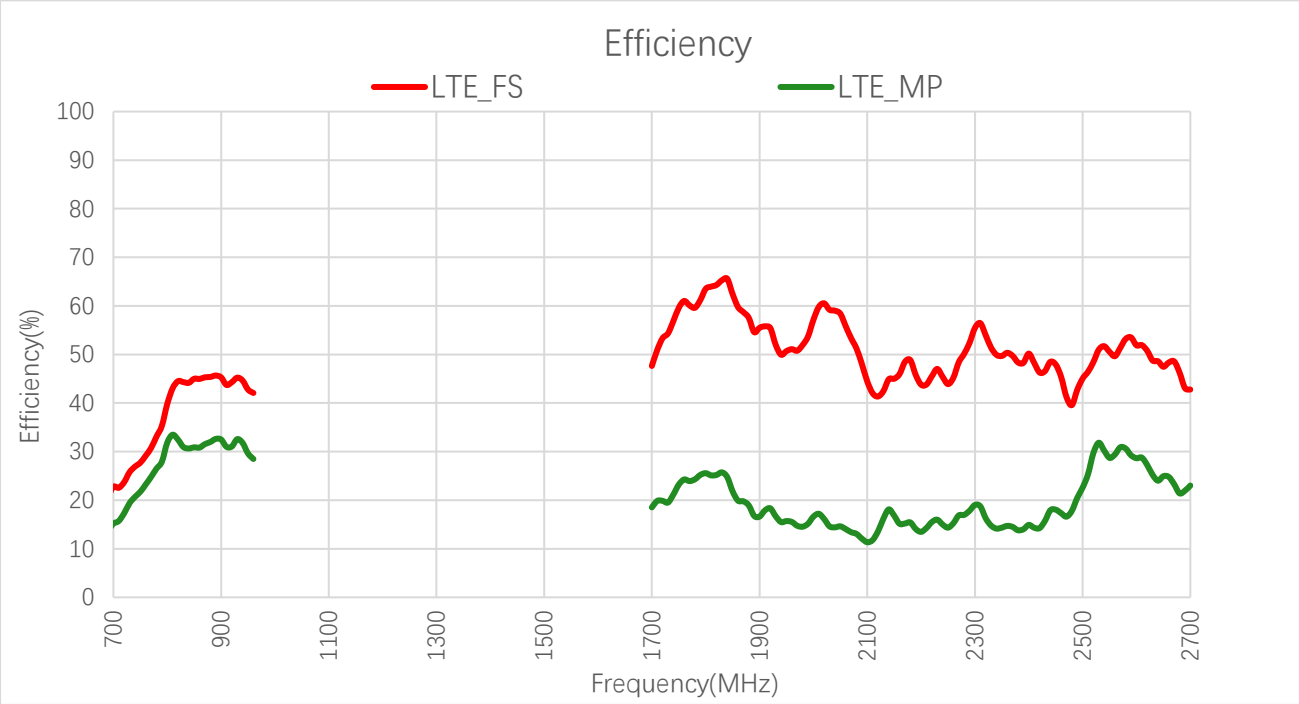

Efficiency (%)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	22.6	44.3	45.3	42.1	-	50.9	56.9	57.5
MP	-	-	15.7	30.9	32.5	28.5	-	19.9	21.2	18.9
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	50.7	44.9	49.7	47.9	51.9	43.1	-	-	-	-
MP	15.7	18.1	14.4	18.1	28.6	22.0	-	-	-	-

3.2.2. Average Gain

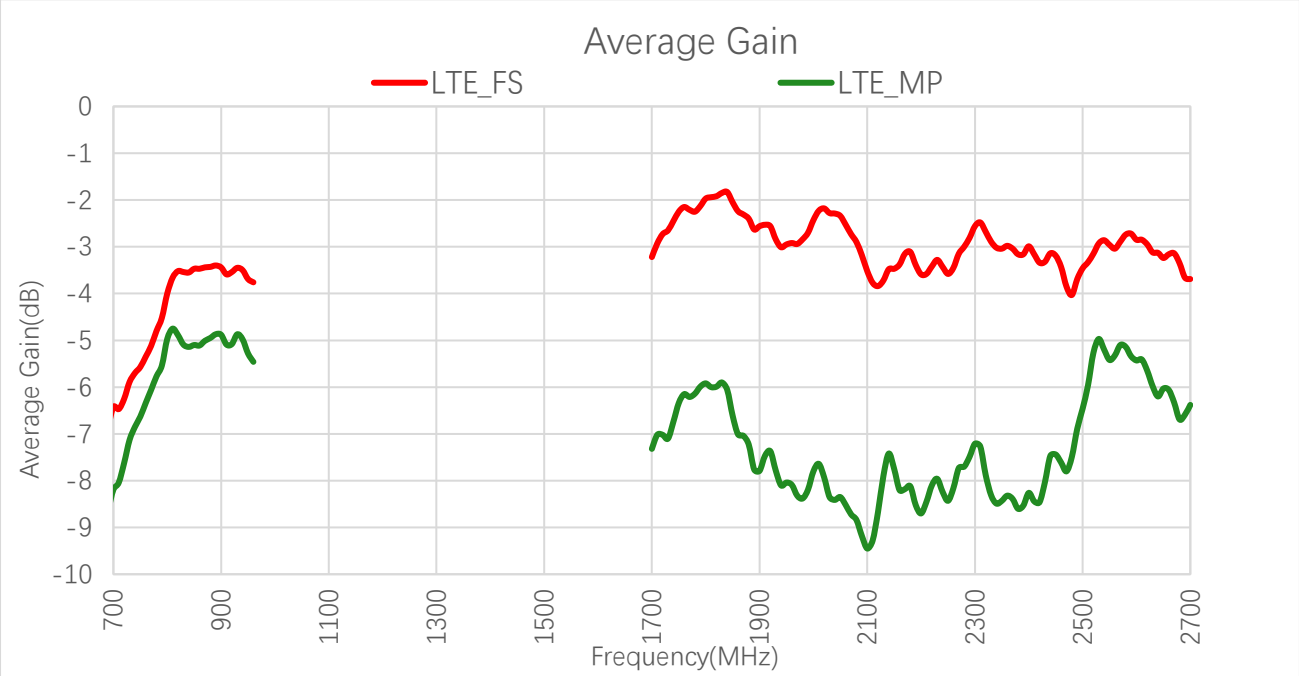

Average Gain (dB)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	-6.5	-3.5	-3.4	-3.8	-	-2.9	-2.5	-2.4
MP	-	-	-8.0	-5.1	-4.9	-5.5	-	-7.0	-6.7	-7.2
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	-3.0	-3.5	-3.0	-3.2	-2.9	-3.7	-	-	-	-
MP	-8.0	-7.4	-8.4	-7.4	-5.4	-6.6	-	-	-	-

3.2.3. Peak Gain

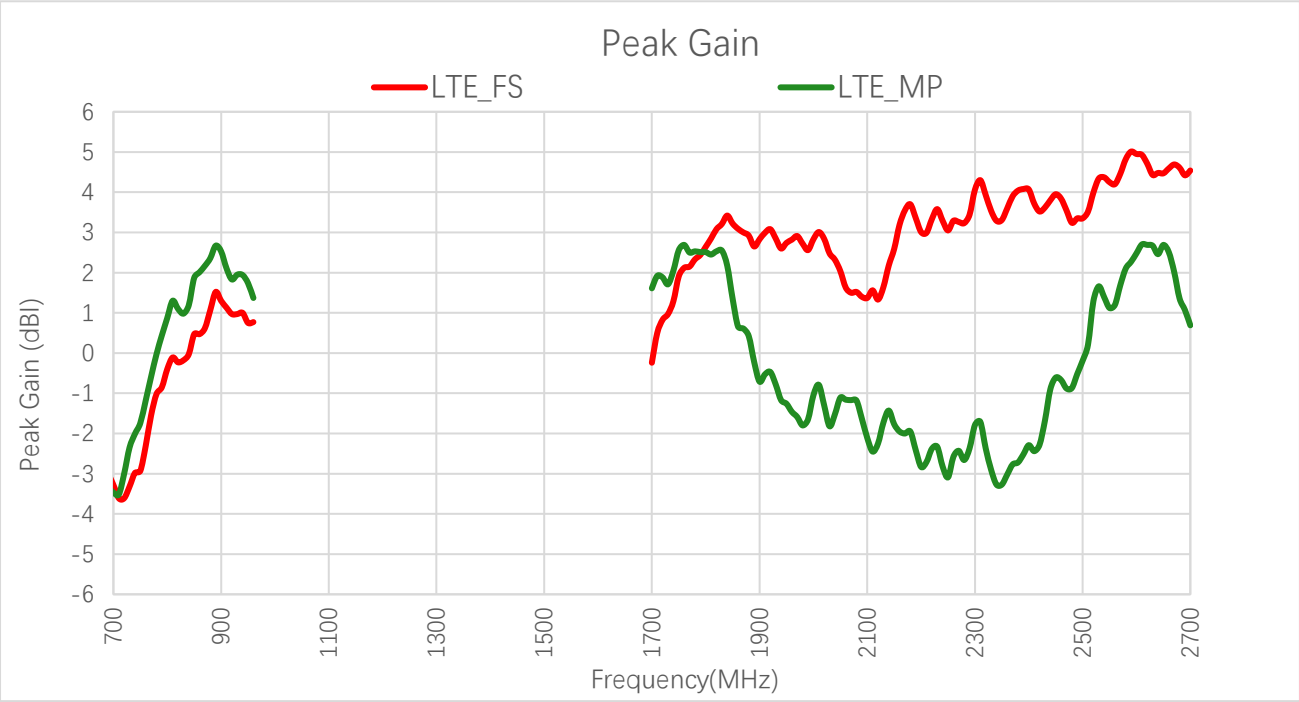

Peak Gain (dBi)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
FS	-	-	-3.6	-0.2	1.3	0.8	-	0.5	1.3	2.9
MP	-	-	-3.5	1.0	2.5	1.4	-	1.9	2.1	0.4
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	2.7	2.2	3.3	4.0	5.0	4.4	-	-	-	-
MP	-1.3	-1.4	-3.3	-0.6	2.5	1.1	-	-	-	-

3.2.4. 3D & 2D Radiation Pattern

3.2.4.1. Test Condition: In Free Space

- Test Chamber: HF-S-1

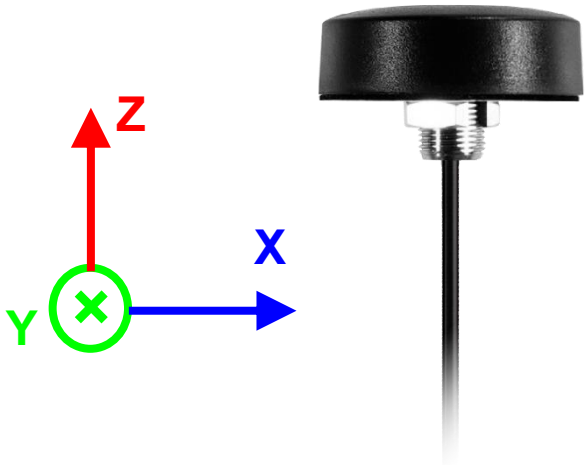

- **LTE**

710 MHz		830 MHz	
			
			
900 MHz		**1740 MHz**	
			
			

1880 MHz		1950 MHz	
			
			
2140 MHz		**2350 MHz**	
			
			

2450 MHz		2600 MHz	
			
			

- **LTE Max Peak Gain**

810 MHz		890 MHz	
			
			

2170 MHz		2310 MHz	
			
			
2400 MHz		2590 MHz	
			
			

3.2.4.2. Test Condition: On 300 mm × 300 mm Metal Plane

- Test Chamber: HF-S-1

- **LTE**

710 MHz		830 MHz	
			
			
900 MHz		**1740 MHz**	
			
			

1880 MHz		1950 MHz	
			
			
2140 MHz		2350 MHz	
	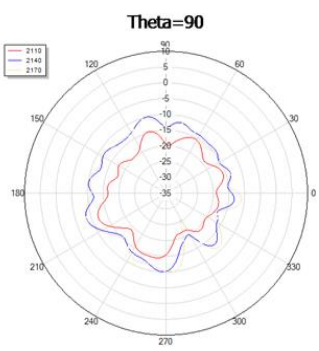		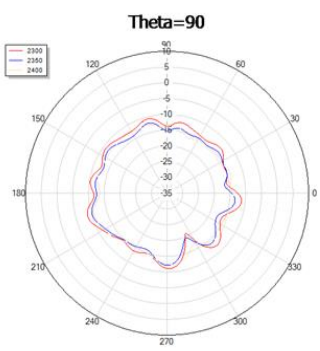
			

2450 MHz		2600 MHz	
			
			

- **LTE Max Peak Gain**

810 MHz		890 MHz	
			
			

1760 MHz		2310 MHz	
			
			
2500 MHz		**2610 MHz**	
			
			

4 Packaging

Step	Packaging Picture / 2D Picture	Description
1		Whole antenna product in a small PE bag. (1 Antenna / Small PE Bag)
2		20 antenna products in a big PE bag. (20 Antennas / Big PE Bag)
3		(14 Big PE Bags / Carton Box) (280 Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. Carton Size: L × W × H = 470 × 430 × 310 mm

4	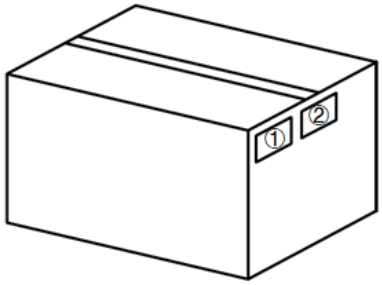	**Position for Attaching Labels** ① Carton Label ② Quality Label
5	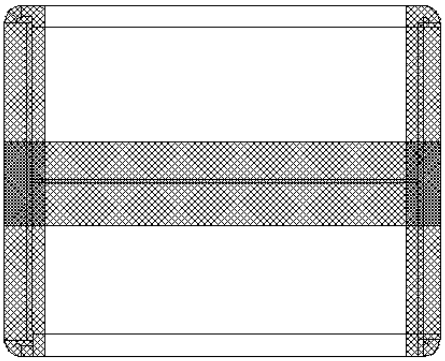	**Sealing Cartons** H-shaped sealing cartons
Note	The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.
Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China
Tel: +86 21 5108 6236
Email: info@quectel.com

Or our local offices. For more information, please visit:
http://www.quectel.com/support/sales.htm.

For technical support, or to report documentation errors, please visit:
http://www.quectel.com/support/technical.htm.
Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Revision History

Version	Date	Author	Note
-	2025-11-07	Christopher Yao/ Blake Xiang/ Strong Qiang/ Rainey Liao	Creation of the document
1.0	2025-11-07	Christopher Yao/ Blake Xiang/ Strong Qiang/ Rainey Liao	First official release

www.quectel.com