



Antenna Datasheet

Product OC: YECT010W1AM

Version: 1.1

Date: 2025-07-09

Status: Released

Product Name: 5G Terminal Mount Rubber Monopole Antenna

Key Features:

Frequency Band: 600–960 MHz, 1400–2690 MHz, 3300–6000 MHz

Dimensions: Φ 10.22 mm $\times$ 69.5 mm

Efficiency: Up 70.7 % (Bent)

RoHS Compliant

Overview

The YECT010W1AM is a 5G rubber antenna measuring $\Phi 10.22 \text{ mm} \times 69.5 \text{ mm}$. This ultra-wide-band 5G antenna provides broad coverage from 600–960 MHz, 1710–2690 MHz, 3300–6000 MHz whilst offering backward-compatibility to support 4G/3G and 2G networks as well as LTE Cat-M and narrowband IoT (NB-IoT). The antenna is terminated with SMA Male connector. This low profile, terminal mount omni-directional antenna, ideal for applications where the antenna is required to be discrete, is easy to install with maximum durability assured thanks to its POM enclosure. It is compatible with Quectel's RM520x Series modules.

It allows constant and reliable transmission and reception due to its omni-directional gain across all frequency bands. The YECT010W1AM is designed as a monopole antenna, which needs to be mounted on a ground plane to offer high efficiency in all working bands. It is a perfect antenna product for customers that desire highest performance. This high-efficiency, high-gain omni-directional antenna is ideally suited for remote monitoring, vehicle tracking and telematics systems, routers and POS devices.

Typical applications include:

- remote monitoring
- vehicle tracking and telematics systems
- routers
- POS devices

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

Overview.....	1
Contents	2
1 Specification.....	3
1.1. Electrical.....	3
1.2. Mechanical & Environmental	4
2 Drawing	5
3 Detailed Performance	6
3.1. S-Parameter Test	6
3.1.1. VSWR	6
3.1.2. Return Loss.....	7
3.2. Radiation Performance Test.....	8
3.2.1. Efficiency.....	8
3.2.2. Average Gain	9
3.2.3. Peak Gain	10
3.2.4. 3D & 2D Radiation Pattern	11
3.2.4.1. Test state: Straight.....	11
3.2.4.2. Test state: Bent.....	19
4 Packaging	27
Contact Us.....	29
Legal Notices	30
Revision History	32

1 Specification

Test Condition: On 130 mm × 70 mm EVB

1.1. Electrical

Electrical	
Frequency Range	600–960 MHz, 1400–2690 MHz, 3300–6000 MHz
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni-directional

Electrical – Detail												
SPEC	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850
Max. VSWR	Straight	3.7	3.6	1.7	2.6	3.6	4.8	5.1	5.1	3.5	3.9	3.6
	Bent	3.7	3.4	2.6	2.1	2.6	3.5	3.7	3.7	3.7	3.6	2.6
Max. Return Loss(dB)	Straight	-4.9	-5.0	-12.0	-7.2	-5.0	-3.7	-3.4	-3.5	-5.1	-4.5	-5.0
	Bent	-4.8	-5.3	-7.1	-9.1	-7.1	-5.1	-4.8	-4.8	-4.8	-4.9	-7.1
AVG Eff. (%)	Straight	43.9	56.3	59.1	64.2	45.9	35.4	33.3	36.4	49.8	35.5	36.0
	Bent	39.3	49.9	52.6	69.5	57.3	45.7	39.8	38.8	47.4	36.1	45.3
AVG AVG Gain (dB)	Straight	-3.6	-2.5	-2.3	-1.9	-3.4	-4.5	-4.8	-4.4	-3.1	-4.5	-4.4
	Bent	-4.1	-3.0	-2.8	-1.6	-2.4	-3.4	-4.0	-4.1	-3.3	-4.4	-3.4
Max. Peak Gain(dBi)	Straight	1.0 (690)	1.5 (810)	1.9 (950)	1.9 (1470)	0.6 (1920)	-0.4 (2310)	-0.5 (2450)	0.5 (2630)	2.0 (3450)	0.3 (4750)	0.6 (5600)
	Bent	1.1	1.5	2.2	2.4	2.5	1.1	0.3	-0.2	1.1	1.5	2.6


		(690)	(810)	(950)	(1500)	(2150)	(2310)	(2470)	(2500)	(3770)	(4880)	(5240)
VSWR	Straight					≤ 5.1						
	Bent					≤ 3.7						
Return Loss	Straight					≤ -3.4 dB						
	Bent					≤ -4.8 dB						
Peak Gain	Straight					≤ 2.0 dBi						
	Bent					≤ 2.6 dBi						

- Straight: The connector is vertical.
- Bent: The connector is Bend.

1.2. Mechanical & Environmental

Mechanical	
Antenna Dimensions	$\Phi 10.22$ mm $\times$ 69.5 mm
Casing Material & Color	POM & Black
Connector Type	SMA Male
Weight	Typ. 9.5 g
Mounting Type	Terminal (Connector)
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
RoHS Compliant	Yes


2 Drawing

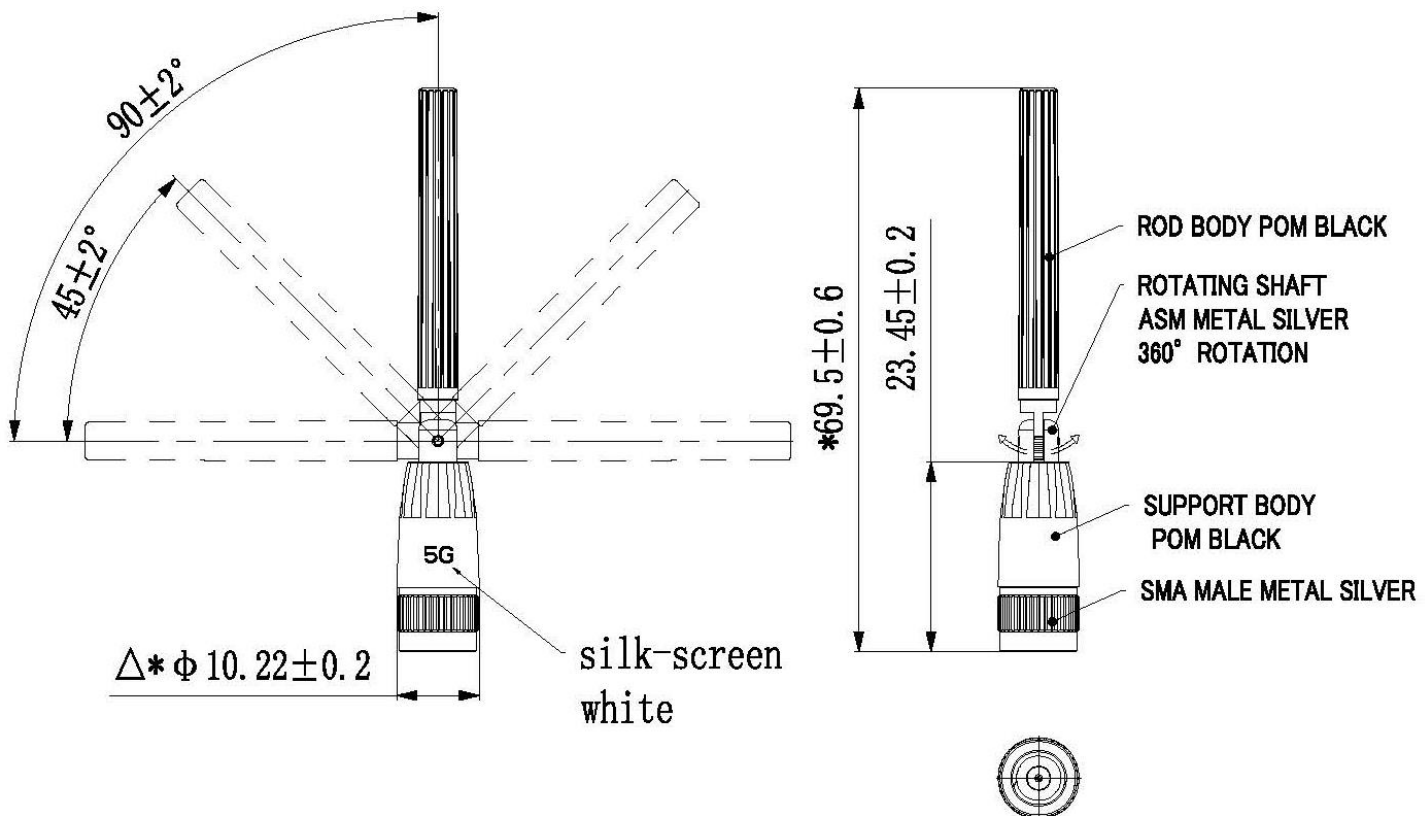

3 Detailed Performance

3.1. S-Parameter Test


3.1.1. VSWR

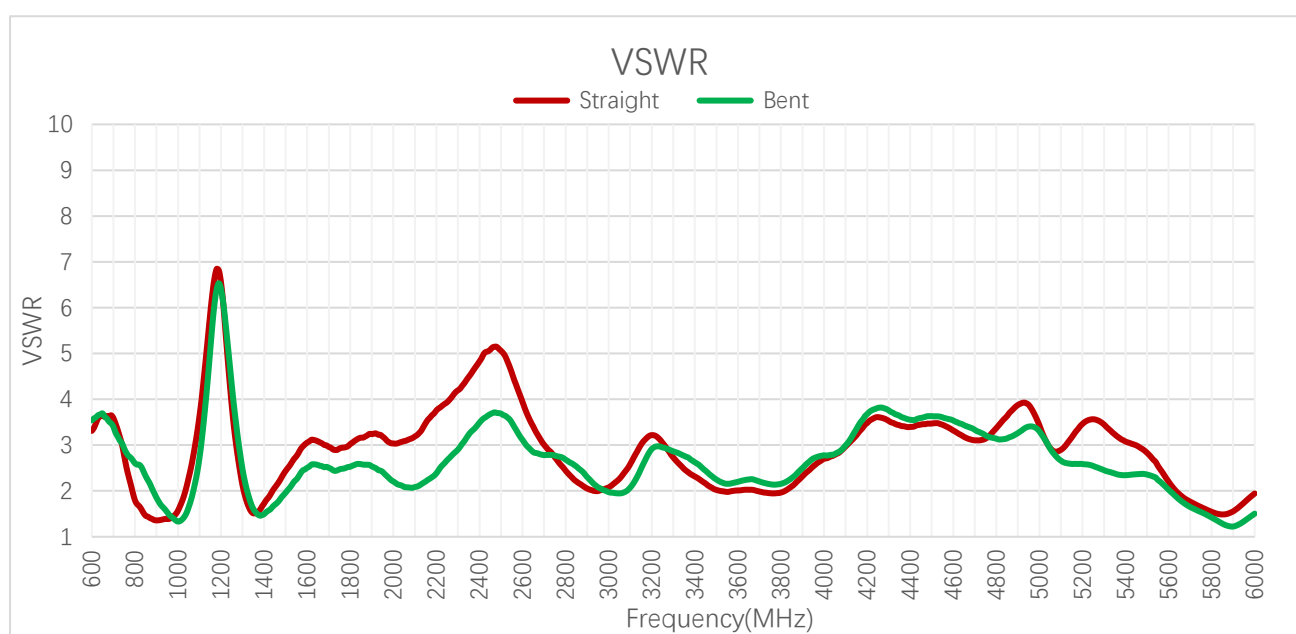

VSWR

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Straight	3.3	3.6	3.5	1.6	1.4	1.4	2.0	2.9	2.9	3.2
Bent	3.5	3.7	3.3	2.5	1.9	1.5	1.7	2.5	2.4	2.6
Frequency (MHz)	1950	2140	2350	2450	2600	3300	4700	5000	5500	6000
Straight	3.2	3.4	4.5	5.1	3.9	2.7	3.1	3.4	2.8	1.9
Bent	2.4	2.2	3.2	3.7	3.1	2.9	3.3	3.3	2.4	1.5

3.1.2. Return Loss

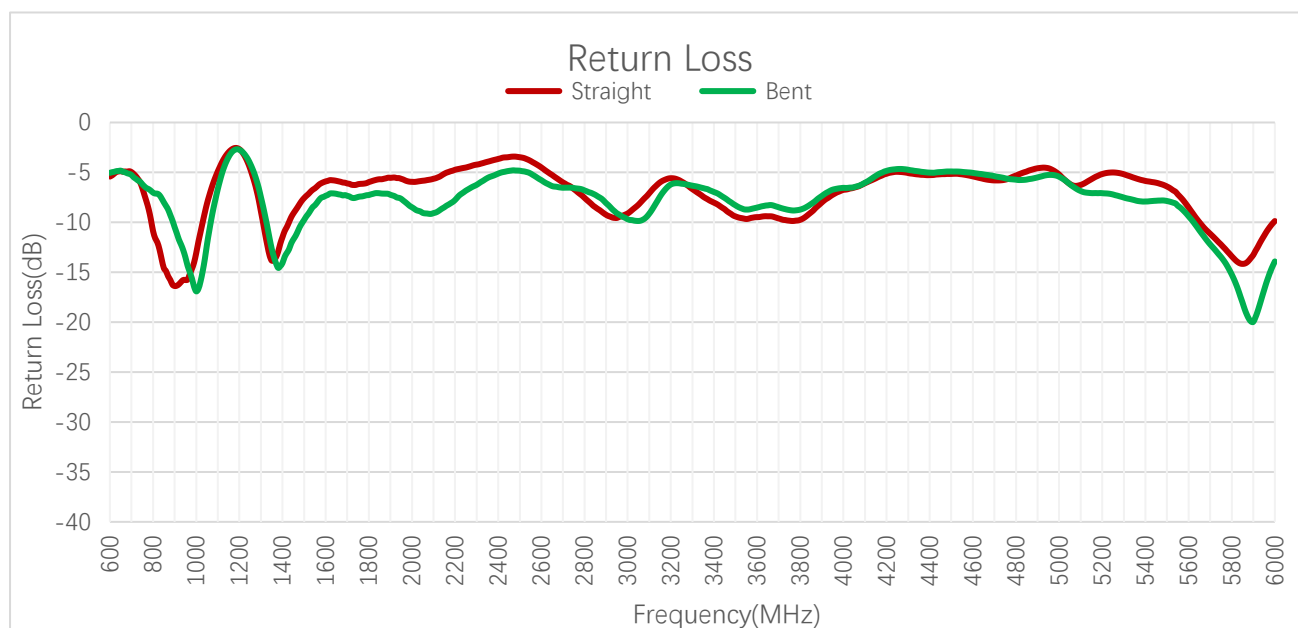


Return Loss (dB)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Straight	-5.4	-5.0	-5.2	-12.7	-16.4	-15.7	-9.5	-6.1	-6.3	-5.6
Bent	-5.0	-4.9	-5.5	-7.3	-10.5	-14.3	-12.1	-7.4	-7.5	-7.1
Frequency (MHz)	1950	2140	2350	2450	2600	3300	4700	5000	5500	6000
Straight	-5.6	-5.3	-3.9	-3.5	-4.5	-6.7	-5.8	-5.2	-6.4	-9.9
Bent	-7.6	-8.6	-5.6	-4.8	-5.8	-6.3	-5.4	-5.4	-7.9	-13.9

3.2. Radiation Performance Test


3.2.1. Efficiency

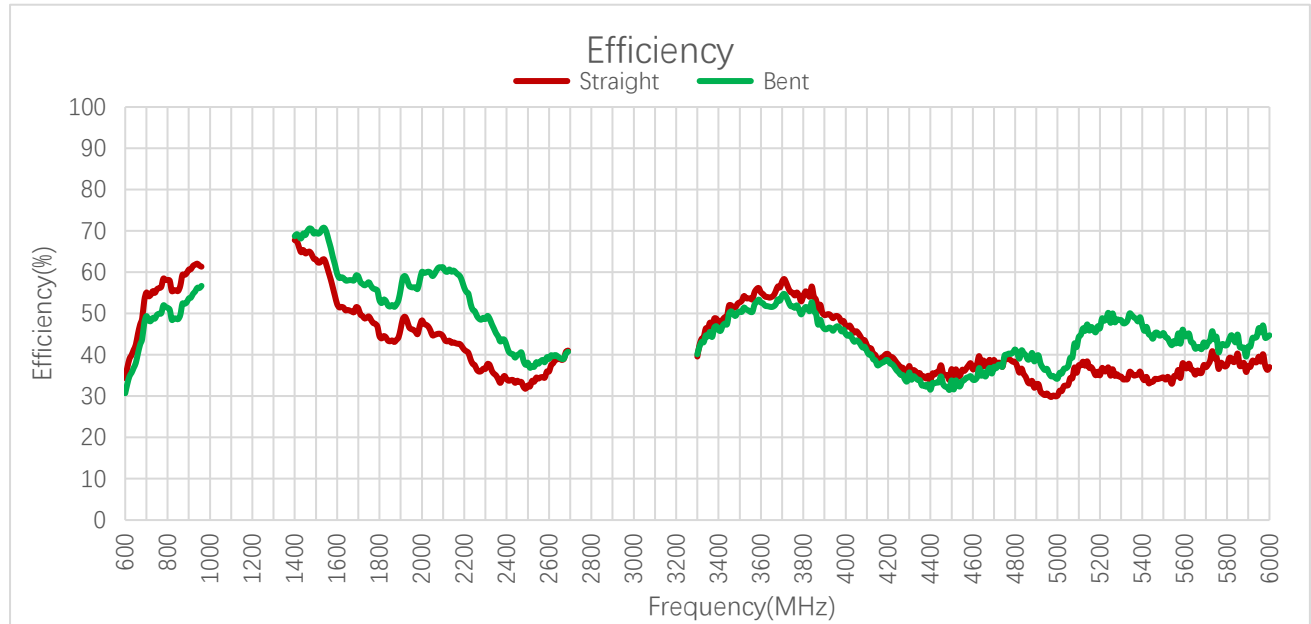

Efficiency (%)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Straight	34.4	39.9	54.2	55.7	60.6	61.3	65.4	49.8	49.0	43.6
Bent	30.7	35.7	48.4	48.8	53.7	56.7	69.4	57.6	57.2	52.2
Frequency (MHz)	1950	2140	2350	2450	2600	3300	4700	5000	5500	6000
Straight	46.2	42.9	35.0	33.7	36.0	39.6	38.8	30.1	34.5	37.1
Bent	56.4	60.1	45.2	39.9	39.0	40.1	37.1	34.3	45.3	44.7


3.2.2. Average Gain

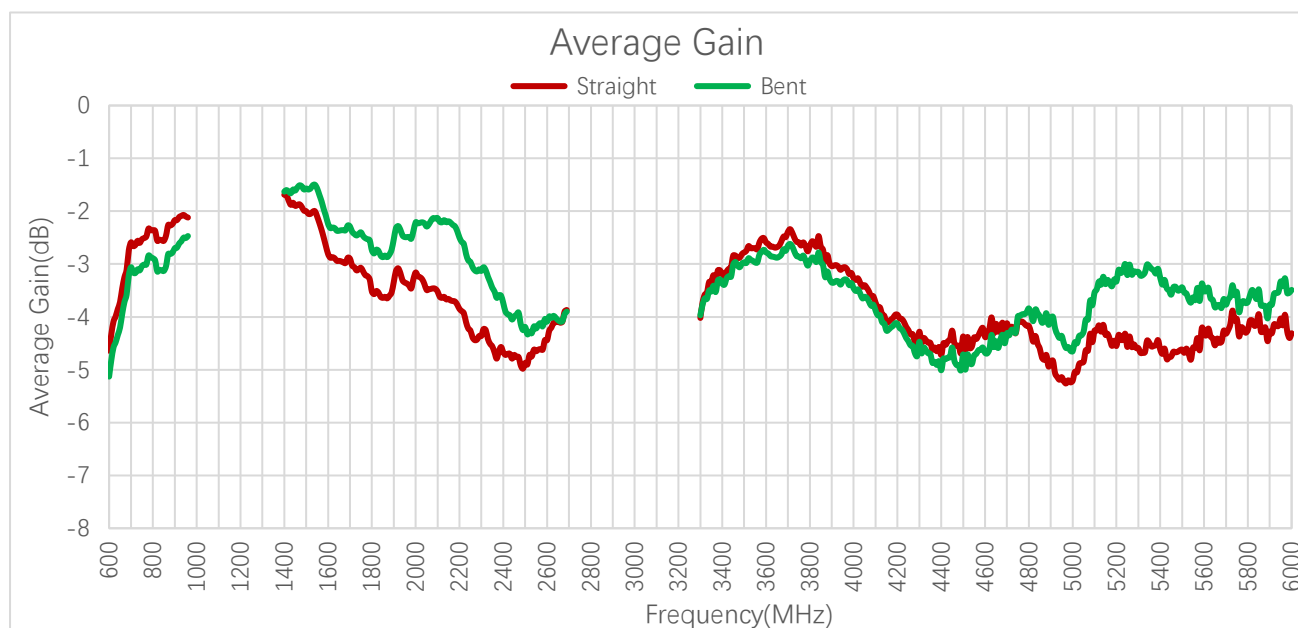

Average Gain (dB)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Straight	-4.6	-4.0	-2.7	-2.5	-2.2	-2.1	-1.8	-3.0	-3.1	-3.6
Bent	-5.1	-4.5	-3.2	-3.1	-2.7	-2.5	-1.6	-2.4	-2.4	-2.8
Frequency (MHz)	1950	2140	2350	2450	2600	3300	4700	5000	5500	6000
Straight	-3.4	-3.7	-4.6	-4.7	-4.4	-4.0	-4.1	-5.2	-4.6	-4.3
Bent	-2.5	-2.2	-3.5	-4.0	-4.1	-4.0	-4.3	-4.7	-3.4	-3.5

3.2.3. Peak Gain

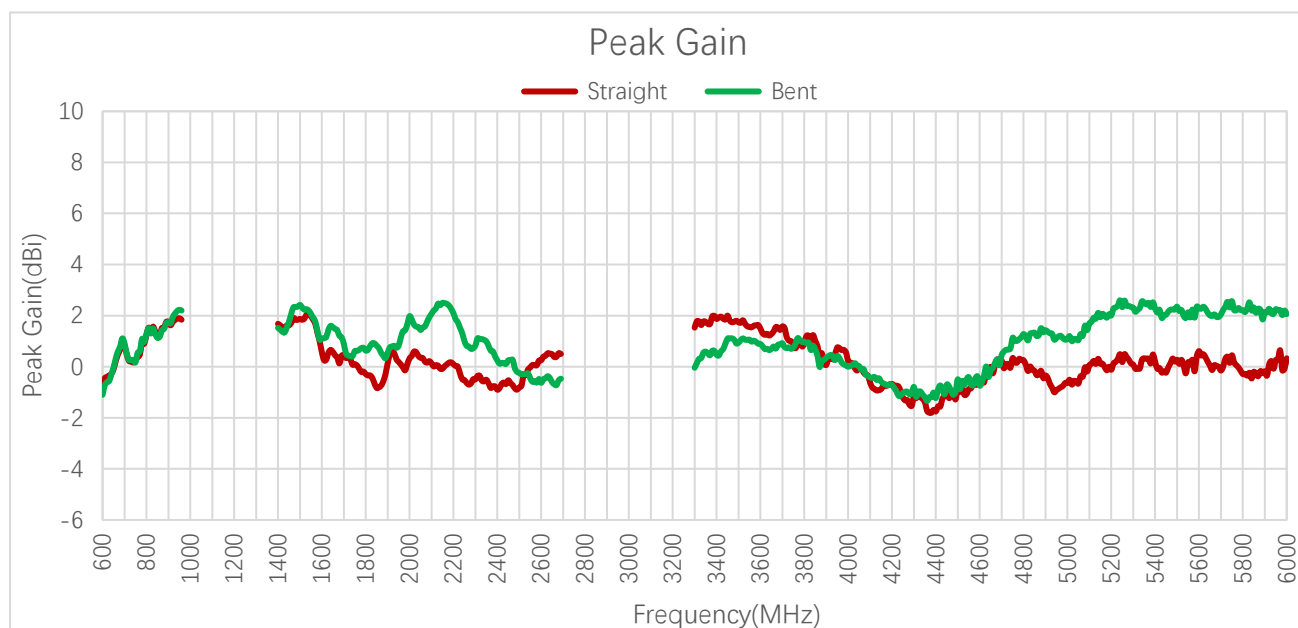


Peak Gain (dBi)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Straight	-0.8	-0.3	0.5	1.6	1.8	1.8	1.6	0.3	0.1	-0.6
Bent	-1.1	-0.6	0.5	1.5	1.7	2.2	1.5	0.5	0.4	0.4
Frequency (MHz)	1950	2140	2350	2450	2600	3300	4700	5000	5500	6000
Straight	0.2	-0.1	-0.5	-0.5	0.3	1.5	0.2	-0.6	0.3	0.3
Bent	0.8	2.4	1.0	0.3	-0.6	0.0	0.5	1.1	2.4	2.1



3.2.4. 3D & 2D Radiation Pattern

3.2.4.1. Test state: Straight







- Test Condition: On 130 mm × 70 mm EVB
- Test Chamber: GL-G-1

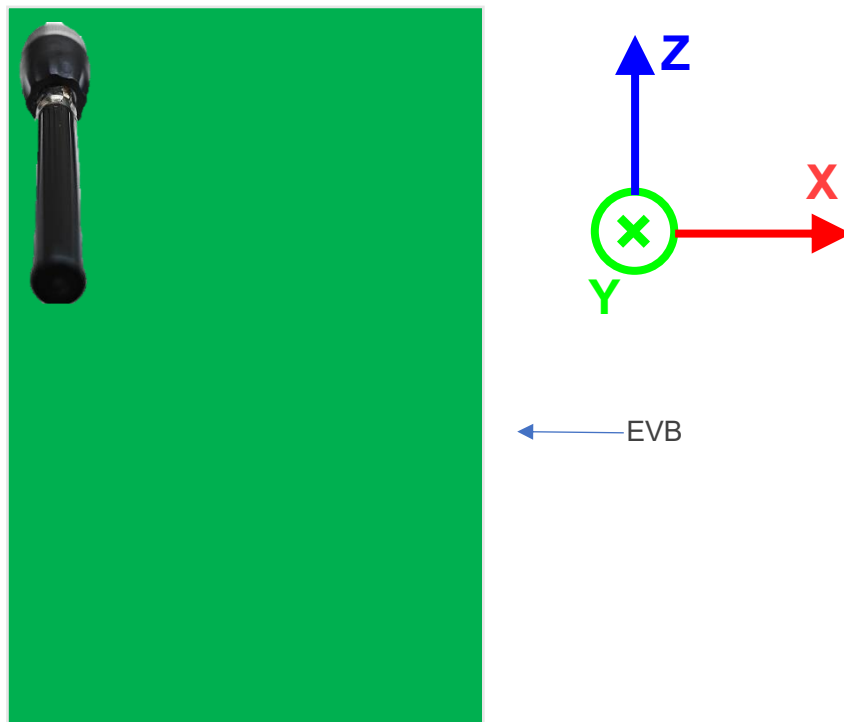









630 MHz





710 MHz




830 MHz




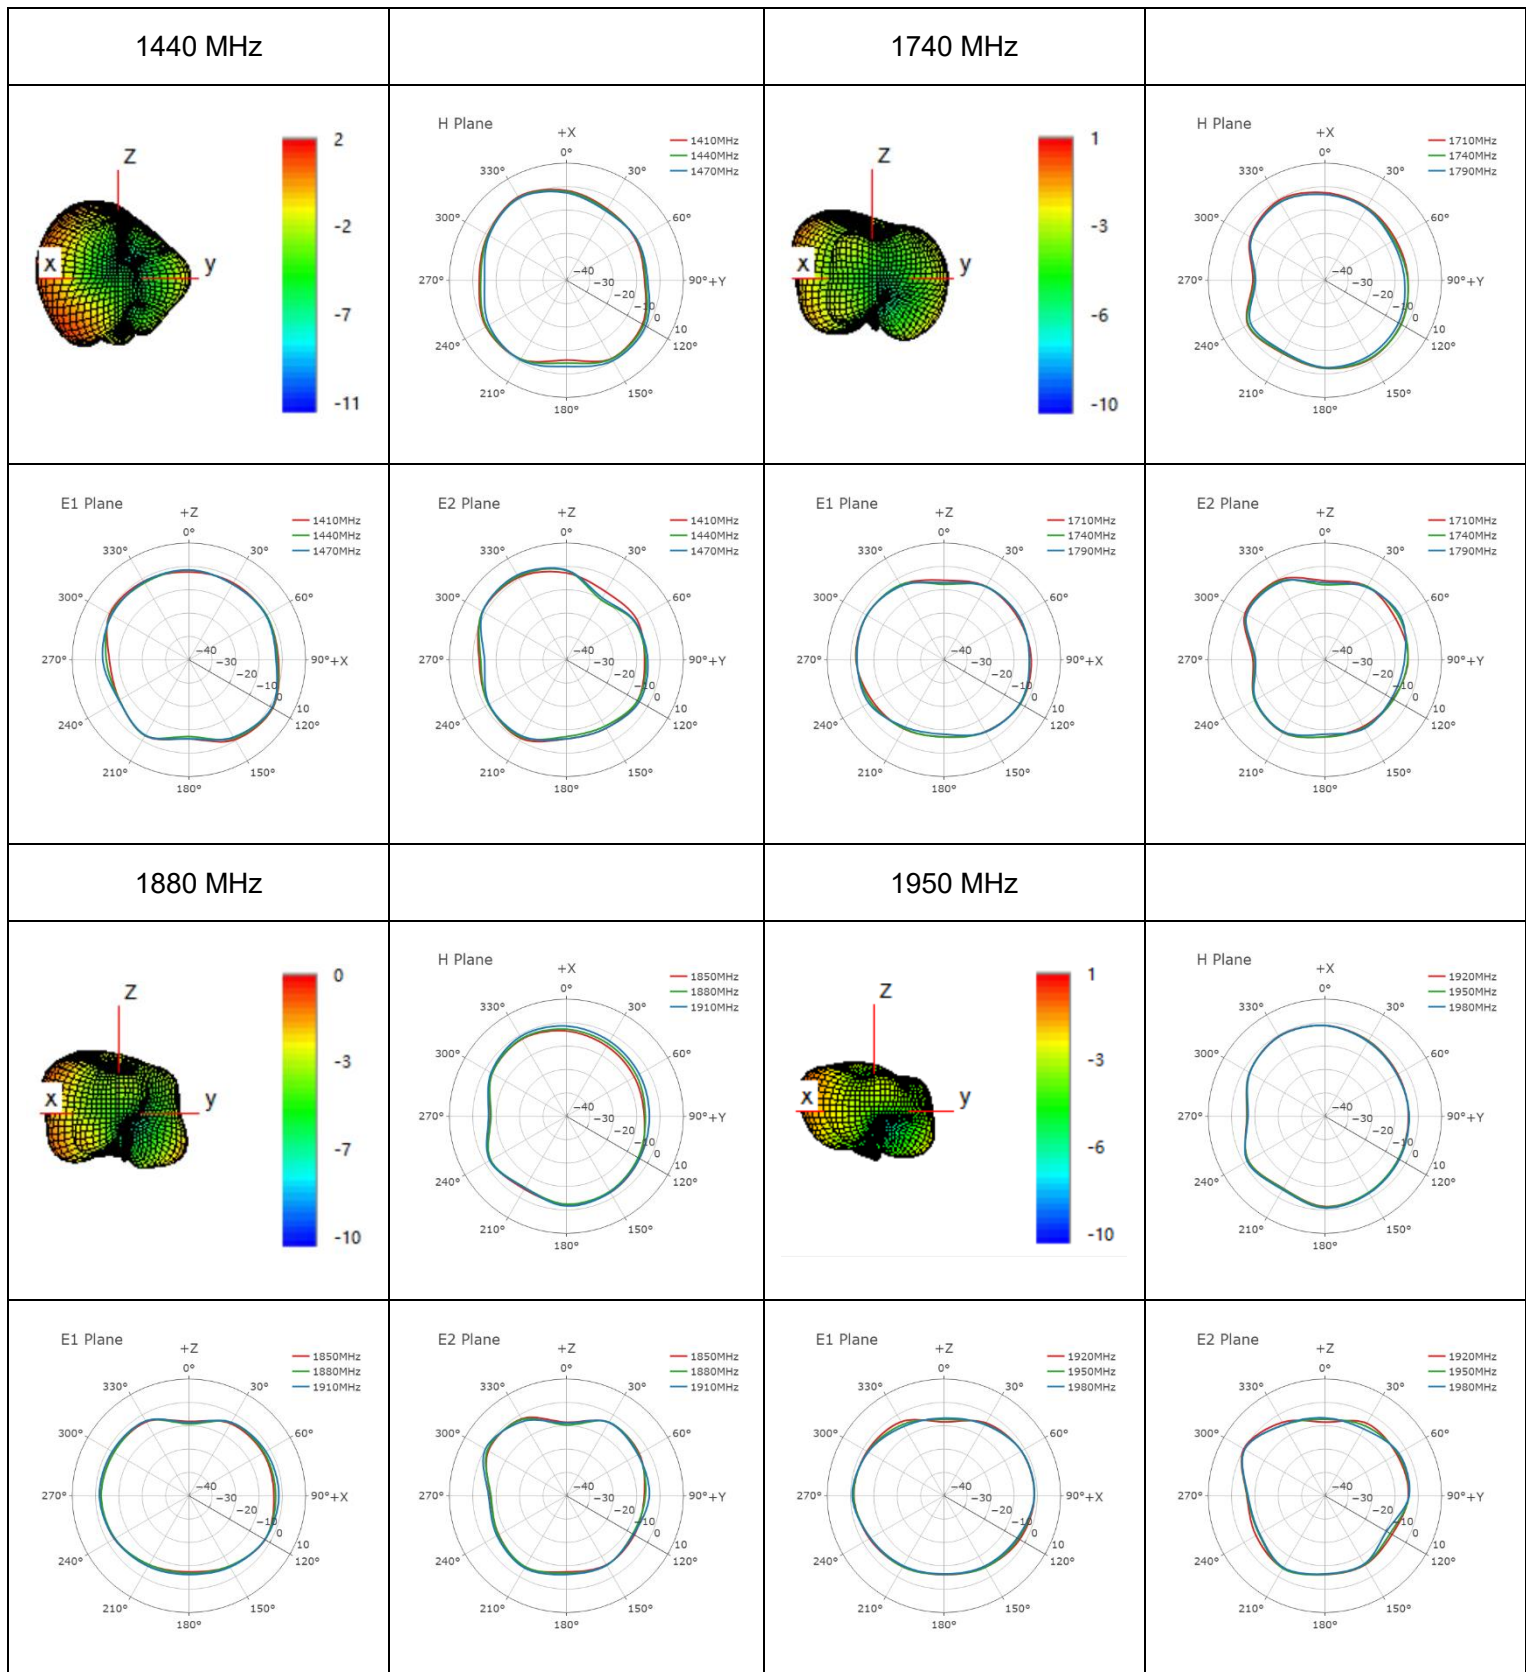


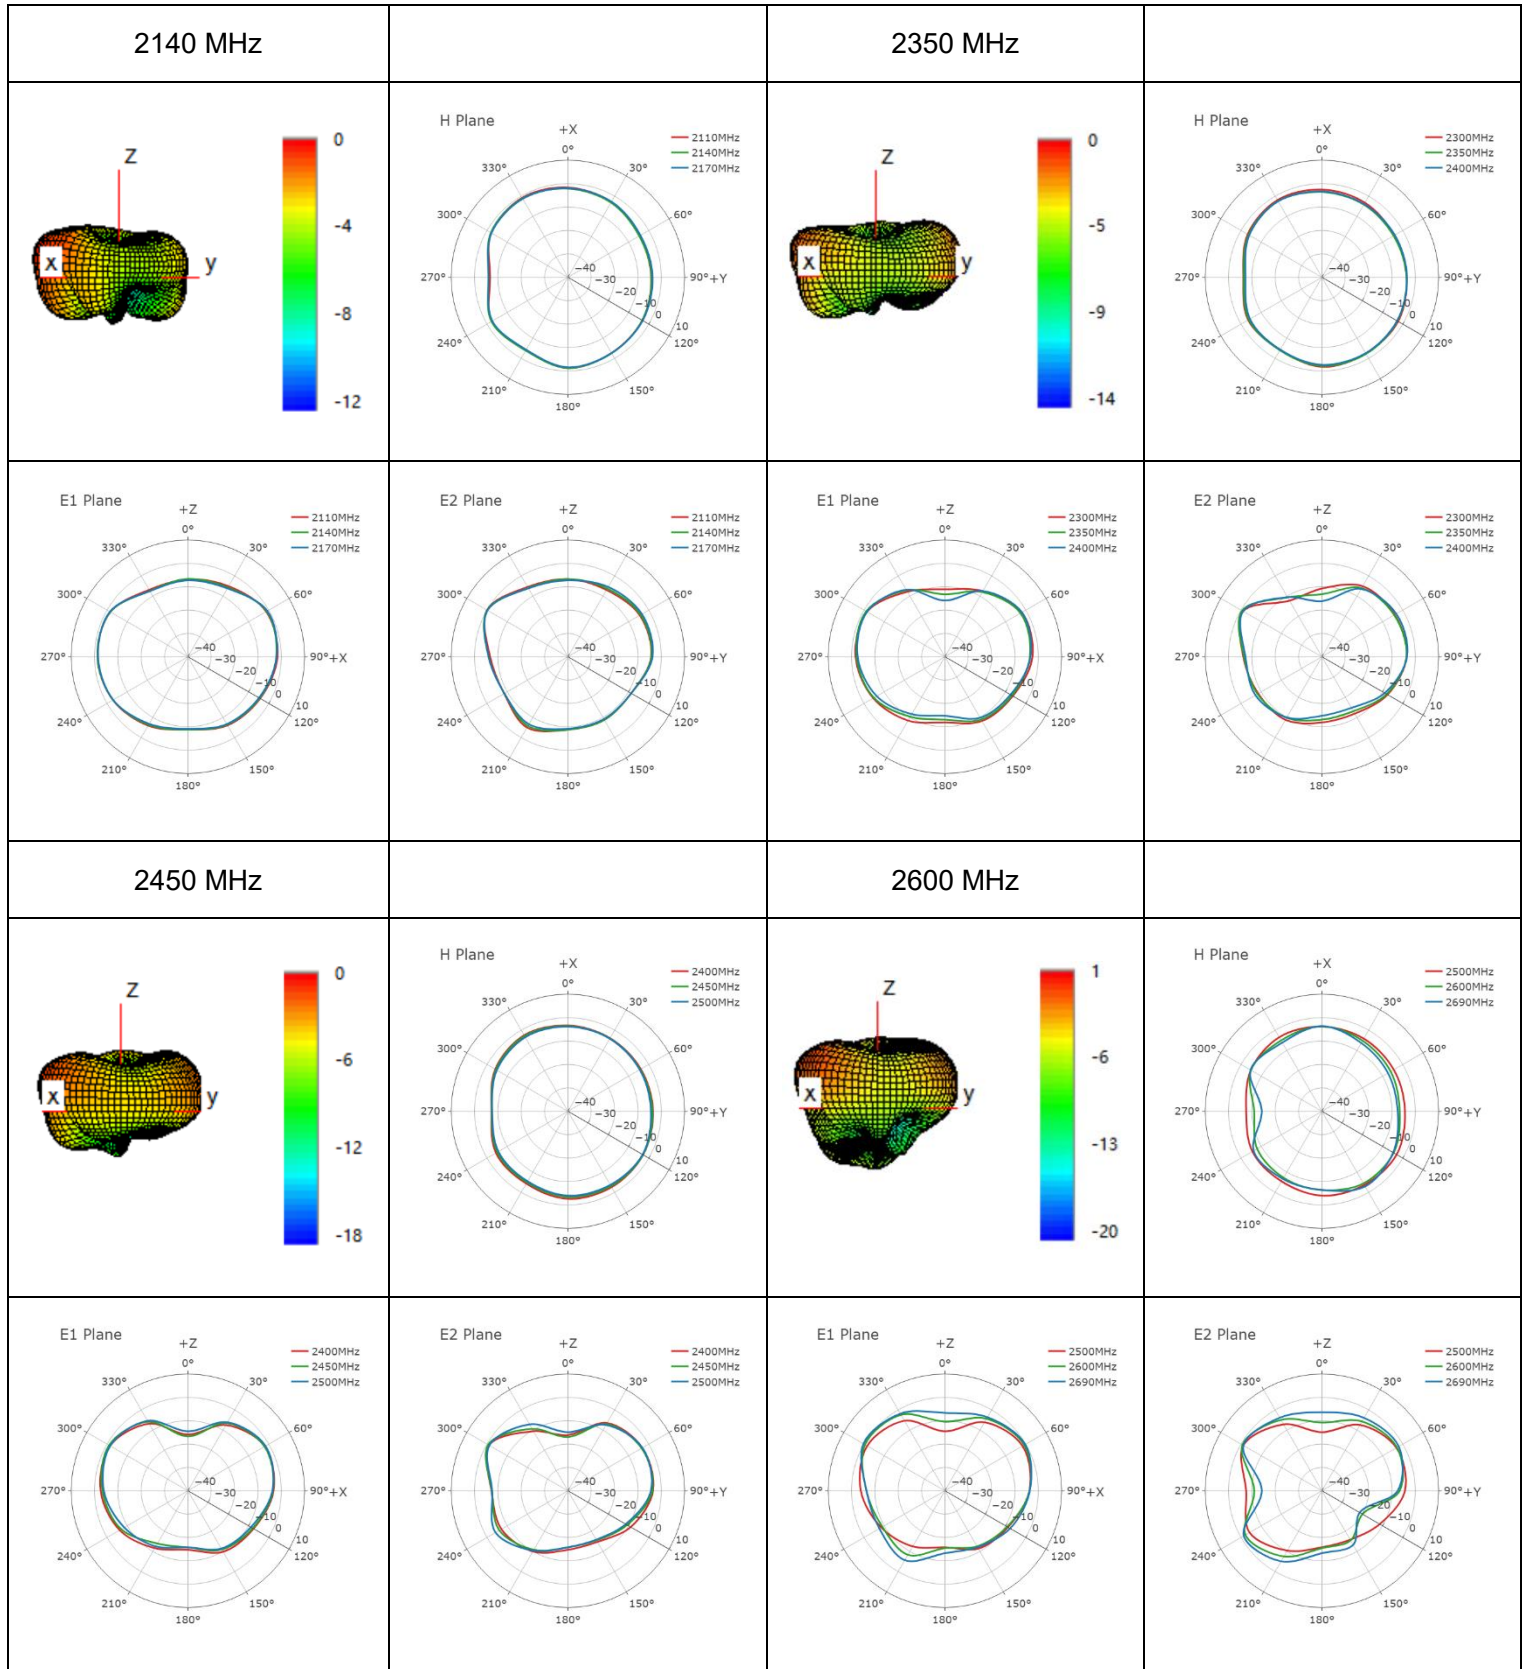


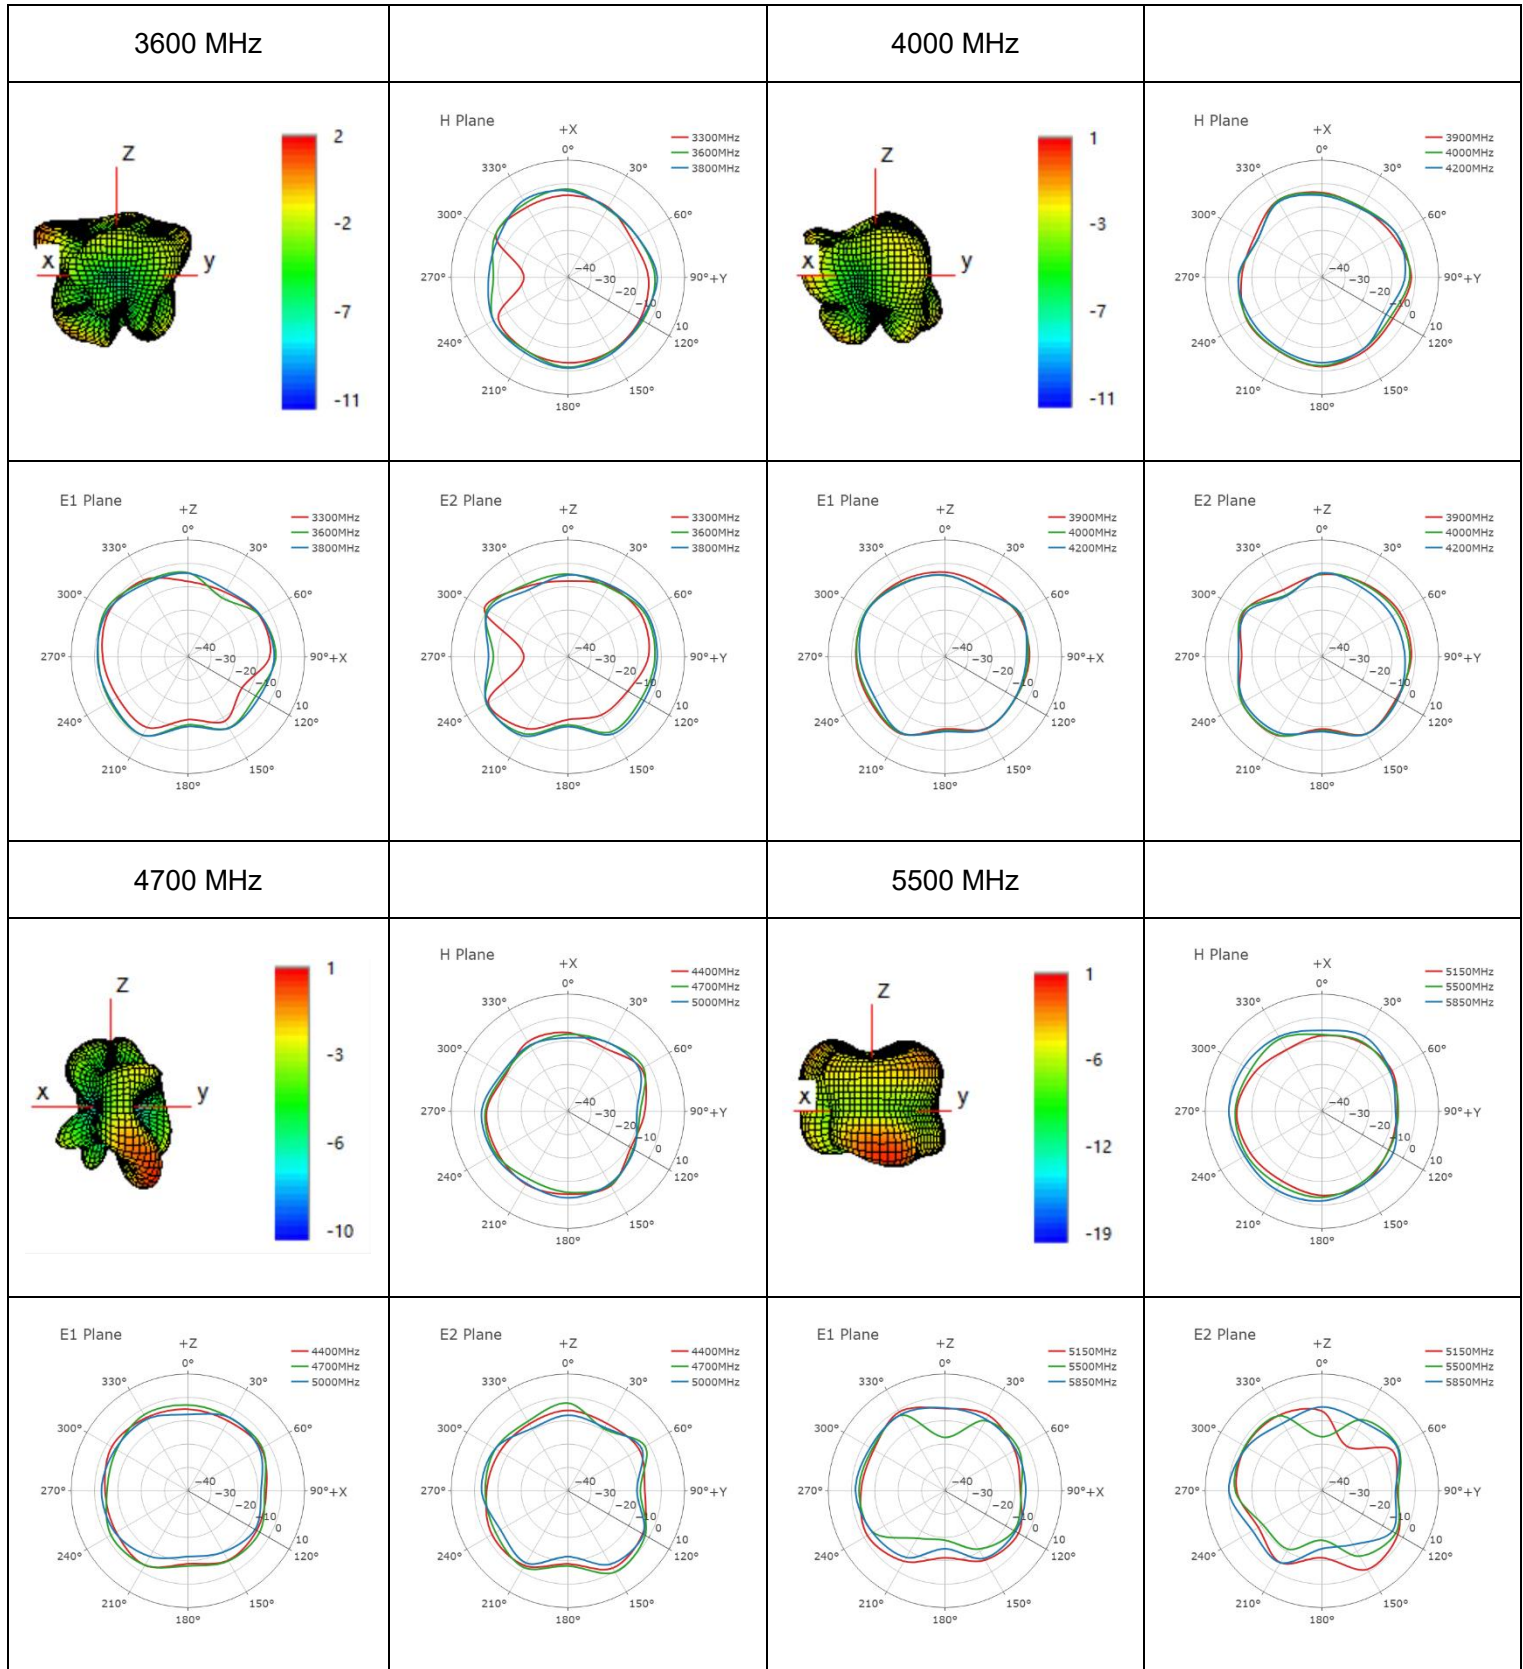

● **Max Peak Gain**

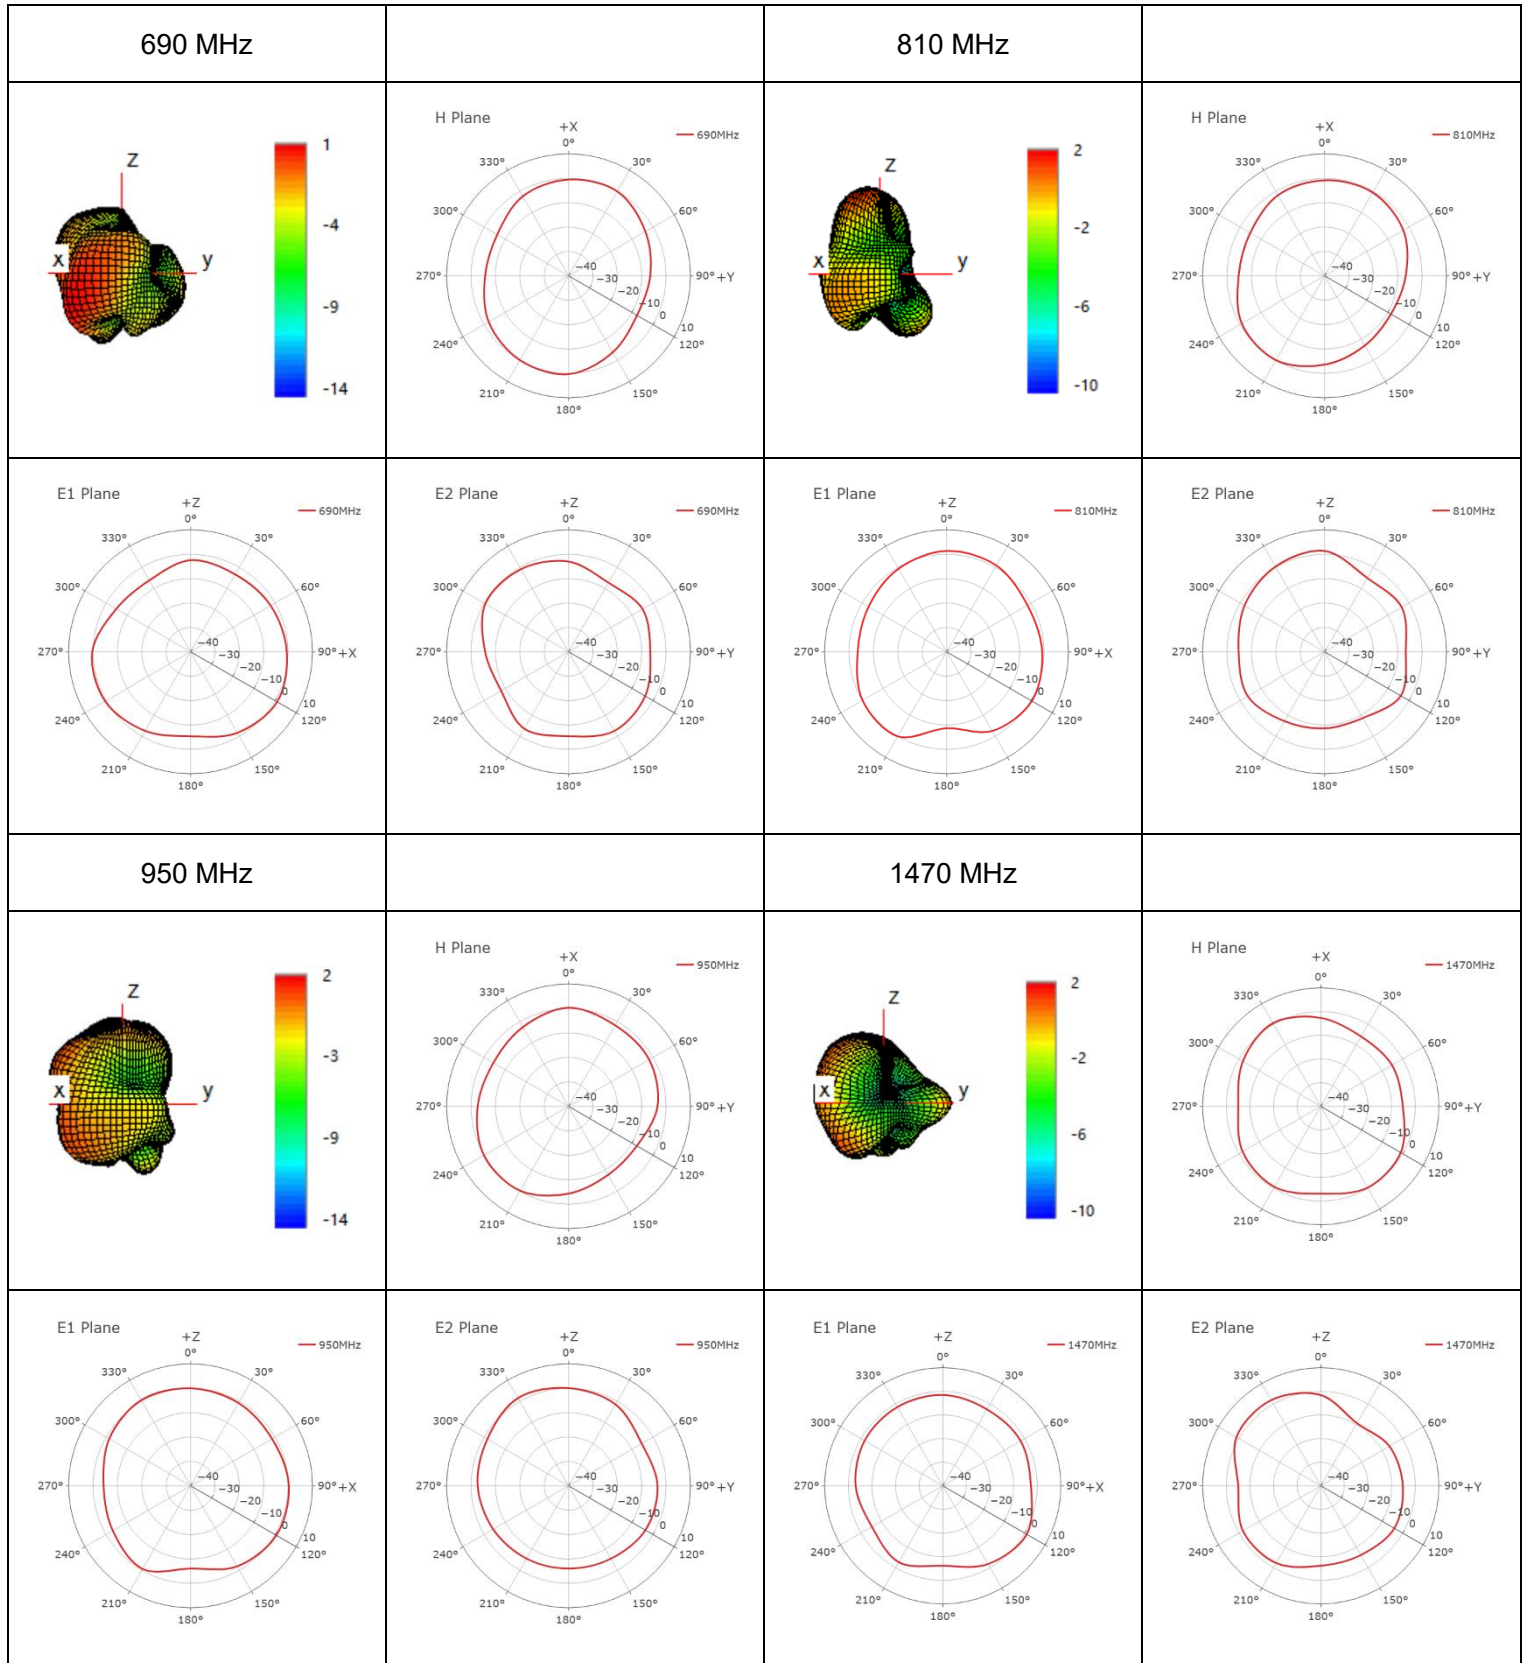


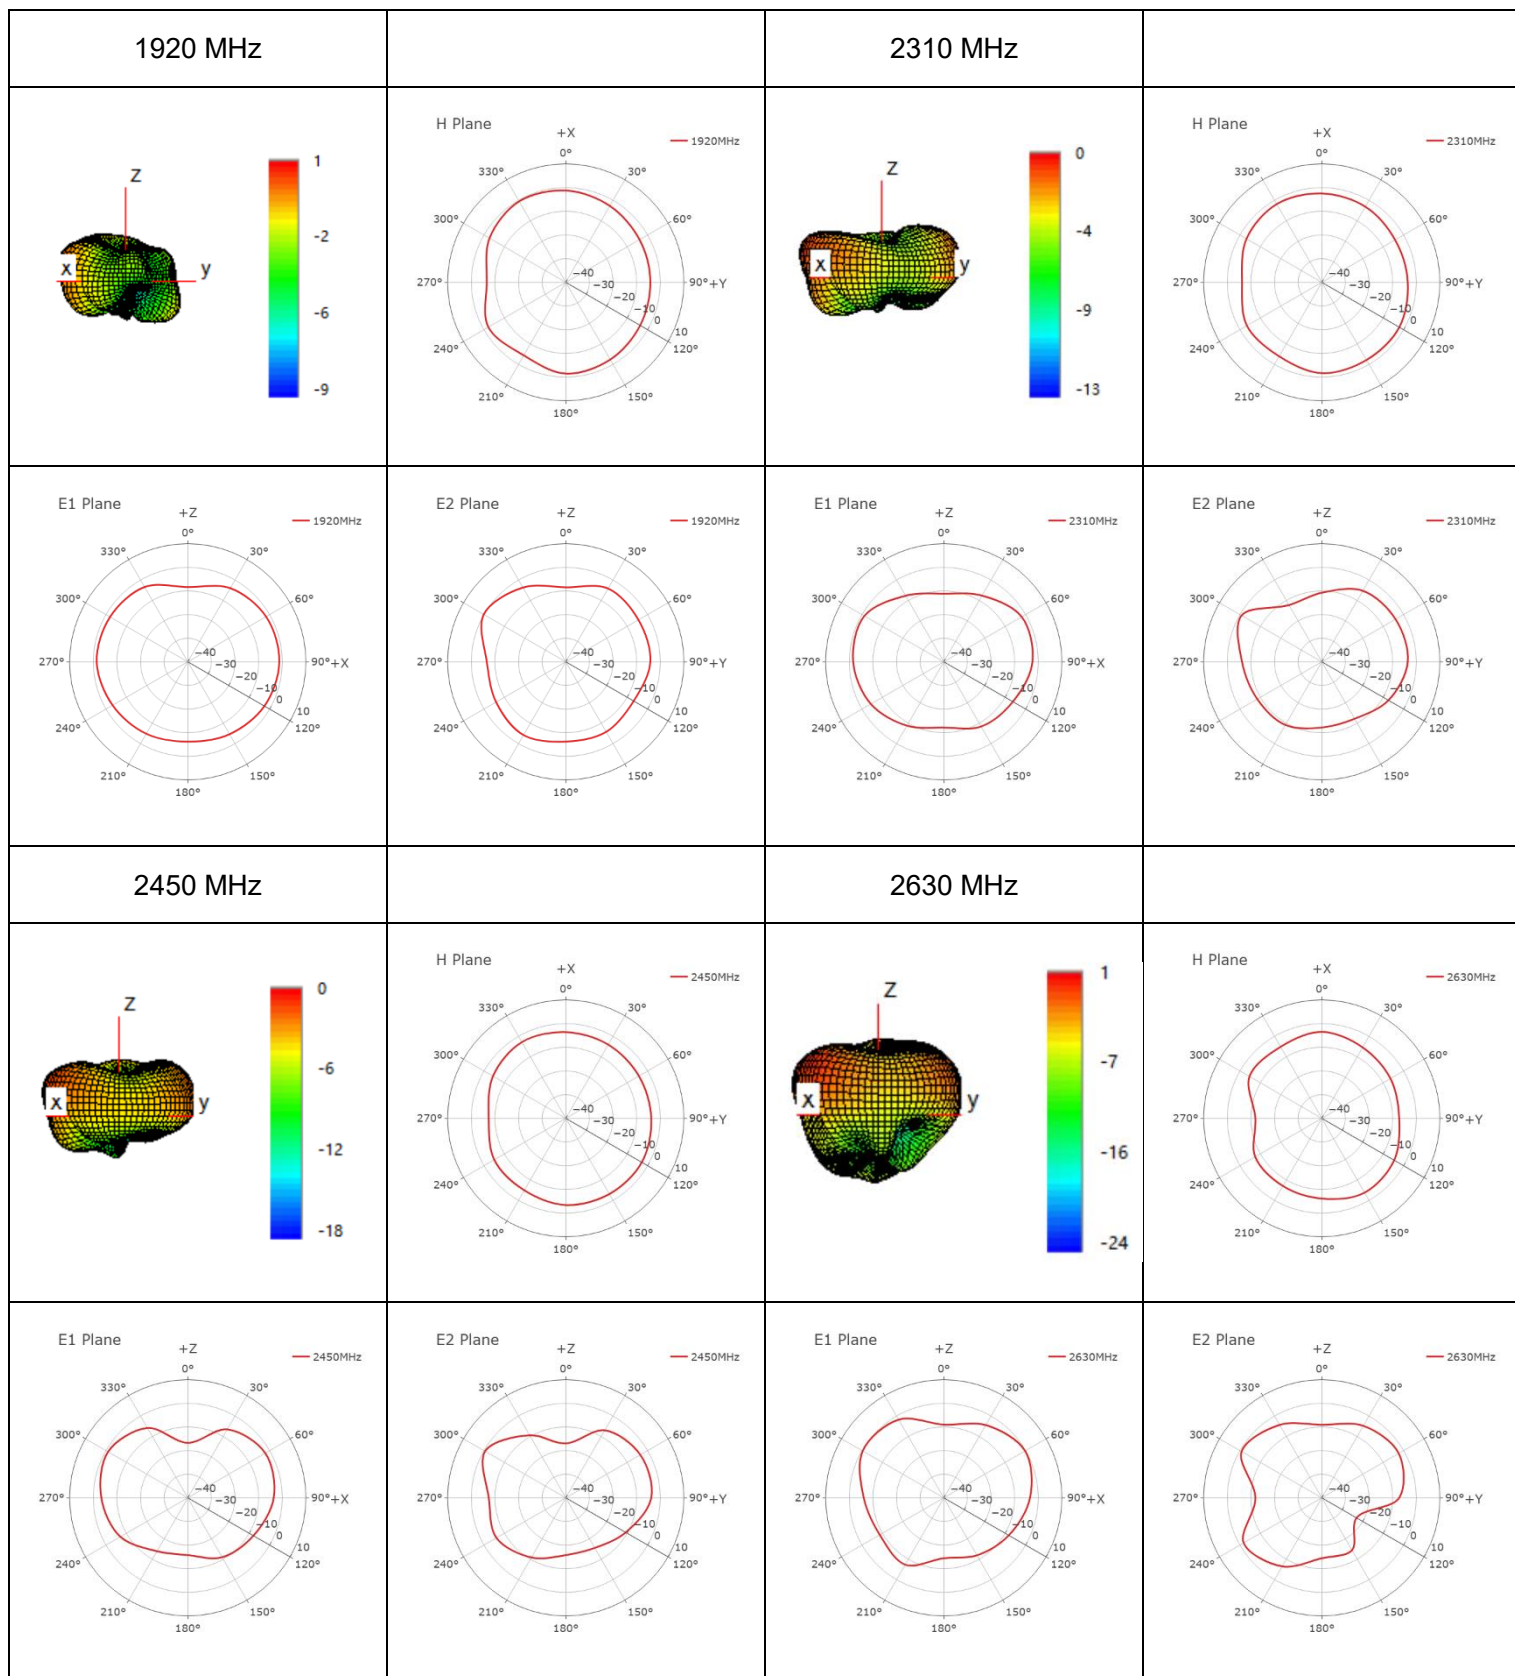


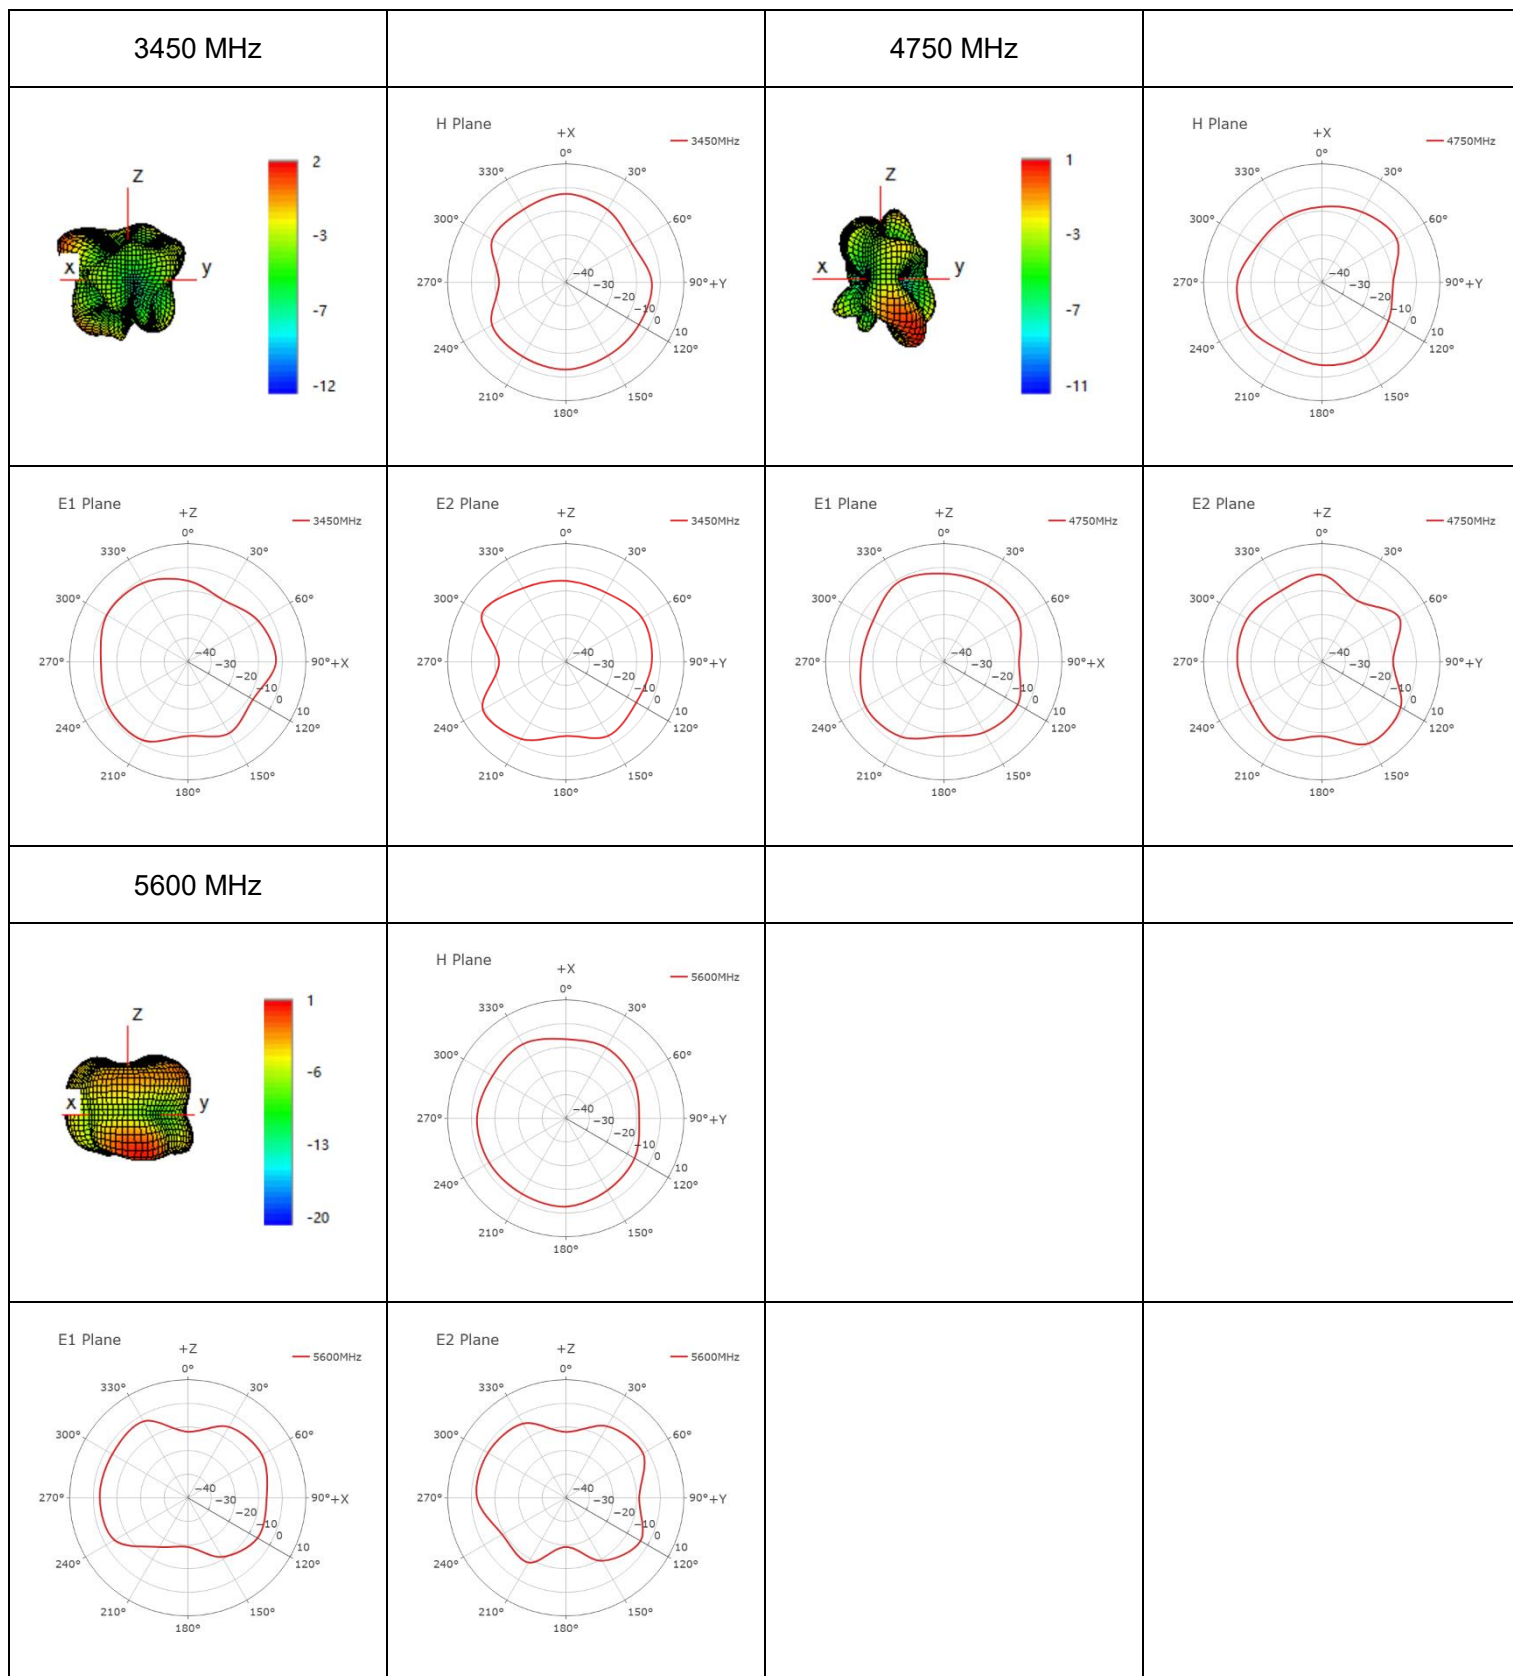


3.2.4.2. Test state: Bent







- Test Condition: On 130 mm × 70 mm EVB
- Test Chamber: GL-G-1

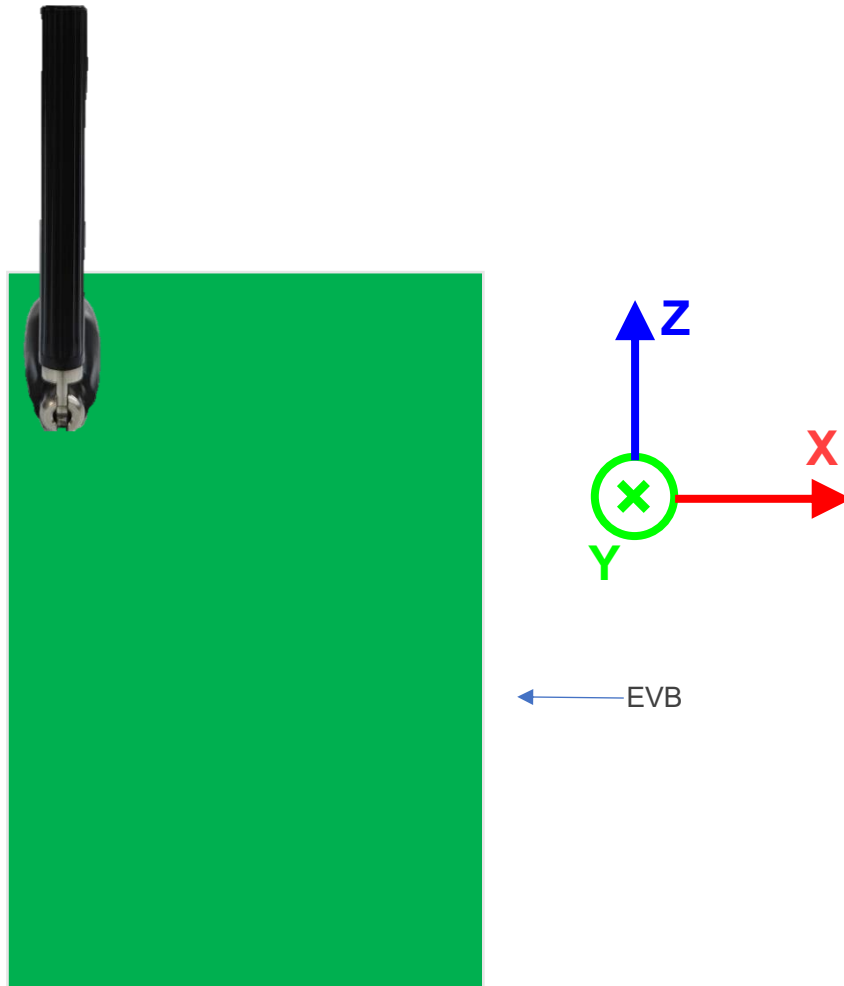



630 MHz









710 MHz





830 MHz




900 MHz




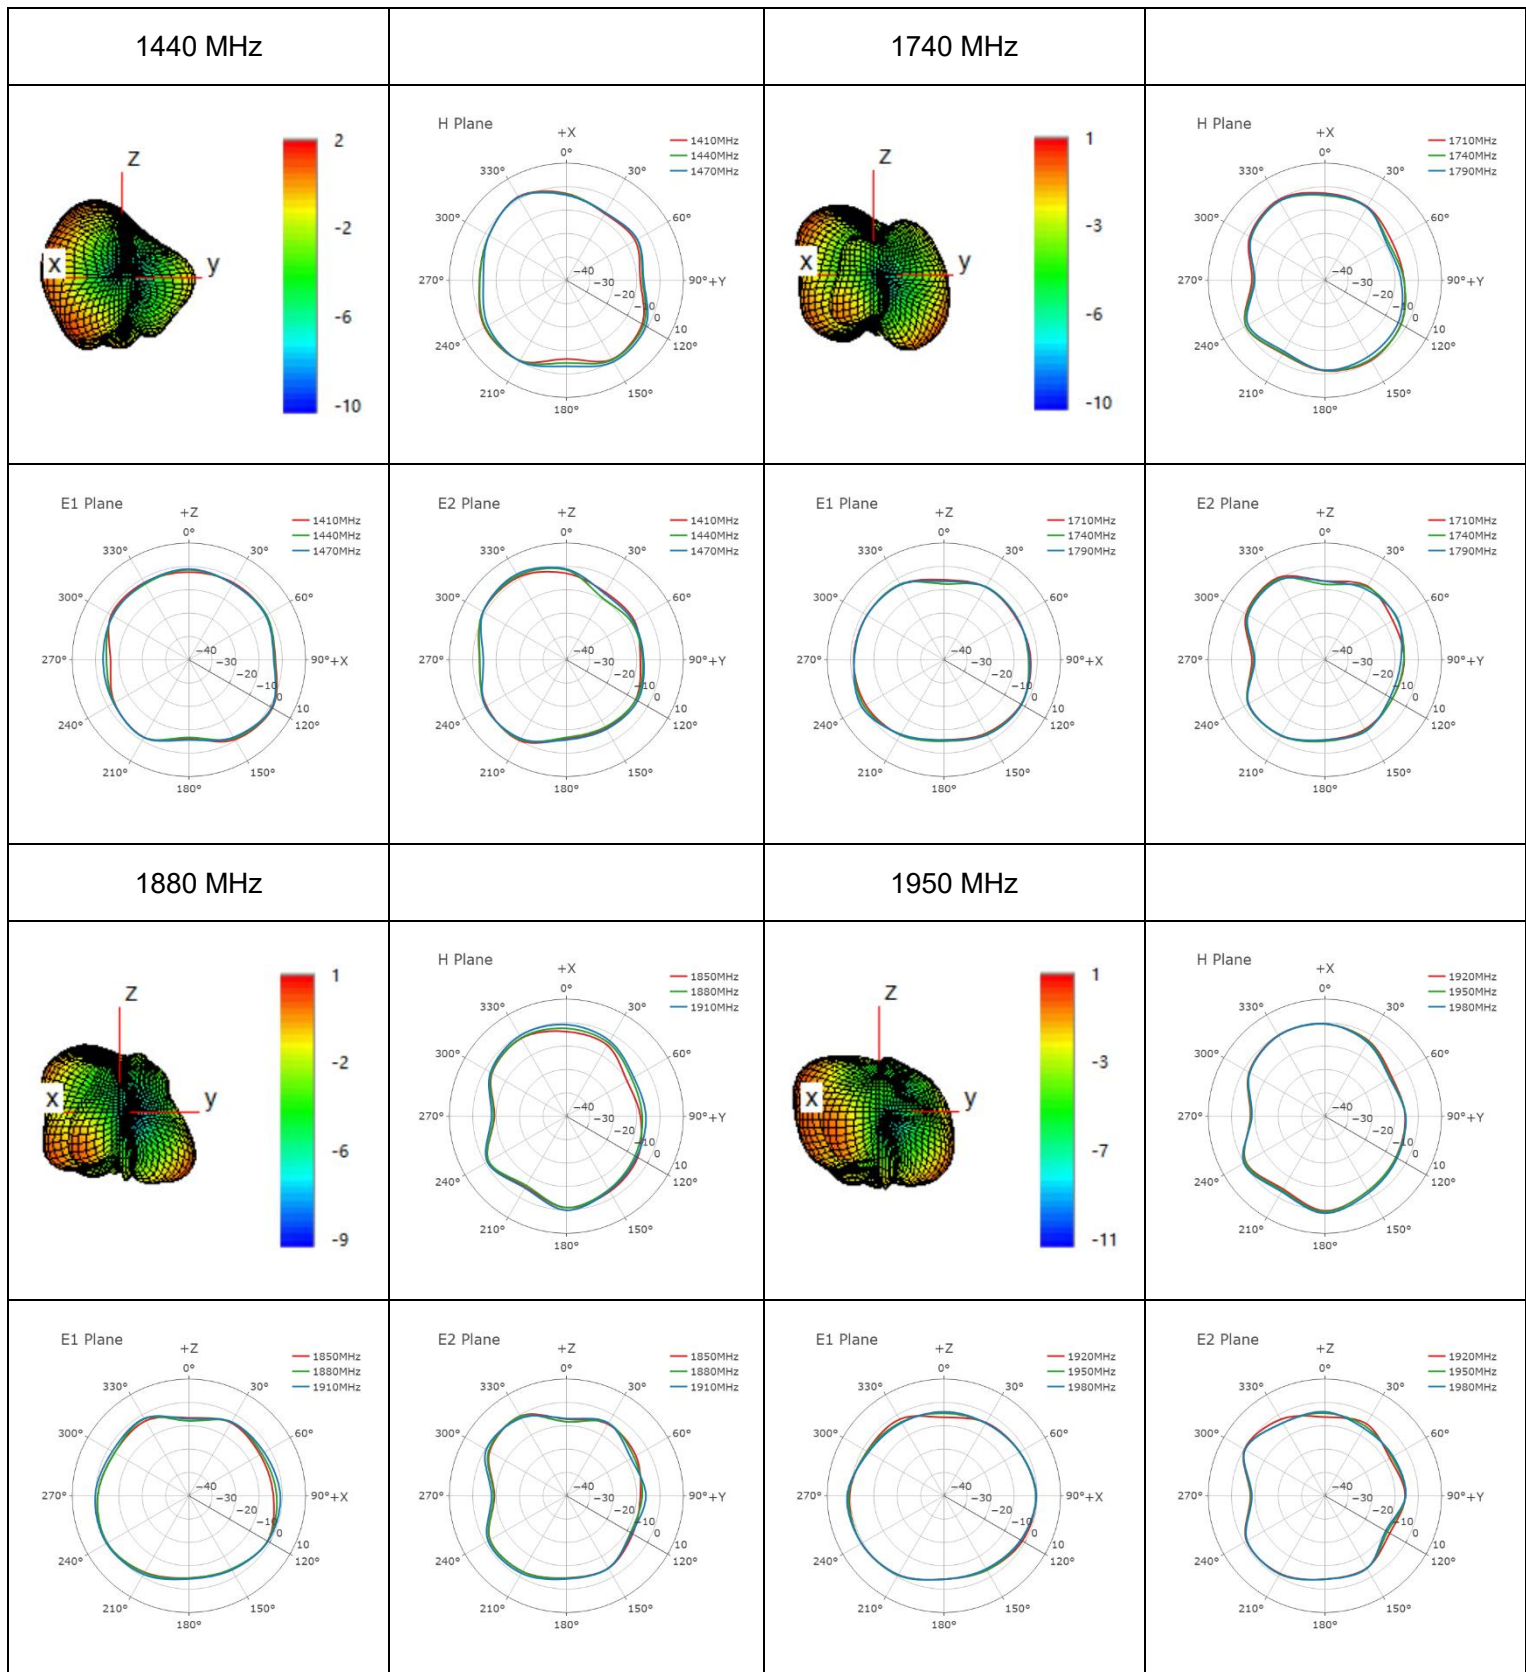


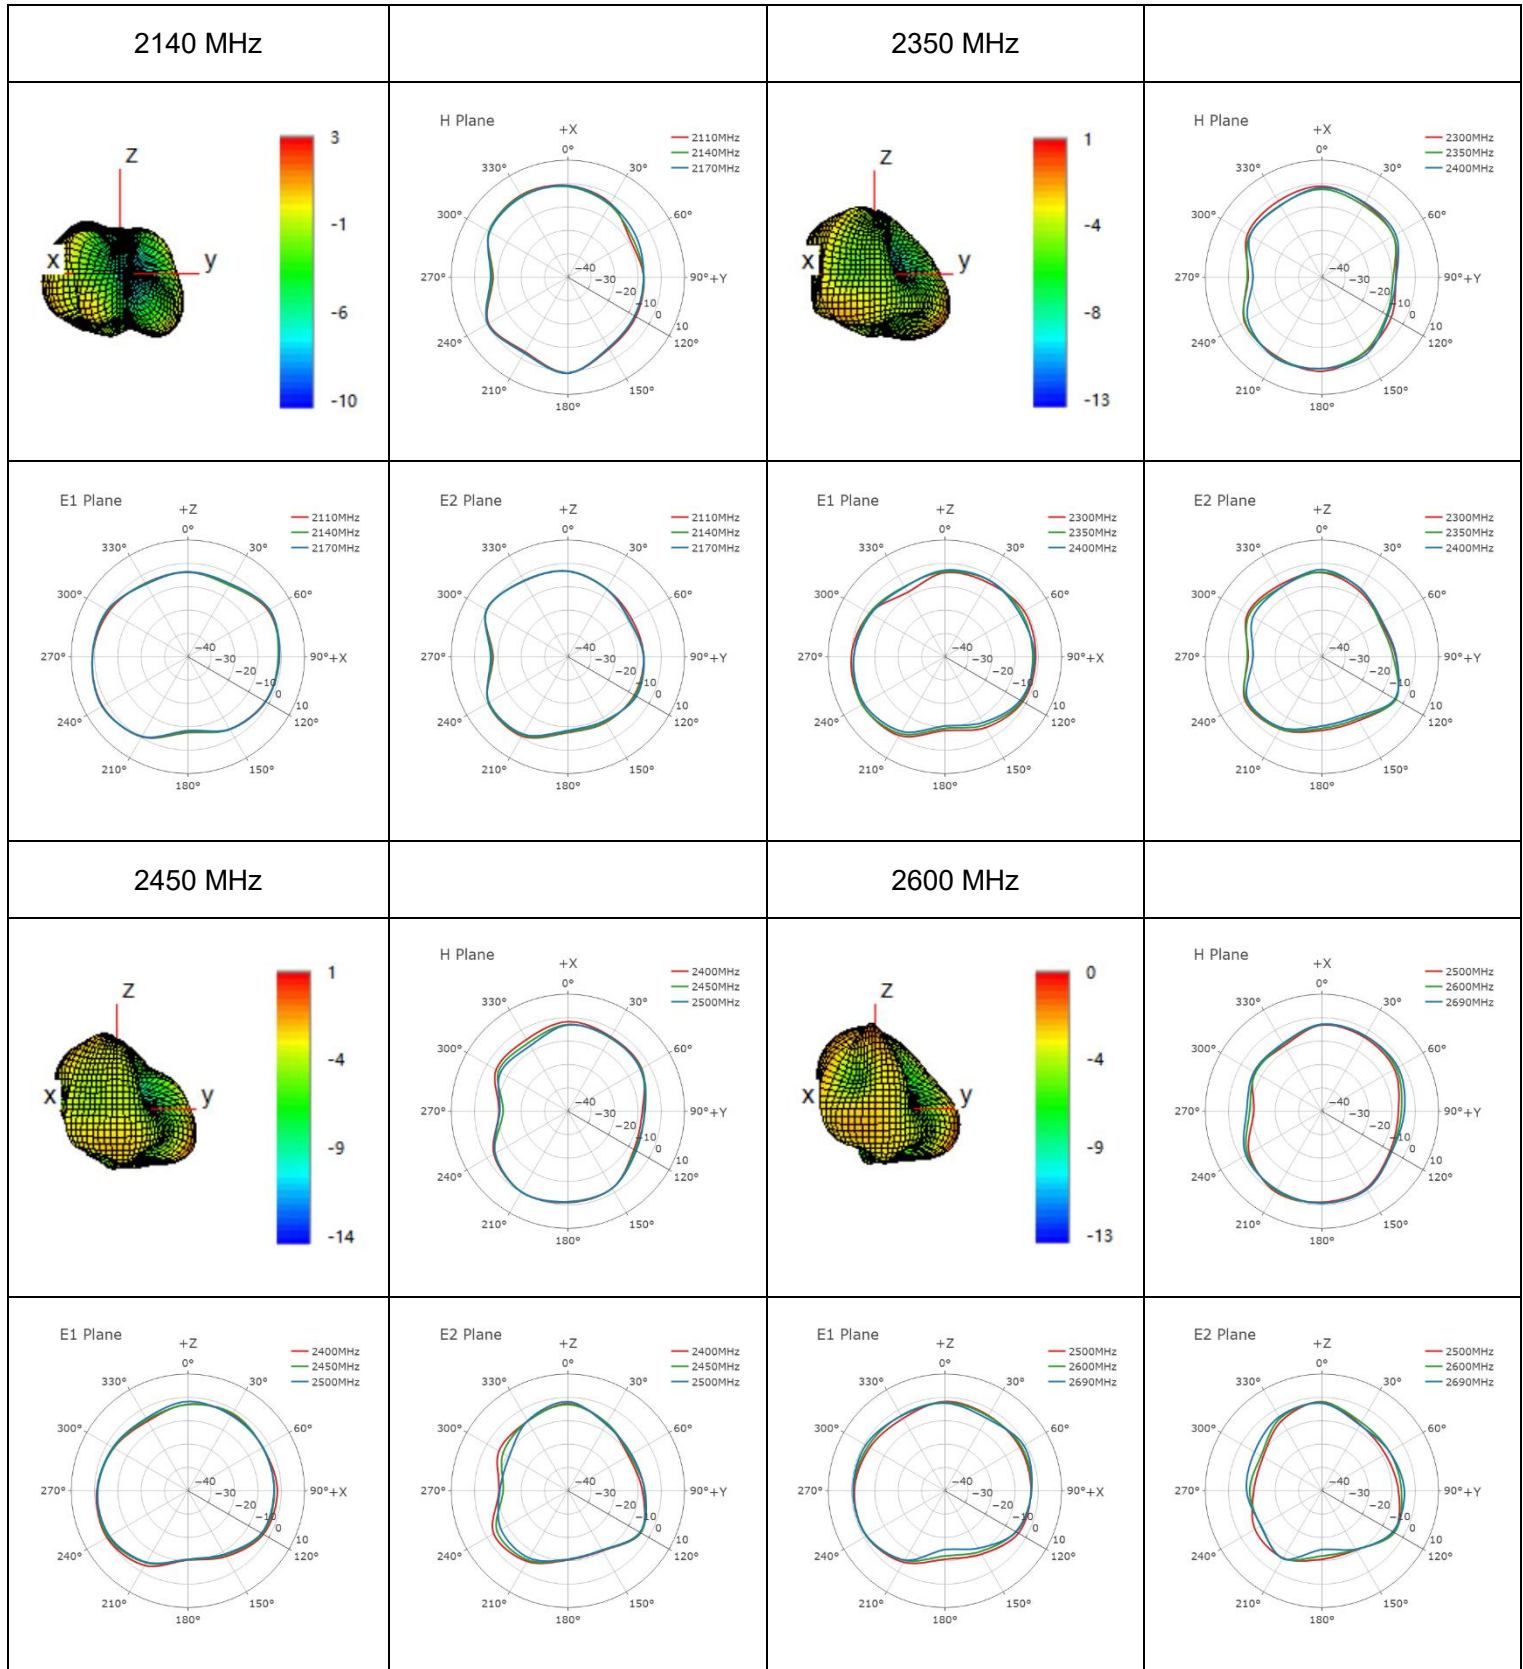


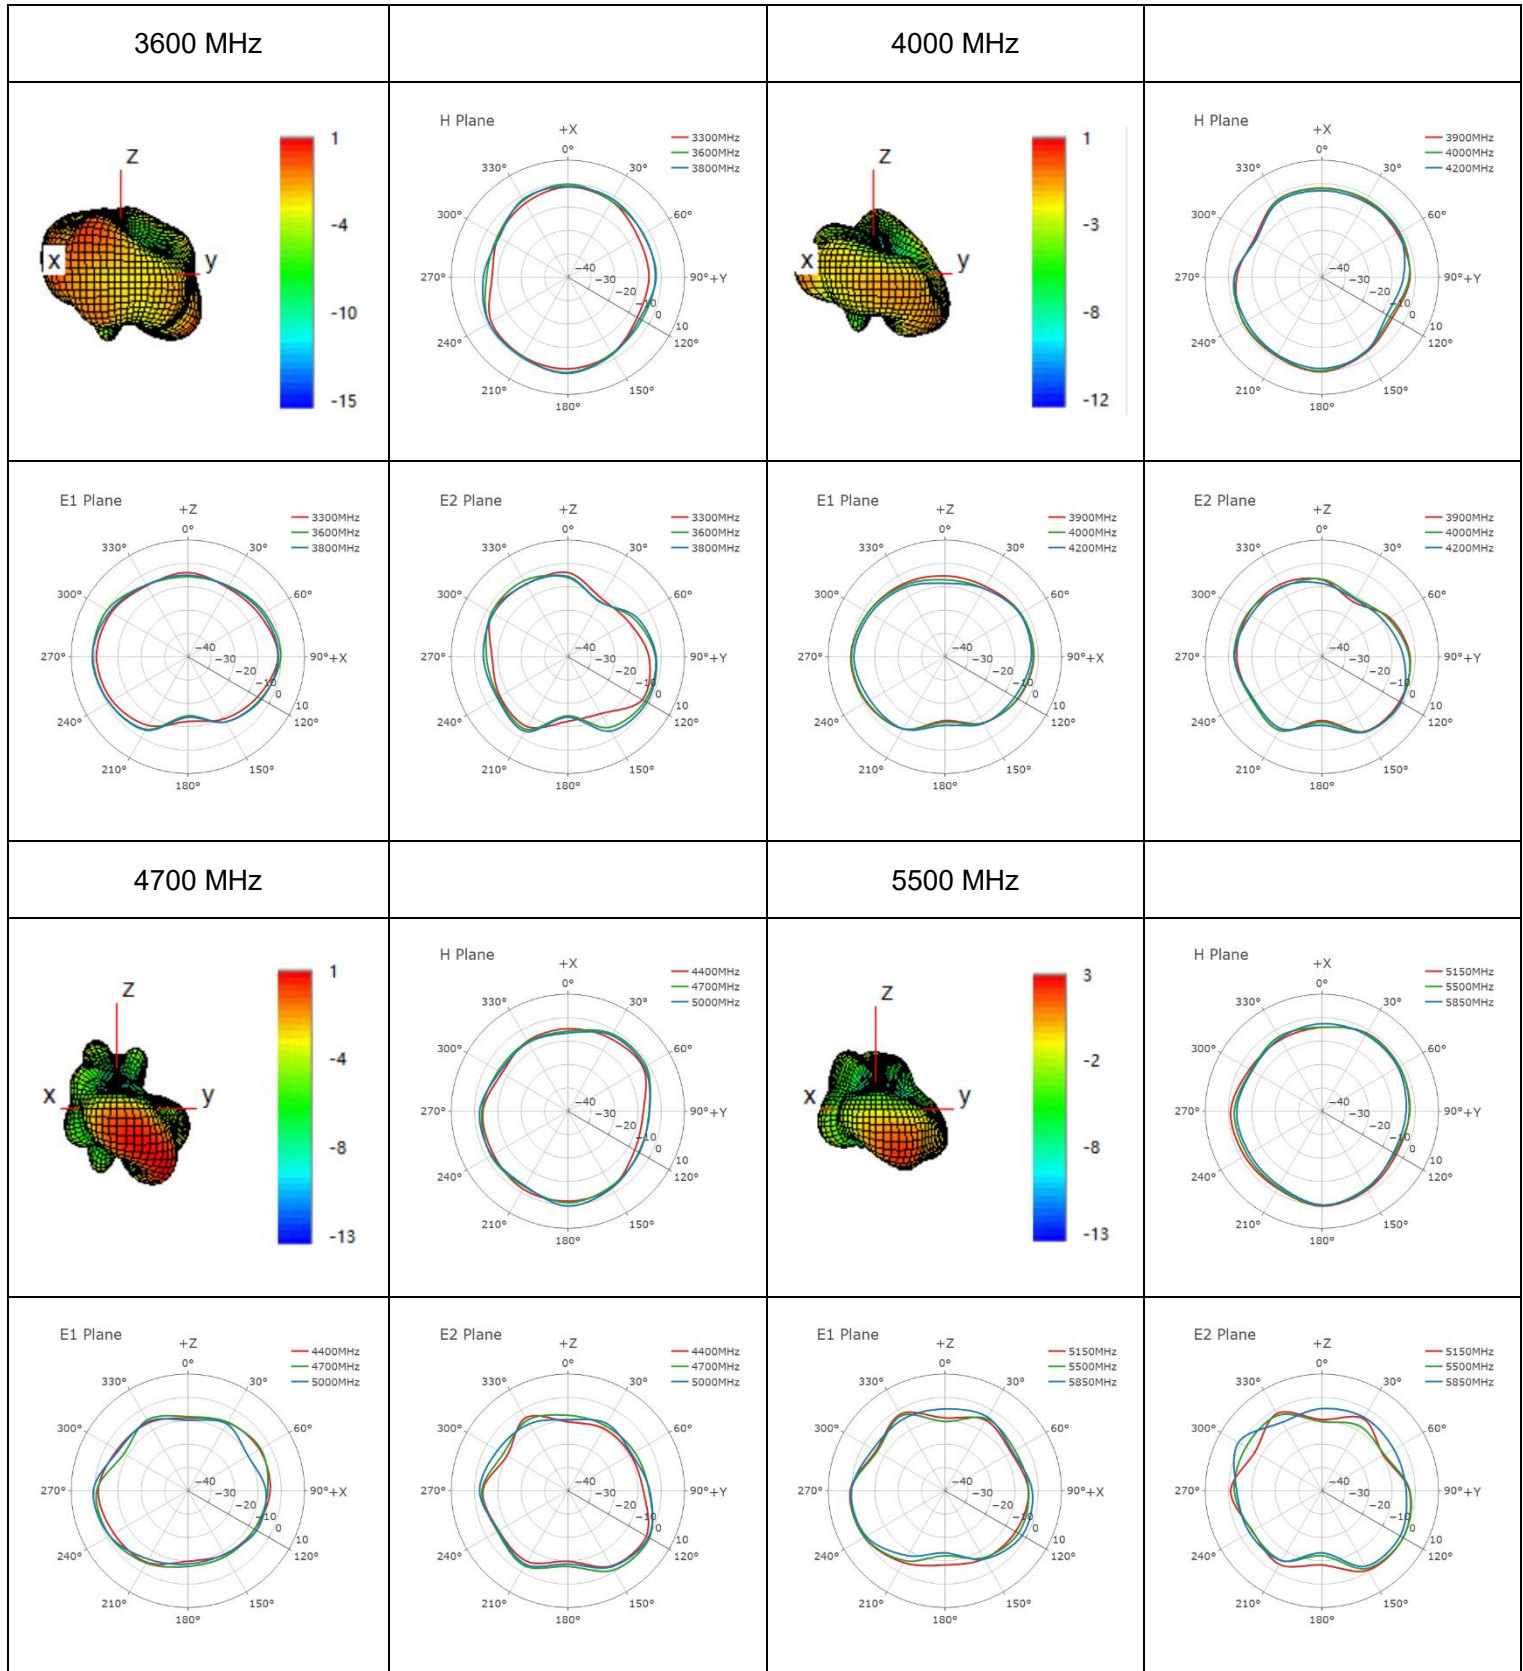





● **Max Peak Gain**

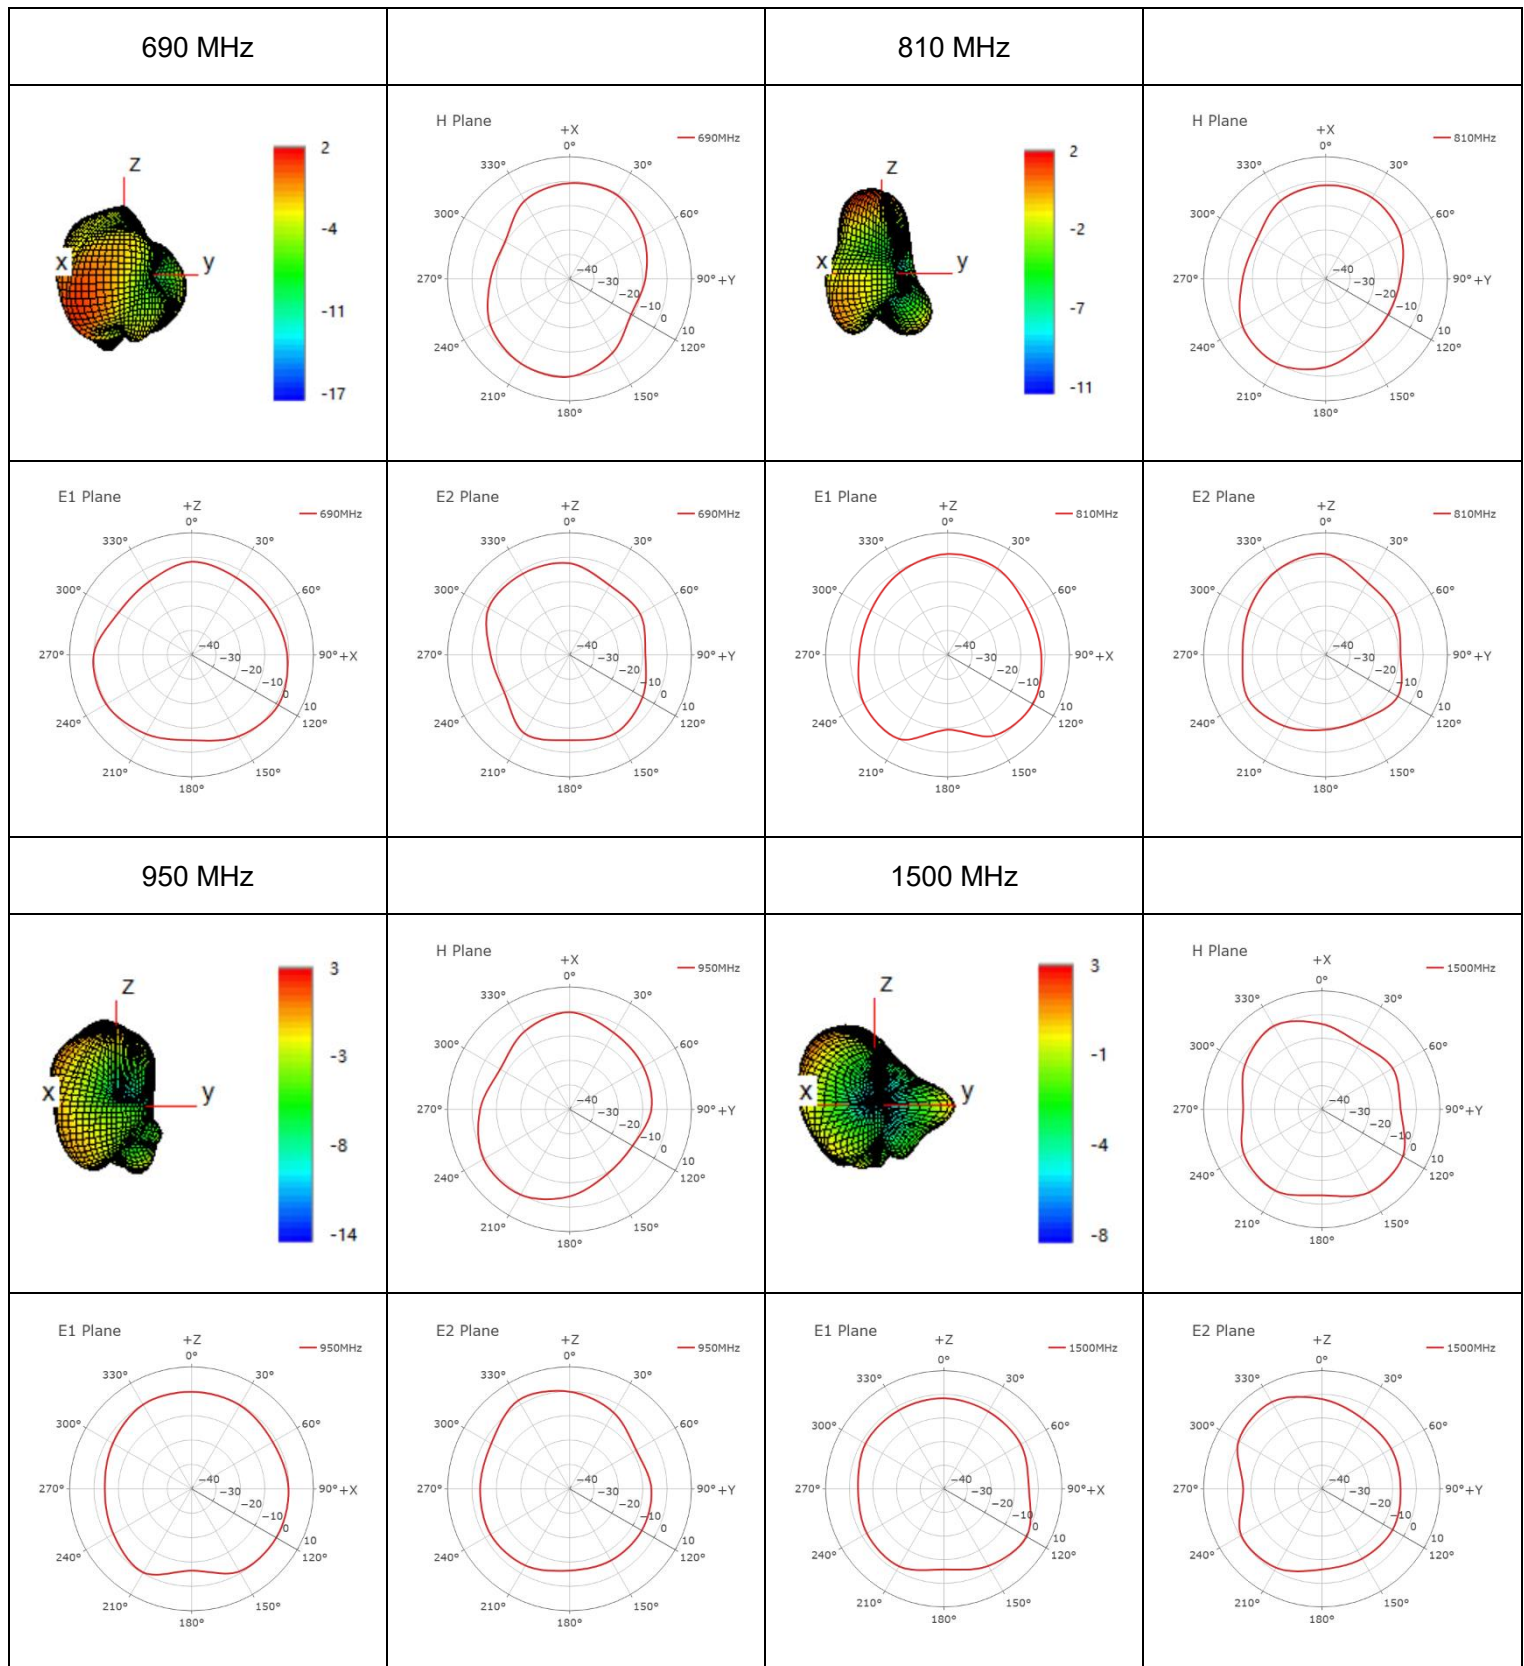


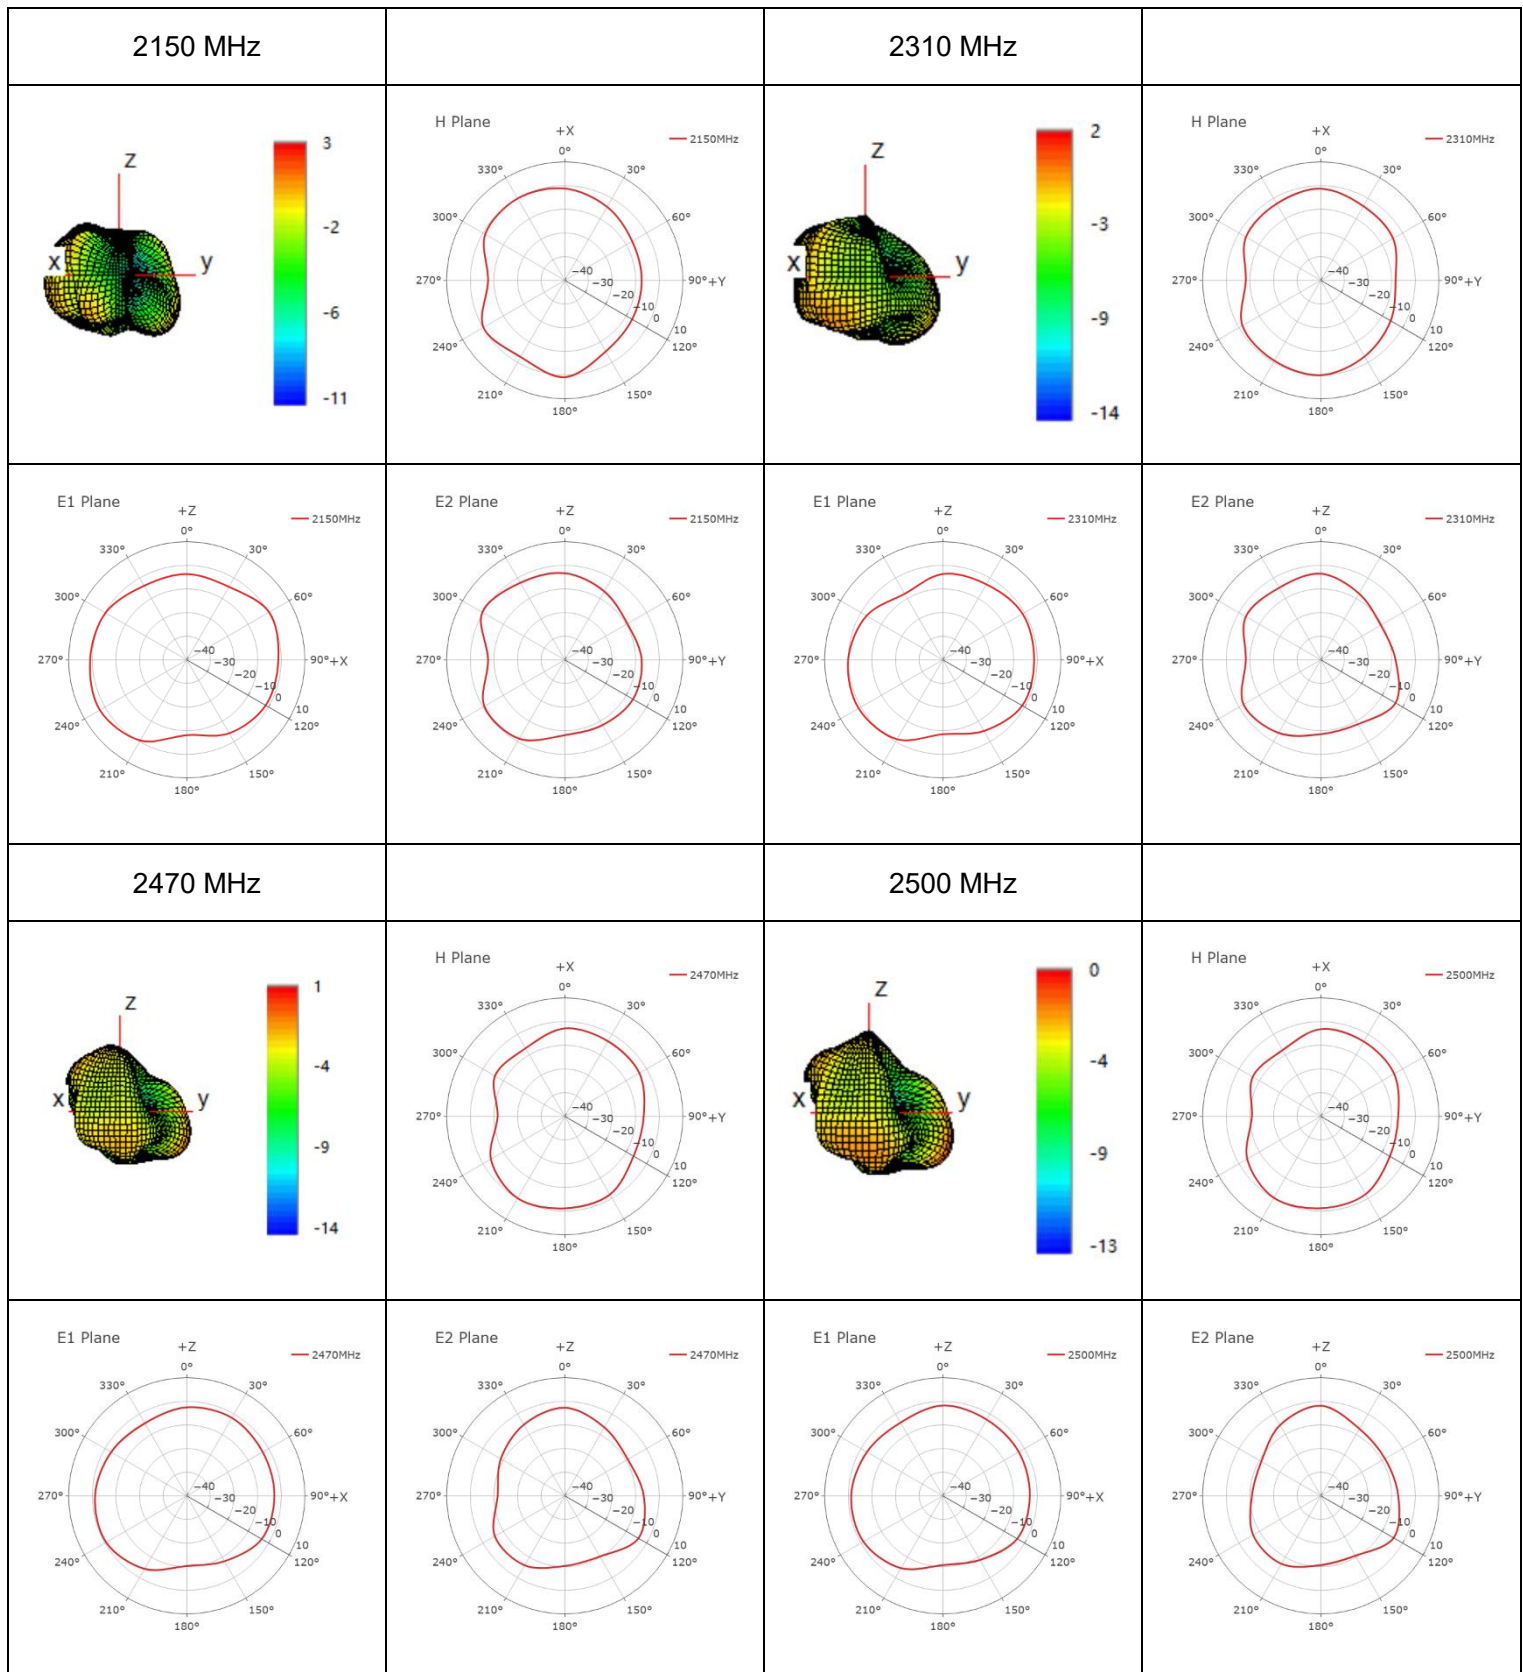

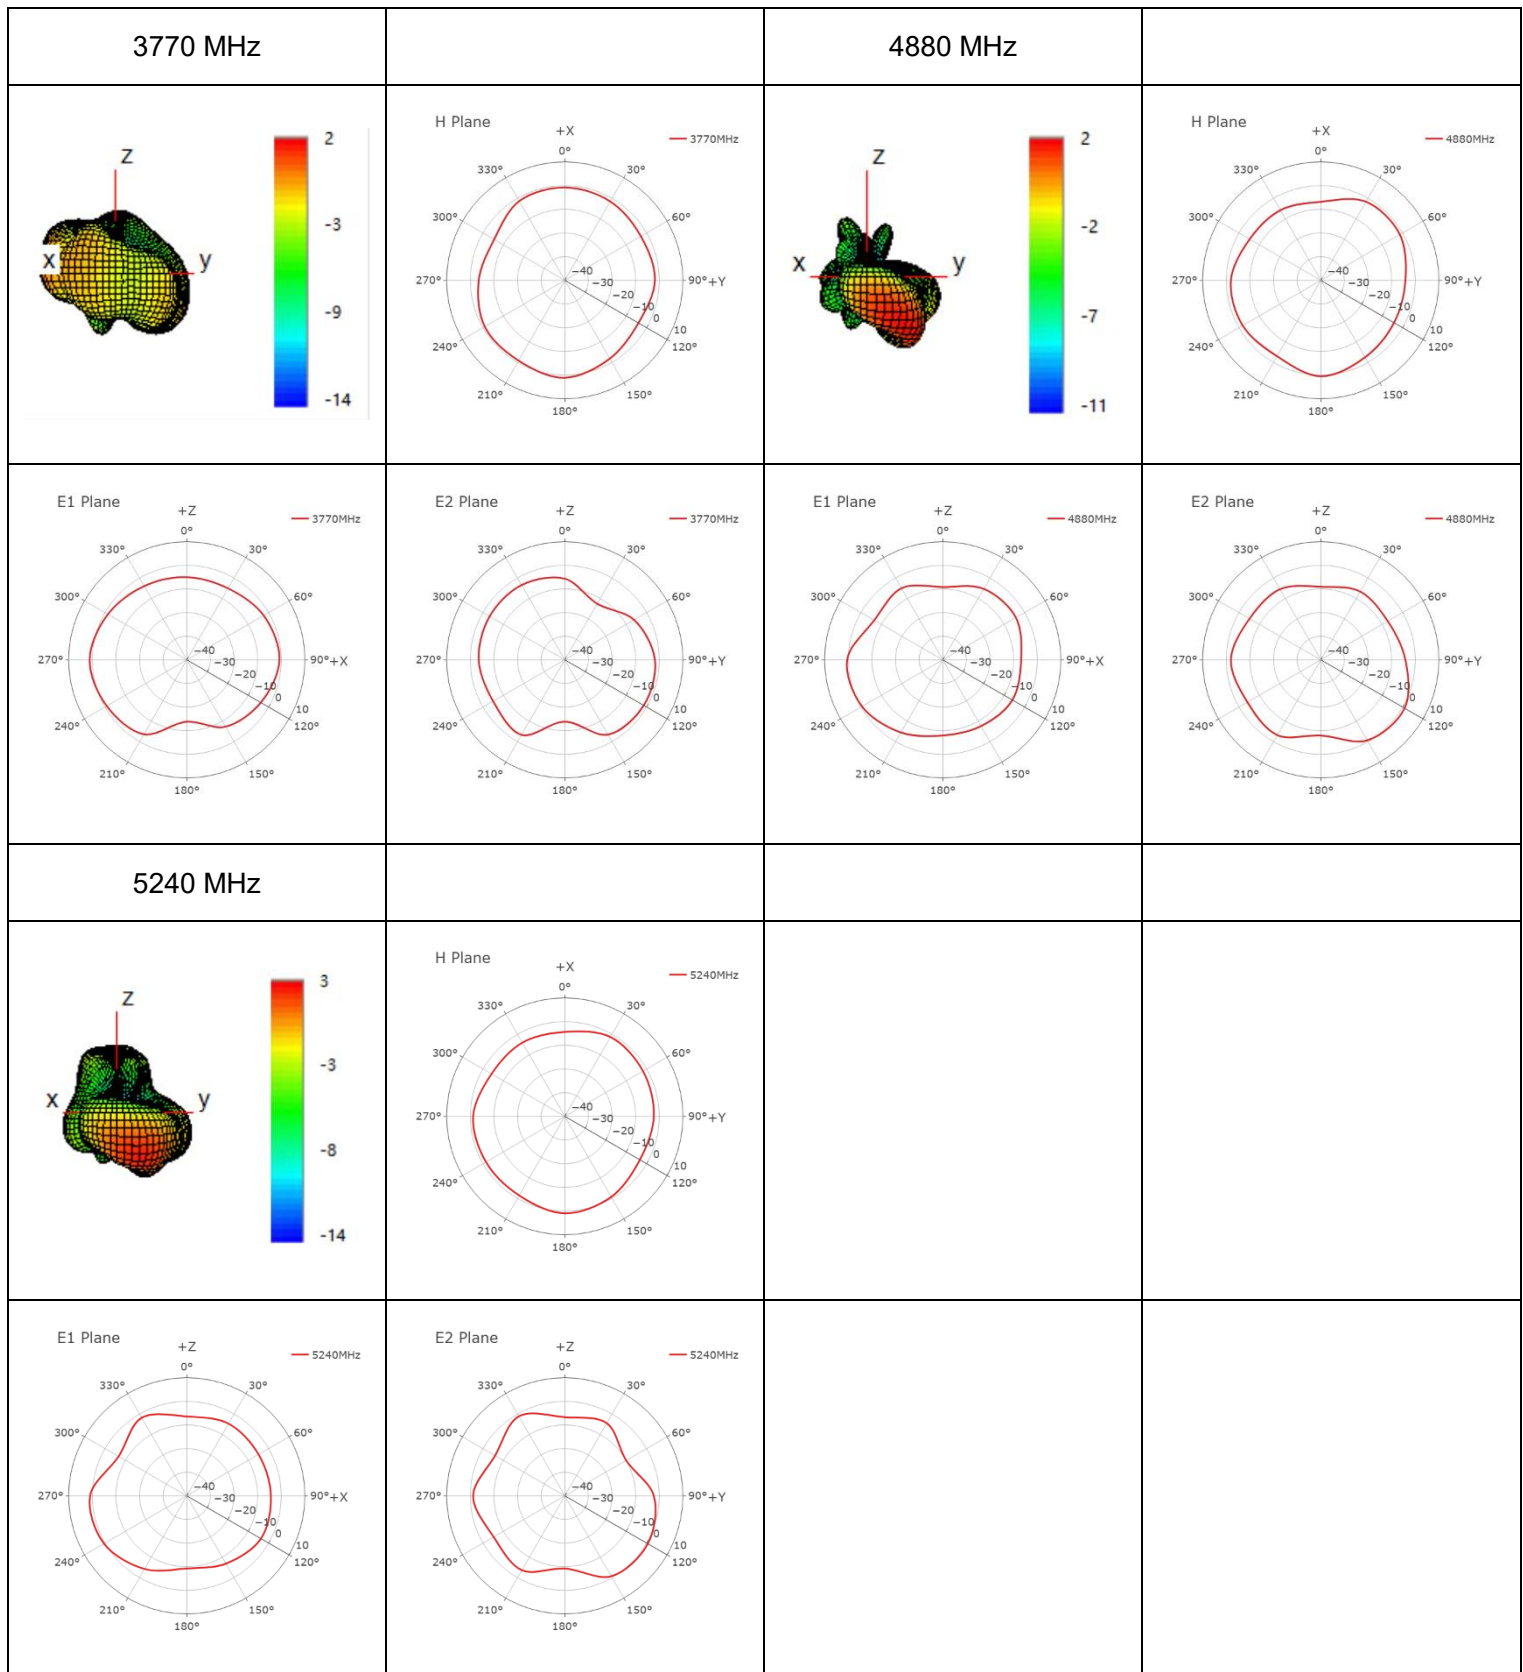

4 Packaging

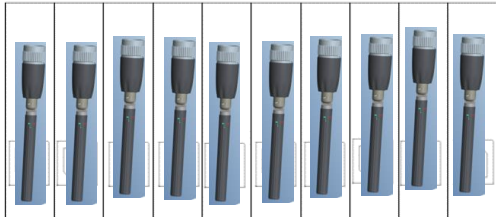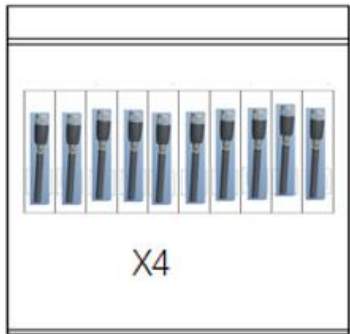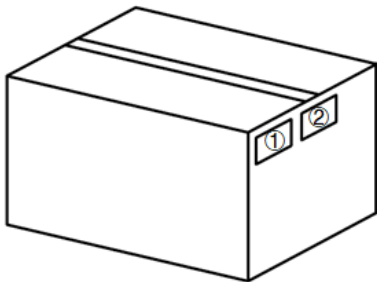Step	Packaging Picture / 2D Picture	Description
1		10 pcs antenna products in a one-piece bag. (10 PCS Antennas / PE Bag)
2		40 pcs antenna products in a PE bag. (40 PCS Antennas / PE Bag)
3		(20 PE Bags / Carton Box) (800 PCS Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. <u>Carton Size:</u> <u>L × W × H = 300 × 250 × 200 mm</u>
4		Position for Attaching Labels ① Carton Label ② Quality Label

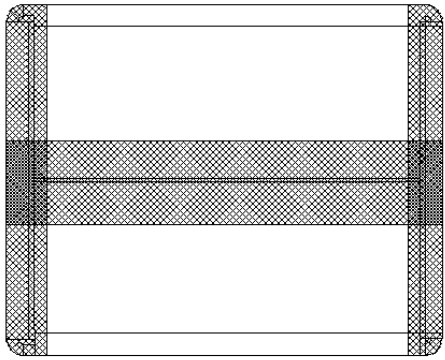5		Sealing Cartons H-shaped sealing cartons
Note	The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under
- d) development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- e) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2025. All rights reserved.

Revision History

Version	Date	Author	Note
-	2025-05-26	Mayes LI/ Rojin LUO/ Riva REN/ Rainey LIAO	Creation of the document
1.0	2025-05-26	Mayes LI/ Rojin LUO/ Riva REN/ Rainey LIAO	First official release
1.1	2025-07-09	Rojin LUO/ Rainey LIAO	1. Updated the antenna image (Cover page). 2. Updated the drawing (Chapter 2).



www.quectel.com