



Antenna Datasheet

Product OC: YEME490WPAM

Version: 1.1

Date: 2026-04-22

Status: Released

Product Name: 4G 4in1 Pole Mount Combo Dual Beam Lens Antenna

Key Features:

Frequency Band: 698–960 MHz

Dimensions: 850 mm × 645 mm × 850 mm

RoHS and REACH Compliant

Overview

The Quectel YEME490WPAM is a high-gain, four-port dual beam lens antenna engineered for precision coverage in modern cellular networks. Operating within the 698–960 MHz frequency range, it is ideally suited for LTE, NB-IoT, and other mid-band applications requiring robust and focused signal delivery. Its standout feature is the generation of two independent beams, each with a $\pm 45^\circ$ polarization and a beam center at $\pm 33^\circ$ in the horizontal plane, allowing for sophisticated sectorization and enhanced capacity in dense deployment scenarios.

With a high gain of 13 dBi ± 1.5 , excellent sidelobe suppression (15 dB), and strong isolation between ports (≥ 20 dB), this antenna ensures high signal quality and minimizes interference. Its robust mechanical design supports a wide mounting diameter (Φ 50 mm– Φ 114 mm), features an ASA radome for durability, and is built to withstand harsh environmental conditions, operating reliably from -40°C to $+70^\circ\text{C}$. As a RoHS and REACH compliant solution from Quectel, the YEME490WPAM delivers the performance, reliability, and precision required for critical outdoor wireless infrastructure.

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

Overview.....	1
Contents	2
1 Specification.....	3
1.1. Electrical.....	3
1.2. Mechanical & Environmental	4
2 Drawing	5
3 Detailed Performance	6
4 Packaging	7
Contact Us.....	9
Legal Notices	10
Revision History	12

1 Specification


1.1. Electrical

Electrical	
Frequency Range (MHz)	698–960 MHz
Polarization	±45
Gain (dBi)	13 ±1.5
Sidelobe Suppression (dB)	15
Horizontal Plane 3dB Beamwidth (°)	40 ±8
Vertical Plane 3dB Beamwidth (°)	40 ±8
Horizontal beam center (°)	-33, +33
Beam Quantity	2
Horizontal coverage (dB)	120
Beam overlap (dB)	12 ±4
VSWR	≤ 1.5
Isolation Between Polarization (dB)	≥ 25
Isolation Between Beam Port (dB)	≥ 20
Front to Back Ratio (dB)	20
Intermodulation IM3 dBc (2 × 43 dBm)	≤ -150
Power Rating (W)	4 × 200 W
Input Impedance (Ω)	50

1.2. Mechanical & Environmental

Mechanical	
Mechanical Down-Tilt	0–20°
Antenna Dimensions	850 mm × 645 mm × 850 mm
Net Weight	16.35 kg
Gross Weight	34.3 kg
Clip Weight	5.8 kg
Connector	4*4.3.10-Female
Mounting Diameter	Φ 50 mm–Φ 114 mm
Radome Material	ASA
Environmental	
Rated Wind Velocity	55 m/s
Operation Temperature	-40 °C to +70 °C
Operation Humidity	5 %–95 %
Lighting Protection	DC Grounded
RoHS & REACH Compliant	Yes

2 Drawing

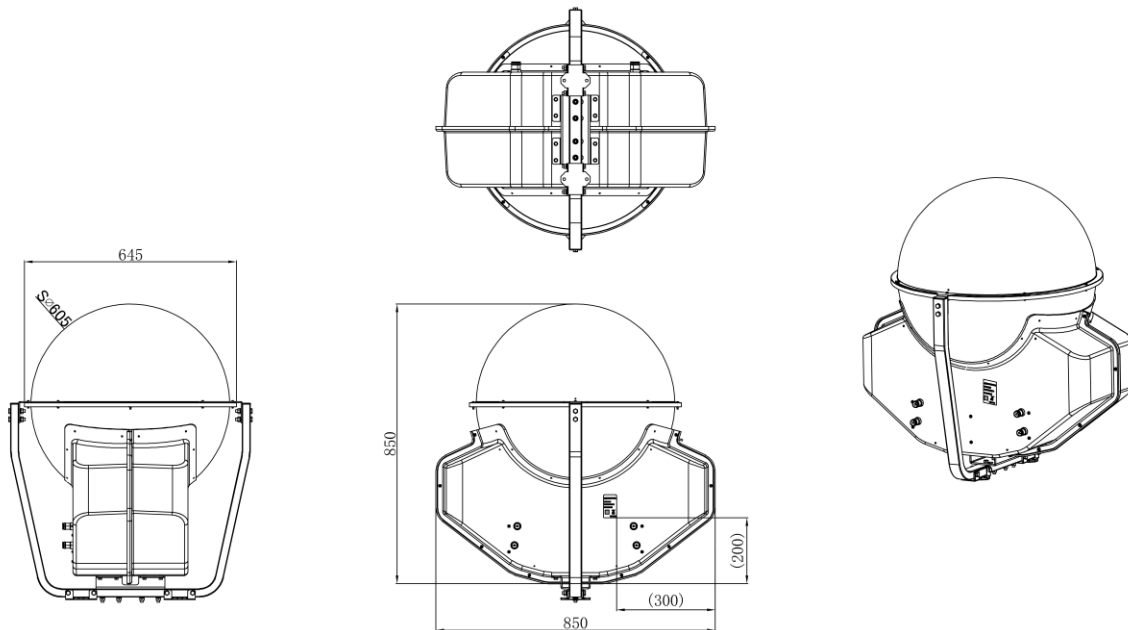


Accessory:Antenna bracket (hot-dip
galvanized)

00-ZJ10D(0-12°)


Specification:Wall thickness
t=4mm

Quantity:1 set





3 Detailed Performance

2D Radiation Pattern

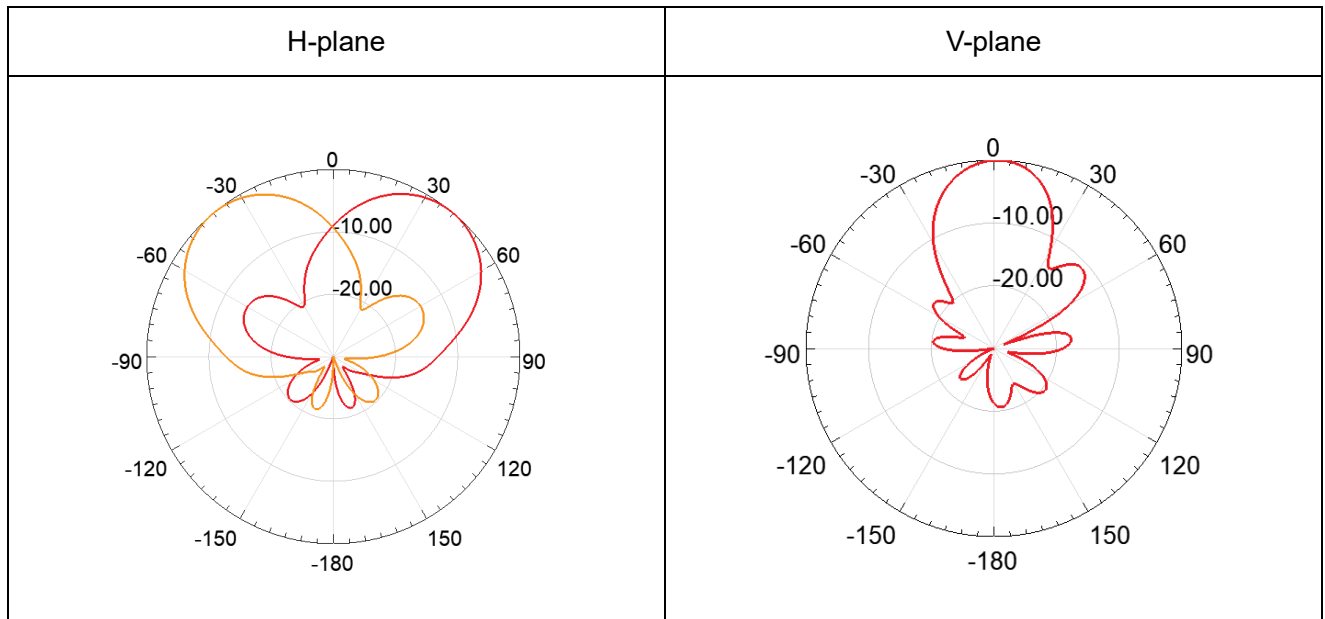

4 Packaging

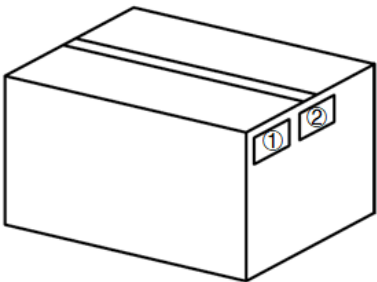Step	Packaging Picture / 2D Picture	Description
1		Product drawing
2		Use buffer plates to protect antenna products. (1 Antenna / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. <u>Carton Size:</u> <u>L × W × H = 925 × 805 × 995 mm</u>
3		Position for Attaching Labels ① Carton Label ② Quality Label

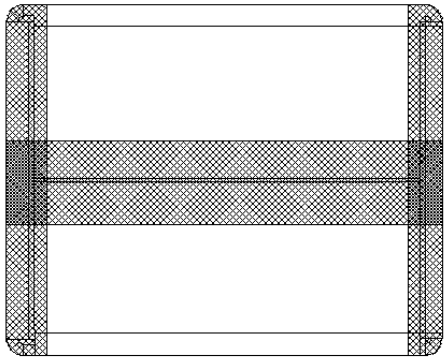4		Sealing Cartons H-shaped sealing cartons
Note	The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<https://www.quectel.com/contact/>.

For technical support, or to report documentation errors, please visit:

<https://www.quectel.com/tech-support/>.

Or email us at: support@quectel.com.

Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

Use and Disclosure Restrictions

License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the intended project.

Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

Disclaimer

- a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
- b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
- c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
- d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2026. All rights reserved.

Revision History

Version	Date	Author	Note
-	2026-01-15	Ryder Zhang/ Singh Wang/ Riva Ren/ Aria Chu	Creation of the document
1.0	2026-01-15	Ryder Zhang/ Singh Wang/ Riva Ren/ Aria Chu	First official release
1.1	2026-04-22	Singh Wang/ Kessie Geng	1. Updated the drawing (Chapter 2). 2. Updated the packaging (Chapter 4).



www.quectel.com