Antenna Datasheet

Product OC: YECW058L1CM
Version: 1.0
Date: 2025-09-26
Status: Preliminary

Product Name: 4G Screw Mount External Dipole Antenna
Key Features:
Frequency Band: 450–470 MHz, 790–960 MHz, 1710–2690 MHz
Dimensions: 223.18 mm × 74.09 mm × 76.50 mm
Efficiency: Up to 64.6 % (FS)
RoHS and REACH Compliant

Overview

YECW058L1CM is a 4G external antenna measuring 223.18 mm × 74.09 mm × 76.50 mm. This ultra-wide-band 4G antenna provides broad coverage from 450–470 MHz, 700–960 MHz & 1710–2690 MHz whilst offering backward-compatibility to support 3G and 2G networks as well as LTE Cat-M and narrowband IoT (NB-IoT). The antenna is terminated with SMA Male connector. Ideal for applications where the antenna is required to be discrete, this low profile, terminal mount omni-directional antenna is easy to install with maximum durability assured thanks to its PC + ABS enclosure.

The YECW058L1CM is designed as dipole type to work with various GND plane sizes or in free space for ease of integration with a SMA Male connector to achieve the optimum position. This omni-directional antenna is ideally suited for Gateways & Routers, Smart Metering, Vending Machines, Industrial IoT, Smart Home, Connected Enterprise, offering great performance with its high gain and efficiency.

Typical applications include:

- Gateways & Routers
- Smart Metering
- Vending Machines
- Industrial IoT
- Smart Home
- Connected Enterprise

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

1 Specification

Test Condition: In Free Space & On 500 mm × 500 mm Metal Plane

1.1. Electrical

Electrical	
Frequency Range	450–470 MHz, 790–960 MHz, 1710-2690 MHz
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni-directional

Electrical – Detail

Band / SPEC	Band	B31	B20	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	450–470	790–820	820–960	1420–1520	1700–2170	2300–2400	2400–2500	2500–2690	3300–4200	4400–5000	5150–5850
Max. VSWR	FS	1.5	1.1	1.8	-	1.6	1.9	1.9	1.8	-	-	-
	MP	3.2	1.7	2.2	-	1.6	1.9	1.9	2.0	-	-	-
Max. Return Loss (dB)	FS	-13.4	-24.9	-11.1	-	-12.3	-10.0	-10.4	-10.8	-	-	-
	MP	-5.7	-12.0	-8.3	-	-12.2	-10.3	-10.1	-9.7	-	-	-
AVG Eff. (%)	FS	61.9	59.6	54.7	-	46.3	36.3	35.1	36.3	-	-	-
	MP	42.7	56.4	48.4	-	46.0	37.9	34.9	35.1	-	-	-
AVG AVG Gain (dB)	FS	-2.1	-2.3	-2.6	-	-3.3	-4.4	-4.5	-4.4	-	-	-
	MP	-3.7	-2.5	-3.2	-	-3.4	-4.2	-4.6	-4.6	-	-	-

Max. Peak Gain (dBi)	**FS**	0.7	1.0	1.5	-	2.9	1.2	1.2	2.7	-	-	-
	MP	2.0	5.6	5.3	-	7.1	6.5	6.1	4.7	-	-	-

VSWR	**FS**	≤ 1.9
	MP	≤ 3.2
Return Loss	**FS**	≤ -10.0 dB
	MP	≤ -5.7 dB
Peak Gain	**FS**	≤ 2.9 dBi
	MP	≤ 7.1 dBi

Note:
FS: In Free Space
MP: On 500 mm × 500 mm Metal Plane

1.2. Mechanical & Environmental

Mechanical	
Antenna Dimensions	223.18 mm × 74.09 mm × 76.50 mm
Material & Color	PC + ABS & Black
Cable Type & Color & Length	RG174 & Black & 1500 mm
Connector Type	SMA Male
Mounting Type	Screw
Weight	Typ. 224 g
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
RoHS & REACH Compliant	Yes

2 Drawing

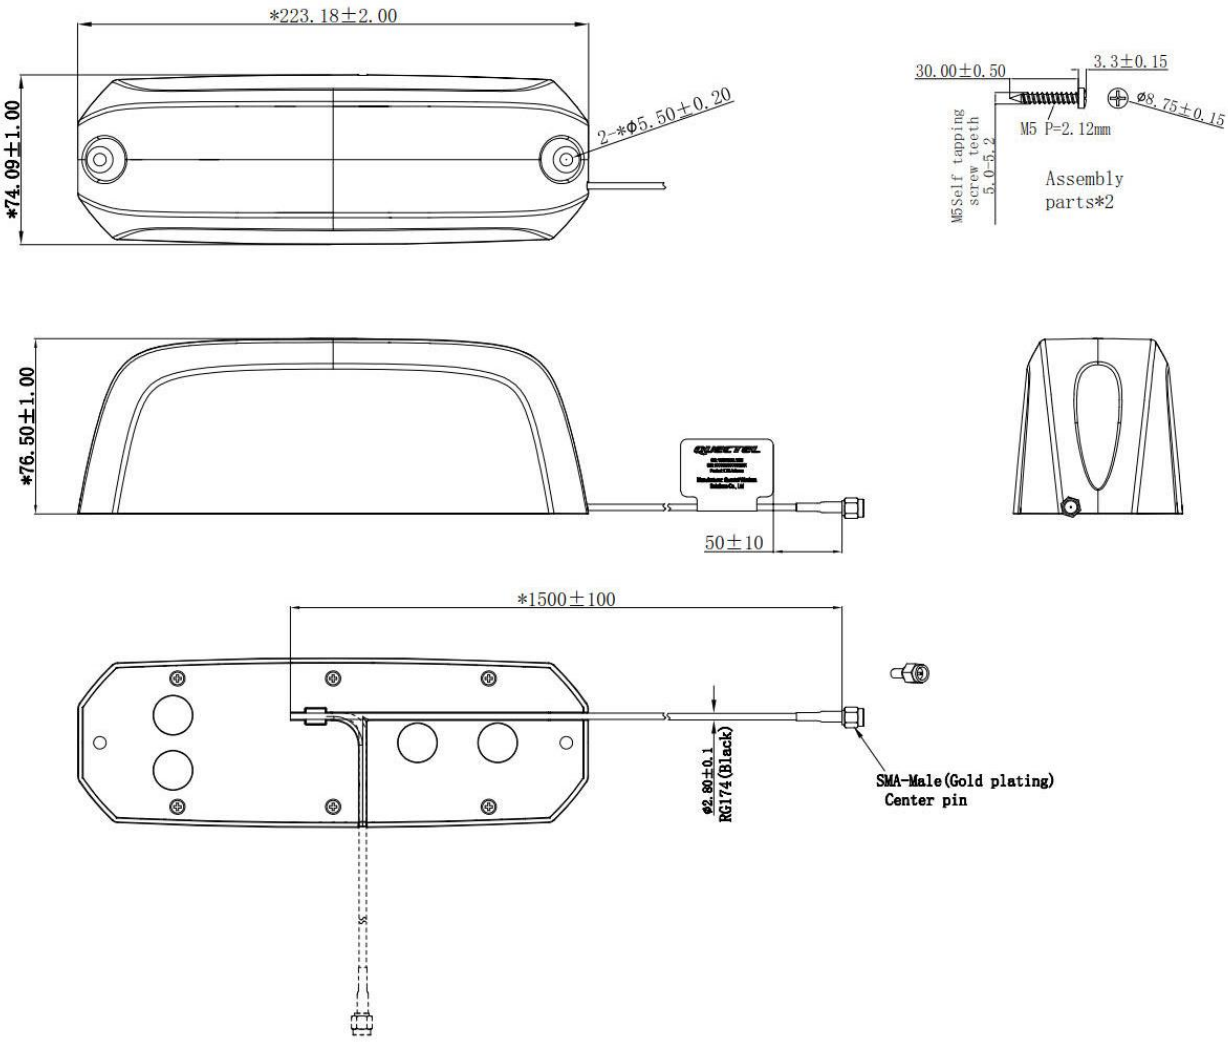
*223.18±2.00
*74.09±1.00
2-*Ø5.50±0.20
30.00±0.50
3.3±0.15
Ø8.75±0.15
M5 P=2.12mm
M5Self tapping screw teeth 5.0-5.2
Assembly parts*2
*76.50±1.00
50±10
*1500±100
Ø2.80±0.1
RG174(Black)
SMA-Male(Gold plating)
Center pin

3 Detailed Performance

3.1. S-Parameter Test

3.1.1. VSWR

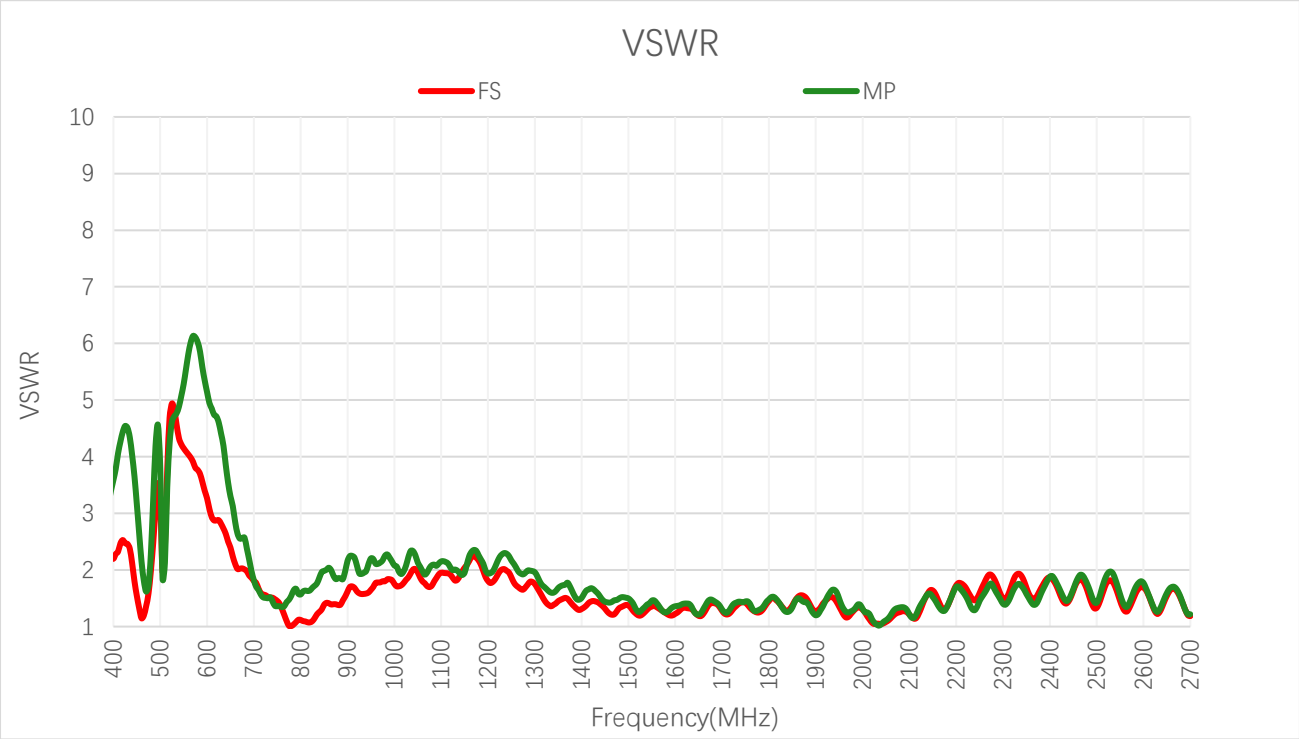

VSWR

Frequency (MHz)	450	460	470	830	900	960	1440	1710	1740	1880
FS	1.5	1.1	1.4	1.2	1.6	1.8	-	1.2	1.4	1.5
MP	3.2	2.2	1.6	1.7	2.2	2.1	-	1.2	1.4	1.4
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	1.4	1.6	1.7	1.6	1.7	1.3	-	-	-	-
MP	1.5	1.6	1.6	1.7	1.8	1.3	-	-	-	-

3.1.2. Return Loss

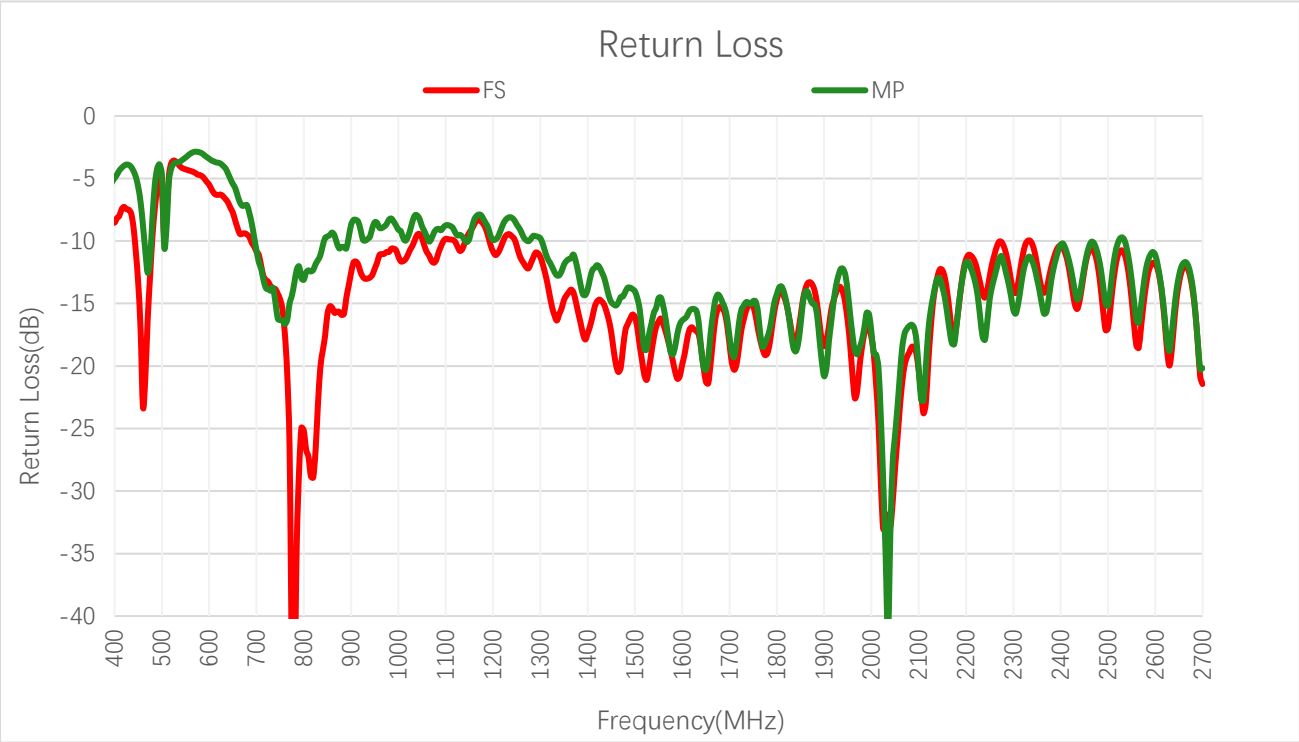

Return Loss (dB)

Frequency (MHz)	450	460	470	830	900	960	1440	1710	1740	1880
FS	-13.4	-23.3	-16.3	-23.0	-12.5	-11.1	-	-20.3	-15.2	-14.0
MP	-5.7	-8.7	-12.6	-11.5	-8.7	-8.9	-	-19.3	-14.9	-15.1
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	-16.5	-12.8	-11.9	-12.4	-11.8	-18.2	-	-	-	-
MP	-14.1	-13.0	-13.0	-12.1	-11.1	-18.2	-	-	-	-

3.2. Radiation Performance Test

3.2.1. Efficiency

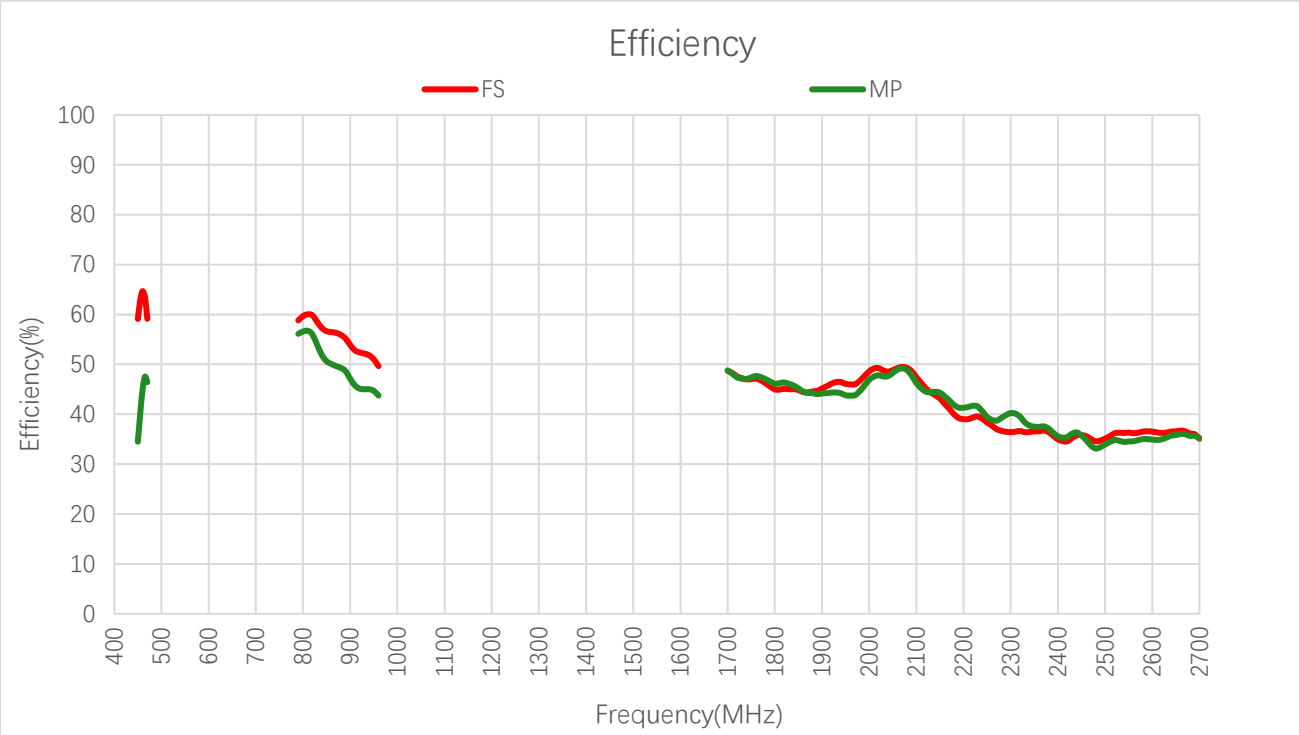

Efficiency (%)

Frequency (MHz)	450	460	470	830	900	960	1440	1710	1740	1880
FS	59.1	64.7	59.1	58.5	53.9	49.6	-	48.3	47.0	44.6
MP	34.5	45.0	46.4	53.9	47.1	43.7	-	48.1	47.1	44.2
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	46.1	43.8	36.6	35.8	36.5	36.0	-	-	-	-
MP	43.8	44.5	37.5	35.7	34.9	35.7	-	-	-	-

3.2.2. Average Gain

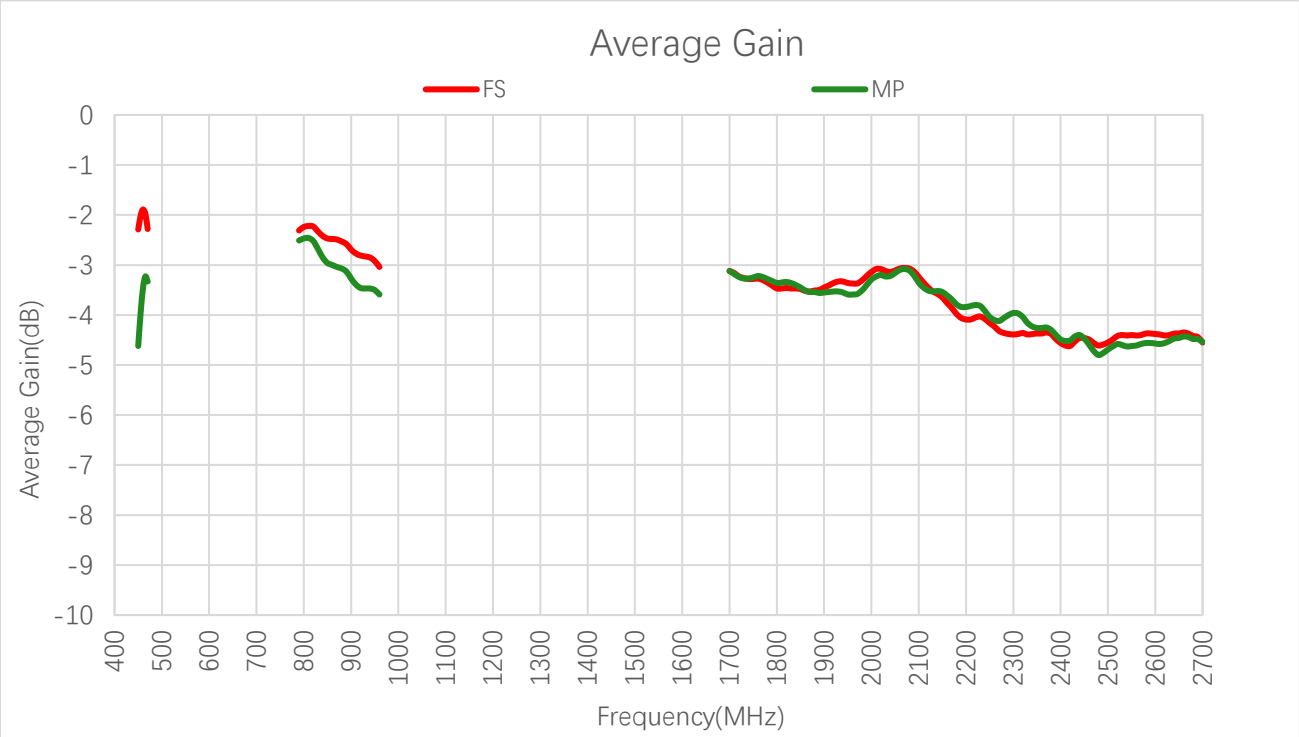

Average Gain (dB)

Frequency (MHz)	450	460	470	830	900	960	1440	1710	1740	1880
FS	-2.3	-1.9	-2.3	-2.3	-2.7	-3.0	-	-3.2	-3.3	-3.5
MP	-4.6	-3.5	-3.3	-2.7	-3.3	-3.6	-	-3.2	-3.3	-3.5
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	-3.4	-3.6	-4.4	-4.5	-4.4	-4.4	-	-	-	-
MP	-3.6	-3.5	-4.3	-4.5	-4.6	-4.5	-	-	-	-

3.2.3. Peak Gain

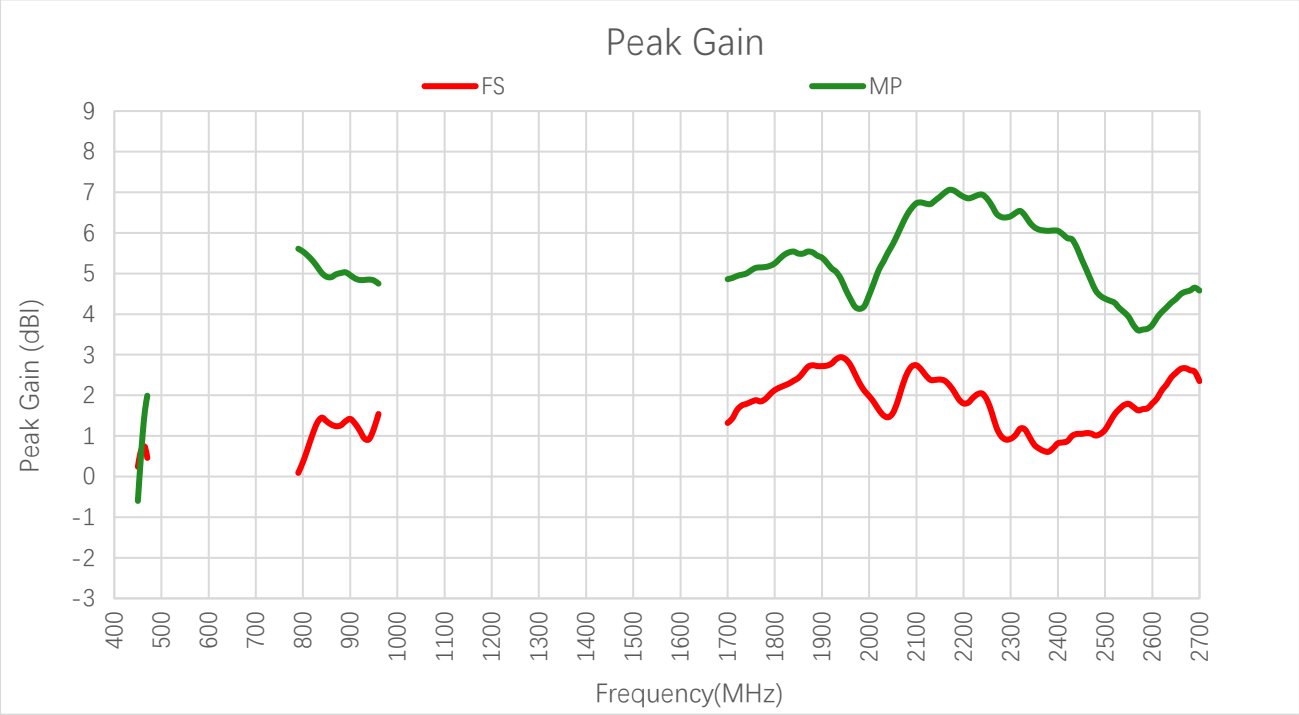

Peak Gain (dBi)

Frequency (MHz)	450	460	470	830	900	960	1440	1710	1740	1880
FS	0.2	0.7	0.5	1.3	1.4	1.5	-	1.4	1.8	2.7
MP	-0.6	1.0	2.0	5.2	5.0	4.8	-	4.9	5.0	5.5
Frequency (MHz)	**1950**	**2140**	**2350**	**2450**	**2600**	**2690**	**4700**	**5000**	**5500**	**6000**
FS	2.9	2.4	0.8	1.1	1.8	2.6	-	-	-	-
MP	4.6	6.8	6.1	5.4	3.7	4.7	-	-	-	-

3.2.4. 3D & 2D Radiation Pattern

3.2.4.1. Test Condition: **In Free Space**

- Test Chamber: HF-S-1

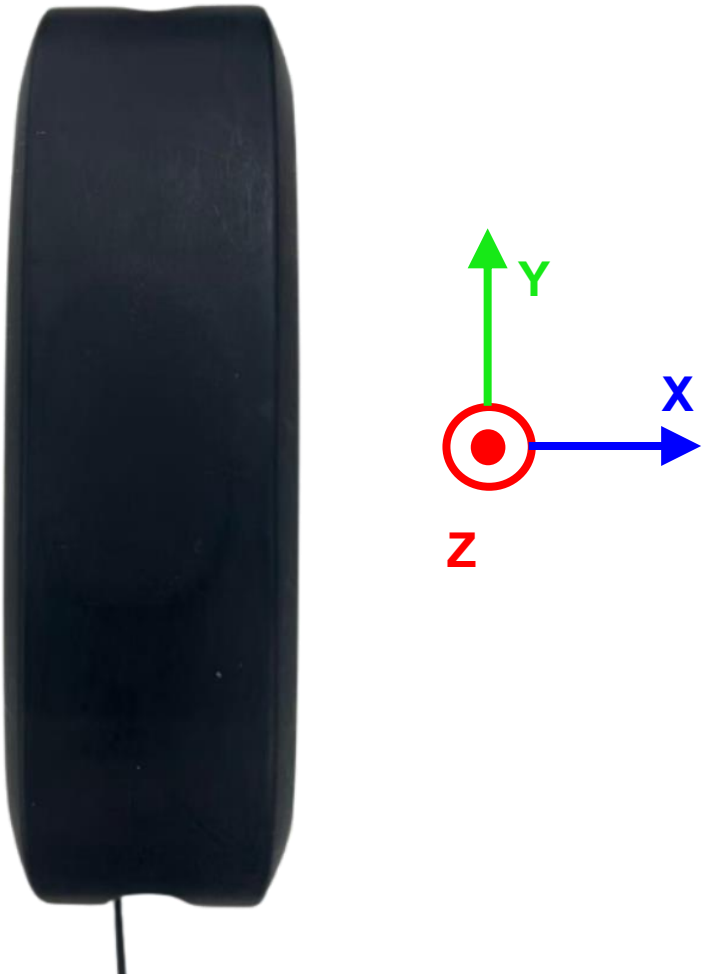

460 MHz		830 MHz	
			
			
900 MHz		1740 MHz	
			
			

1880 MHz		1950 MHz	
			
			
2140 MHz		2350 MHz	
			
			

2450 MHz		2600 MHz	
			
			

3.2.4.2. Test Condition: **On 500 mm × 500 mm Metal Plane**

- Test Chamber: FS-S-1

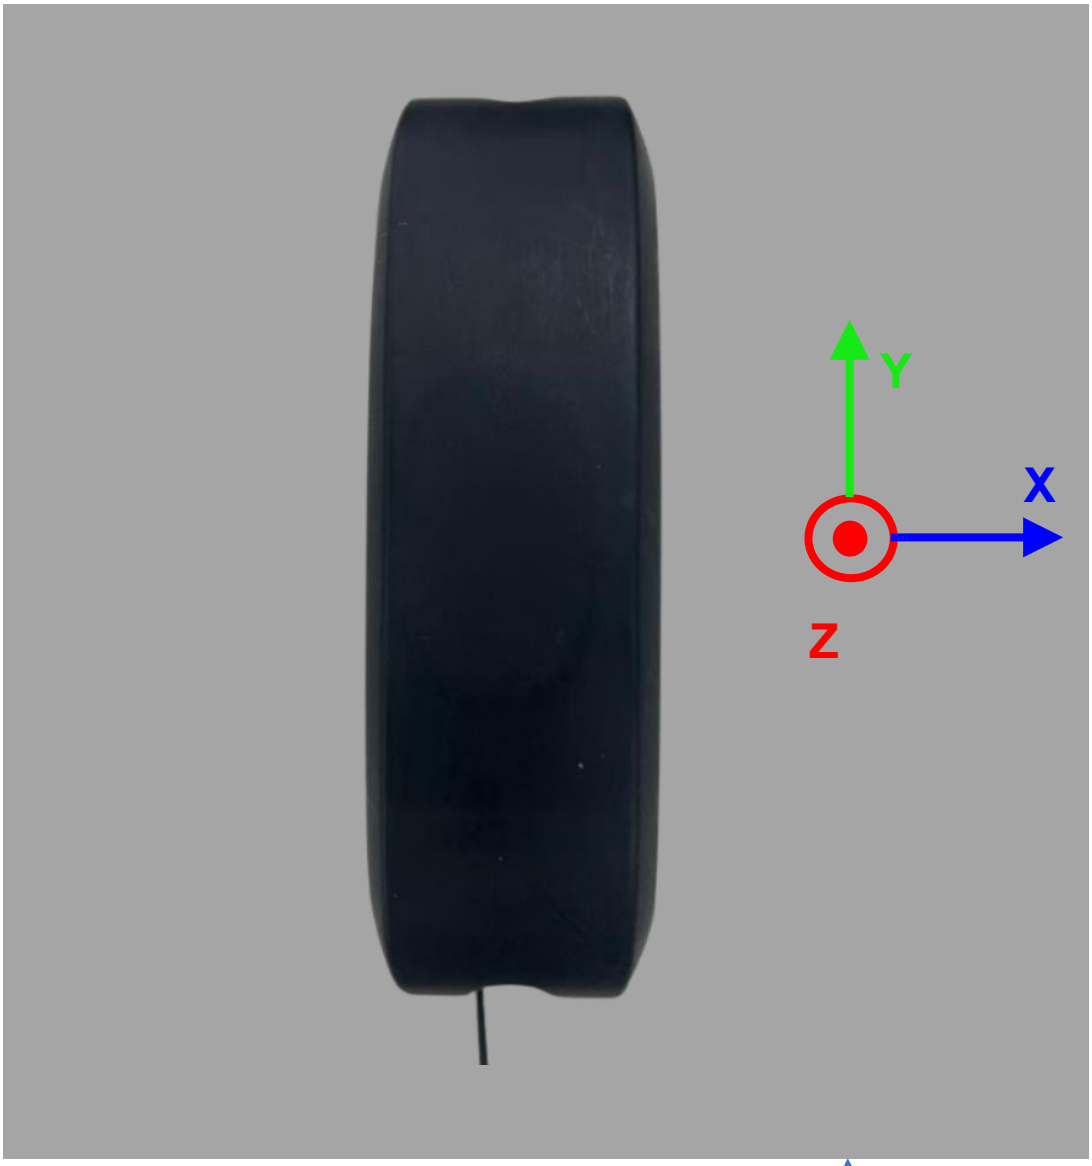

500 mm × 500 mm Metal Plane

460 MHz		830 MHz	
			
			
900 MHz		1740 MHz	
			
			

1880 MHz		1950 MHz	
			
			
2140 MHz		**2350 MHz**	
			
			

2450 MHz		2600 MHz	
			
			

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.
Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China
Tel: +86 21 5108 6236
Email: info@quectel.com

Or our local offices. For more information, please visit:
http://www.quectel.com/support/sales.htm.

For technical support, or to report documentation errors, please visit:
http://www.quectel.com/support/technical.htm.
Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Revision History

Version	Date	Author	Note
-	2025-09-26	Christopher Yao/ Toby Wang/ Zeline Liang	Creation of the document
1.0	2025-09-26	Christopher Yao/ Toby Wang/ Zeline Liang	First official release

www.quectel.com