



Antenna Datasheet

Product OC: YECT001W1AM

Version: 1.6

Date: 2026-03-18

Status: Released

Product Name: 5G Terminal Mount Rubber Monopole External Antenna

Key Features:

Frequency band: 698–960 MHz, 1710–2690 MHz, 3300–6000 MHz

Efficiency: Up to 73.6 %

Dimensions: 52.6 mm × 18.6 mm × 9 mm

RoHS & REACH Compliant

IP54

Overview

YECT001W1AM is a 5G rubber antenna measuring 52.6 mm × 18.6 mm × 9 mm. This ultra-wide-band 5G antenna provides broad coverage from 698–960 MHz, 1710–2690 MHz, 3300–6000 MHz whilst offering backward-compatibility to support 4G/3G and 2G networks as well as LTE Cat-M and narrowband IoT (NB-IoT). The antenna is terminated with 90° SMA Male connector. This low profile, terminal mount omni-directional antenna, ideal for applications where the antenna is required to be discrete, is easy to install with maximum durability assured thanks to its TPE enclosure. It is compatible with Quectel 's 5G Series modules.

It allows constant and reliable transmission and reception due to its omni-directional gain across all frequency bands. The YECT001W1AM is designed as a monopole antenna, which needs to be mounted on a ground plane to offer high efficiency in all working bands. It is a perfect antenna product for customers that desire highest performance. This high-efficiency, high-gain omni-directional antenna is ideally suited for IoT sensors, public safety and security, fleet management, smart home automation.

- **Typical applications include:**

- ✓ IoT Sensors
- ✓ Public Safety and Security
- ✓ Fleet Management
- ✓ Smart Home Automation

Quectel provides comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs. We have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

Overview.....	1
Contents.....	2
1 Specification.....	3
1.1. Electrical.....	3
1.2. Supported Bands	5
1.3. Mechanical & Environmental	7
2 Drawing	8
3 Detailed Performance	9
3.1. Radiation Performance Test.....	9
3.1.1. VSWR	9
3.1.2. Return Loss.....	10
3.2. Radiation Performance Test.....	11
3.2.1. Efficiency.....	11
3.2.2. Average Gain	12
3.2.3. Peak Gain	13
3.2.4. 3D & 2D Radiation Pattern	14
4 Packaging	21
Contact Us.....	23
Legal Notices	24
Revision History	26

1 Specification

Test Condition: On 130 mm × 70 mm EVB

1.1. Electrical

Electrical	
Frequency Range	689–960 MHz, 1710–2690 MHz, 3300–6000 MHz
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni-directional

Band	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850
SPEC												
Max. VSWR		-	6.9	3.7	-	2.7	2.2	2.3	2.5	4.5	4.1	3.4
Max. Return Loss (dB)		-	-2.5	-4.8	-	-6.6	-8.3	-8.1	-7.4	-4.0	-4.4	-5.3
AVG Eff. (%)		-	46.0	54.4	-	61.4	71.4	65.9	63.4	57.4	52.6	46.4
AVG AVG Gain (dB)		-	-3.4	-2.7	-	-2.1	-1.5	-1.8	-2.0	-2.5	-2.9	-3.4
Max. Peak Gain (dBi) Frequency (MHz)		-	0.2 (810)	1.6 (900)	-	2.2 (2170)	2.0 (2330)	2.0 (2500)	2.4 (2540)	2.1 (3740)	2.7 (4930)	2.9 (5240)
VSWR		≤ 6.9										
Return Loss		≤ -2.5 dB										
Peak Gain		≤ 2.9 dBi										

Gain – Detail			
	Band	Freq. (MHz)	Max peak Gain (dBi)
FDD < 3 dBi	B1	1920–1980	1.8
	B3/n3	1710–1785	1.2
	B8	880–915	1.6
	B18	815–830	0.2
	B19	830–845	0.4
	B26	814–849	0.4
	B28/n28	703–748	-0.6
	n77/n78	3400–4100	2.1
	n79	4500–4900	2.6
TDD < 4 dBi	B39	1888–1920	1.9
	B41/n41 (Disable HPUE)	2496–2690	2.4
	B42	3400–3600	2.0

1.2. Supported Bands


5G NR / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / GPRS / GSM / NB-IoT				
Band	Frequency (MHz)	Uplink (MHz)	Downlink (MHz)	Covered
1	2100	1920–1980	2110–2170	√
2	1900	1850–1910	1930–1990	√
3	1800	1710–1785	1805–1880	√
4	1700	1710–1755	2110–2155	√
5	850	824–849	869–894	√
7	2600	2500–2570	2620–2690	√
8	900	880–915	925–960	√
9	1800	1749.9–1784.9	1844.9–1879.9	√
11	1500	1427.9–1447.9	1475.9–1495.9	-
12	700	699–716	729–746	√
13	700	777–787	746–756	√
14	700	788–798	758–768	√
17	700	704–716	734–746	√
18	850	815–830	860–875	√
19	850	830–845	875–890	√
20	800	832–862	791–821	√
21	1500	1447.9–1462.9	1495.9–1510.9	-
22	3500	3410–3490	3510–3590	√
23	2100	2000–2020	2180–2200	√
24	1600	1626.5–1660.5	1525–1559	-
25	1900	1850–1915	1930–1995	√
26	850	814–849	859–894	√

28	700	703–748	758–803	√
31	450	452.5–457.5	462.5–467.5	-
34	2100	2010–2025		√
38	2600	2570–2620		√
39	1900	1880–1920		√
40	2300	2300–2400		√
41	2500	2496–2690		√
42	3500	3400–3600		√
48	3500	3550–3700		√
66	1700	1710–1780	2110–2200	√
71	600	663–698	617–652	-
74	1500	1427–1470	1475–1518	-
77	3500	3300–4200		√
78	3500	3300–3800		√
79	4500	4400–5000		√

1.3. Mechanical & Environmental

Mechanical	
Antenna Dimensions	52.6 mm × 18.6 mm × 9 mm
Material & Color	TPE & Black
Connector Type	90° SMA Male
Mounting Type	Terminal
Weight	Typ. 7.4 g
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
Ingress Protection (IP) Rating	IP54
RoHS and REACH Compliant	Yes


2 Drawing

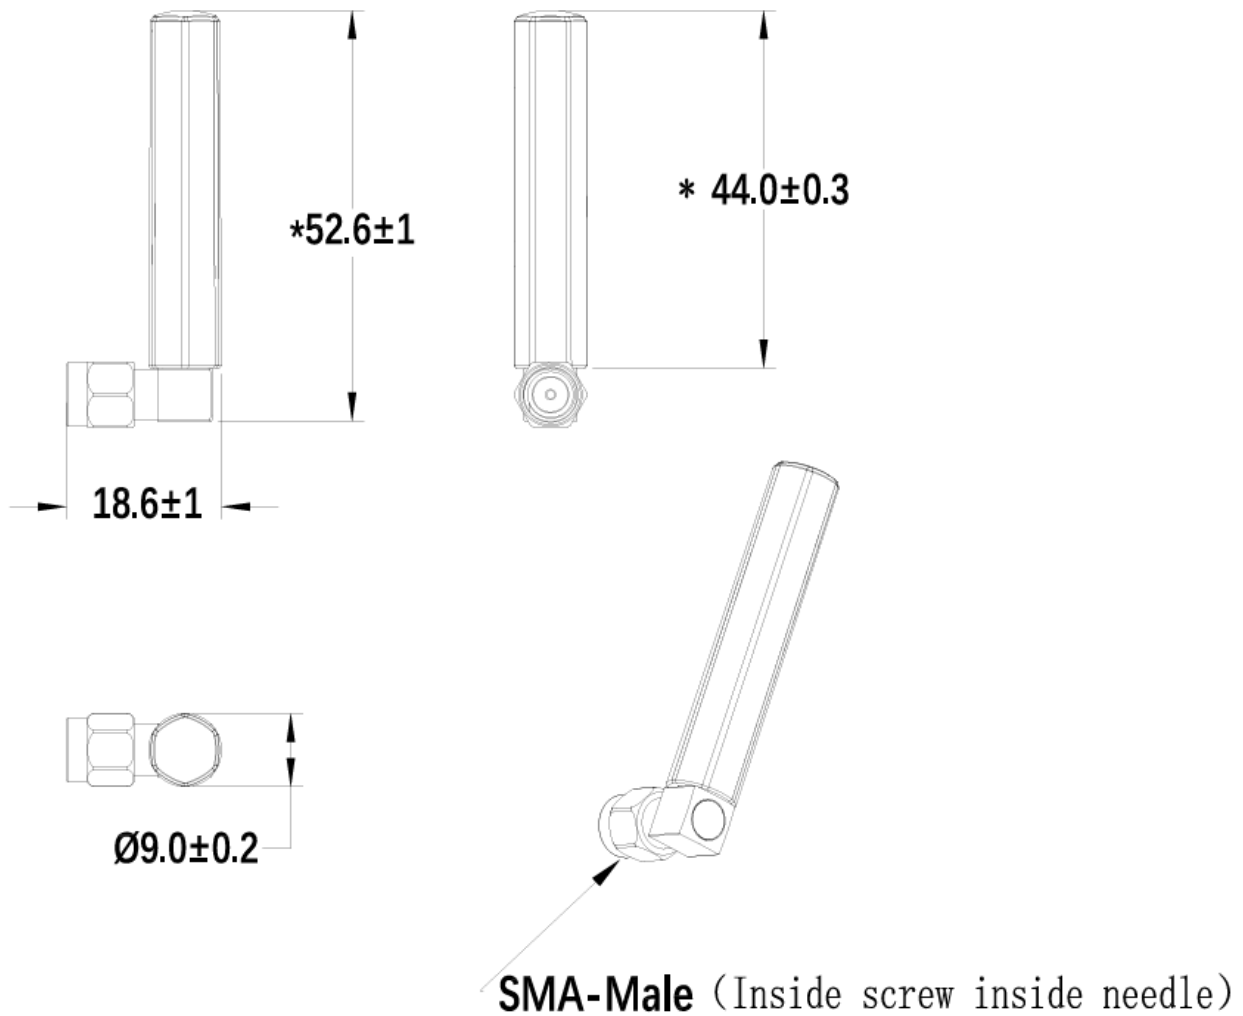

3 Detailed Performance

3.1. Radiation Performance Test


3.1.1. VSWR

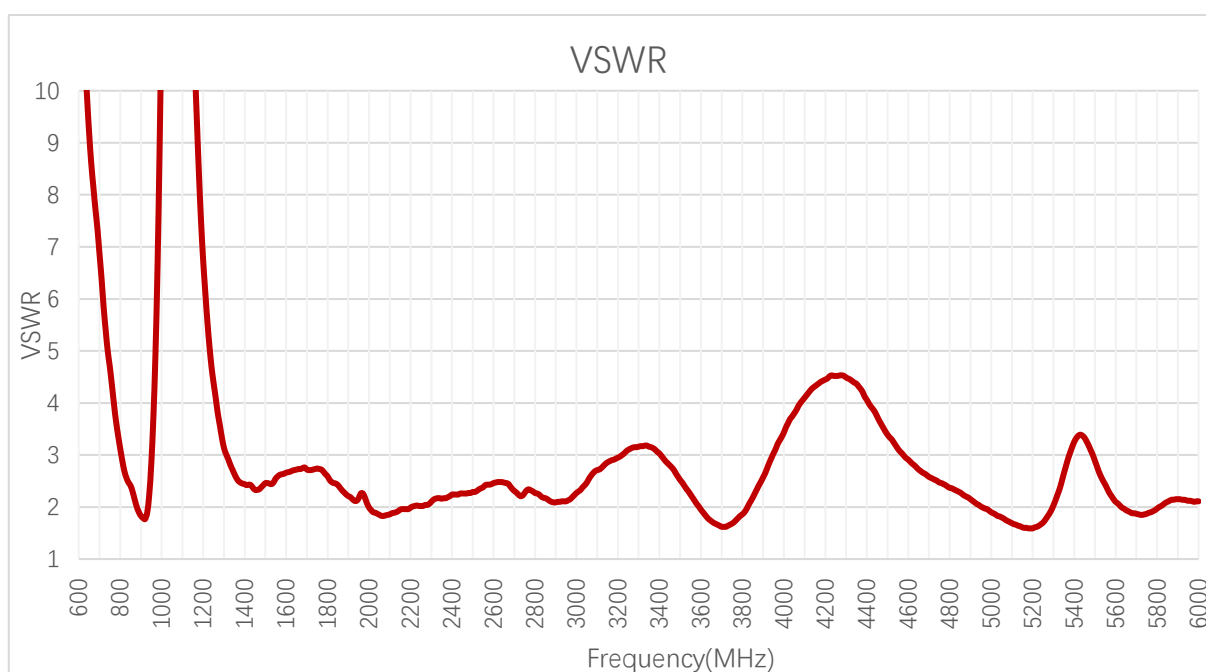

VSWR

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
VSWR	-	-	6.4	2.6	1.8	3.7	-	2.7	2.7	2.3
Frequency (MHz)	1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
VSWR	2.2	1.9	2.2	2.3	2.5	2.0	2.6	1.9	2.9	2.1

3.1.2. Return Loss

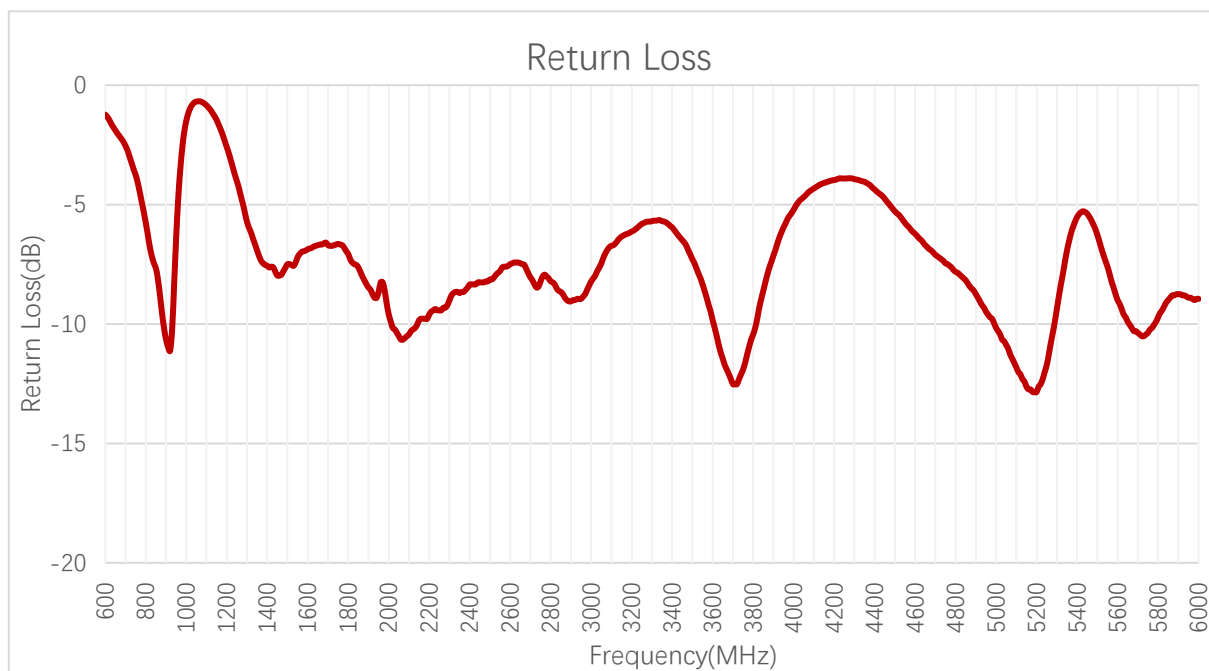


Return Loss (dB)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Return Loss (dB)	-	-	-2.7	-7.2	-10.7	-4.8	-	-6.7	-6.7	-8.2
Frequency (MHz)	1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
Return Loss (dB)	-8.7	-10.0	-8.7	-8.3	-7.5	-9.8	-7.1	-10.2	-6.3	-8.9

3.2. Radiation Performance Test


3.2.1. Efficiency

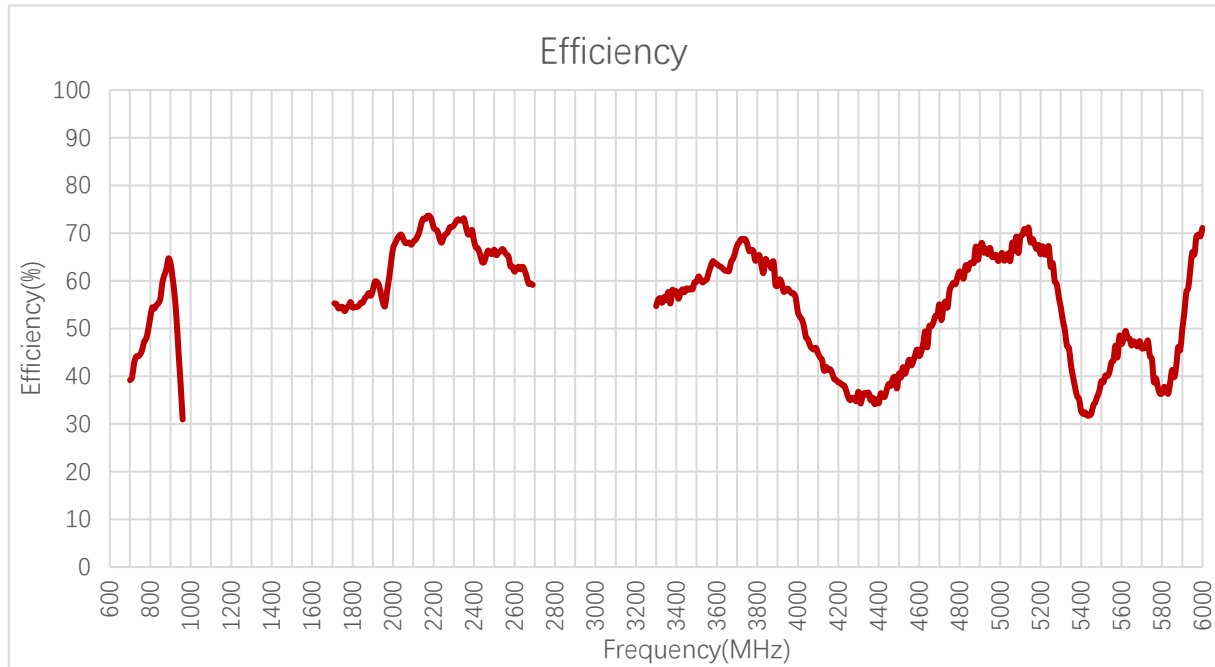

Efficiency (%)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Efficiency (%)	-	-	39.8	54.9	63.7	31.0	-	55.3	54.5	57.5
Frequency (MHz)	1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
Efficiency (%)	55.4	72.1	73.1	64.0	61.9	63.5	55.1	65.0	39.0	71.1


3.2.2. Average Gain

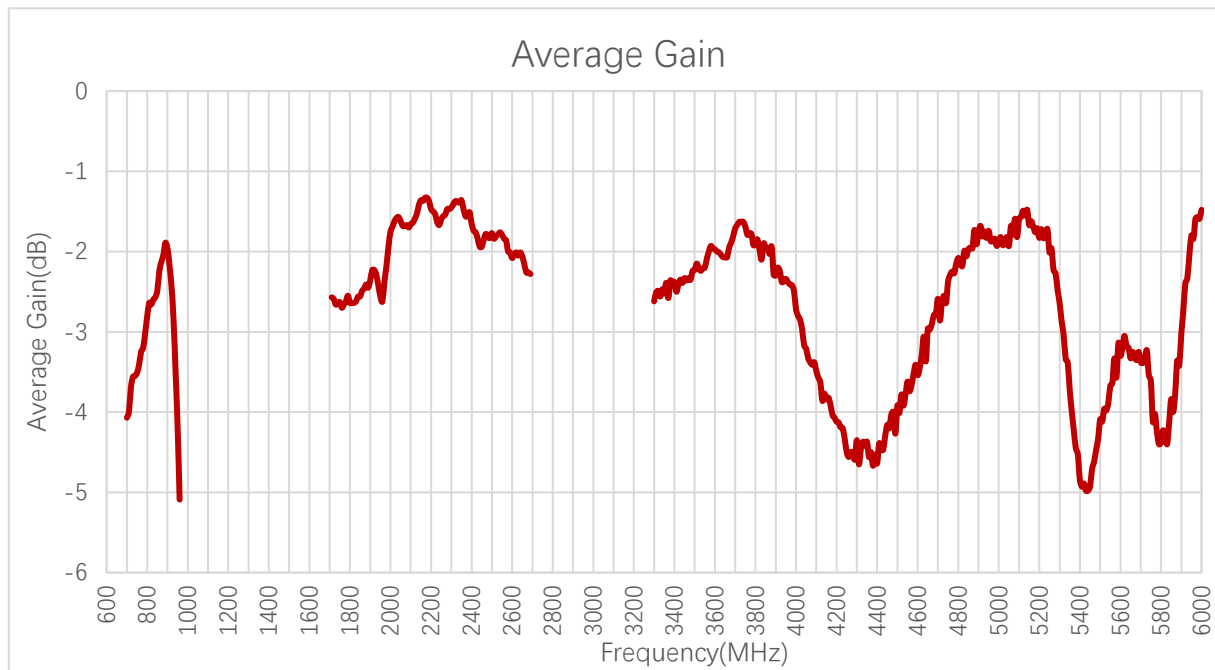

Average Gain (dB)

Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Average Gain (dB)	-	-	-4.0	-2.6	-2.0	-5.1	-	-2.6	-2.6	-2.4
Frequency (MHz)	1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
Average Gain (dB)	-2.6	-1.4	-1.4	-1.9	-2.1	-2.0	-2.6	-1.9	-4.1	-1.5

3.2.3. Peak Gain

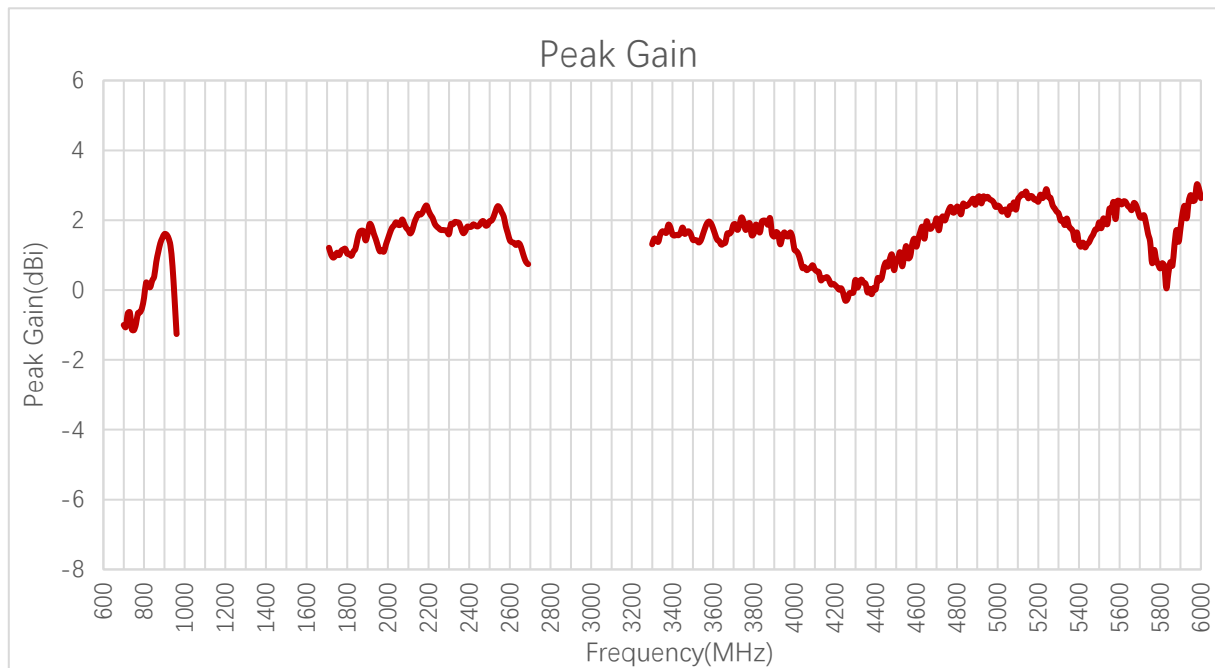

Peak Gain (dBi)


Frequency (MHz)	600	630	710	830	900	960	1440	1710	1740	1880
Peak Gain (dBi)	-	-	-1.1	0.1	1.6	-1.3	-	1.2	1.0	1.7
Frequency (MHz)	1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
Peak Gain (dBi)	1.3	2.1	1.9	1.9	1.4	1.8	2.1	2.4	1.9	2.6

Max Peak Gain (dBi)

Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
Frequency (MHz)	-	810	900	-	2170	2330	2500	2540	3740	4930	5420
Peak Gain (dBi)	-	0.2	1.6	-	2.2	2.0	2.0	2.4	2.1	2.7	1.4



3.2.4. 3D & 2D Radiation Pattern

- Test Condition: On 130 mm × 70 mm EVB
- Test Chamber: GL-G-1






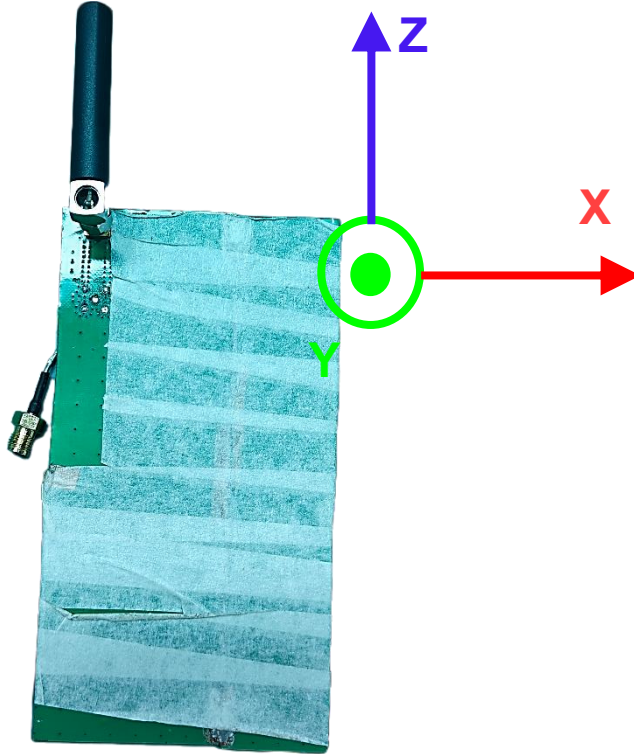


- On 130 mm × 70 mm EVB



710 MHz









830 MHz





900 MHz




1740 MHz




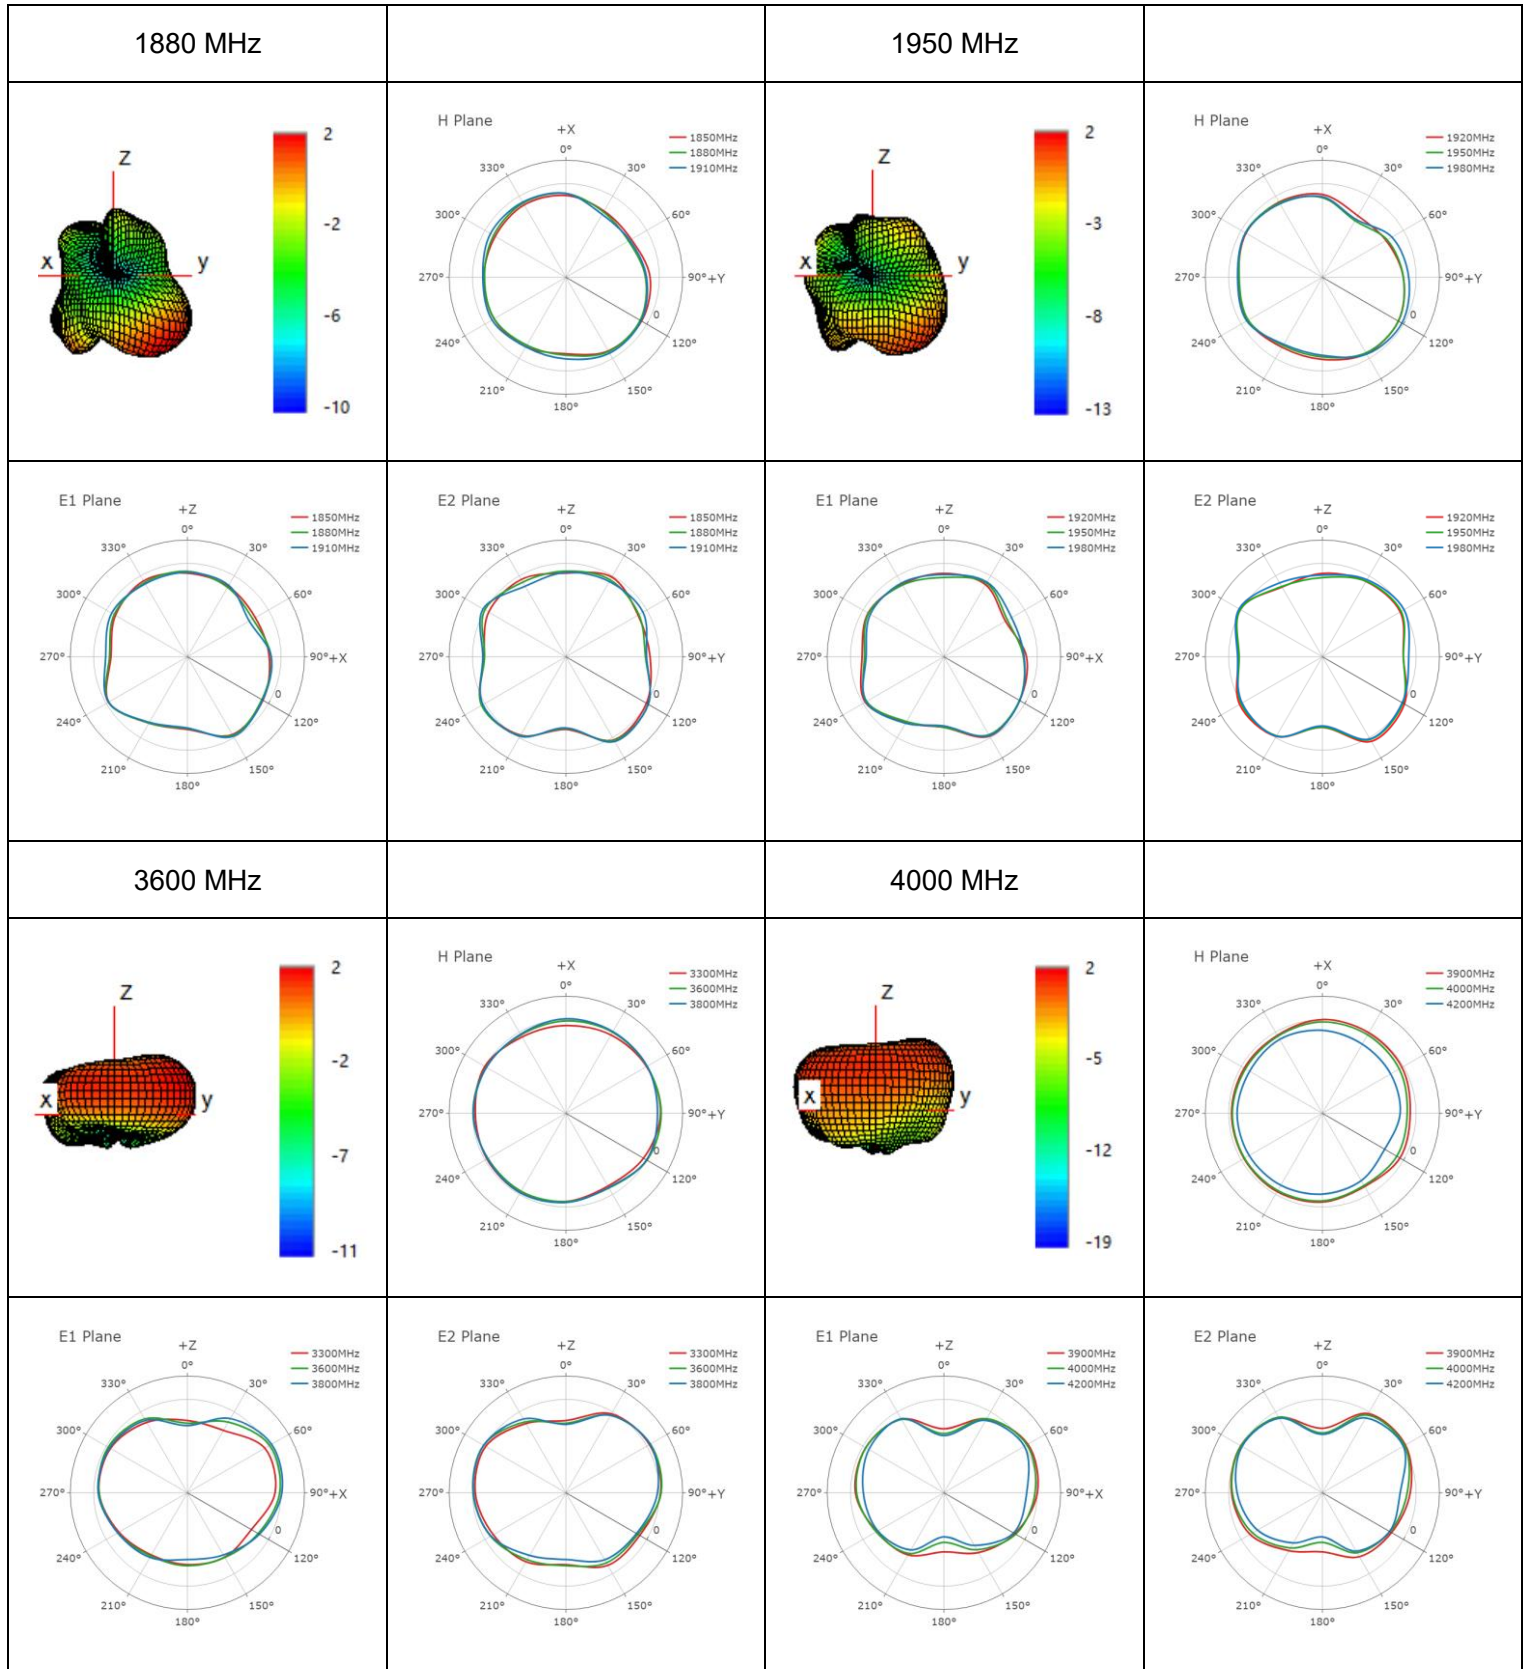


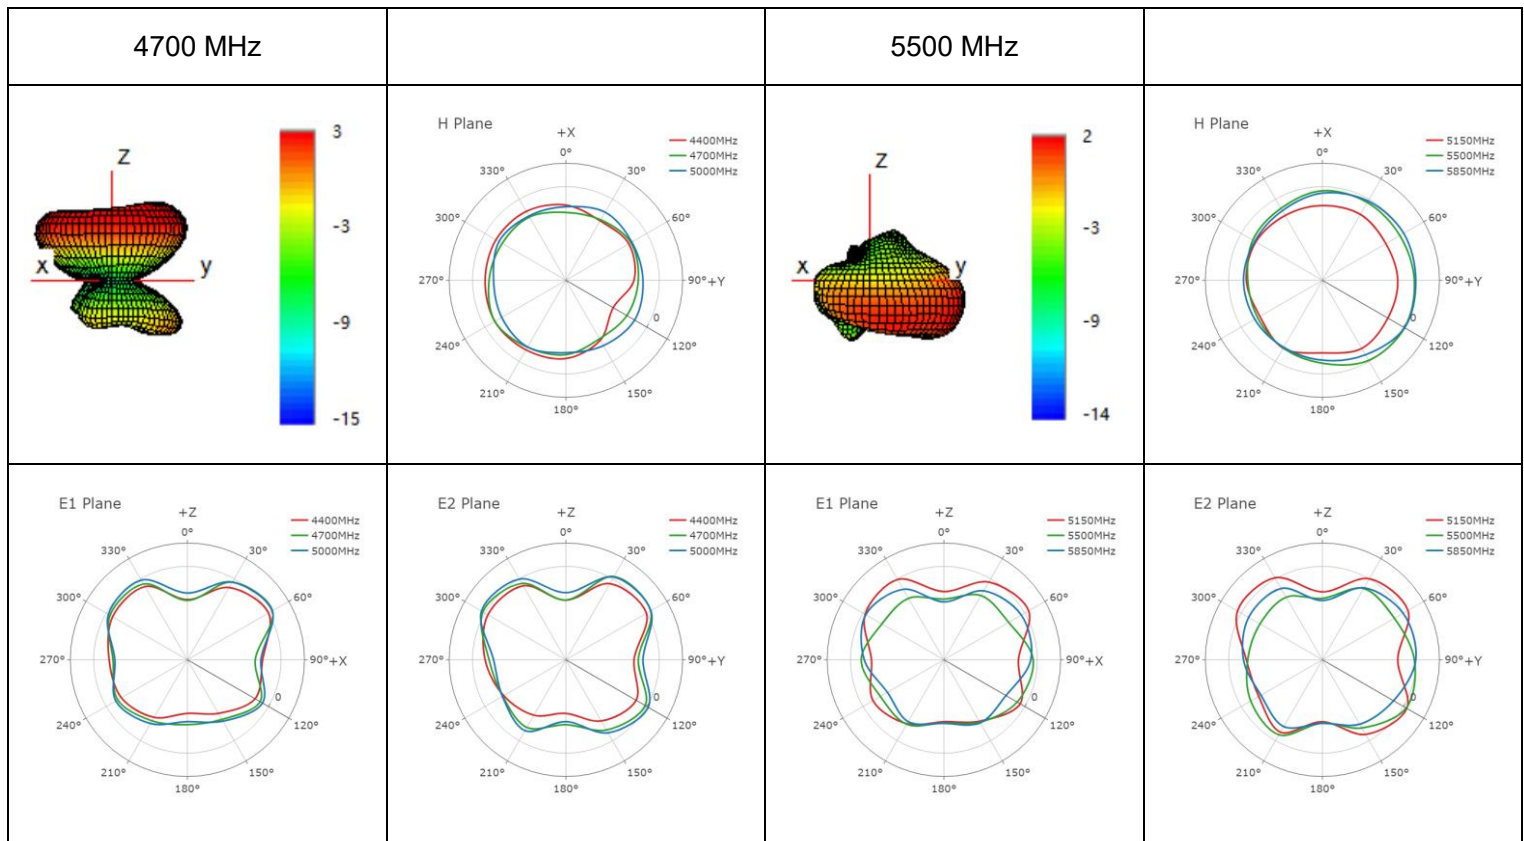





● **Max Peak Gain**

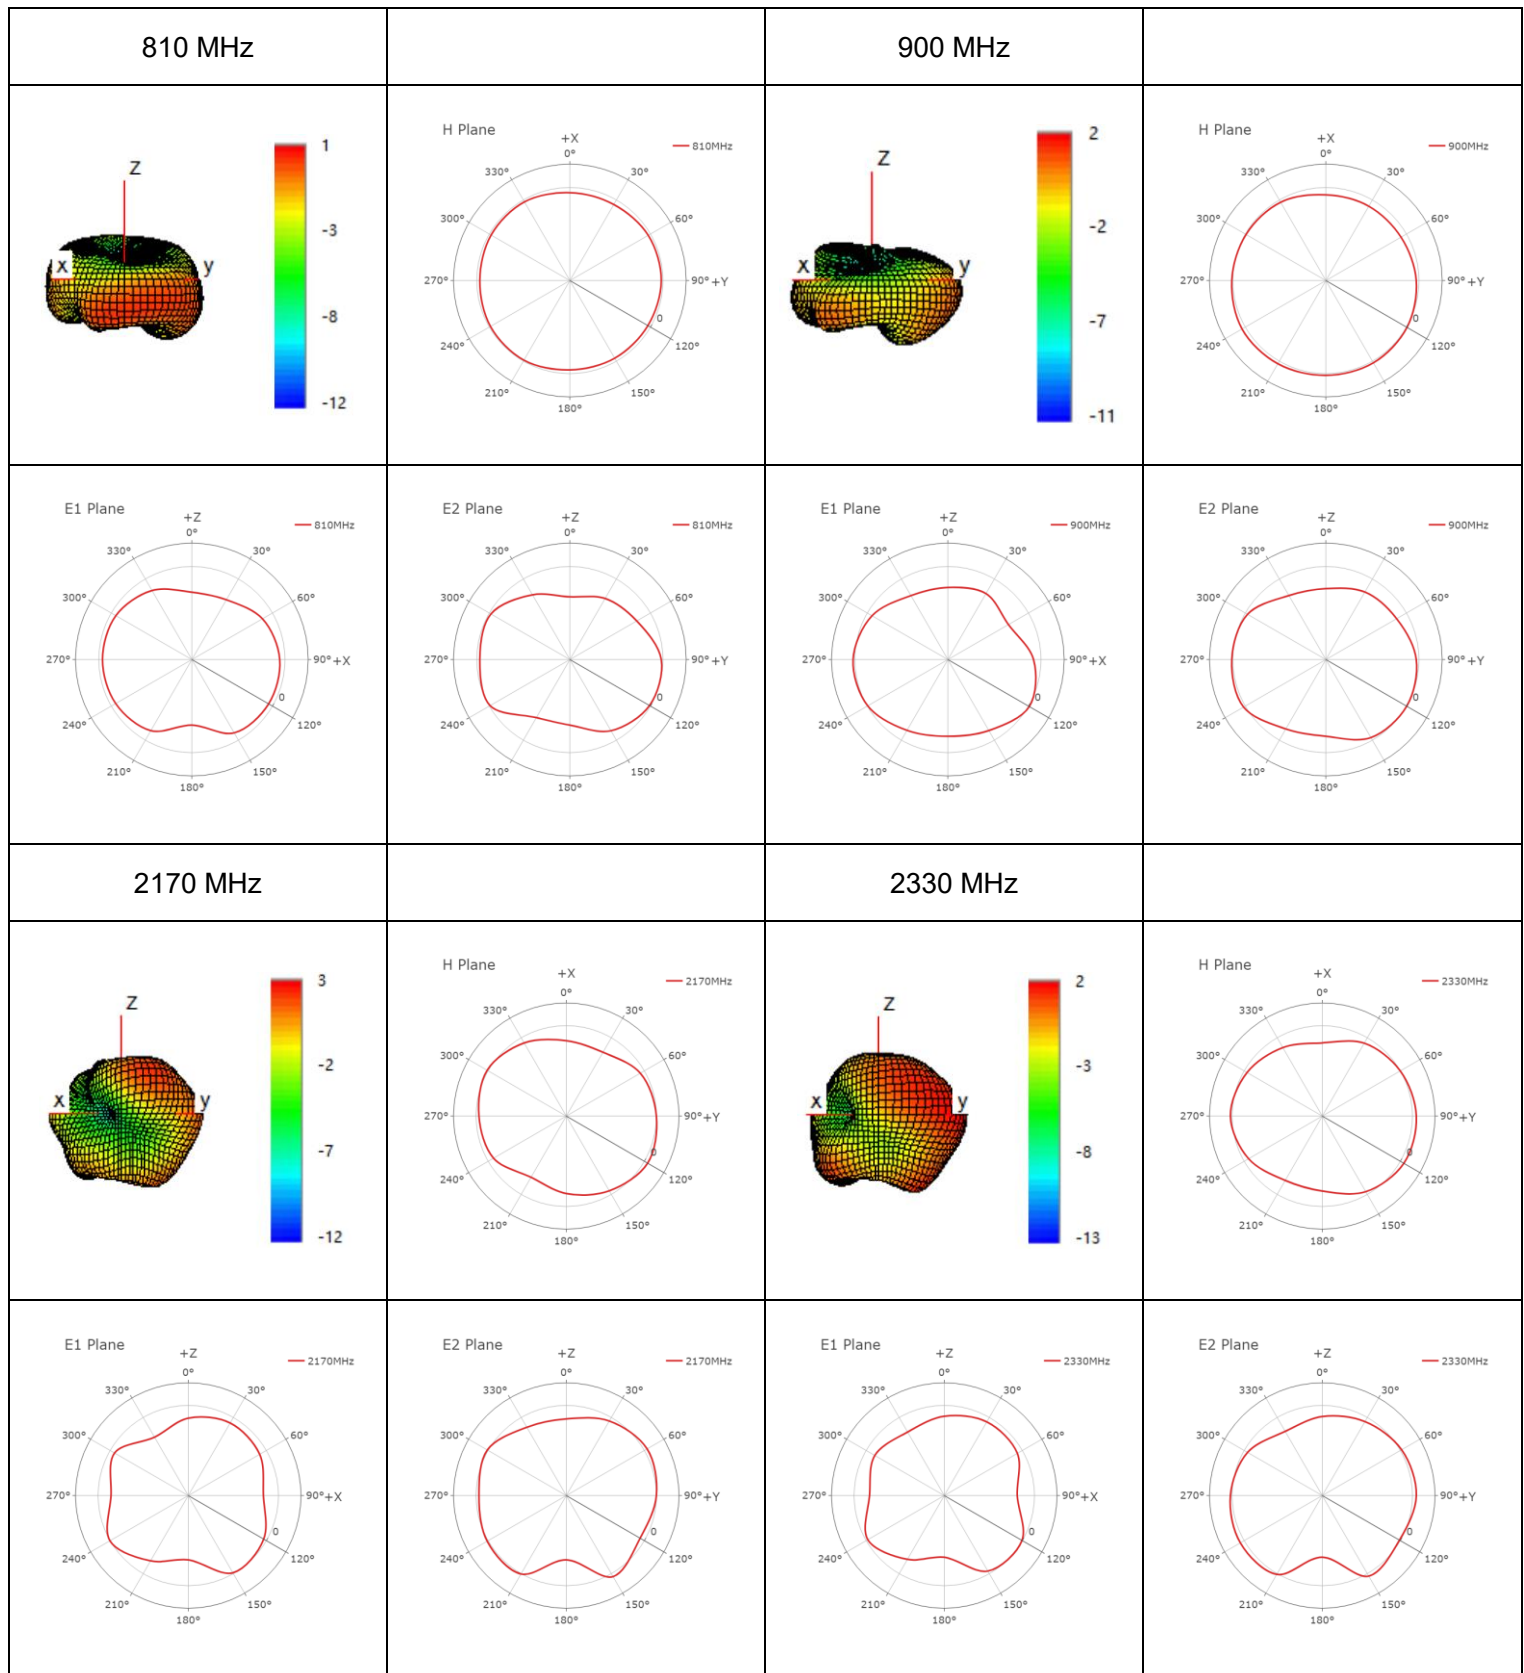


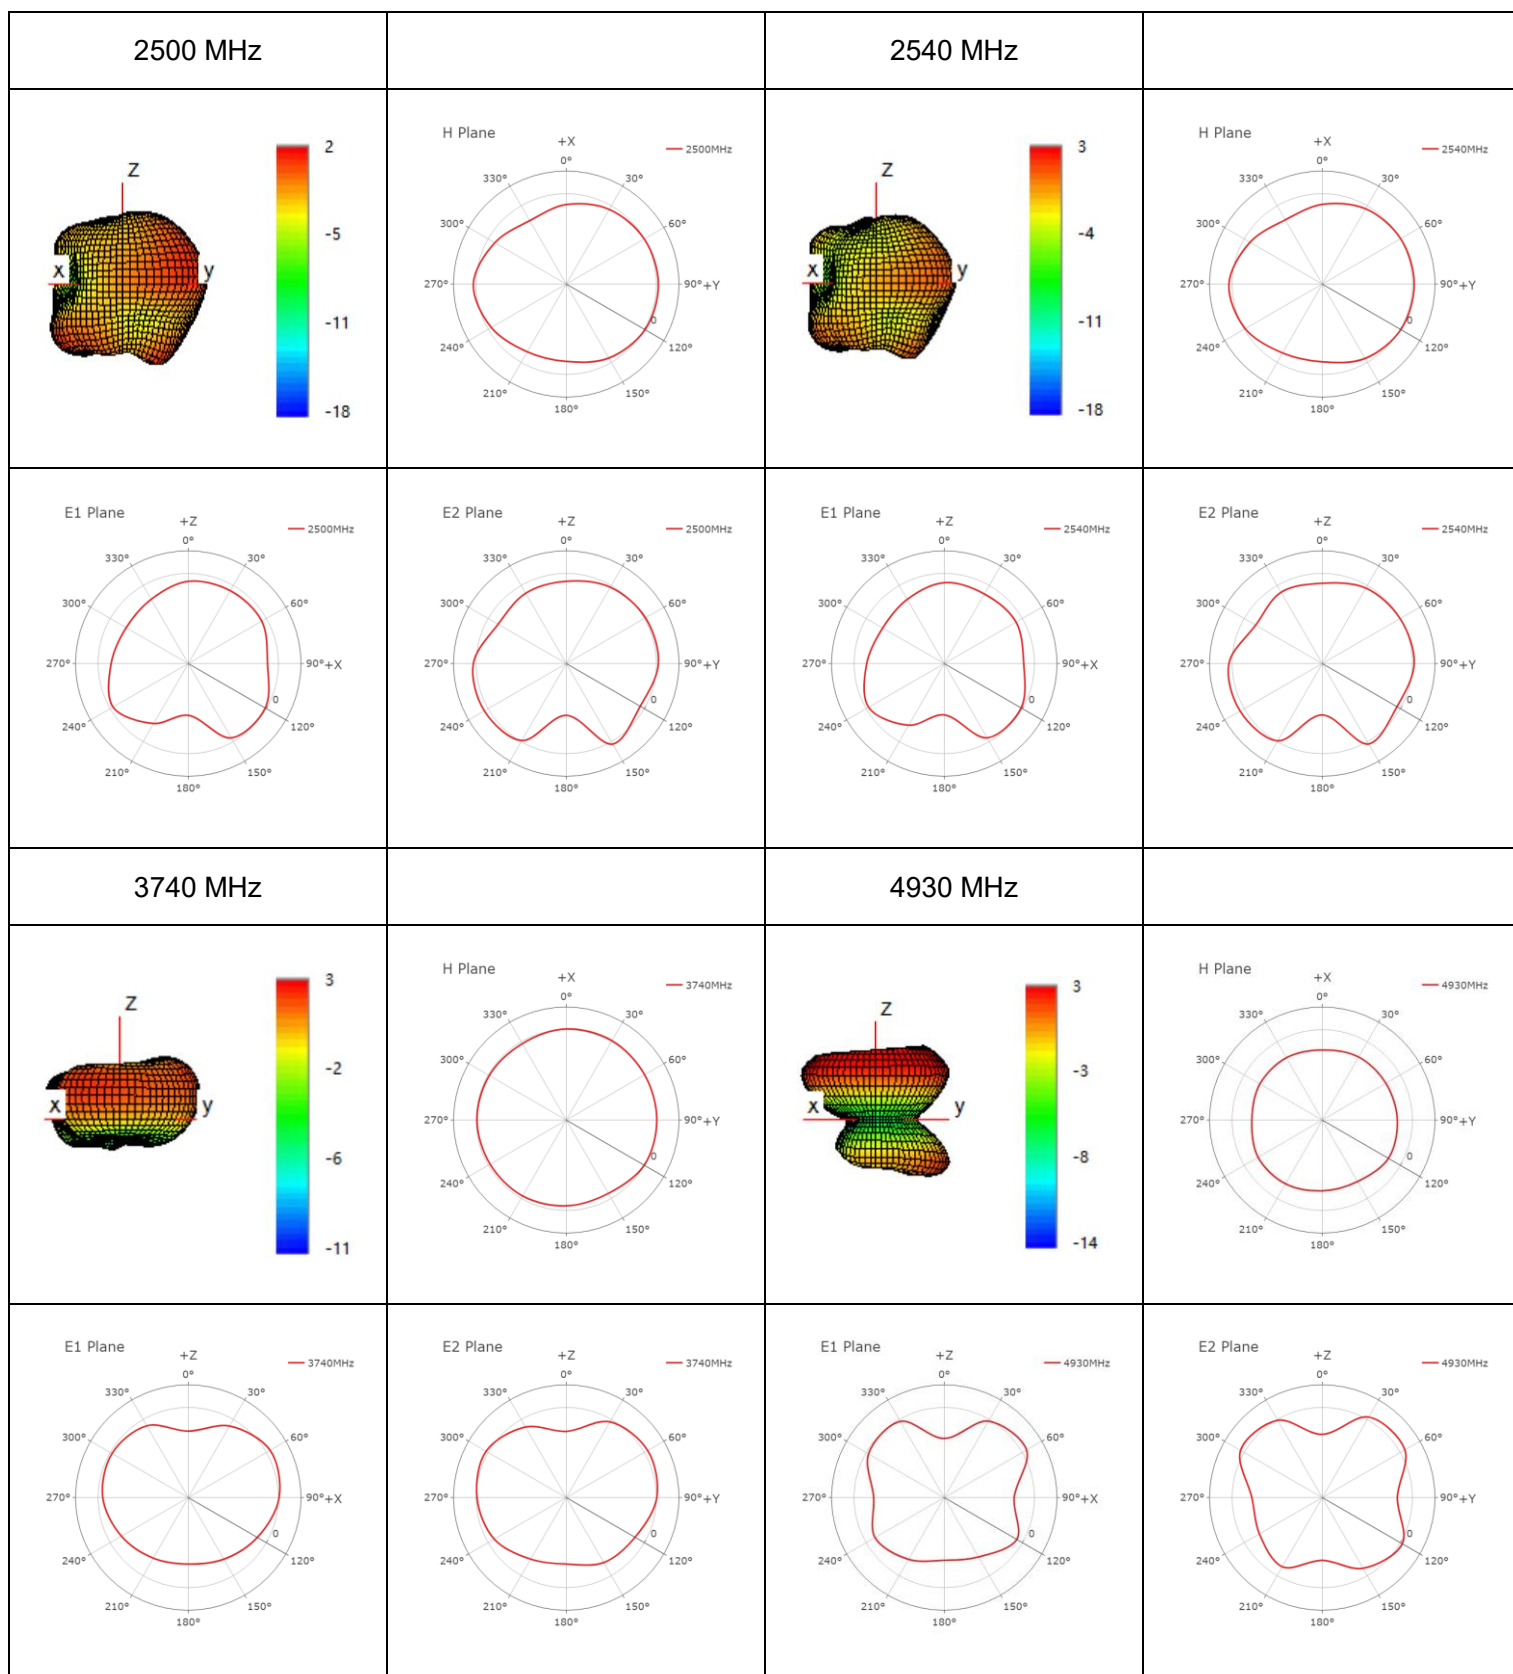

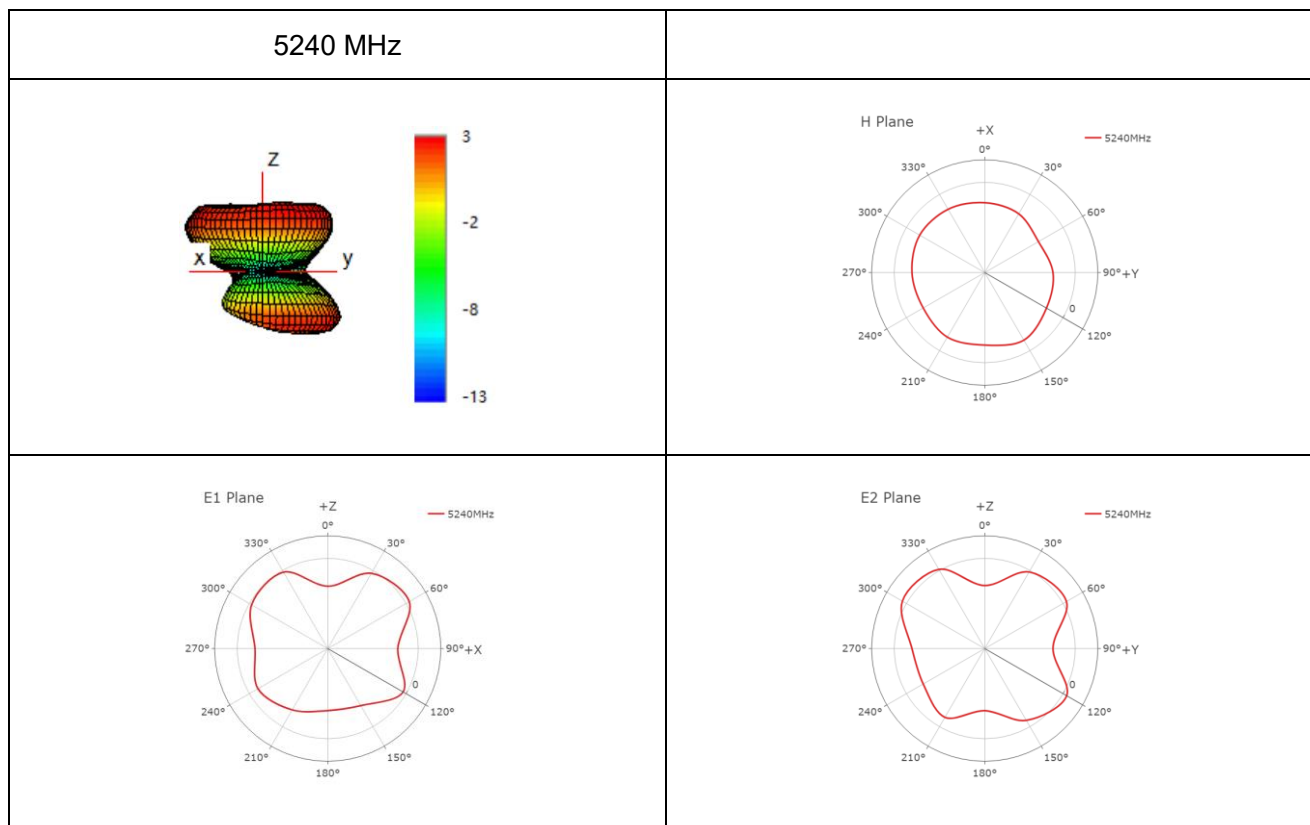

4 Packaging

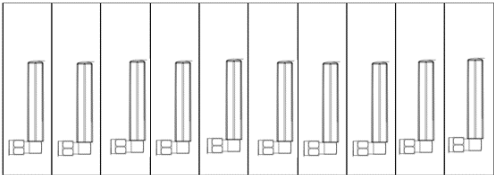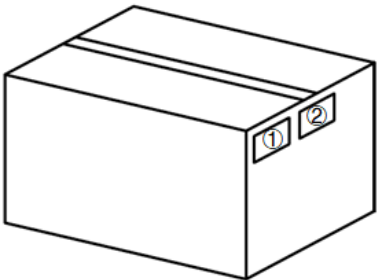Step	Packaging Picture / 2D Picture	Description
1		10 antennas products in a one-piece bag. (10 Antennas / One-piece Bag)
2		40 antennas products in a PE bag. (40 Antennas / PE Bag)
3		(40 PE Bags / Carton Box) (1600 Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. <u>Carton Size:</u> <u>L × W × H = 470 × 310 × 310 mm</u>
4		Position for Attaching Labels ① Carton Label ② Quality Label

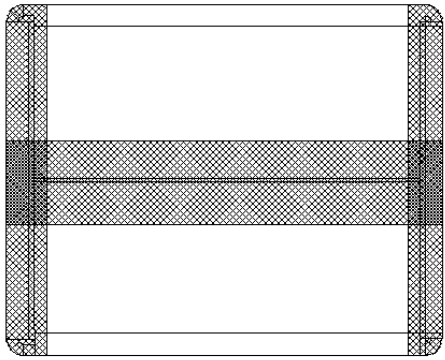5		Sealing Cartons H-shaped sealing cartons
Note	The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<https://www.quectel.com/contact/>.

For technical support, or to report documentation errors, please visit:

<https://www.quectel.com/tech-support/>.

Or email us at: support@quectel.com.

Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

Use and Disclosure Restrictions

License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the intended project.

Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

Disclaimer

- a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
- b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
- c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
- d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2026. All rights reserved.

Revision History

Version	Date	Author	Note
-	2024-07-31	Black Li/ Steven Mo/ David Liu/ Rainey Liao	Creation of the document
1.0	2024-07-31	Black Li/ Steven Mo/ David Liu/ Rainey Liao	First official release
1.1	2024-10-17	Steven Mo	Added Ingress Protection (IP) Rating (Chapter 1.2).
1.2	2025-03-11	Rainey Liao	Updated the starting frequency to 698 MHz (Homepage, Overview and Chapter 1.1).
1.3	2025-04-24	Rainey Liao	Updated the antenna image (Cover page).
1.4	2025-08-18	Steven Mo	Updated the Ingress Protection (IP) rating to IP54.
1.5	2026-01-19	Strong Qiang	Updated the packaging (Chapter 4).
1.6	2026-03-18	Steven Mo	Updated the drawing (Chapter 2).



www.quectel.com