



Antenna Datasheet

Product OC: YECN001L1AH

Version: 1.0

Date: 2025-12-22

Status: Released

Product Name: 5G Screw Mount Stubby Monopole External Antenna

Key Features:

Frequency Band: 600–960 MHz, 1400–6000 MHz

Dimensions: Φ 40.6 mm \times 104 mm

Efficiency: Up to 88.1 % (MP)

RoHS and REACH Compliant

IP67

IP69K

IK10

Compatible with ECE-R118 cables under demand

Overview

The Quectel YECN001L1AH is an external Screw mounting antenna. This ultra-wide-band antenna provides coverage the 5G/4G/3G/2G networks as well as LPWA, Cat-M, NB IoT, ZigBee, ISM, Wi-Fi/BT. Its shape is cylinder, with dimensions of Φ 40.6 mm × 104 mm. YECN001L1AH has a SMA Male connector.

YECN001L1AH is an external antenna with high performance, which can be installed outside the device. It can adopt waterproof, dustproof, and anti-drop design, with IP67 and IP69K waterproof and dustproof ratings, and IK10 impact protection (IK) rating, this design can maximize the protection of the antenna from natural environmental damage such as water droplets, dust and falls. We also provide a housing UV resistant of UL 746c f1, which can allow the YECN001L1AH to be used in outdoor environments for a long time and remain intact even in harsh environments, thereby extending its service life for providing a more flexible and reliable high-performance antenna solution for products in external application environments.

YECN001L1AH allows high efficiency, stable signal transmission and reception for from 600 to 960 MHz, 1400 to 6000 MHz.

Typical Applications Include:

- Smart Buildings: Climate control, access control, security, irrigation
- Transport (Busses, Utility & Public Safety)
- Agricultural machinery
- Mining Vehicles & Machinery communications, telemetry and automation
- Industrial factory automation
- Warehouses & Logistic systems

Quectel provides customized service for optimization of your devices, we have regional R & D centers to offer quick response to meet your requirements. Please contact our sales & FAEs if you have any requests.

Contents

Overview	1
Contents	2
1 Specification	3
1.1. Electrical.....	3
1.2. Mechanical & Environmental	4
2 Drawing	5
3 Detailed Performance	7
3.1. S-Parameter Test	7
3.1.1. VSWR	7
3.1.2. Return Loss.....	8
3.2. Radiation Performance Test.....	9
3.2.1. Efficiency.....	9
3.2.2. Average Gain	10
3.2.3. Peak Gain	11
3.2.4. 3D & 2D Radiation Pattern	12
3.2.5. 3D & 2D Radiation Pattern	20
4 Packaging	28
Contact Us	30
Legal Notices	31
Revision History	33

1 Specification

Test Condition: In Free Space & On 300 mm × 300 mm Metal Plane

1.1. Electrical

Electrical Specifications	
Frequency Range	600–960 MHz, 1400–6000 MHz
Radiation Pattern	Omni-directional
Polarization	Linear
Impedance	50 Ω


Electrical – Detail												
SPEC	Band	B71	B12 /B13 /B28	B5 /B8 /B26	n74 /n75 /n76	B1 /B2 /B3	B40	Wi-Fi 2G	B38 /B41	B42 /B48 /n77	n79	Wi-Fi 5G
	Freq. (MHz)	600– 700	700– 810	820– 960	1420– 1520	1700– 2170	2300– 2400	2400– 2500	2500– 2690	3300– 4200	4400– 5000	5150– 5850
Max. VSWR	FS	11.9	11.8	3.3	2.2	3.2	1.9	1.8	1.7	2.3	1.9	2.1
	MP	5.6	2.1	1.7	3.2	3.8	1.9	1.8	1.8	2.5	1.9	2.1
Max. Return Loss (dB)	FS	-1.5	-1.5	-5.5	-8.5	-5.5	-10.1	-11.3	-11.3	-8.2	-10.1	-8.9
	MP	-3.2	-8.9	-11.5	-5.6	-4.7	-10.3	-10.9	-11.0	-7.5	-10.0	-9.1
AVG Eff. (%)	FS	9.0	24.8	46.2	60.1	46.6	64.5	65.4	67.8	59.6	54.4	53.1
	MP	42.4	76.0	76.3	58.8	53.2	65.9	68.0	69.0	54.4	55.7	53.2
AVG AVG Gain (dB)	FS	-10.5	-6.8	-3.4	-2.2	-3.3	-1.9	-1.8	-1.7	-2.3	-2.7	-2.8
	MP	-3.9	-1.2	-1.2	-2.3	-2.8	-1.8	-1.7	-1.6	-2.7	-2.6	-2.8
Max. Peak Gain (dBi)	FS	-2.9 (600)	2.1 (810)	4.8 (960)	4.0 (1450)	1.8 (1700)	3.1 (2310)	2.8 (2400)	2.4 (2520)	3.5 (4190)	2.4 (4400)	3.1 (5740)
	MP	0.3	2.1	2.7	1.6	2.8	4.7	4.2	4.2	5.0	5.2	5.4

	(690)	(810)	(940)	(1450)	(2070)	(2310)	(2450)	(2530)	(3340)	(4580)	(5600)
VSWR	FS			≤ 11.9							
	MP			≤ 5.6							
Return Loss	FS			≤ -1.5 dB							
	MP			≤ -3.2 dB							
Gain	FS			≤ 4.8 dBi							
	MP			≤ 5.4 dBi							

1.2. Mechanical & Environmental

Mechanical	
Antenna Dimensions	40.6 mm × 104 mm
Material & Color	ASA & Black
Cable Type & Length	ALSR200 Black & 1000 mm
Connector Type	SMA Male (The current state of the SMA connector is not waterproof. If a waterproof connector is required, it can be customized.)
Weight	Typ. 205 g
Mounting Type	Screw
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
Ingress Protection (IP) Rating	IP67 (After Installation) IP69K (After Installation)
Impact Protection (IK) Rating	IK10 (Only top face meets IK10)
RoHS & REACH Compliant	Yes
Housing UV Resistant	UL 746c f1

2 Drawing

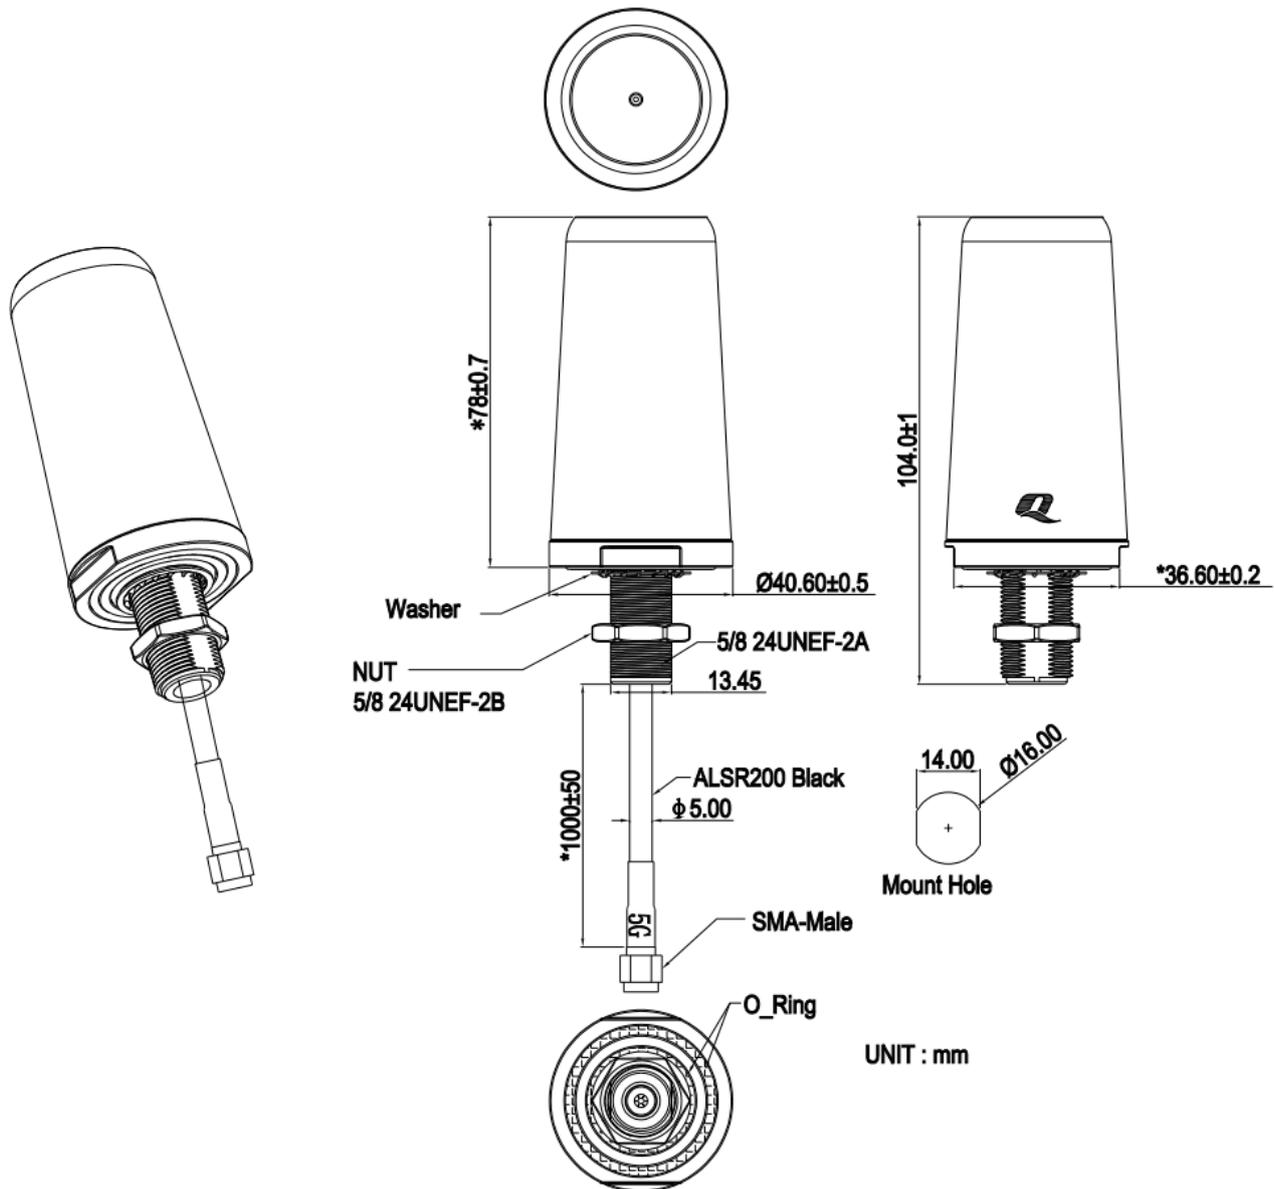


Caution: If you find the silicon seal ring dropping out of the groove when opening the package, it's a normal phenomenon due to its special structure design. Please assemble the silicon seal ring into groove before you assemble antenna on the device, thanks!



3 Detailed Performance

3.1. S-Parameter Test


3.1.1. VSWR

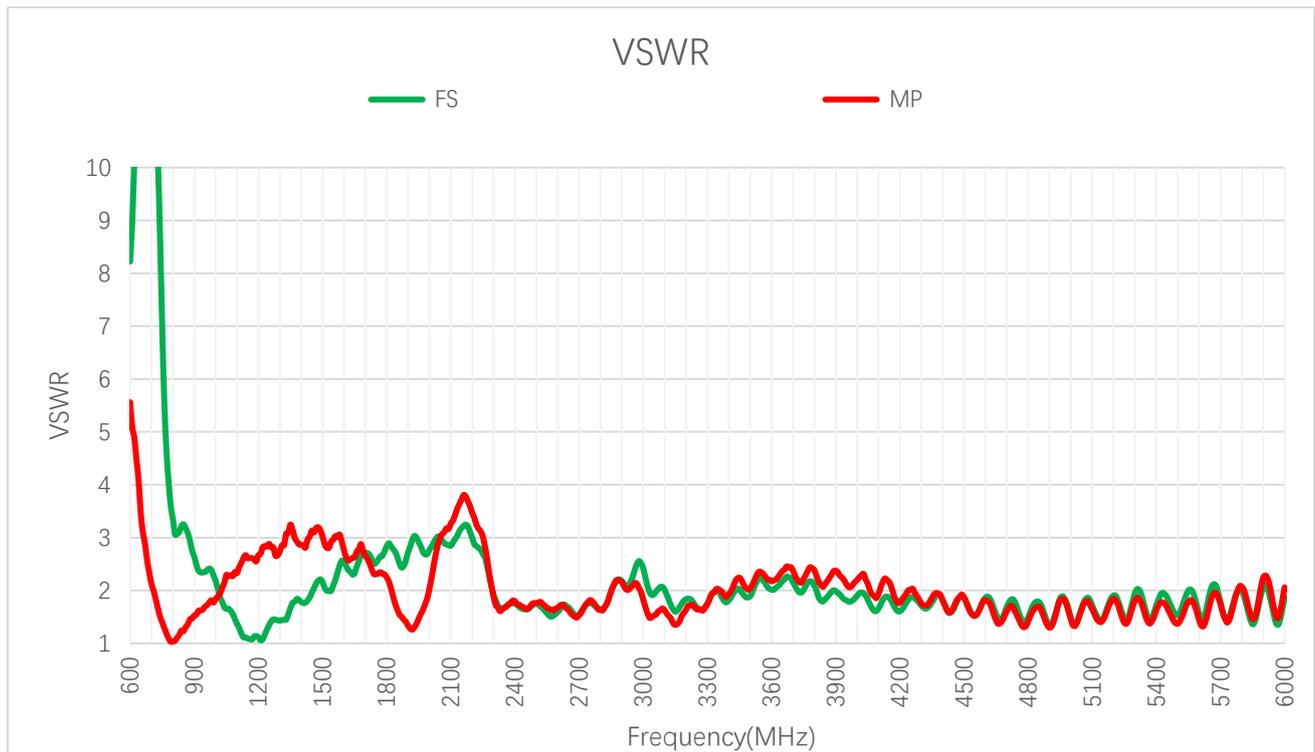

VSWR

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
5G	FS	8.2	10.9	11.8	3.1	2.6	2.4	1.9	2.7	2.5	2.5
	MP	5.6	4.5	2.0	1.2	1.5	1.7	3.0	2.6	2.3	1.4
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
5G	FS	2.9	3.1	1.7	1.6	1.6	2.0	1.7	1.5	1.5	1.9
	MP	1.5	3.6	1.7	1.6	1.7	2.2	1.6	1.4	1.4	2.1

3.1.2. Return Loss

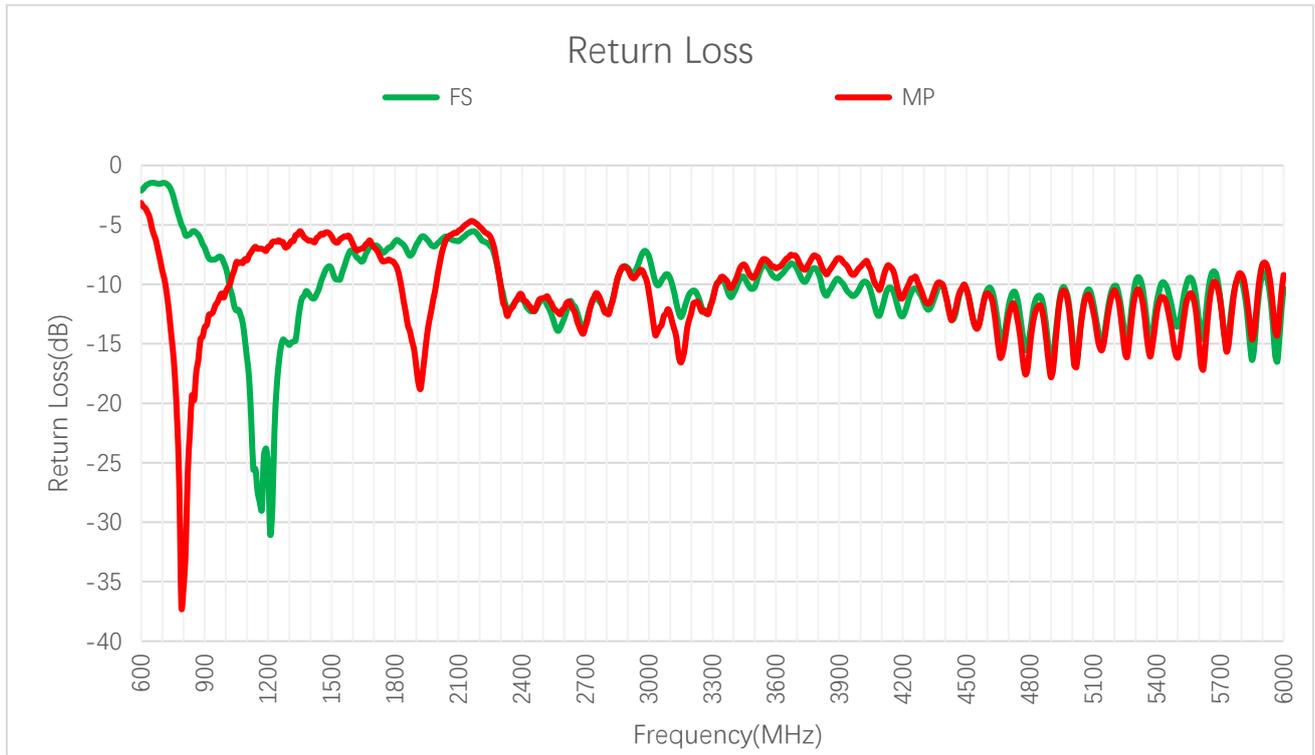


Return Loss (dB)

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
5G	FS	-2.1	-1.6	-1.5	-5.8	-6.9	-7.8	-10.4	-6.7	-7.4	-7.5
	MP	-3.2	-4.0	-9.6	-22.5	-13.6	-11.5	-6.0	-7.0	-8.0	-14.8
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
5G	FS	-6.2	-5.8	-11.9	-12.2	-12.8	-9.5	-11.8	-14.2	-13.5	-10.3
	MP	-14.4	-4.9	-12.0	-12.2	-12.0	-8.7	-12.7	-14.7	-16.2	-9.2

3.2. Radiation Performance Test


3.2.1. Efficiency

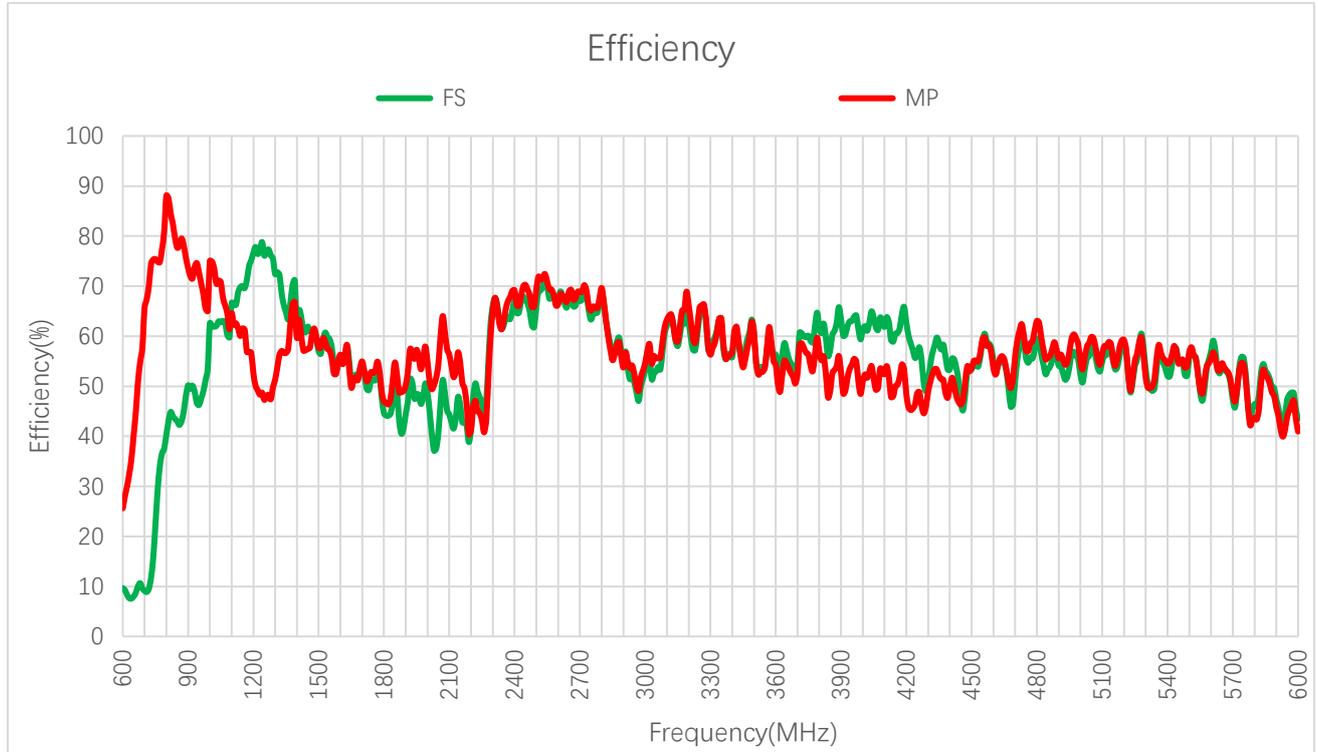

Efficiency (%)

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
5G	FS	9.7	7.6	8.9	44.0	50.2	47.6	60.8	52.5	51.0	40.5
	MP	25.6	32.6	67.4	82.5	73.6	70.5	57.2	53.0	52.8	48.8
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
5G	FS	48.4	47.9	62.1	67.5	67.0	56.3	51.2	52.3	55.7	43.5
	MP	57.3	56.8	63.1	70.3	66.3	54.3	56.0	54.9	56.9	41.0


3.2.2. Average Gain

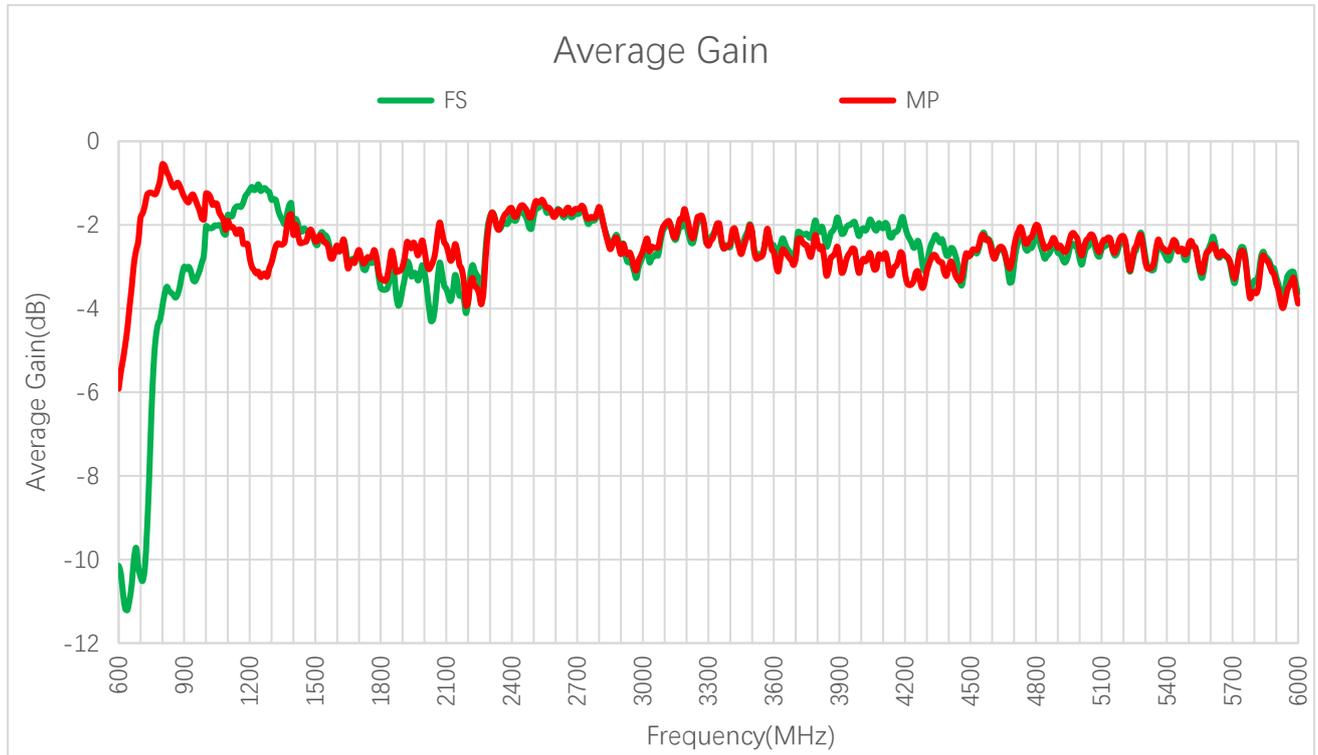

Average Gain (dB)

Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
5G	FS	-10.2	-11.2	-10.5	-3.6	-3.0	-3.2	-2.2	-2.8	-2.9	-3.9
	MP	-5.9	-4.9	-1.7	-0.8	-1.3	-1.5	-2.4	-2.8	-2.8	-3.1
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
5G	FS	-3.2	-3.2	-2.1	-1.7	-1.7	-2.5	-2.9	-2.8	-2.5	-3.6
	MP	-2.4	-2.5	-2.0	-1.5	-1.8	-2.7	-2.5	-2.6	-2.5	-3.9

3.2.3. Peak Gain

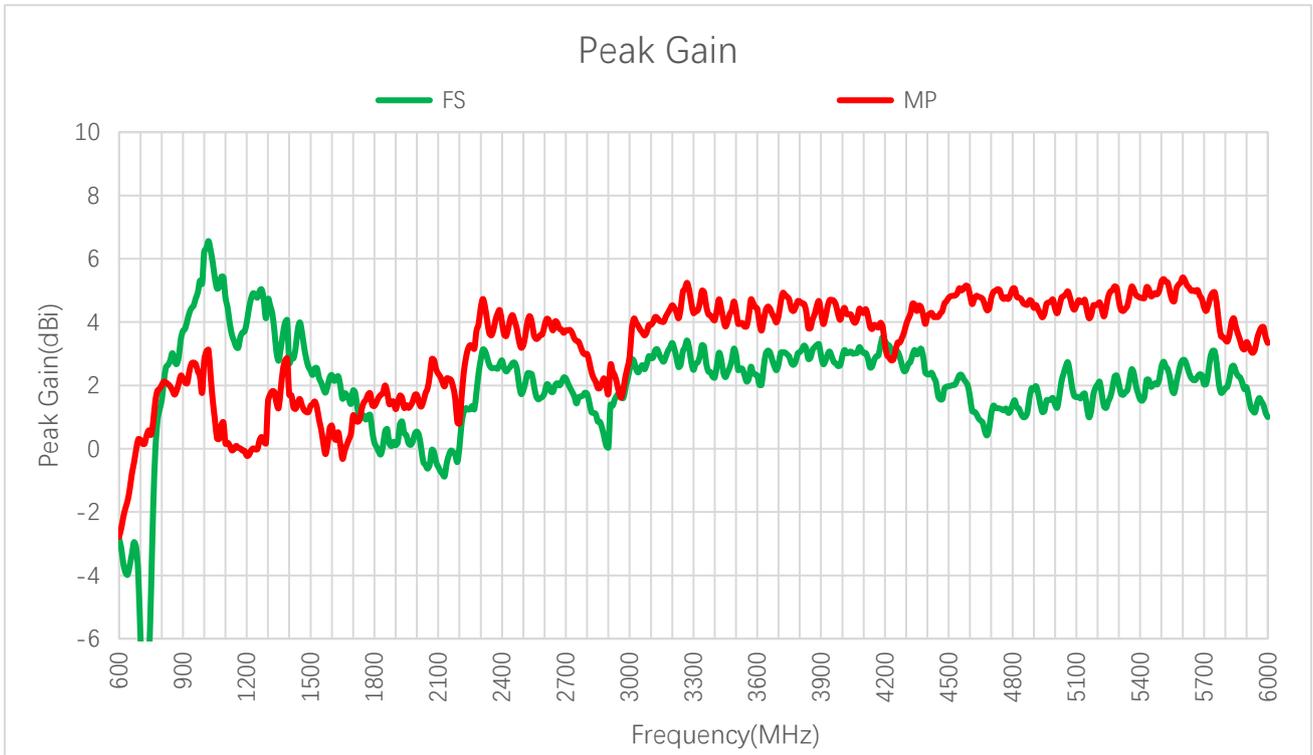

Peak Gain (dBi)


Frequency (MHz)		600	630	710	830	900	960	1440	1710	1740	1880
5G	FS	-2.9	-3.9	-7.7	2.7	3.7	4.8	3.8	1.8	1.1	0.1
	MP	-2.8	-1.9	0.2	2.0	2.2	2.7	1.5	1.0	1.2	1.5
Frequency (MHz)		1950	2140	2350	2450	2600	3600	4700	5000	5500	6000
5G	FS	0.4	-0.5	2.6	2.7	1.8	2.3	1.1	1.4	2.6	1.0
	MP	1.4	2.2	3.6	4.2	3.9	4.4	4.8	4.4	5.3	3.3


3.2.4. 3D & 2D Radiation Pattern


- Test Condition: Free space
- Test Chamber: HF-S-1




● **5G**

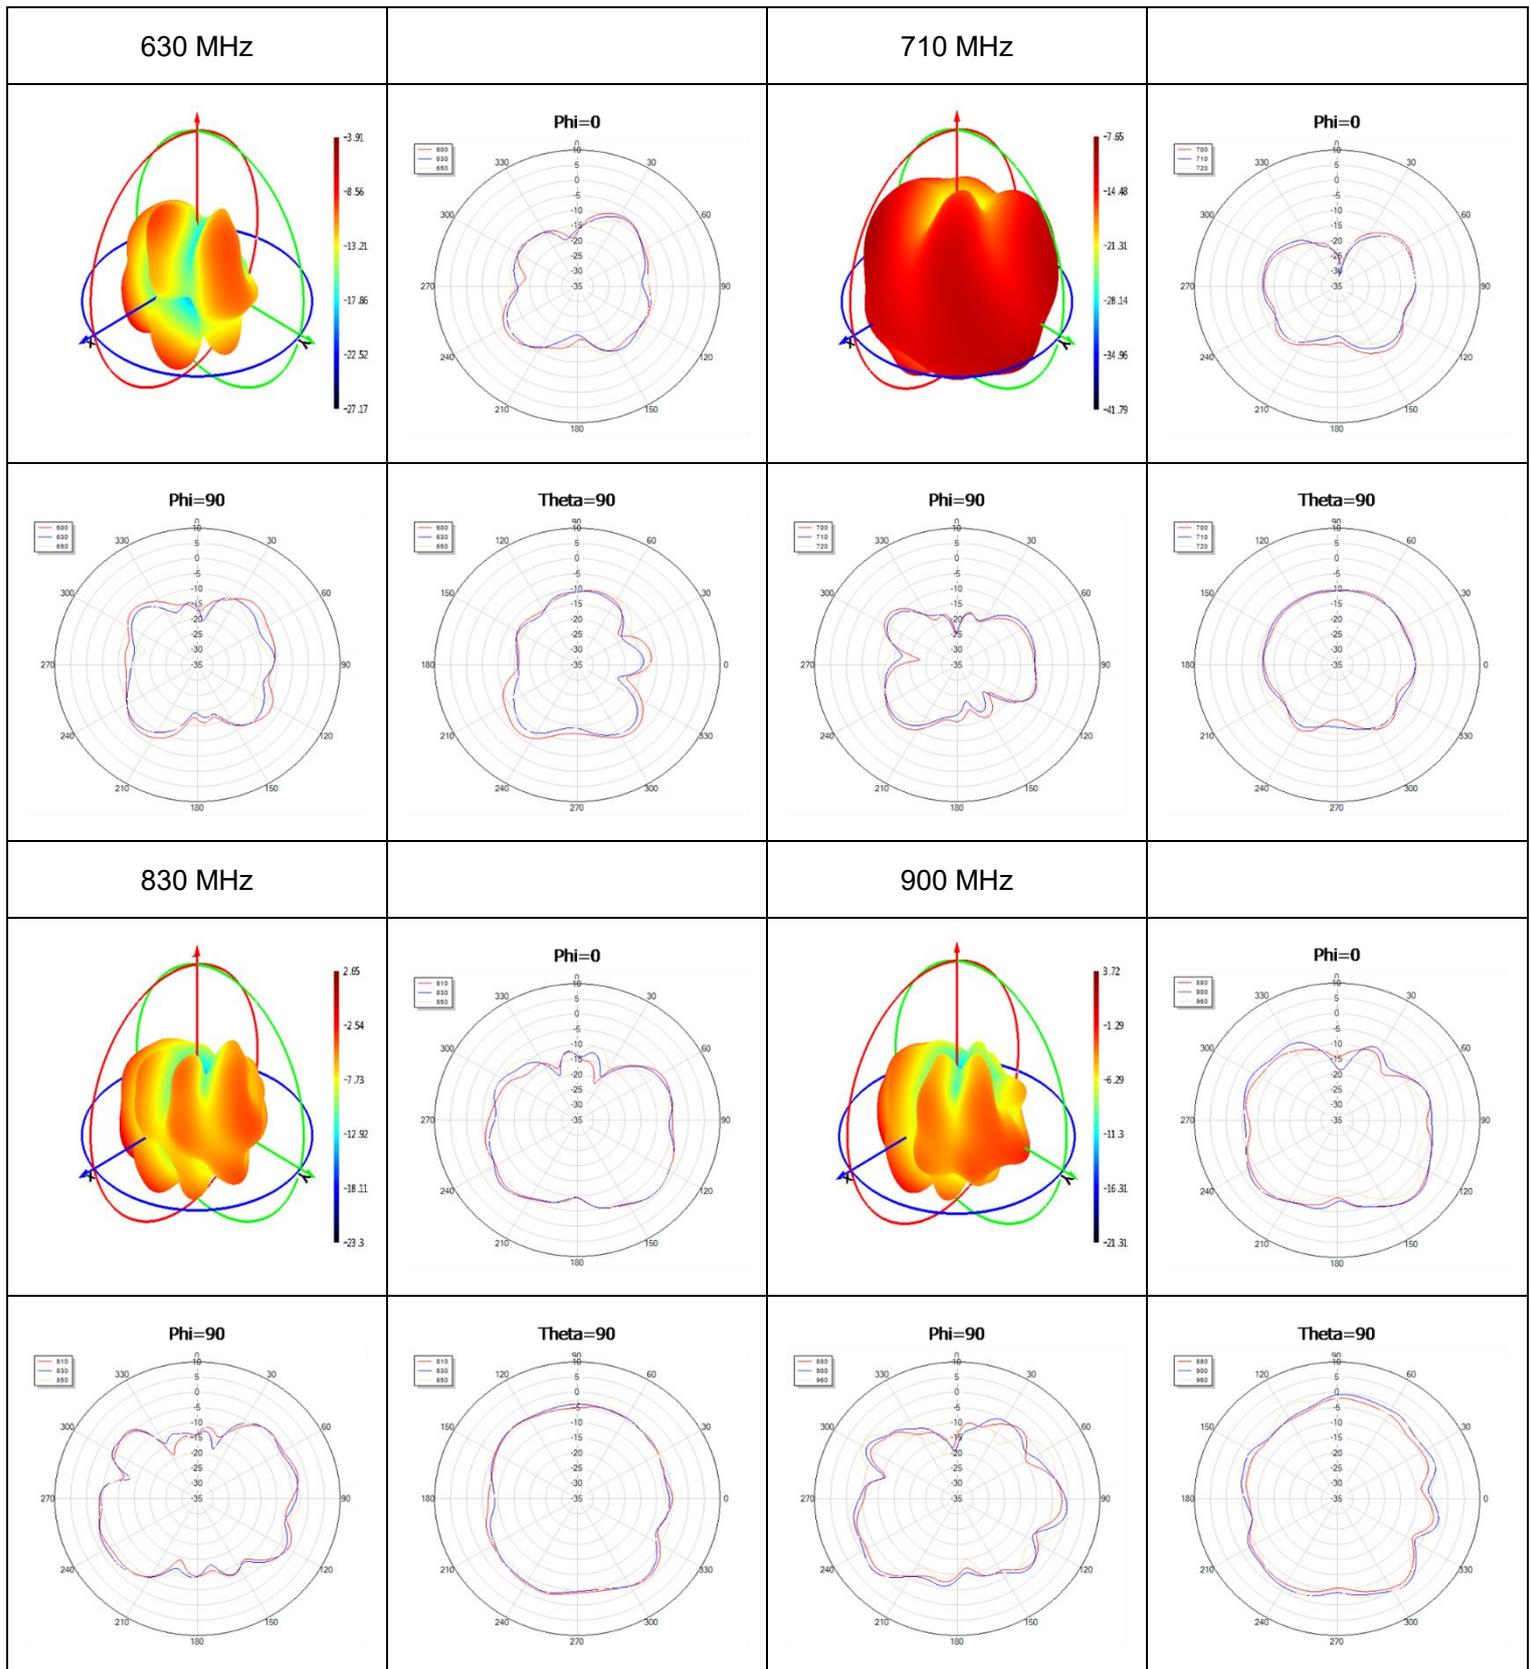


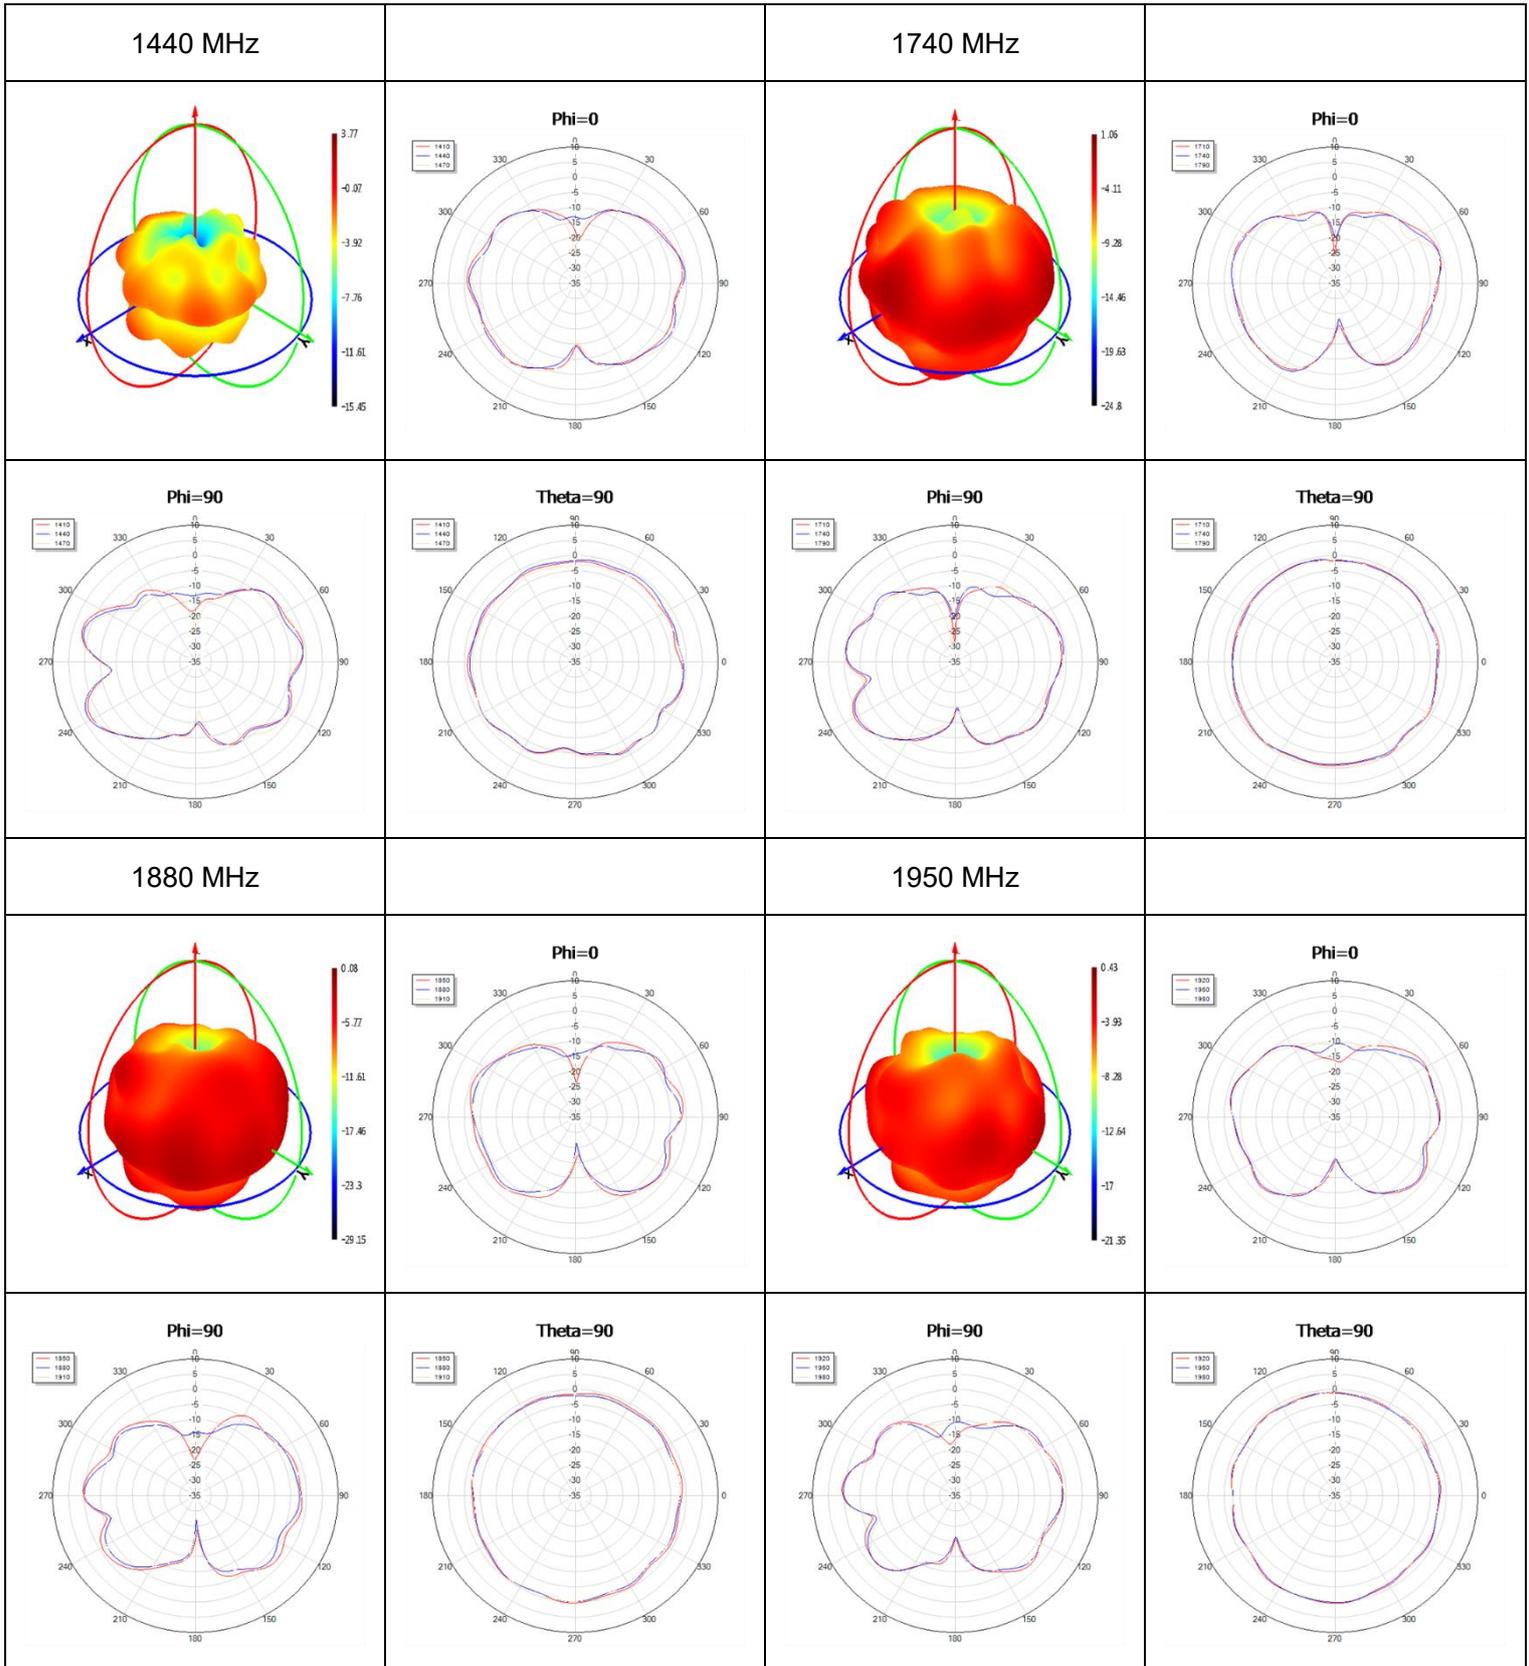


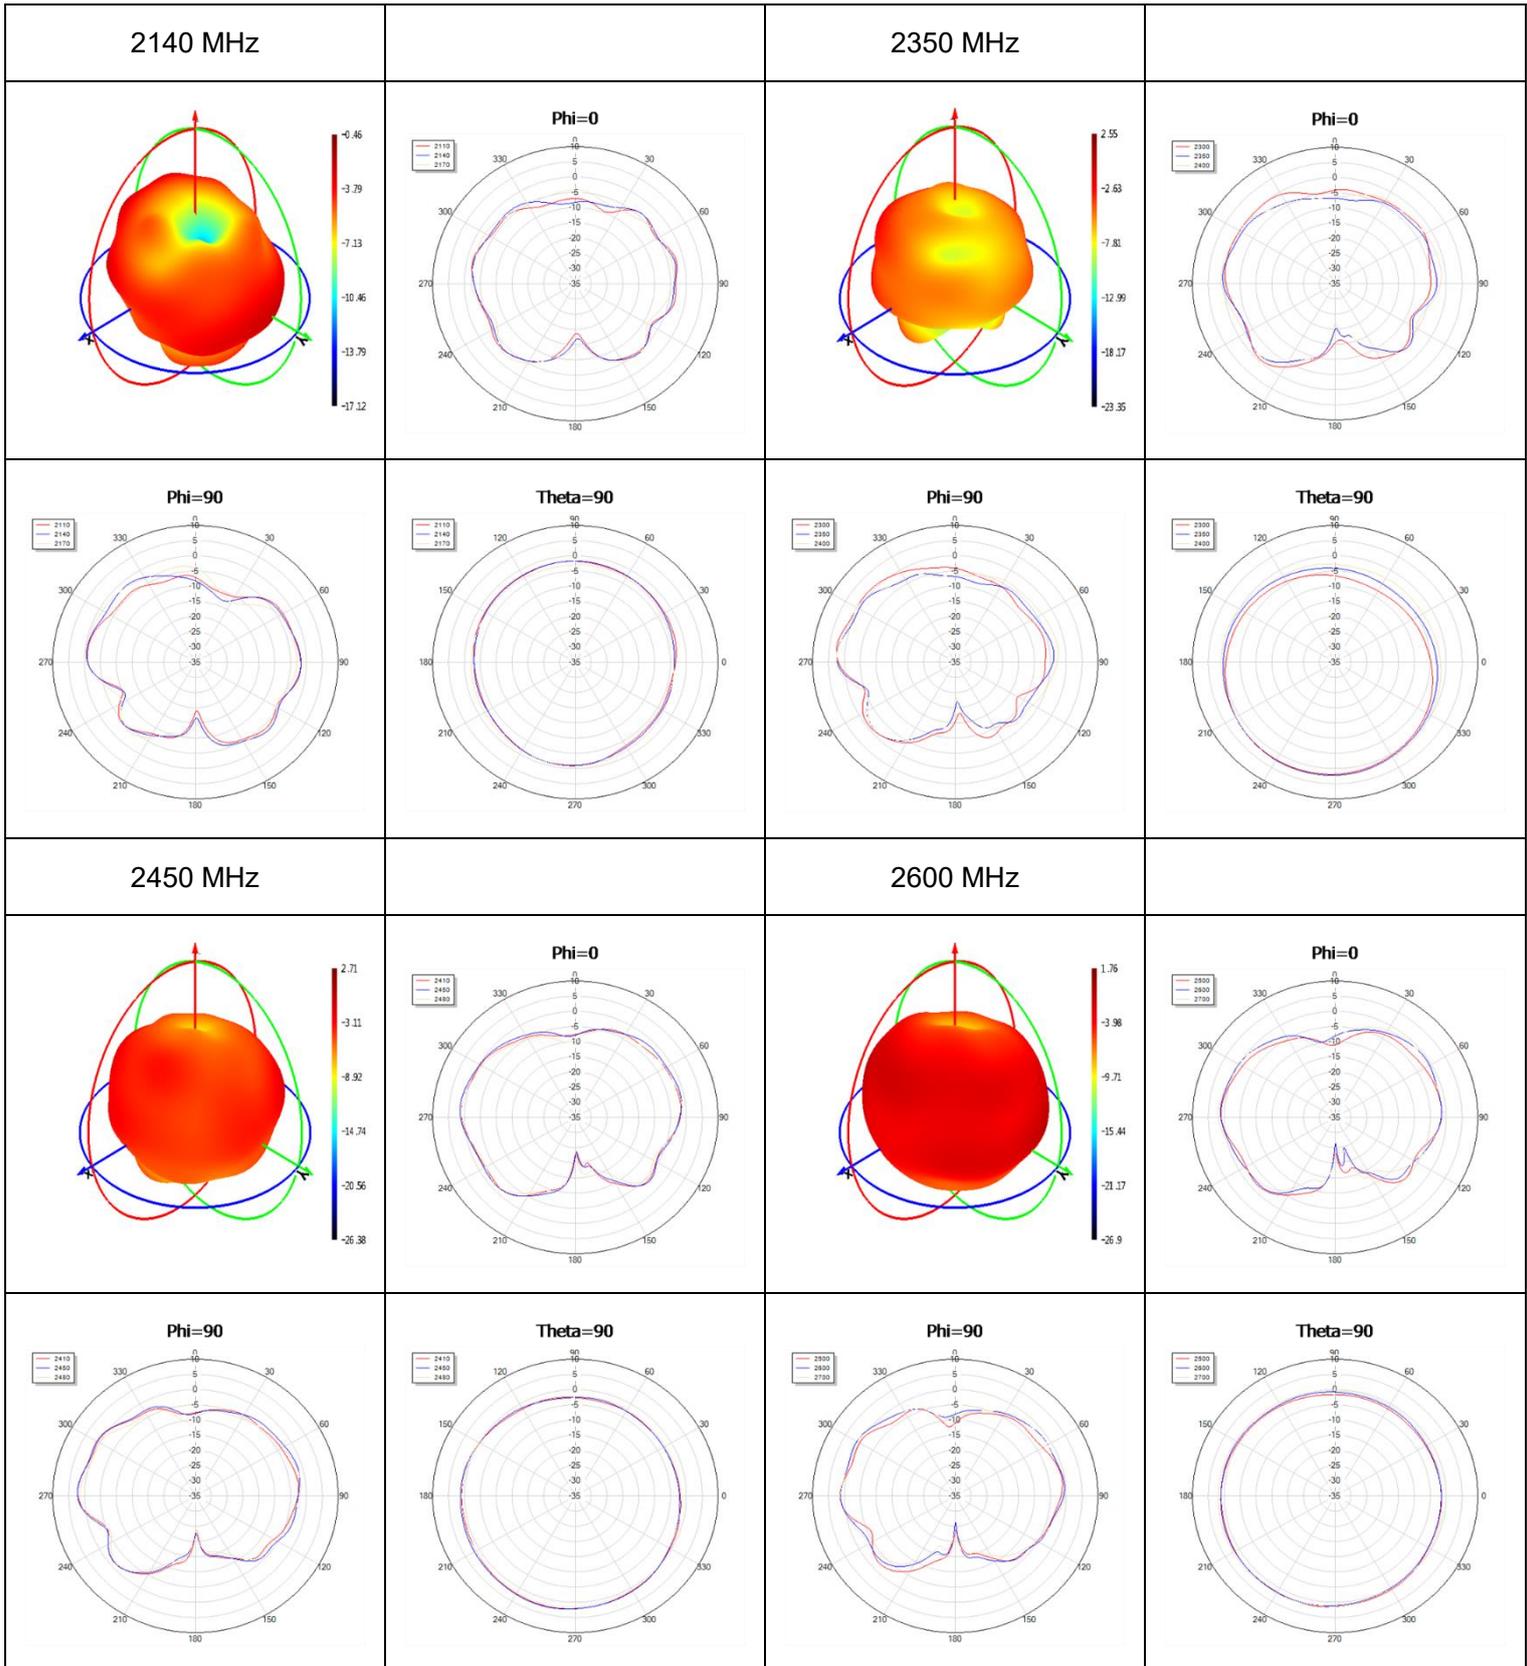


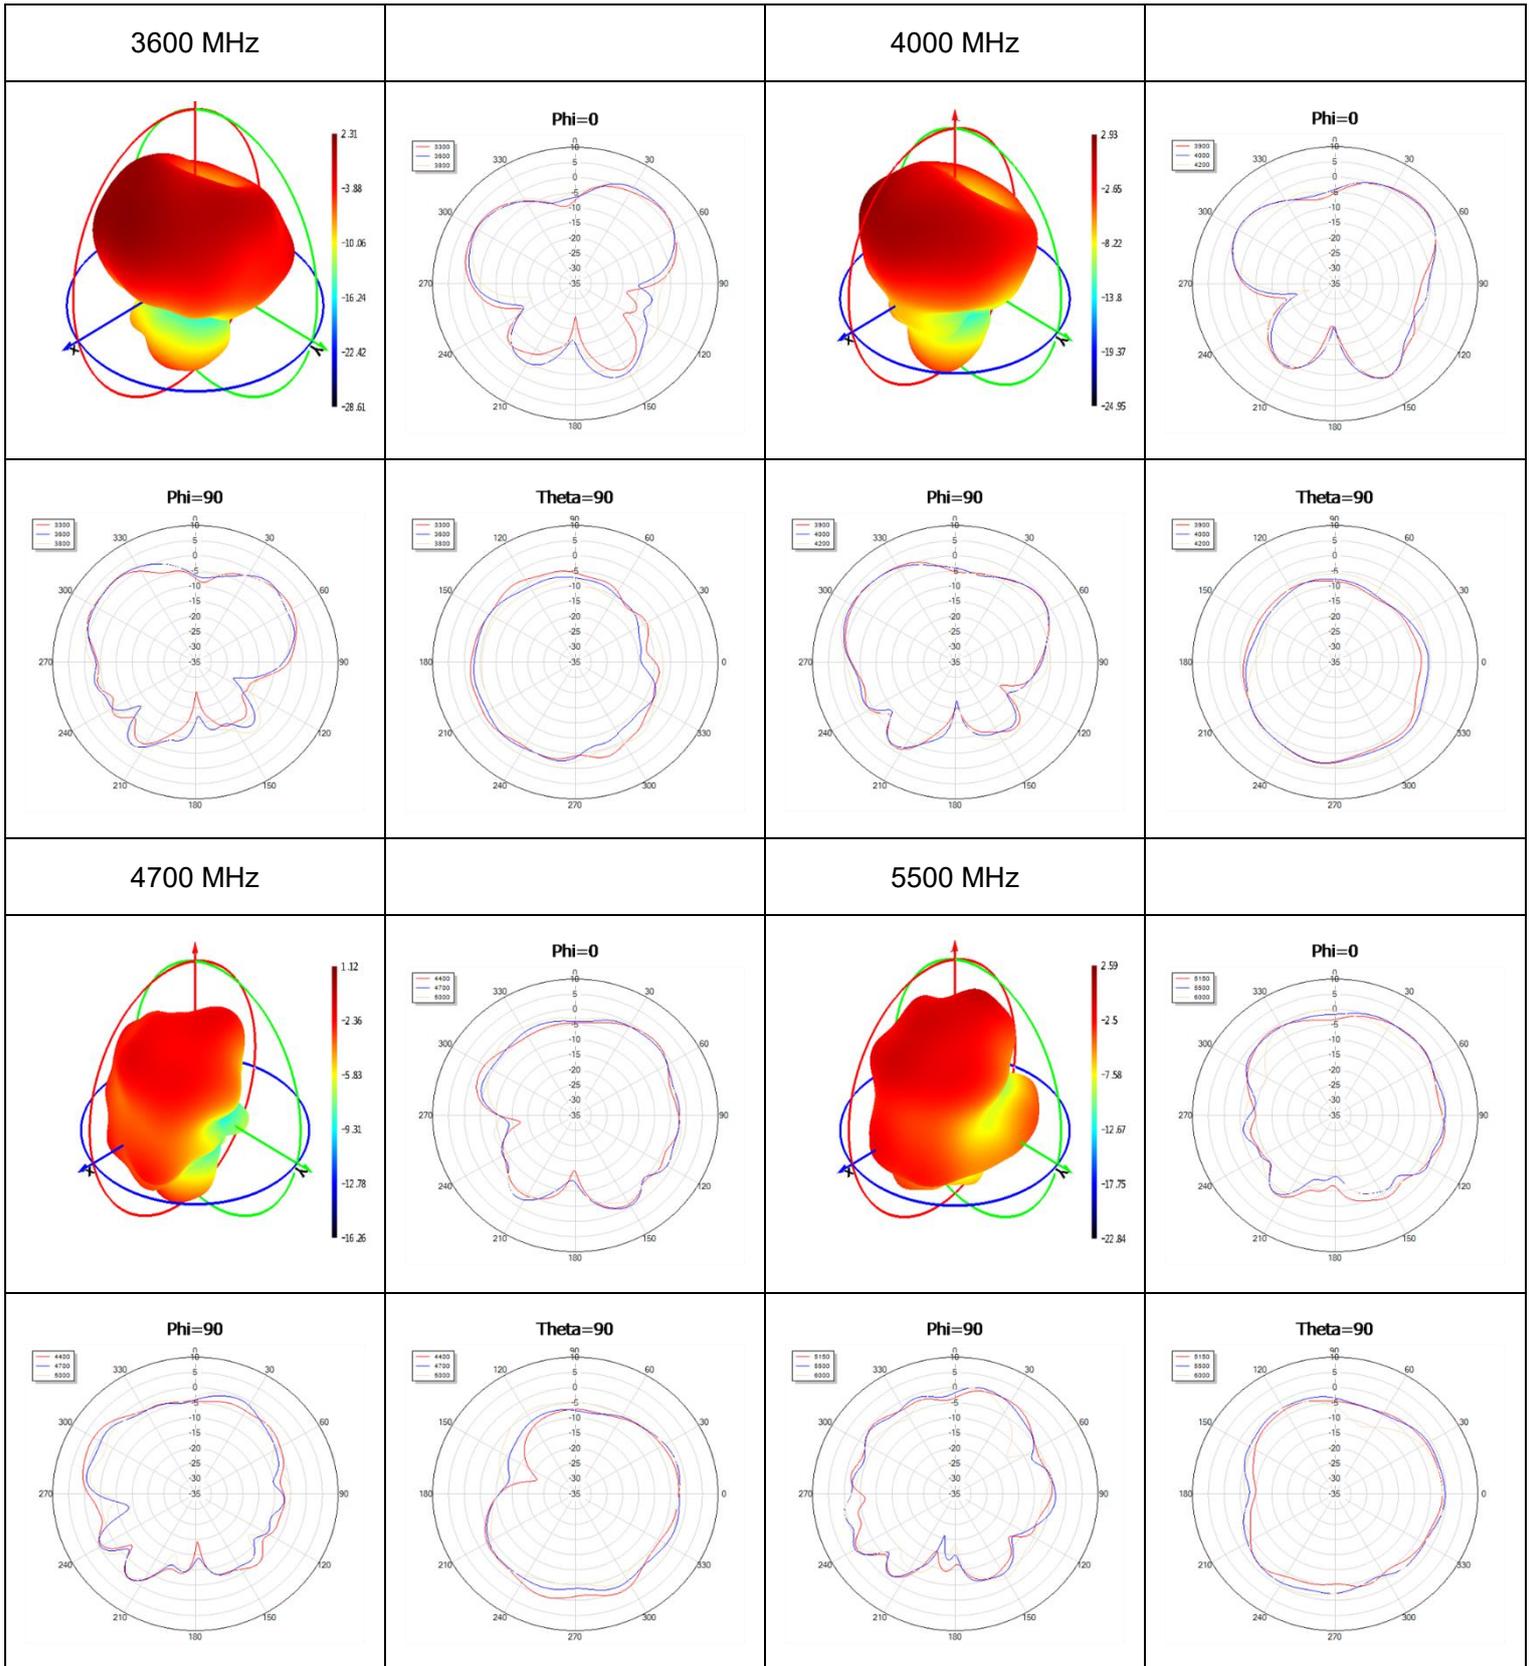


● **Max Peak Gain**


600 MHz

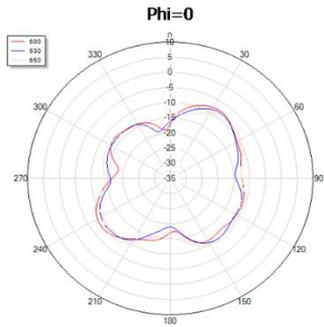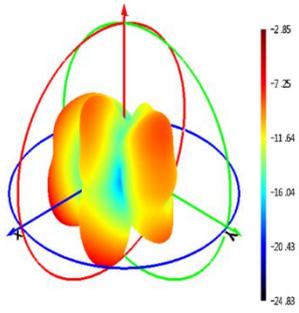


810 MHz

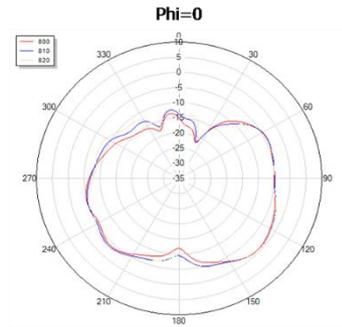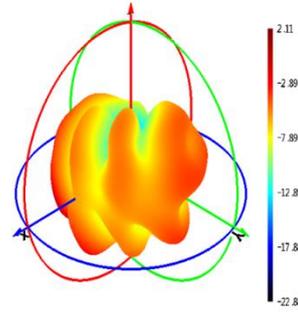


Phi=90

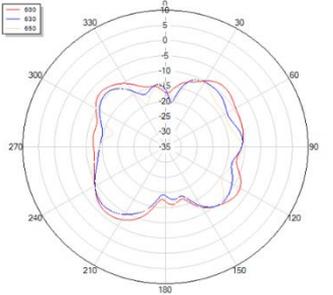


Theta=90

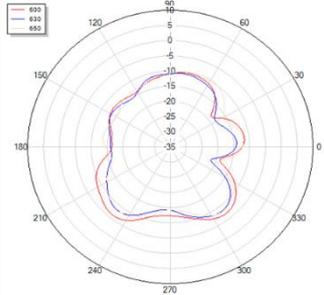



Phi=90

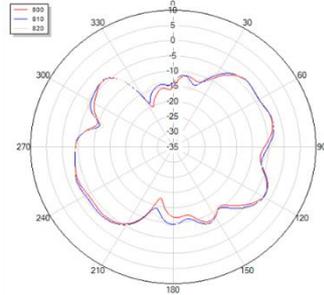



Theta=90

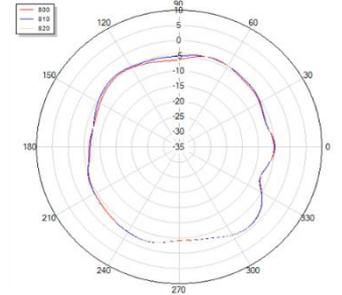


960 MHz

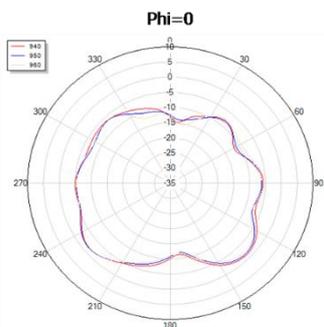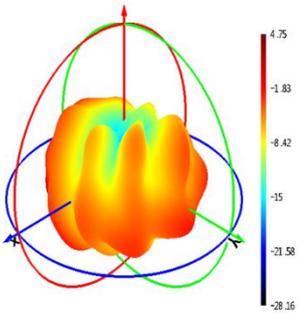


1450 MHz

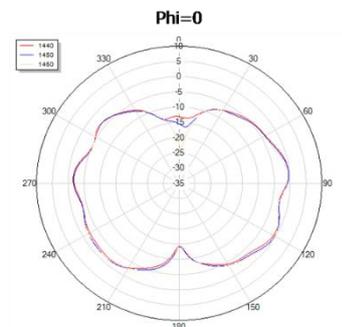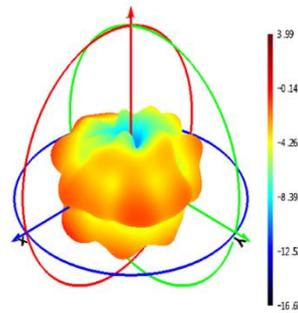


Phi=90

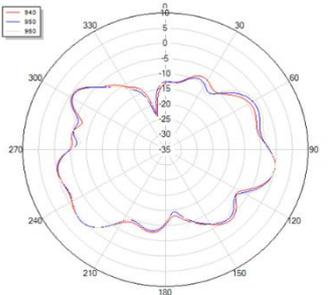


Theta=90

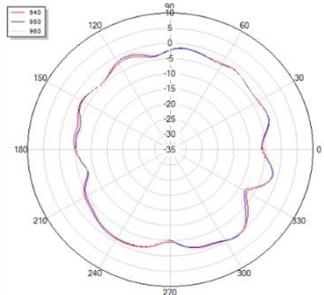



Phi=90

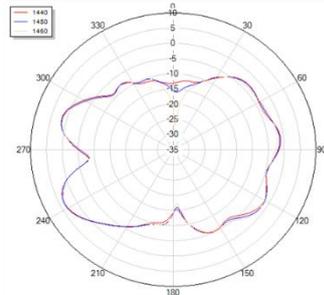



Theta=90

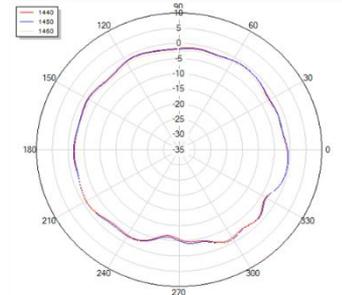


1700 MHz

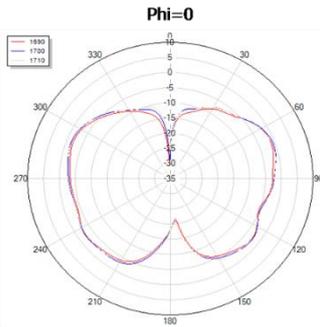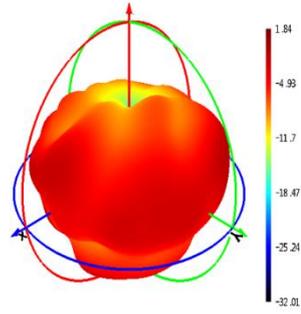


2310 MHz

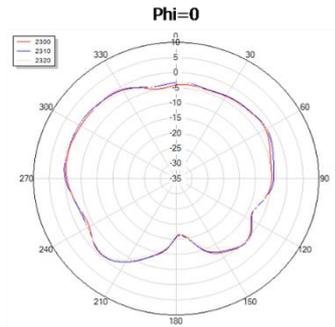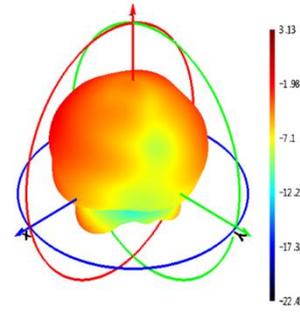


Phi=90

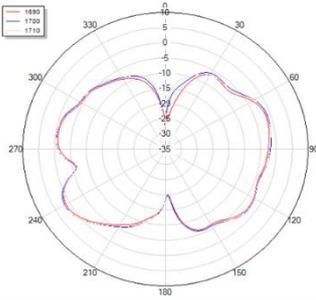


Theta=90

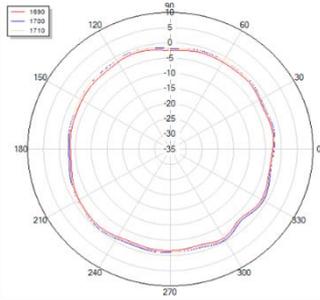



Phi=90

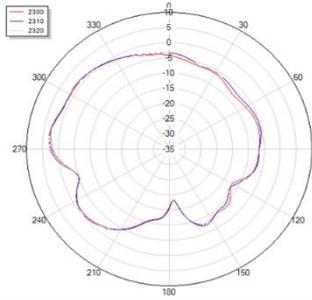



Theta=90

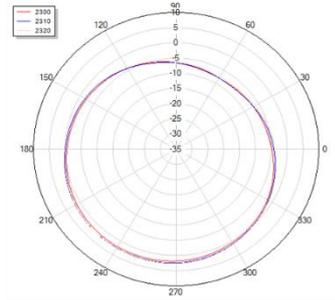


2400 MHz

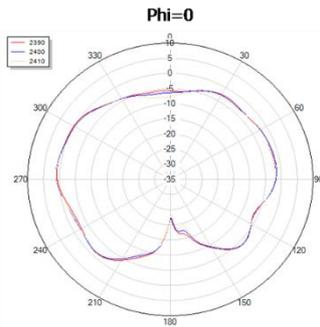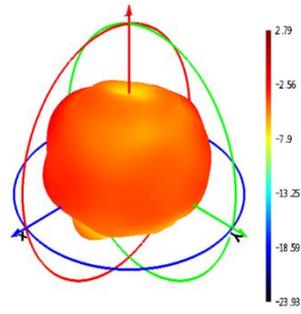


2520 MHz

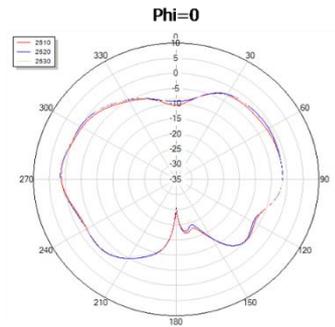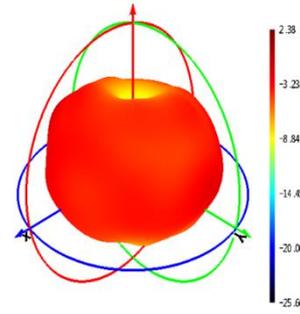


Phi=90

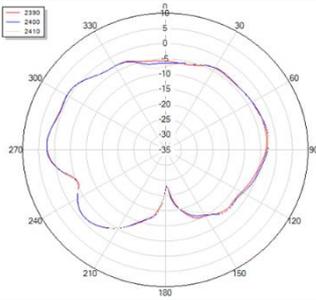


Theta=90

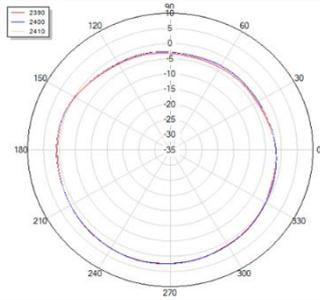


Phi=90

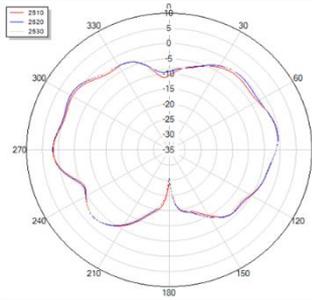


Theta=90

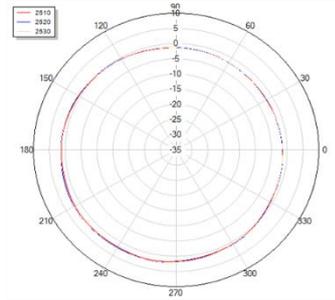

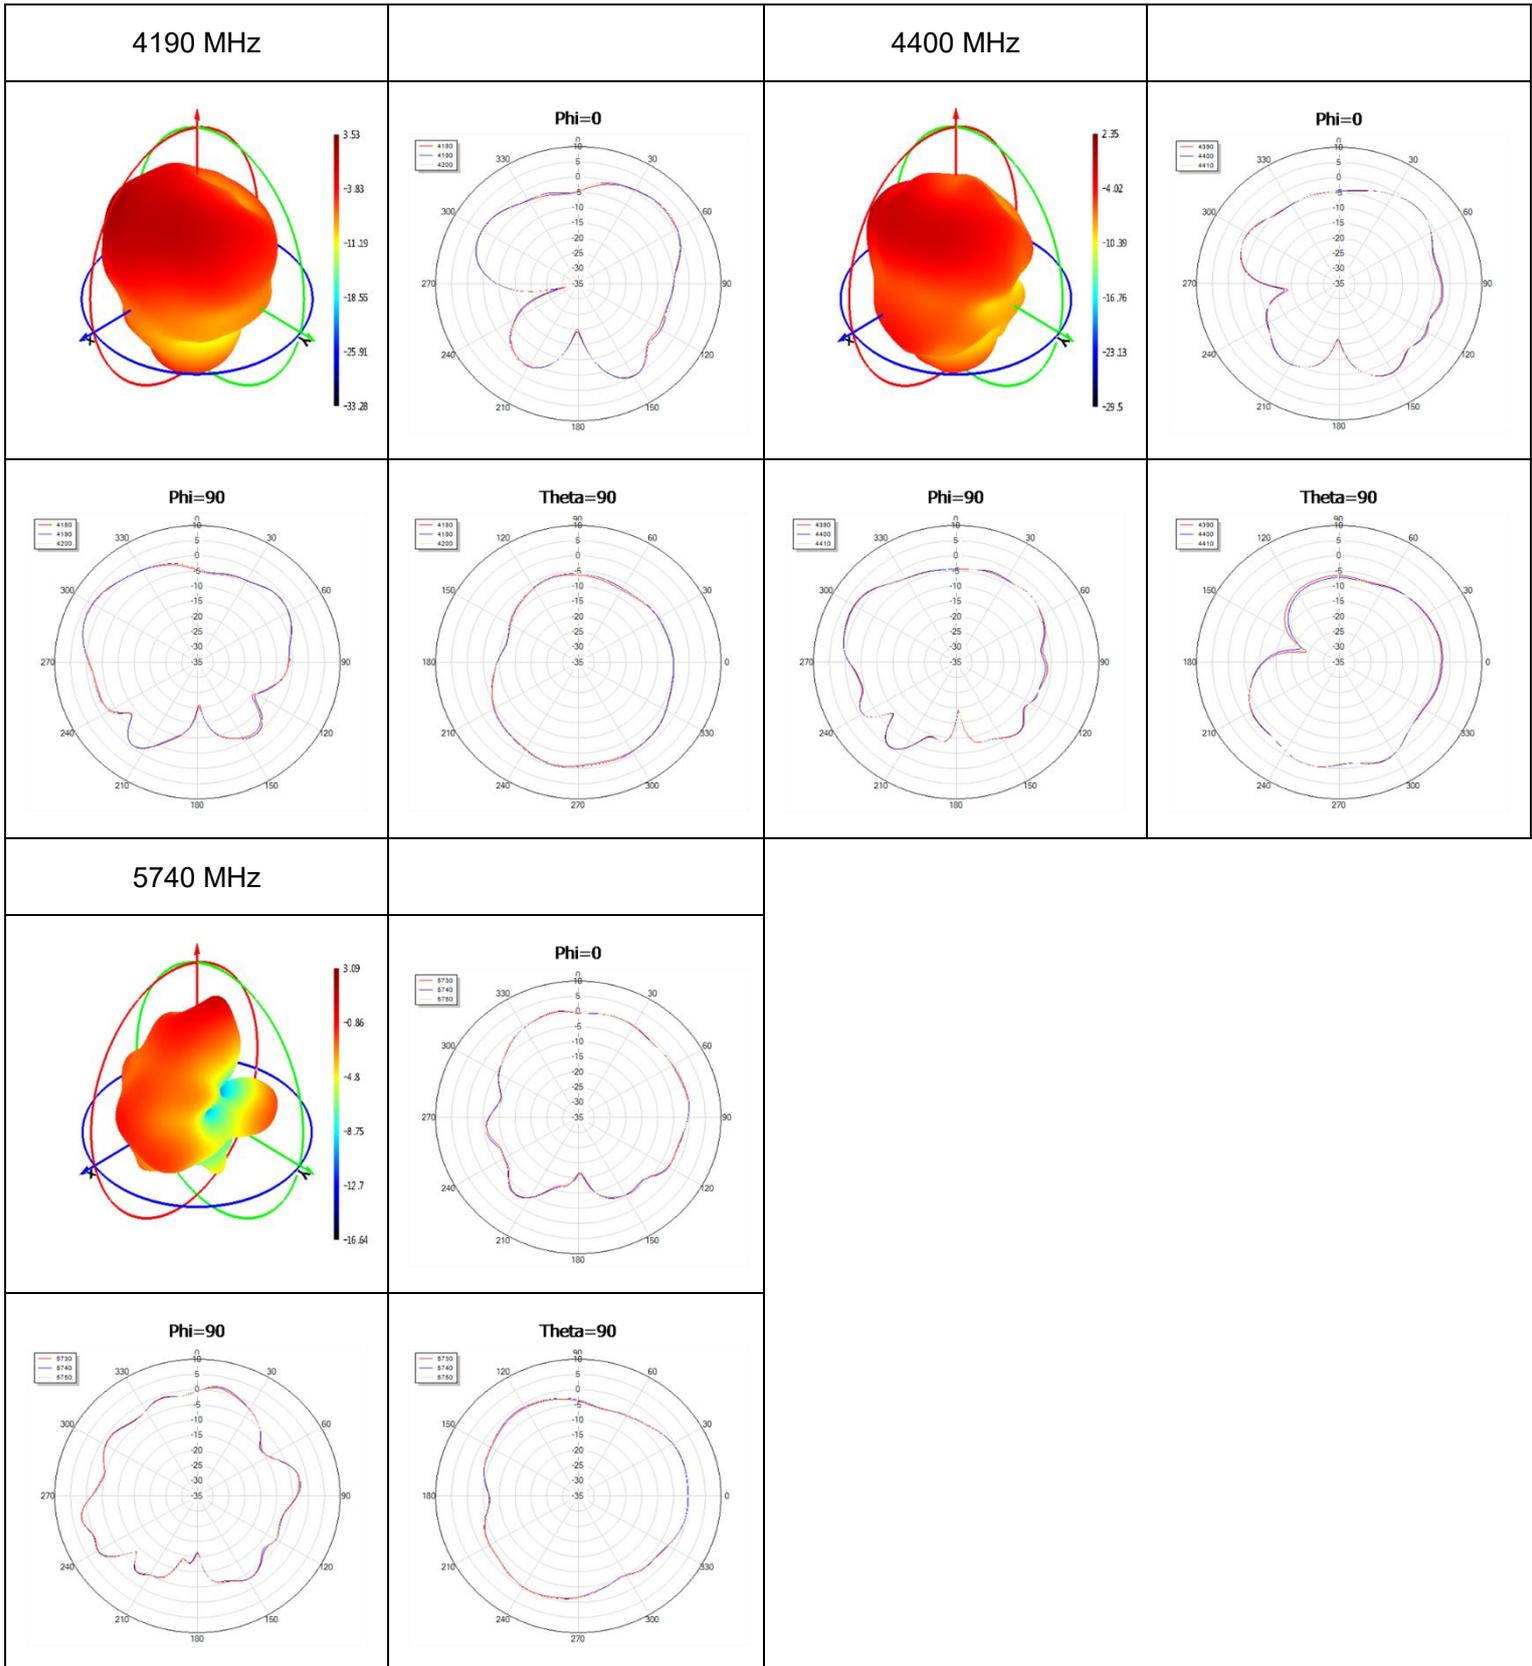



3.2.5. 3D & 2D Radiation Pattern


- Test Condition: On 300 mm × 300 mm metal plane
- Test Chamber: HF-S-1

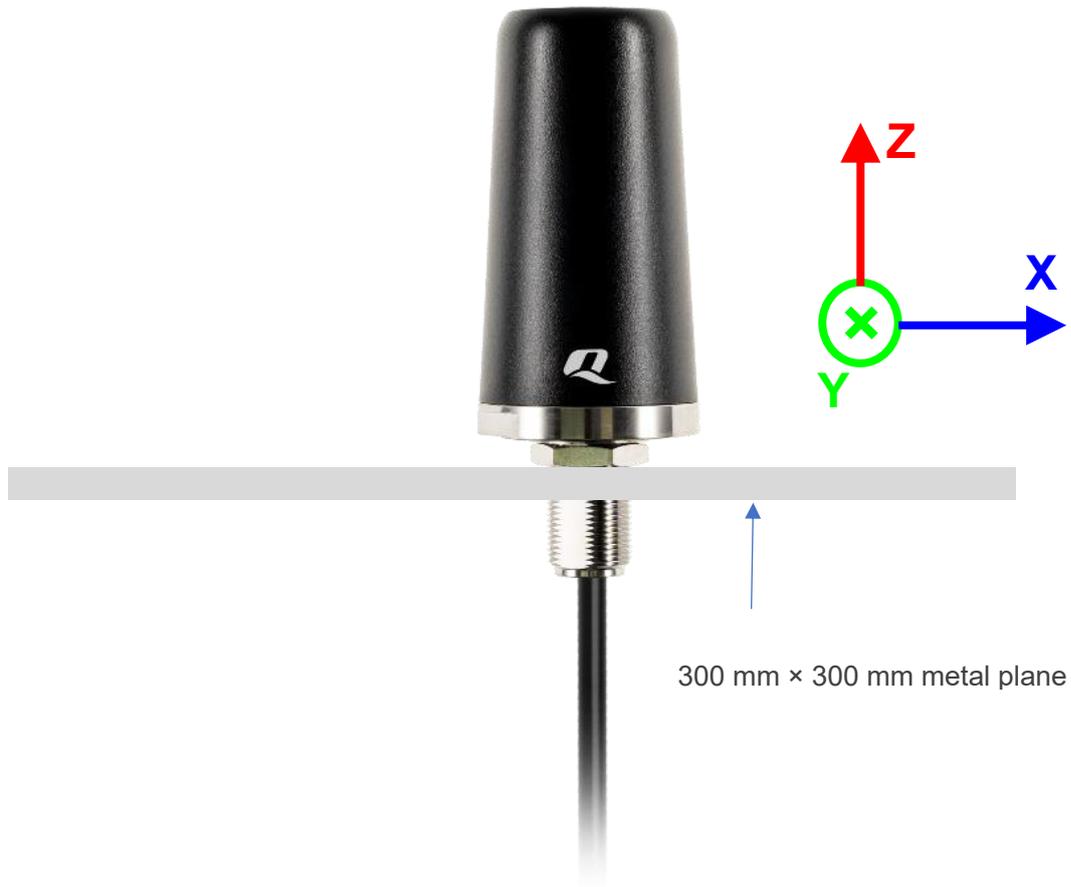


● 5G

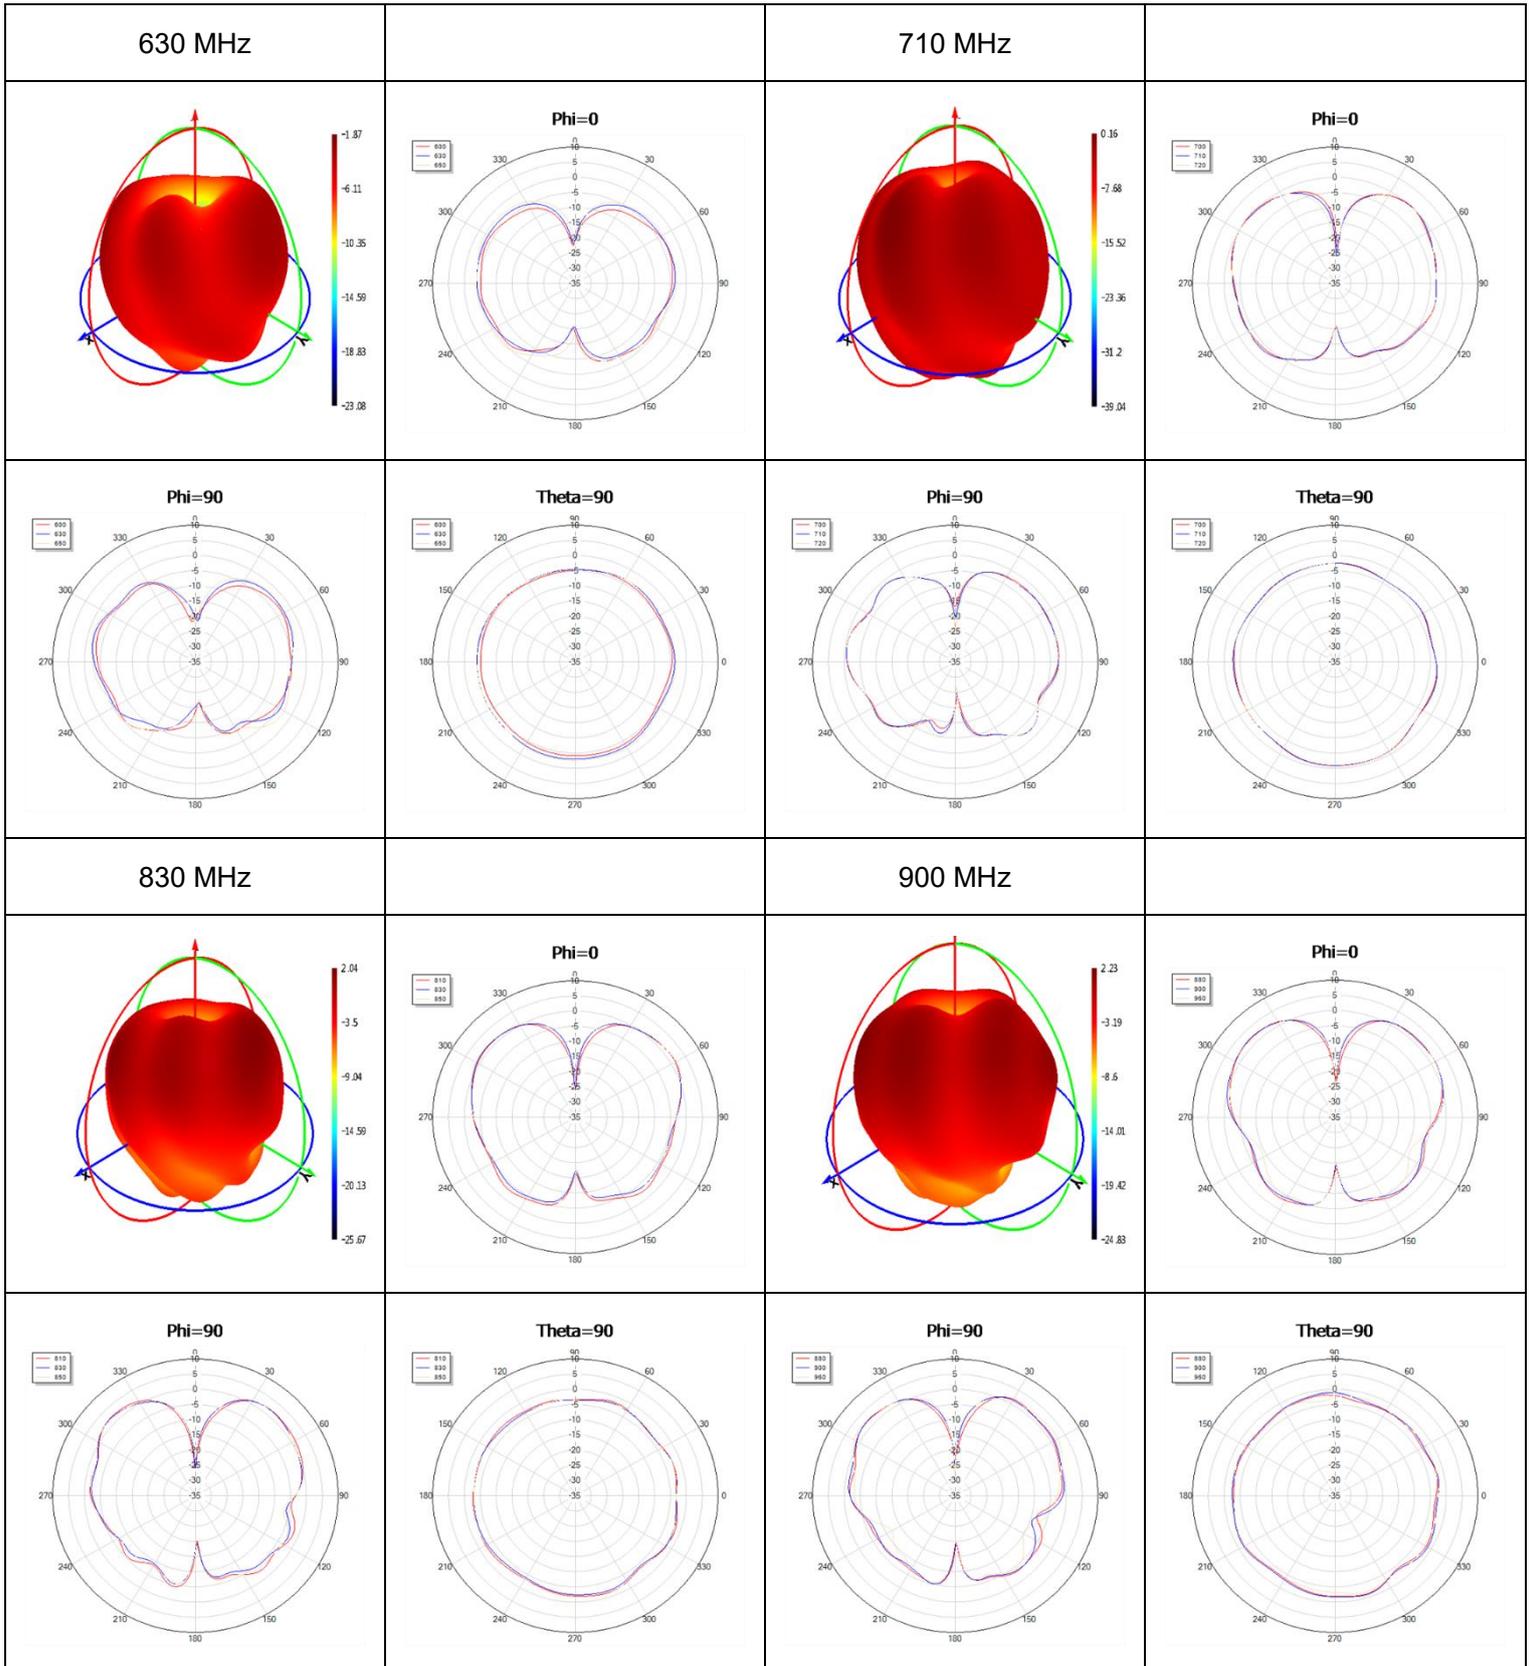


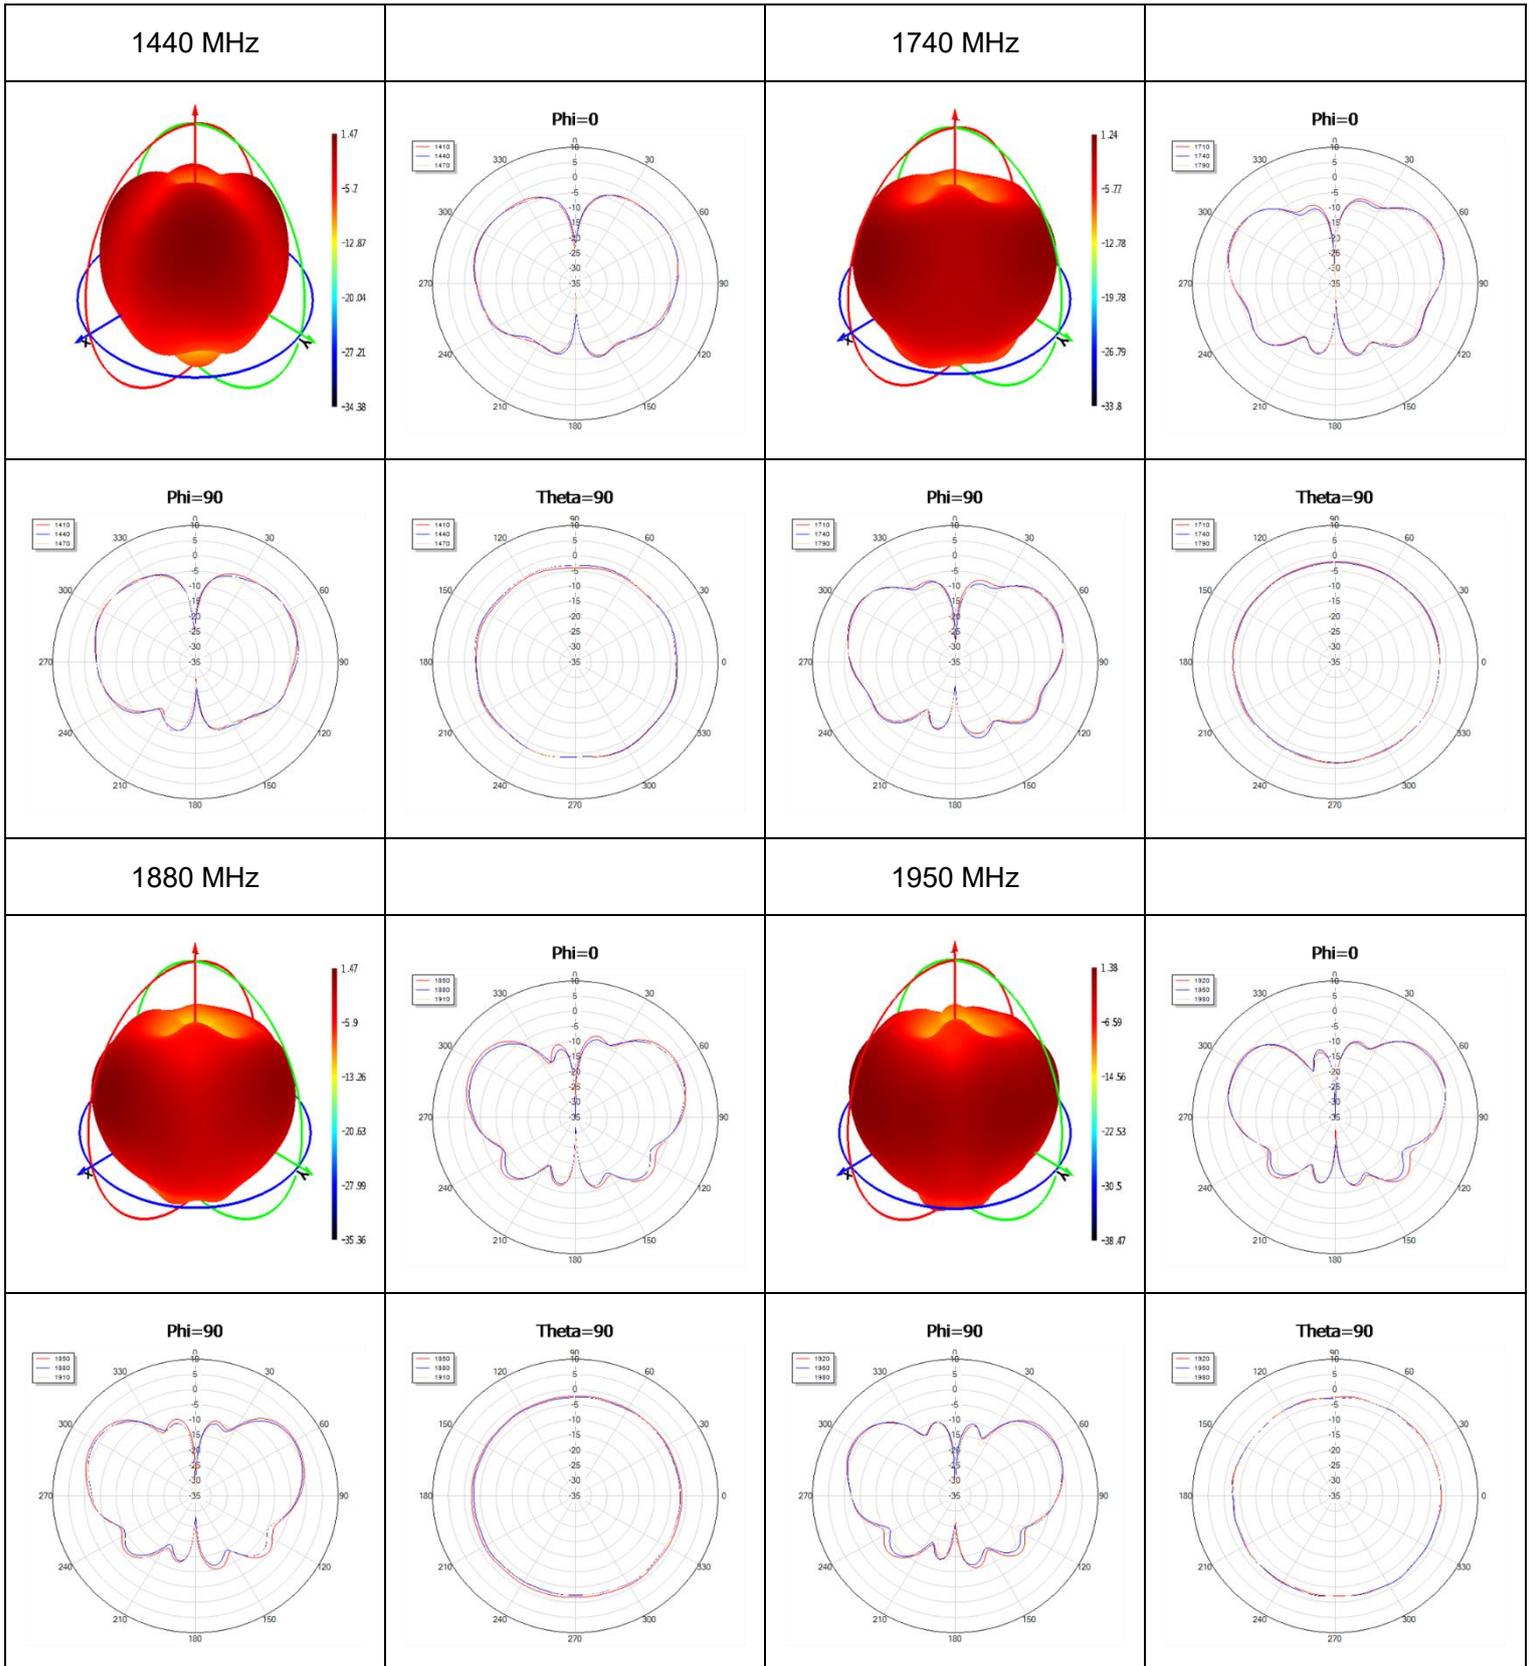


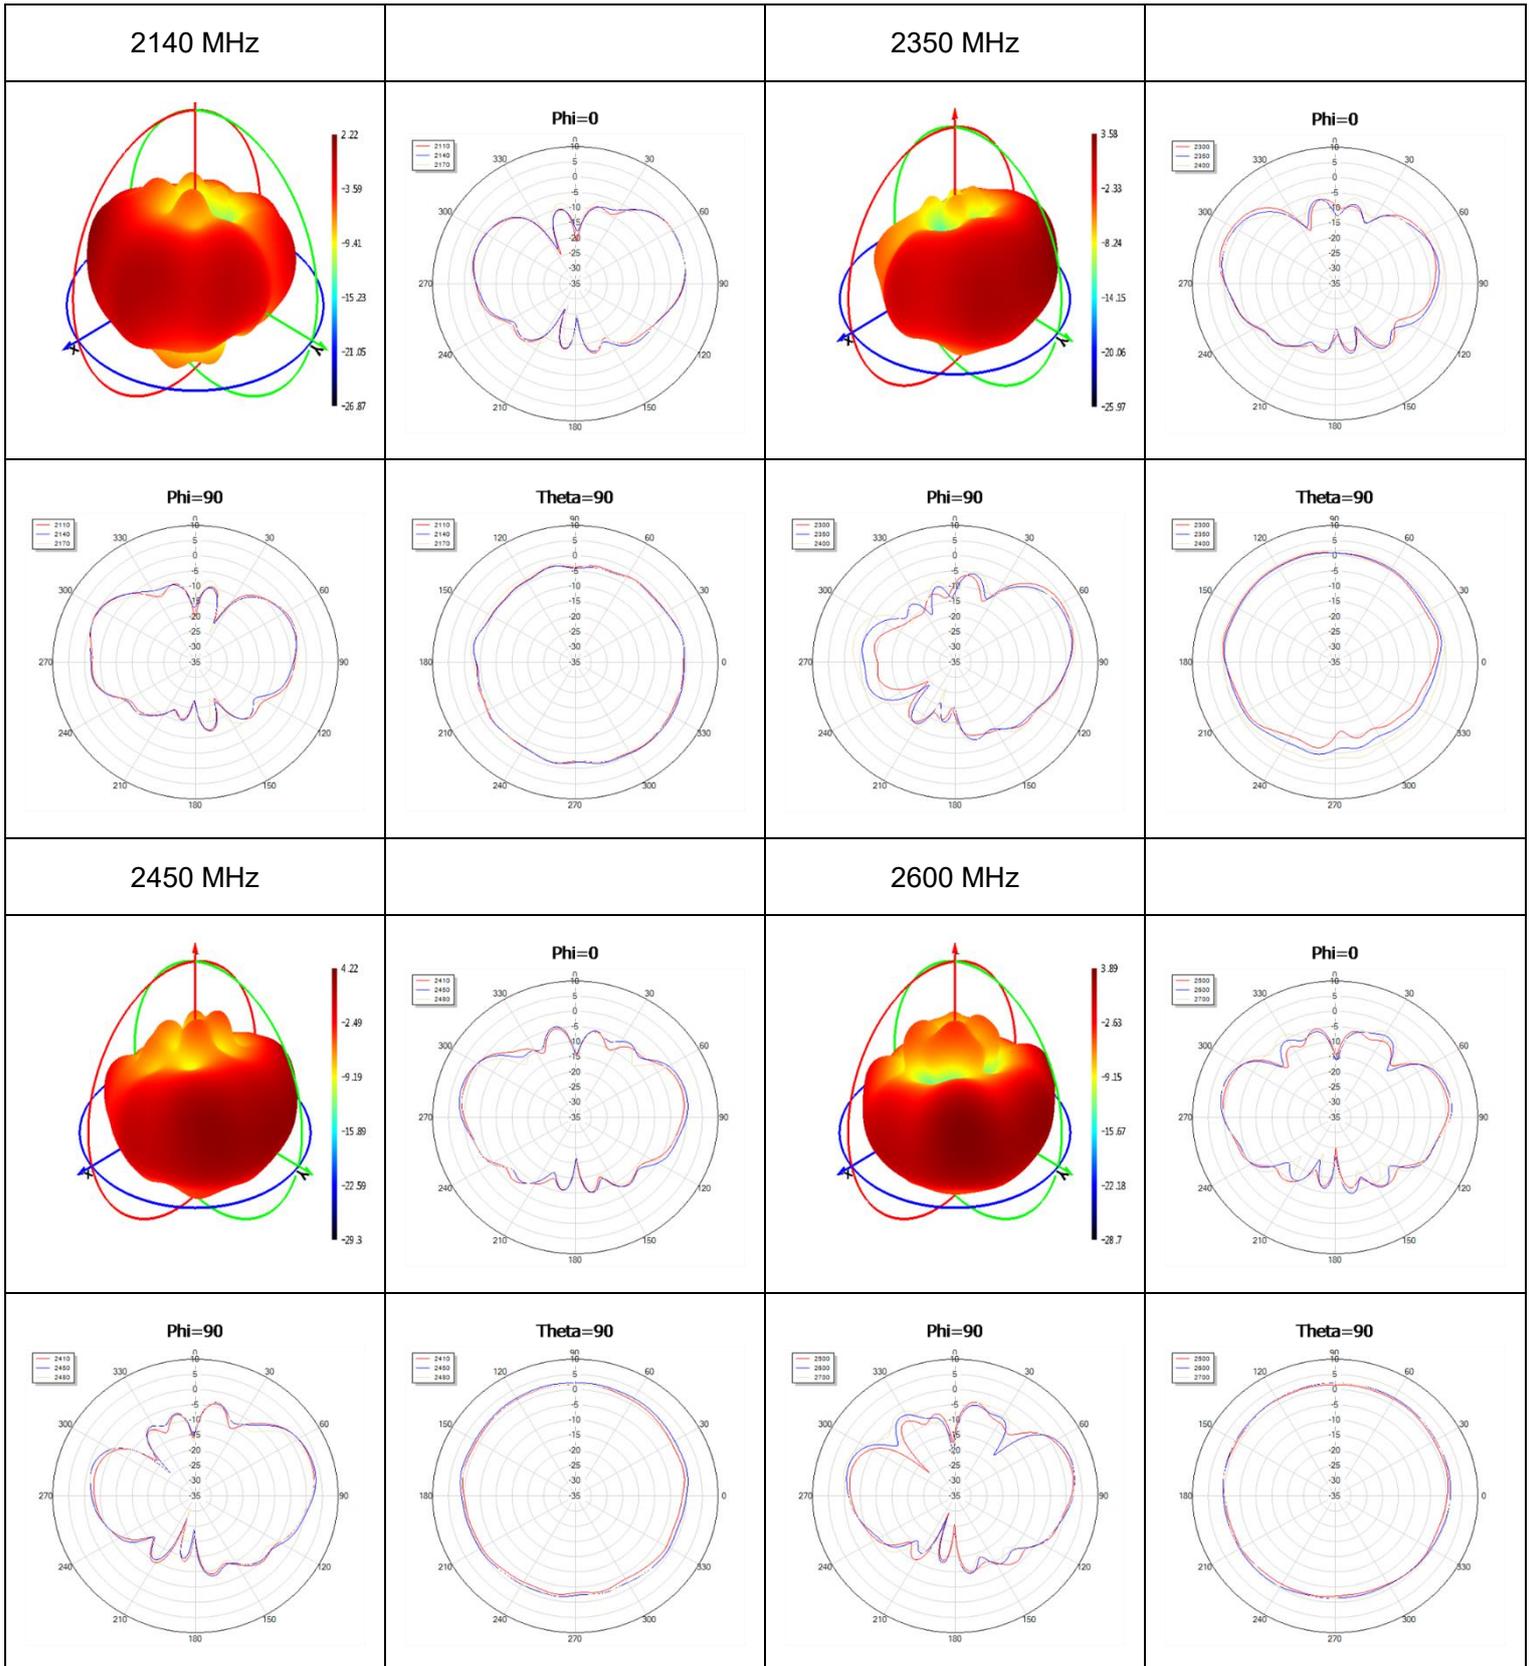


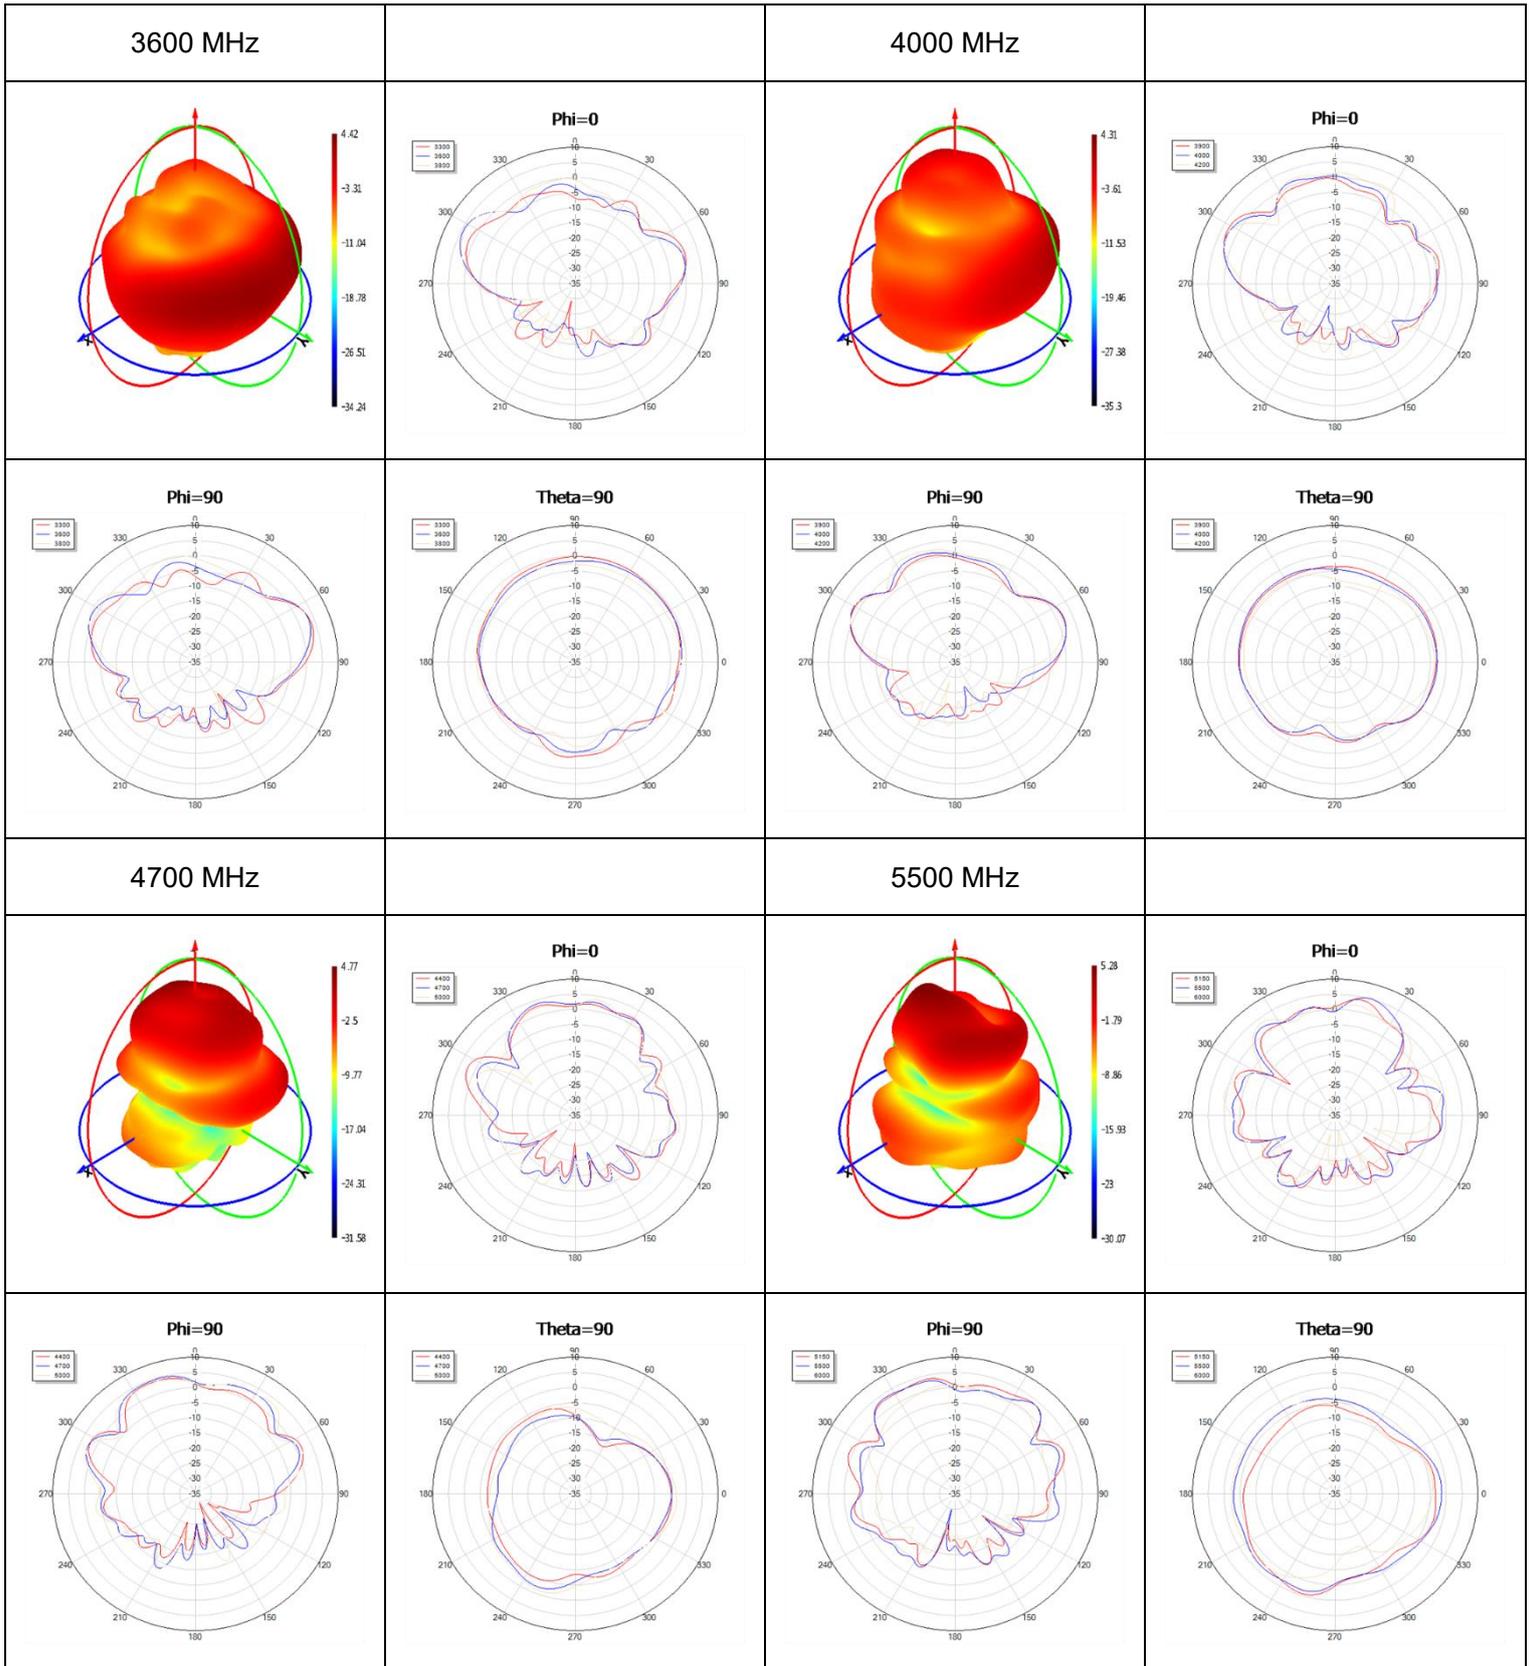


● **Max Peak Gain**


690 MHz

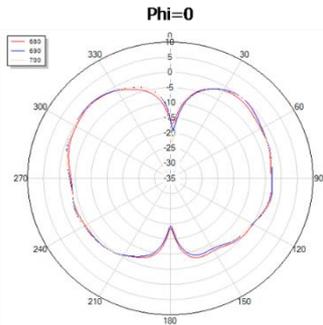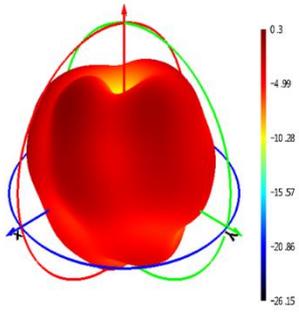


810 MHz

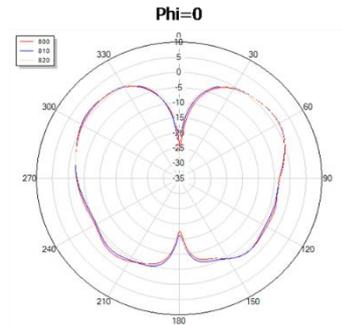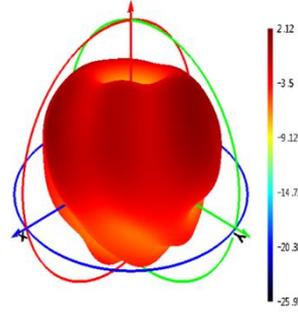


Phi=90

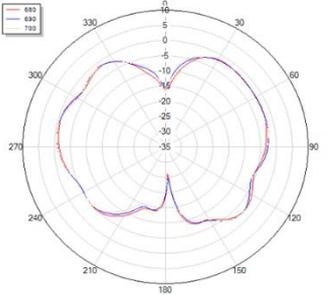


Theta=90

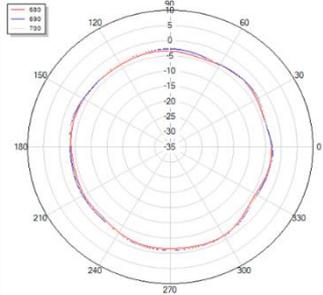



Phi=90

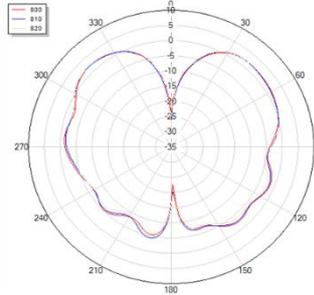



Theta=90

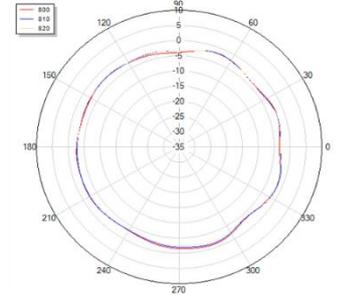


940 MHz

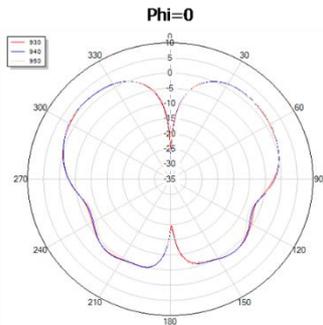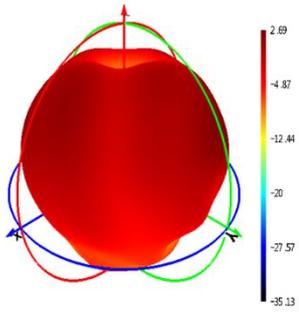


1450 MHz

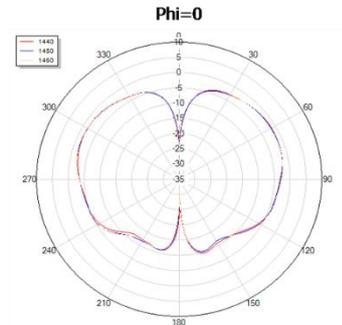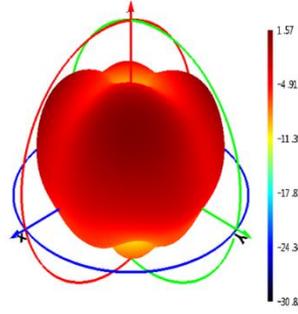


Phi=90

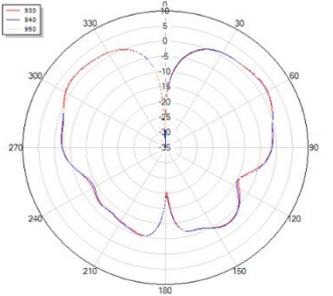


Theta=90

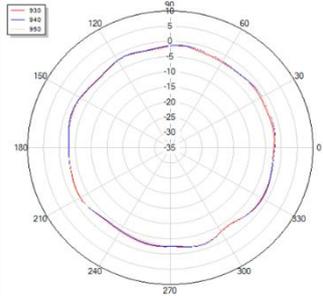



Phi=90

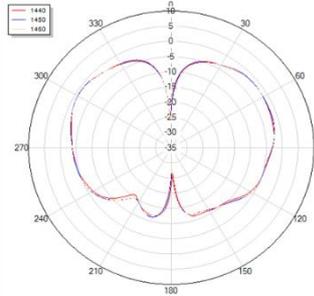

Theta=90


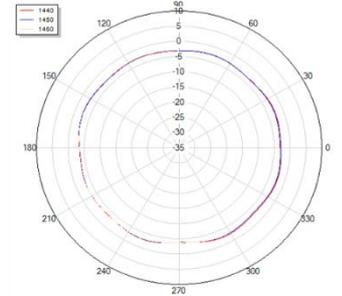


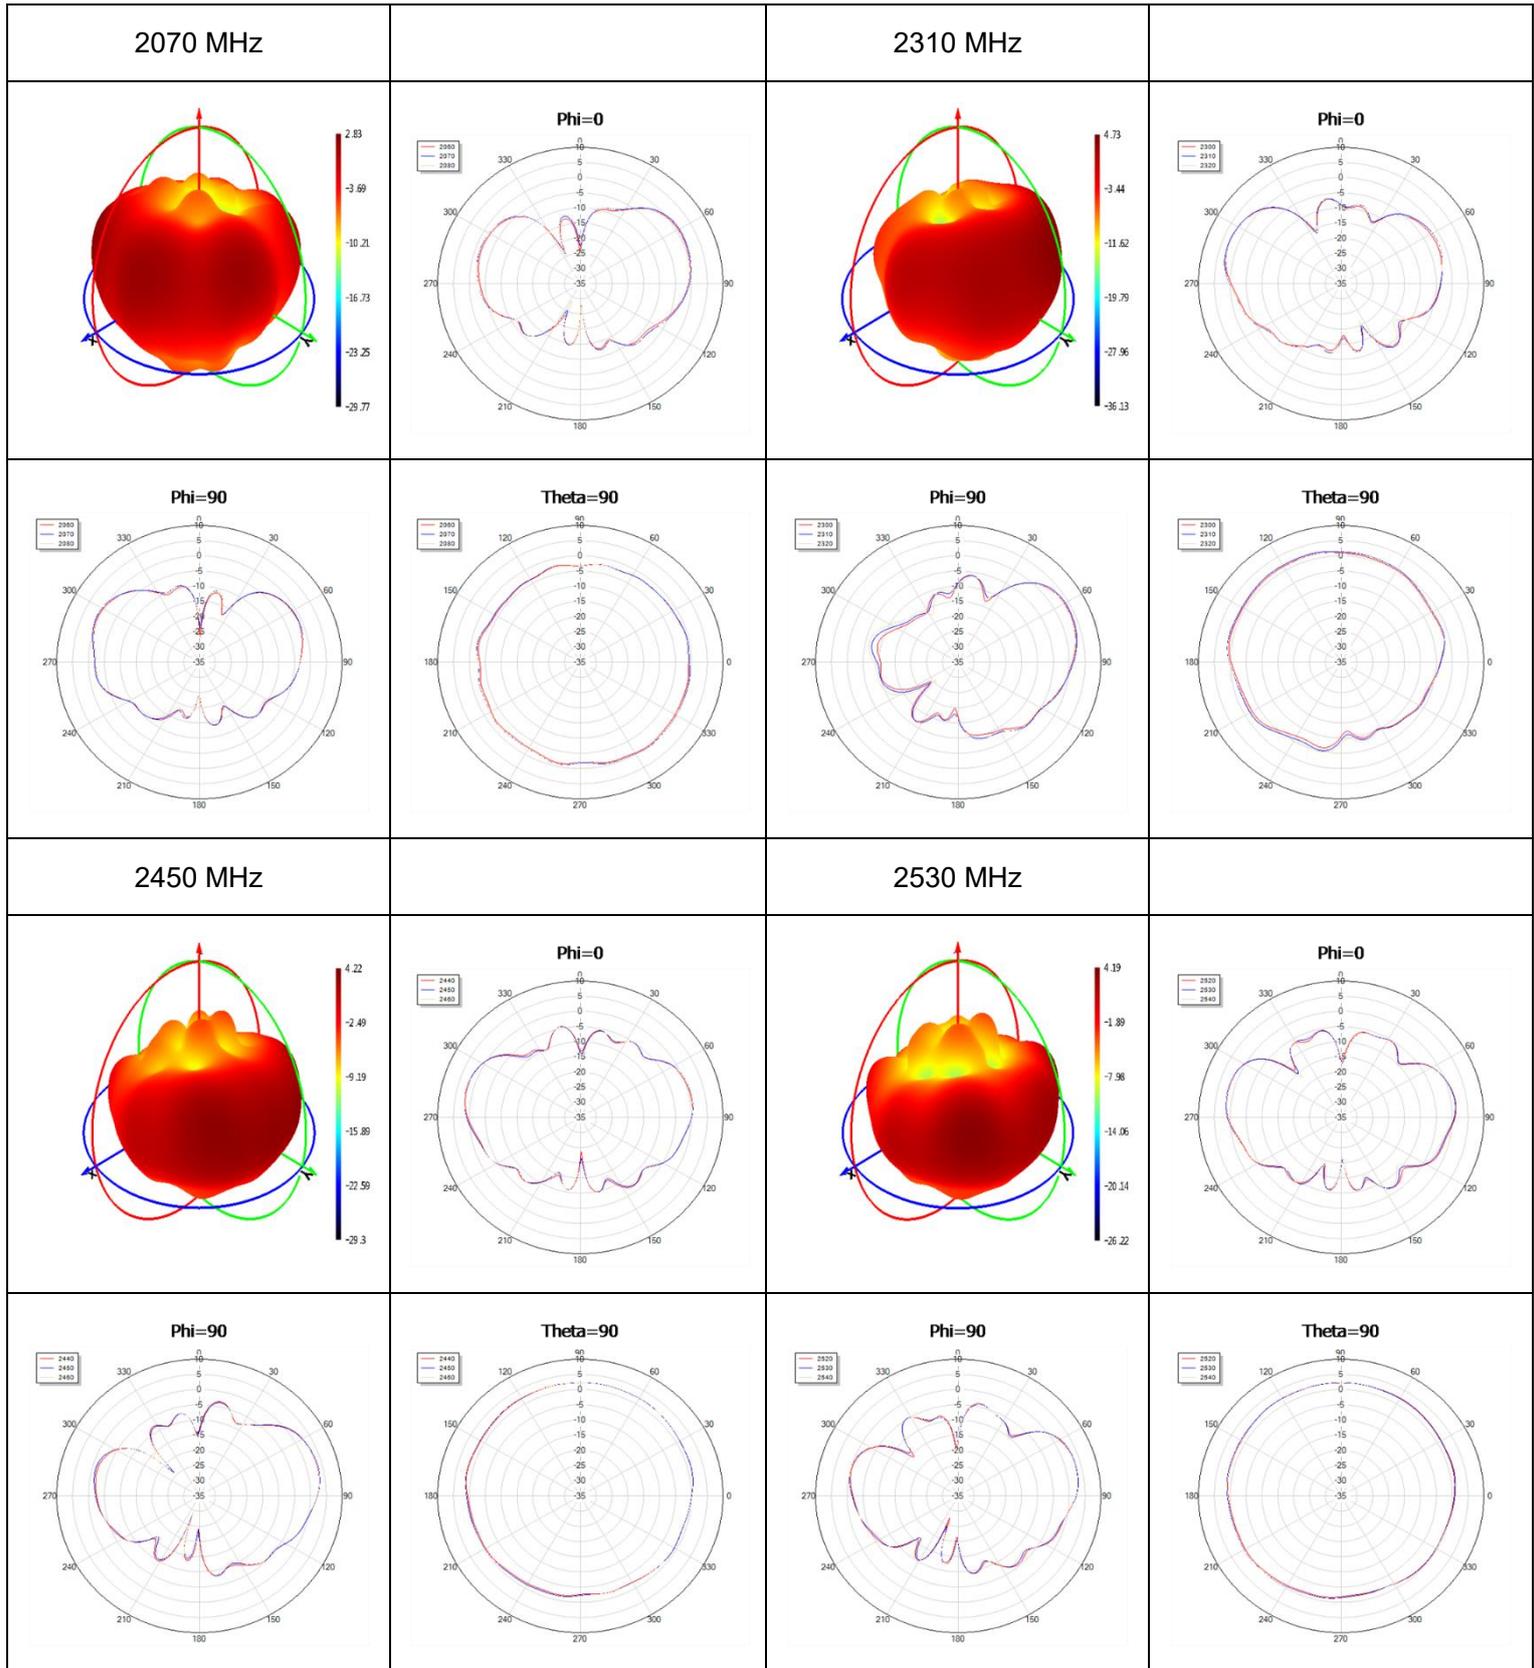

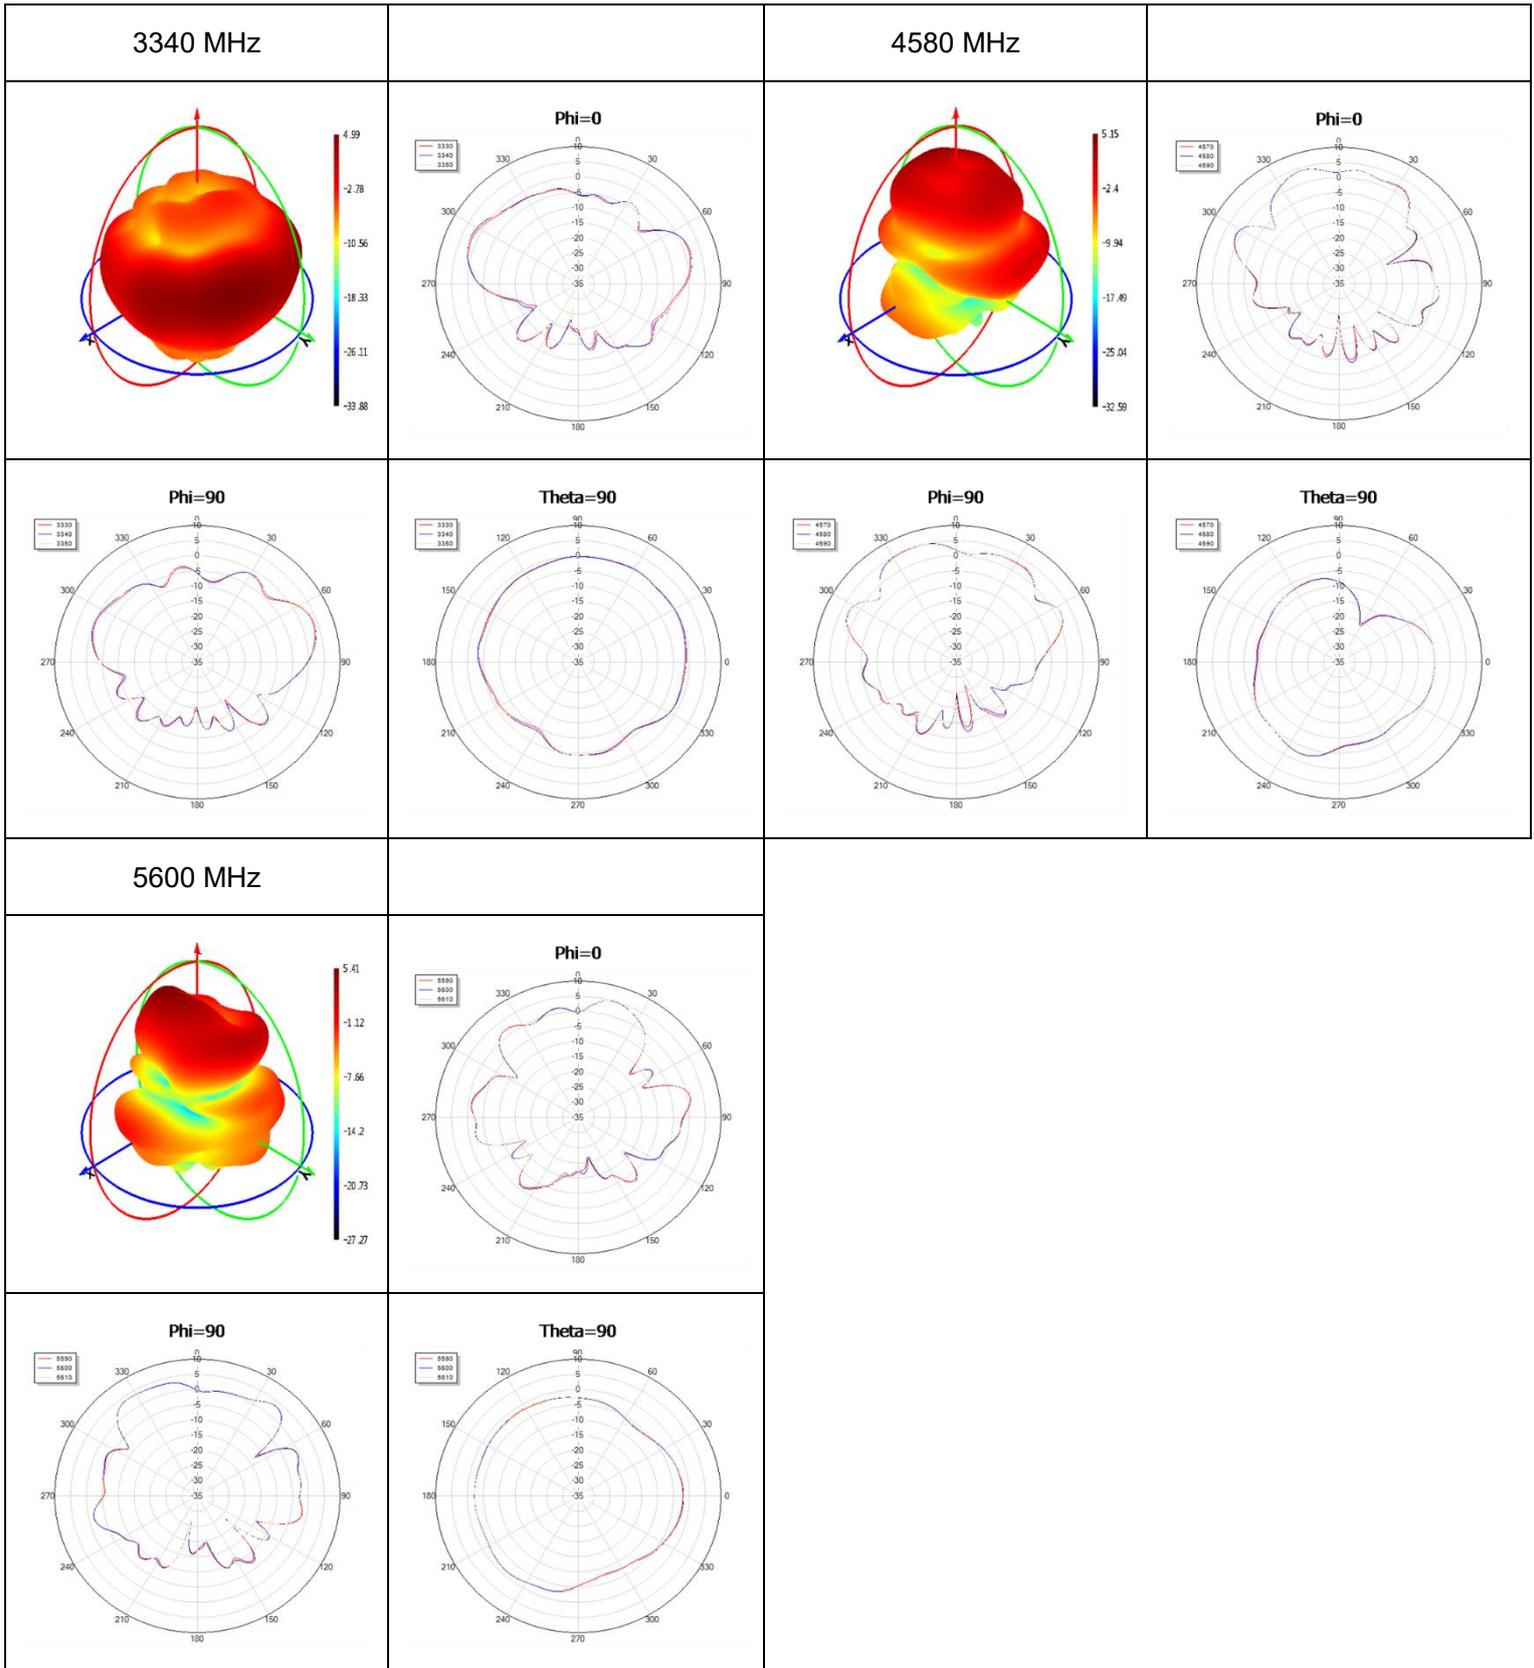

4 Packaging

Step	Packaging Picture / 2D Picture	Description
1		<p>The product is fully enclosed in pearl cotton liners at both the top and bottom. The wiring harness is secured in the pearl cotton slot above.</p>
2		<p>1 antenna product in an inner box. (1 Antenna / Inner Box)</p>
3		<p>(16 Inner Boxes / Carton Box) (16 Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. <u>Carton Size:</u> <u>L × W × H = 370 × 370 × 400 mm</u></p>
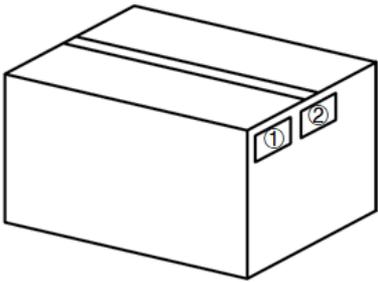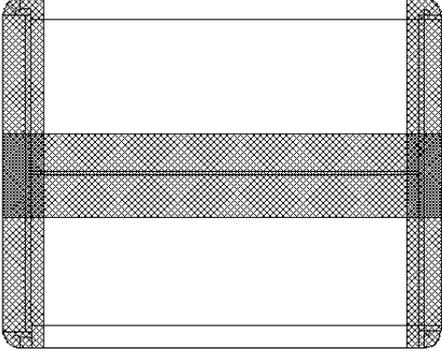
<p>4</p>		<p>Position for Attaching Labels</p> <ul style="list-style-type: none"> ① Carton Label ② Quality Label
<p>5</p>		<p>Sealing Cartons H-shaped sealing cartons</p>
<p>Note</p>	<p>The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.</p>	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<https://www.quectel.com/contact/>.

For technical support, or to report documentation errors, please visit:

<https://www.quectel.com/tech-support/>.

Or email us at: support@quectel.com.

Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

Use and Disclosure Restrictions

License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the intended project.

Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

Disclaimer

- a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
- b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
- c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
- d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2025. All rights reserved.

Revision History

Version	Date	Author	Note
-	2025-12-22	Simon Sheng/ Blake Xiang/ Strong Qiang/ Rainey Liao	Creation of the document
1.0	2025-12-22	Simon Sheng/ Blake Xiang/ Strong Qiang/ Rainey Liao	First official release

QUECTEL

www.quectel.com