



# Antenna Datasheet

**Product OC:** YE0006AA

**Version:** 3.3

**Date:** 2025-04-24

**Status:** Released

**Product Name:** 4G Magnetic Mount Whip Monopole External Antenna

**Key Features:**

Frequency Band: 698–960 MHz, 1710–2690 MHz

Dimensions:  $\Phi$  30 mm  $\times$  318 mm

Efficiency: Up to 65 % (MP)

RoHS Compliant

IP65

# Overview

This Quectel external 4G antenna covers main 4G LTE bands and is compatible with 3G/2G/LPWA bands as well. The external antenna is barely influenced by the internal environment of devices, giving a much better performance in efficiency, radiation and gain whilst providing an optimized solution for a customer product. Quectel also offers flexible installation with custom cable length and connector options.

# Contents

|   |           |
|---|-----------|
| <b>Overview</b> .....   | <b>1</b>  |
| <b>Contents</b> .....   | <b>2</b>  |
| <b>1 Specification</b> .....                                  | <b>3</b>  |
| 1.1. Electrical.....  | 3         |
| 1.2. Mechanical & Environmental .....                         | 5         |
| <b>2 Drawing</b> .....  | <b>6</b>  |
| <b>3 Detailed Performance</b> .....                           | <b>7</b>  |
| 3.1. S-Parameter Test .....                                   | 7         |
| 3.1.1. VSWR .....   | 7         |
| 3.1.2. Return Loss.....                                       | 8         |
| 3.2. Radiation Performance Test.....                          | 9         |
| 3.2.1. Efficiency.....  | 9         |
| 3.2.2. Average Gain .....                                     | 10        |
| 3.2.3. Peak Gain .....  | 11        |
| 3.2.4. 3D & 2D Radiation Pattern .....                        | 12        |
| 3.2.4.1. Test Condition: On 300 mm × 300 mm Metal Plane ..... | 12        |
| 3.2.4.2. Test Condition: Free Space .....                     | 16        |
| <b>4 Packaging</b> .....                                      | <b>20</b> |
| <b>Contact Us</b> .....                                       | <b>22</b> |
| <b>Legal Notices</b> .....                                    | <b>23</b> |
| <b>Revision History</b> .....                                 | <b>25</b> |

# 1 Specification

Test Condition: On 300 mm × 300 mm Metal Plane & Free Space

## 1.1. Electrical

| Electrical        |                            |
|-------------------|----------------------------|
| Frequency Range   | 698–960 MHz, 1710–2690 MHz |
| Impedance         | 50 Ω                       |
| Polarization      | Linear                     |
| Radiation Pattern | Omni-directional           |

| Electrical – Detail   |      |      |      |                     |                   |                     |                  |               |               |               |                     |               |               |
|-----------------------|------|------|------|---------------------|-------------------|---------------------|------------------|---------------|---------------|---------------|---------------------|---------------|---------------|
| SPEC                  | Band | Band | B71  | B12<br>/B13<br>/B28 | B5<br>/B8<br>/B26 | n74<br>/n75<br>/n76 | B1<br>/B2<br>/B3 | B40           | Wi-Fi<br>2G   | B38<br>/B41   | B42<br>/B48<br>/n77 | n79           | Wi-Fi<br>5G   |
|                       | Band | Band | 700  | 700–<br>810         | 820–<br>960       | 1420–<br>1520       | 1700–<br>2170    | 2300–<br>2400 | 2400–<br>2500 | 2500–<br>2690 | 3300–<br>4200       | 4400–<br>5000 | 5150–<br>5850 |
| Max. VSWR             | MP   | -    | 3.0  | 3.0                 | -                 | 2.9                 | 2.1              | 2.5           | 2.4           | -             | -                   | -             |               |
|                       | FS   | -    | 3.2  | 2.7                 | -                 | 2.6                 | 2.0              | 2.6           | 2.5           | -             | -                   | -             |               |
| Max. Return Loss (dB) | MP   | -    | -6.0 | -6.1                | -                 | -6.3                | -8.8             | -7.4          | -7.7          | -             | -                   | -             |               |
|                       | FS   | -    | -5.7 | -6.8                | -                 | -6.9                | -9.3             | -6.9          | -7.4          | -             | -                   | -             |               |
| AVG Eff. (%)          | MP   | -    | 46.2 | 53.5                | -                 | 33.6                | 28.3             | 27.1          | 35.3          | -             | -                   | -             |               |
|                       | FS   | -    | 24.4 | 42.9                | -                 | 33.8                | 26.7             | 23.7          | 33.7          | -             | -                   | -             |               |
| AVG AVG Gain (dB)     | MP   | -    | -3.4 | -2.8                | -                 | -4.8                | -5.5             | -5.7          | -4.6          | -             | -                   | -             |               |
|                       | FS   | -    | -6.1 | -3.7                | -                 | -4.8                | -5.7             | -6.2          | -4.8          | -             | -                   | -             |               |
| Max. Peak             | MP   | -    | 0.1  | 0.7                 | -                 | 4.5                 | 0.8              | 1.2           | 3.0           | -             | -                   | -             |               |


|             |    |   |           |     |   |     |      |      |     |   |   |   |
|-------------|----|---|-----------|-----|---|-----|------|------|-----|---|---|---|
| Gain (dBi)  | FS | - | -2.1      | 2.6 | - | 4.9 | -0.9 | -0.8 | 2.6 | - | - | - |
| VSWR        | MP |   | ≤ 3       |     |   |     |      |      |     |   |   |   |
|             | FS |   | ≤ 3.2     |     |   |     |      |      |     |   |   |   |
| Return Loss | MP |   | ≤ -6 dB   |     |   |     |      |      |     |   |   |   |
|             | FS |   | ≤ -5.7 dB |     |   |     |      |      |     |   |   |   |
| Peak Gain   | MP |   | ≤ 4.5 dBi |     |   |     |      |      |     |   |   |   |
|             | FS |   | ≤ 4.9 dBi |     |   |     |      |      |     |   |   |   |

- FS: Free Space
- MP: On 300 mm × 300 mm Metal Plane

## 1.2. Mechanical & Environmental

| Mechanical                     |                          |
|--------------------------------|--------------------------|
| Antenna Dimensions             | Φ 30 mm × 318 mm         |
| Material & Color               | Carbon Steel & Black     |
| Cable Type & Color & Length    | RG 174 & Black & 1500 mm |
| Connector Type                 | SMA Male                 |
| Mounting Type                  | Magnet                   |
| Weight                         | Typ. 41.8 g              |
| Environmental                  |                          |
| Operation Temperature          | -40 °C to +85 °C         |
| Storage Temperature            | -40 °C to +85 °C         |
| Ingress Protection (IP) Rating | IP65                     |
| RoHS Compliant                 | Yes                      |


# 2 Drawing

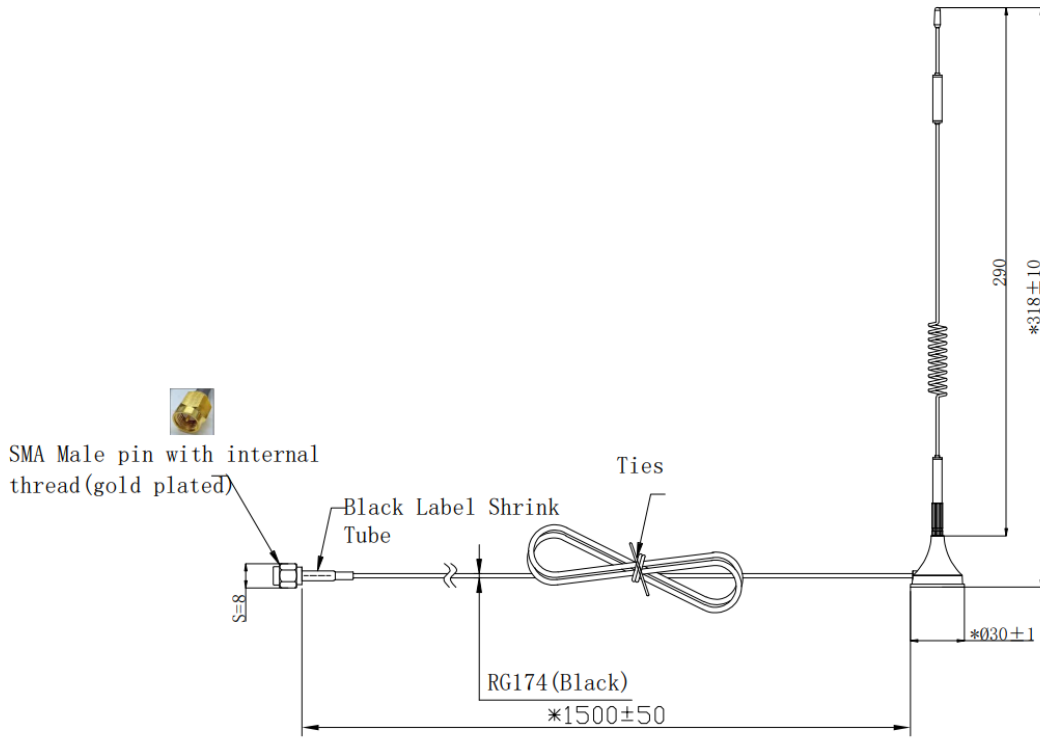

# 3 Detailed Performance

## 3.1. S-Parameter Test


### 3.1.1. VSWR

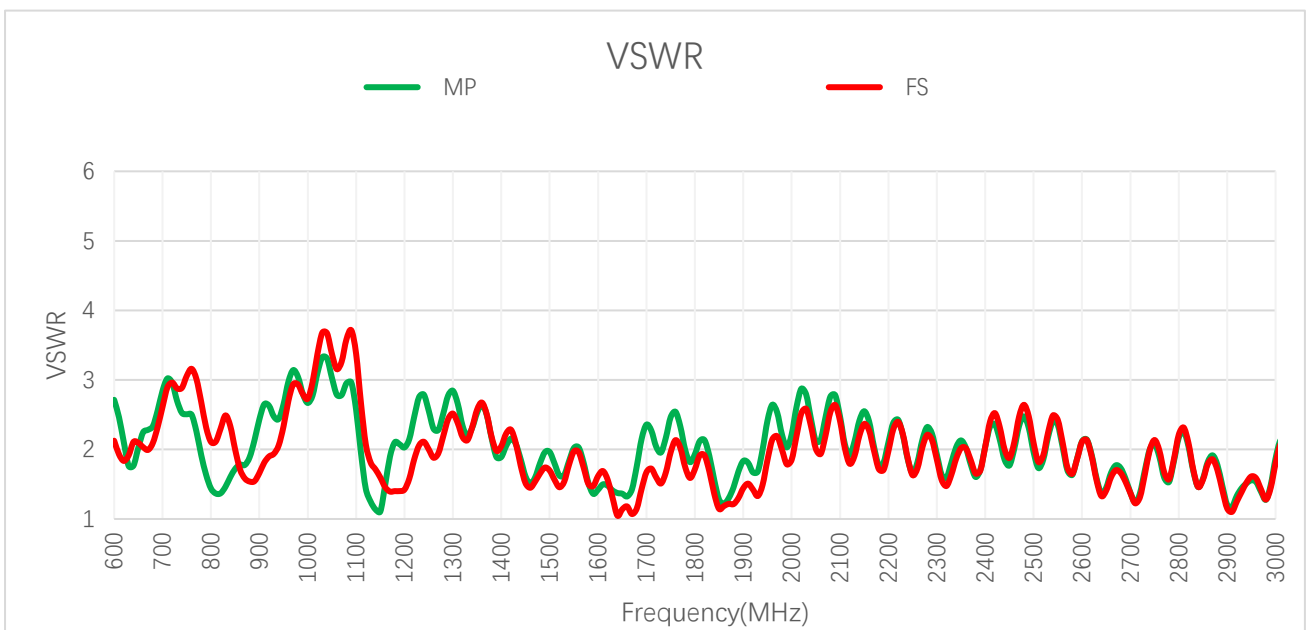

**VSWR**

| Frequency (MHz) |    | 600  | 630  | 710  | 830  | 900  | 960  | 1440 | 1710 | 1740 | 1880 |
|-----------------|----|------|------|------|------|------|------|------|------|------|------|
| VSWR            | MP | -    | -    | 3.0  | 1.5  | 2.4  | 3.0  | -    | 2.3  | 2.2  | 1.5  |
|                 | FS | -    | -    | 2.9  | 2.5  | 1.7  | 2.7  | -    | 1.7  | 1.7  | 1.2  |
| Frequency (MHz) |    | 1950 | 2140 | 2350 | 2450 | 2600 | 2690 | 4700 | 5000 | 5500 | 6000 |
| VSWR            | MP | 2.4  | 2.4  | 2.1  | 1.8  | 2.1  | 1.6  | -    | -    | -    | -    |
|                 | FS | 1.8  | 2.2  | 2.0  | 1.9  | 2.1  | 1.5  | -    | -    | -    | -    |

**3.1.2. Return Loss**

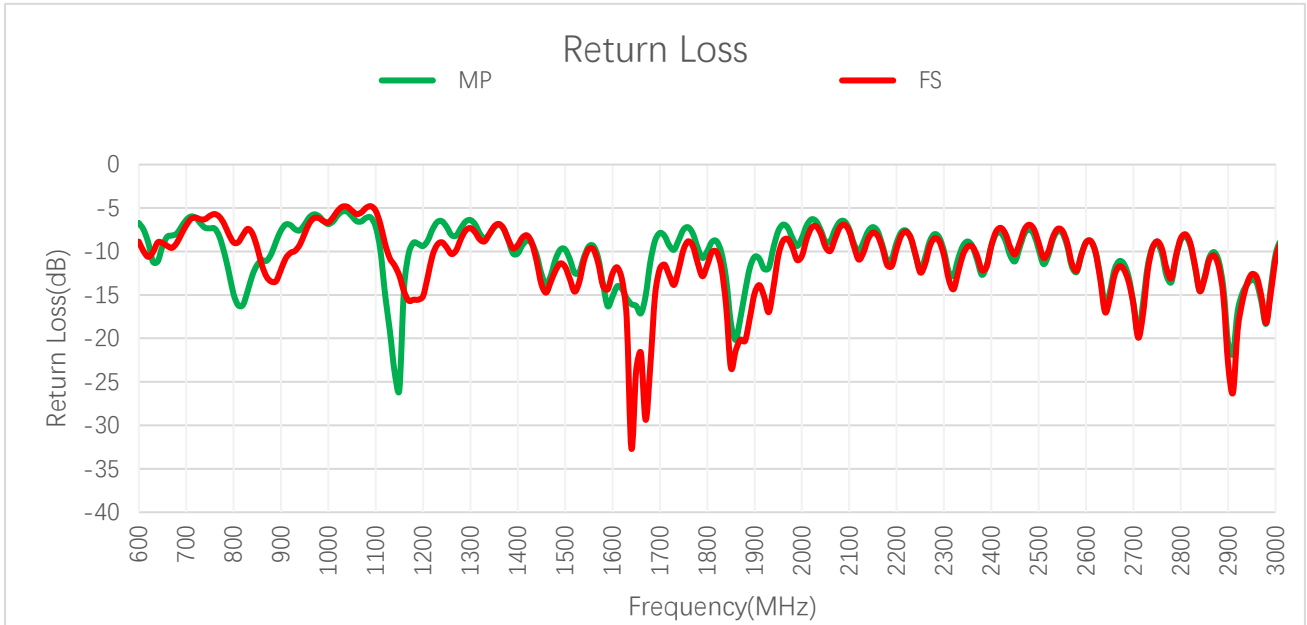


**Return Loss (dB)**

| Frequency (MHz)  |    | 600   | 630  | 710  | 830   | 900   | 960   | 1440 | 1710  | 1740  | 1880  |
|------------------|----|-------|------|------|-------|-------|-------|------|-------|-------|-------|
| Return Loss (dB) | MP | -     | -    | -6.0 | -14.5 | -7.6  | -6.1  | -    | -8.2  | -8.7  | -14.6 |
|                  | FS | -     | -    | -6.3 | -7.4  | -12.1 | -6.8  | -    | -11.5 | -12.0 | -20.3 |
| Frequency (MHz)  |    | 1950  | 2140 | 2350 | 2450  | 2600  | 2690  | 4700 | 5000  | 5500  | 6000  |
| Return Loss (dB) | MP | -7.7  | -7.7 | -8.8 | -11.1 | -8.9  | -13.0 | -    | -     | -     | -     |
|                  | FS | -10.5 | -8.5 | -9.4 | -10.3 | -9.0  | -13.5 | -    | -     | -     | -     |

### 3.2. Radiation Performance Test


#### 3.2.1. Efficiency

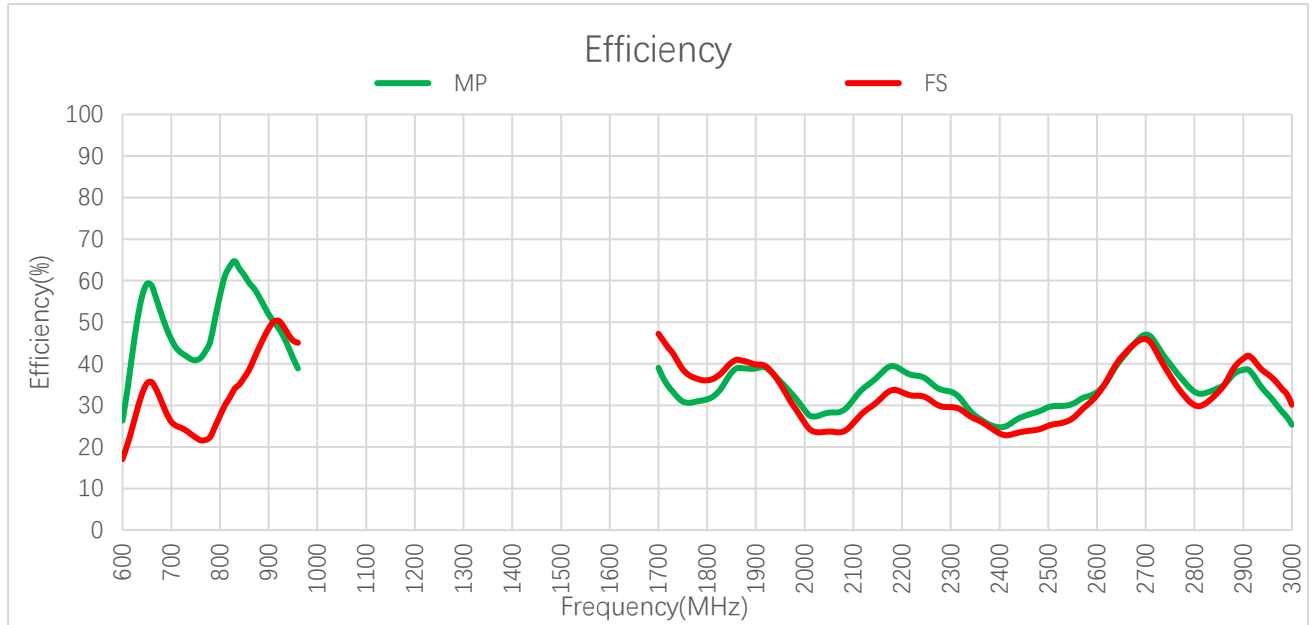

**Efficiency (%)**

| Frequency (MHz) |    | 600  | 630  | 710  | 830  | 900  | 960  | 1440 | 1710 | 1740 | 1880 |
|-----------------|----|------|------|------|------|------|------|------|------|------|------|
| Efficiency (%)  | MP | -    | -    | 43.9 | 64.7 | 51.9 | 38.9 | -    | 36.5 | 31.9 | 38.9 |
|                 | FS | -    | -    | 25.1 | 34.0 | 48.5 | 45.1 | -    | 45.6 | 40.5 | 40.5 |
| Frequency (MHz) |    | 1950 | 2140 | 2350 | 2450 | 2600 | 2690 | 4700 | 5000 | 5500 | 6000 |
| Efficiency (%)  | MP | 35.8 | 35.9 | 27.5 | 27.4 | 33.2 | 46.5 | -    | -    | -    | -    |
|                 | FS | 35.2 | 30.0 | 26.7 | 23.7 | 32.5 | 45.8 | -    | -    | -    | -    |


**3.2.2. Average Gain**

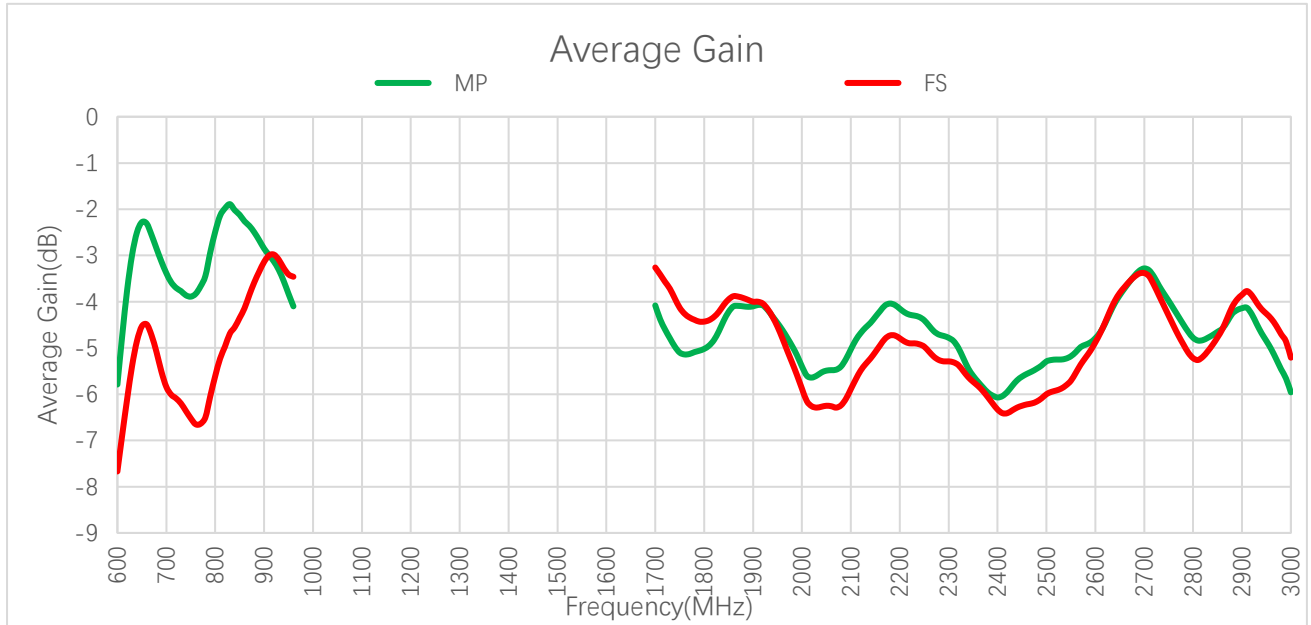

**Average Gain (dB)**

| Frequency (MHz)   |    | 600  | 630  | 710  | 830  | 900  | 960  | 1440 | 1710 | 1740 | 1880 |
|-------------------|----|------|------|------|------|------|------|------|------|------|------|
| Average Gain (dB) | MP | -    | -    | -3.6 | -1.9 | -2.9 | -4.1 | -    | -4.4 | -5.0 | -4.1 |
|                   | FS | -    | -    | -6.0 | -4.7 | -3.1 | -3.5 | -    | -3.4 | -3.9 | -3.9 |
| Frequency (MHz)   |    | 1950 | 2140 | 2350 | 2450 | 2600 | 2690 | 4700 | 5000 | 5500 | 6000 |
| Average Gain (dB) | MP | -4.5 | -4.5 | -5.6 | -5.6 | -4.8 | -3.3 | -    | -    | -    | -    |
|                   | FS | -4.5 | -5.2 | -5.7 | -6.3 | -4.9 | -3.4 | -    | -    | -    | -    |

**3.2.3. Peak Gain**

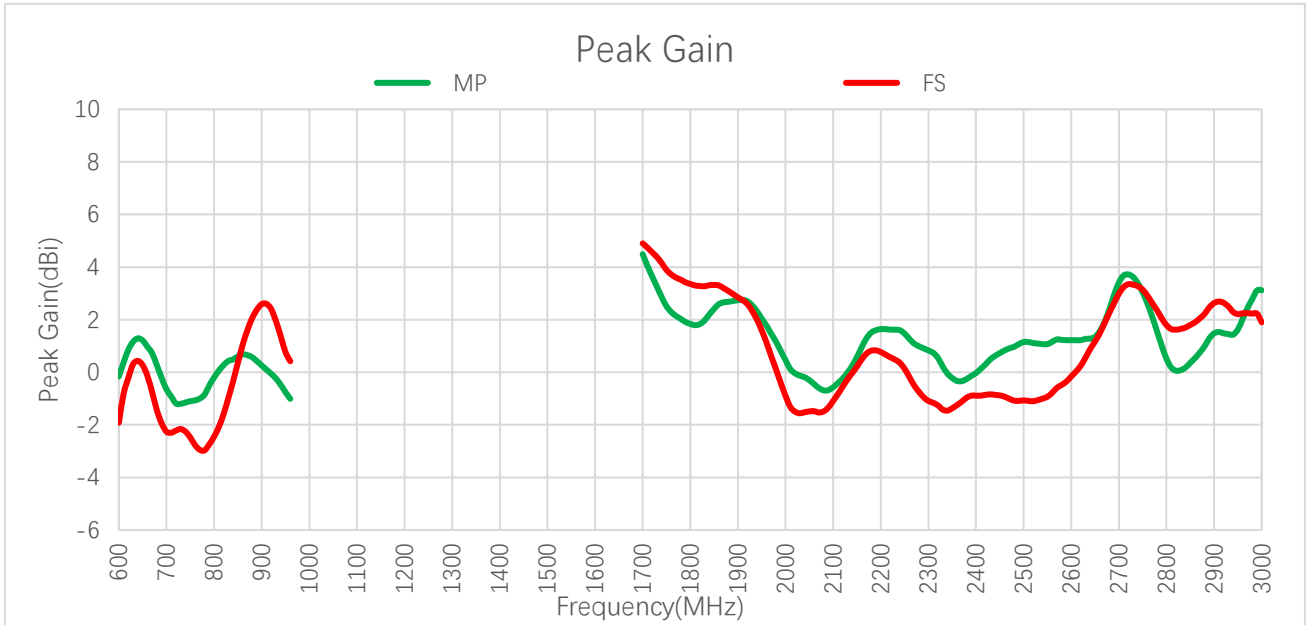


**Peak Gain (dBi)**


| Frequency (MHz) |    | 600  | 630  | 710  | 830  | 900  | 960  | 1440 | 1710 | 1740 | 1880 |
|-----------------|----|------|------|------|------|------|------|------|------|------|------|
| Peak Gain (dBi) | MP | -    | -    | -0.9 | 0.4  | 0.3  | -1.0 | -    | 4.1  | 2.9  | 2.7  |
|                 | FS | -    | -    | -2.3 | -1.0 | 2.6  | 0.4  | -    | 4.7  | 4.2  | 3.1  |
| Frequency (MHz) |    | 1950 | 2140 | 2350 | 2450 | 2600 | 2690 | 4700 | 5000 | 5500 | 6000 |
| Peak Gain (dBi) | MP | 2.0  | 0.3  | -0.2 | 0.7  | 1.2  | 3.0  | -    | -    | -    | -    |
|                 | FS | 1.6  | 0.0  | -1.4 | -0.9 | -0.2 | 2.6  | -    | -    | -    | -    |

### 3.2.4. 3D & 2D Radiation Pattern


#### 3.2.4.1. Test Condition: On 300 mm × 300 mm Metal Plane

- Test Chamber: GL-S-1

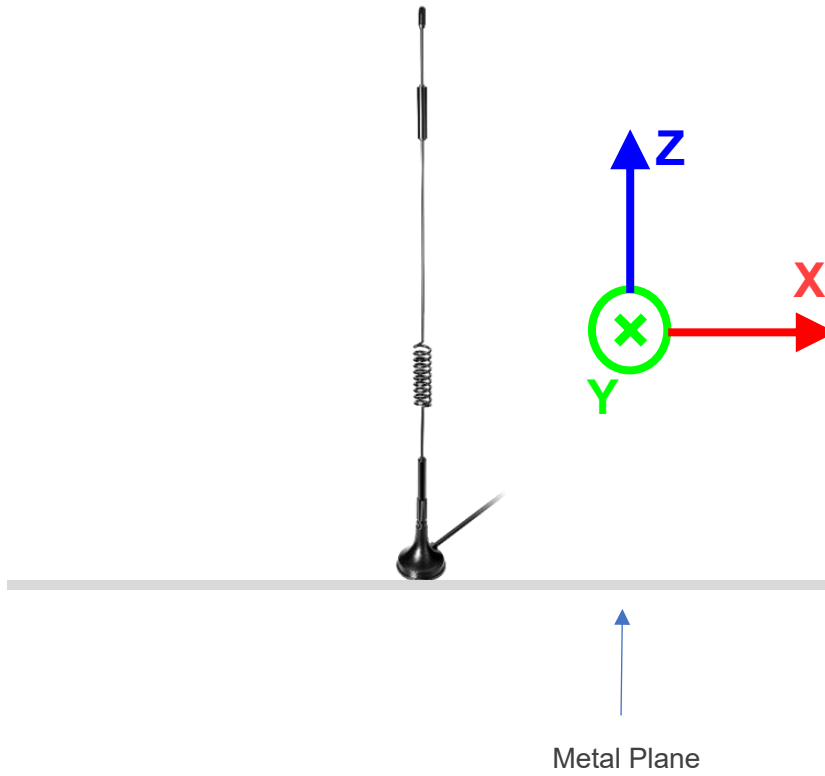


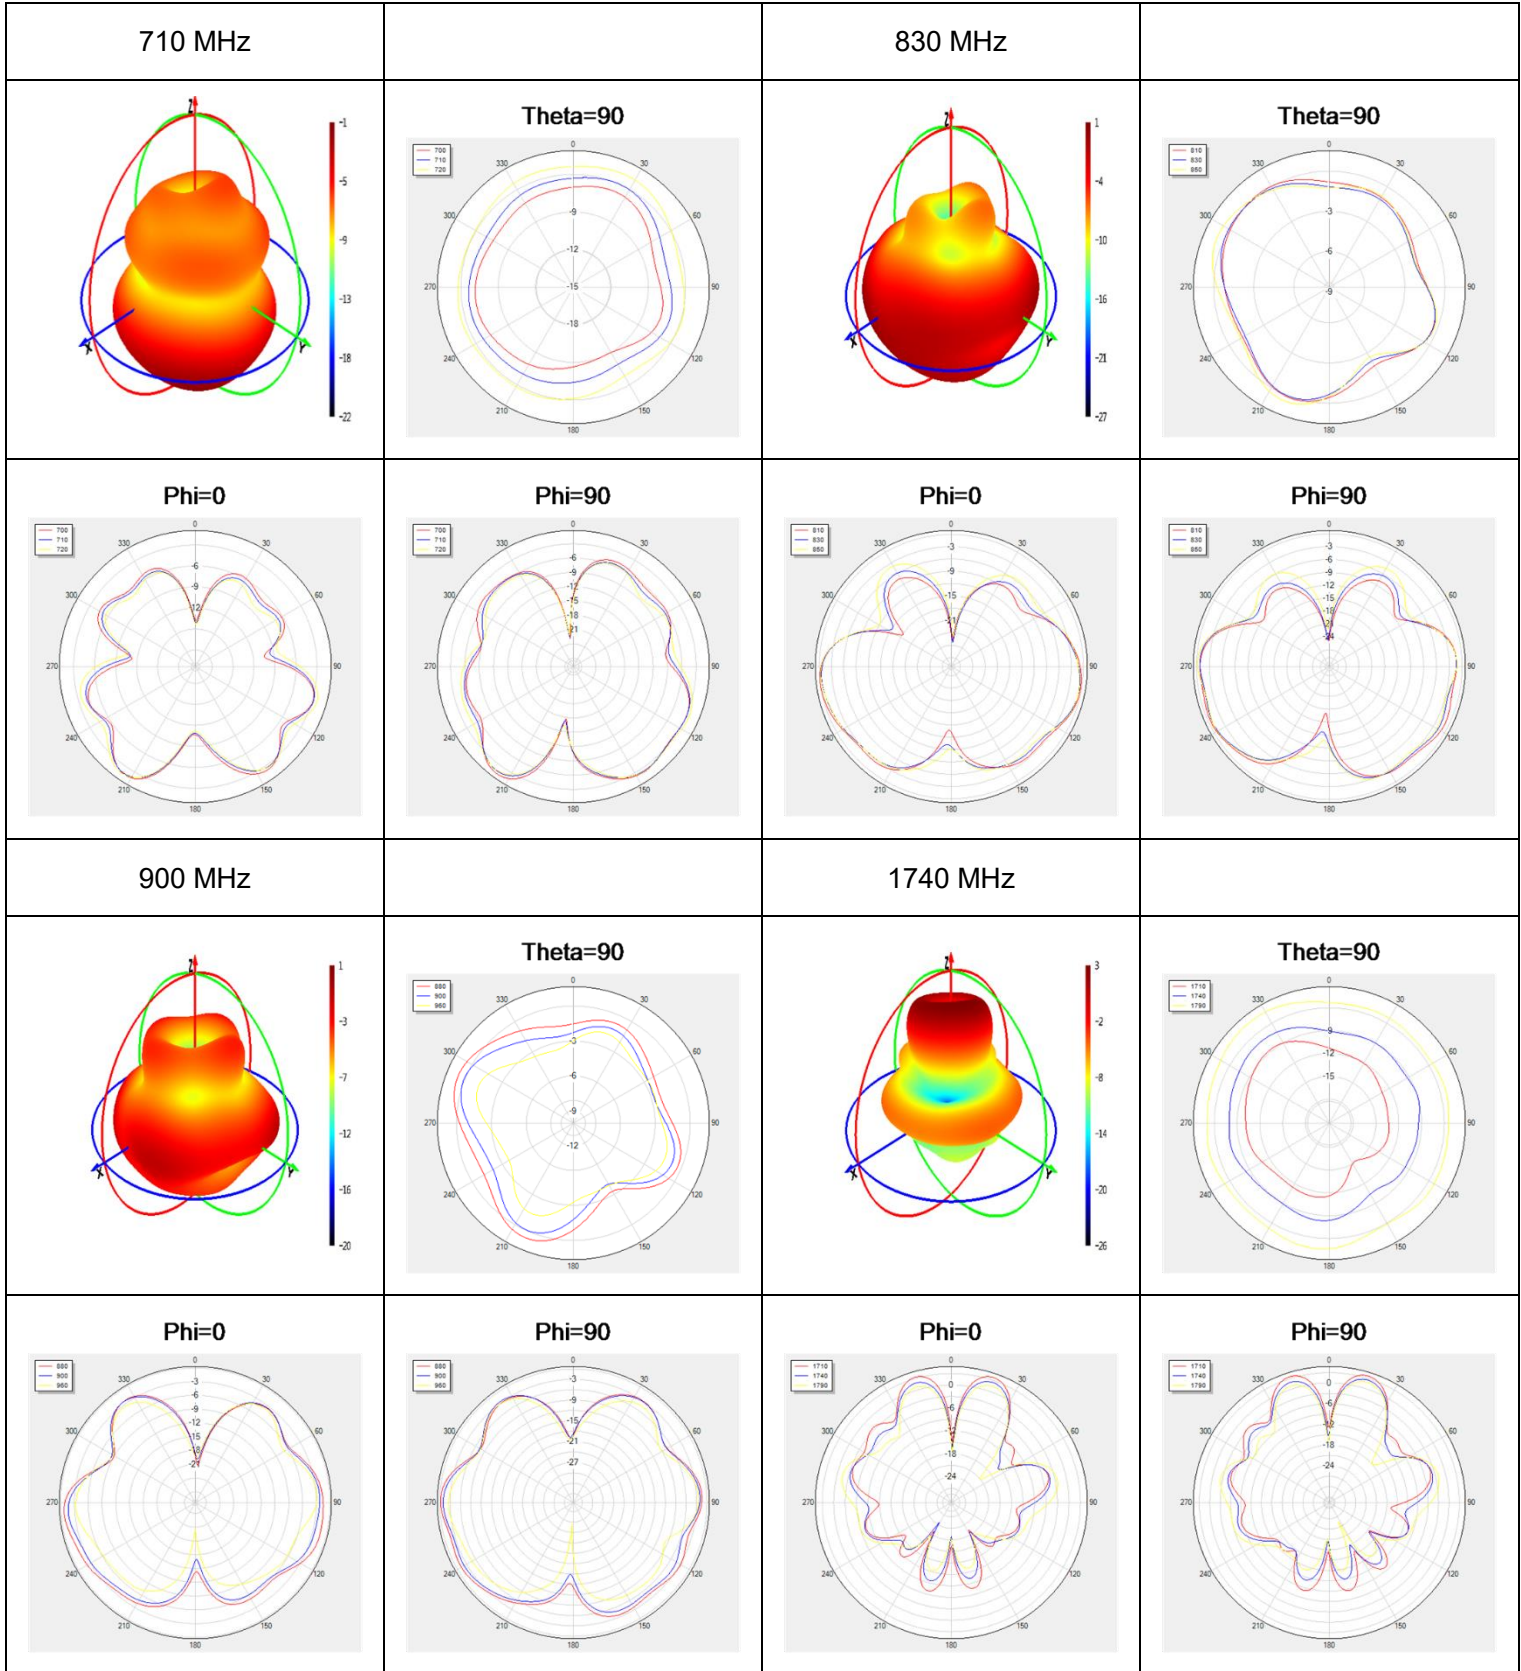


1880 MHz




Theta=90




1950 MHz




Theta=90

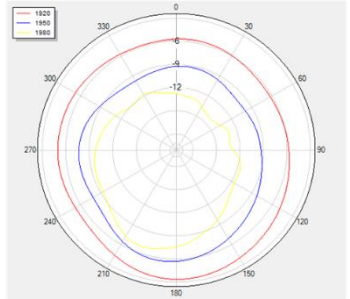


Phi=0




Phi=90




Phi=0




Phi=90

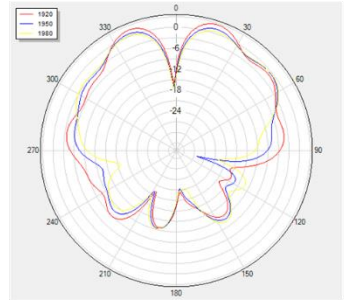


2140 MHz




Theta=90




2350 MHz




Theta=90

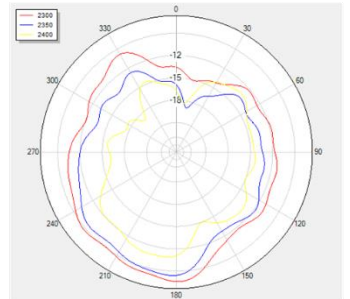


Phi=0




Phi=90




Phi=0




Phi=90

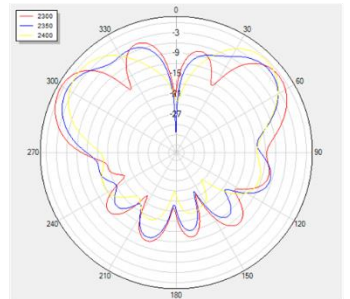


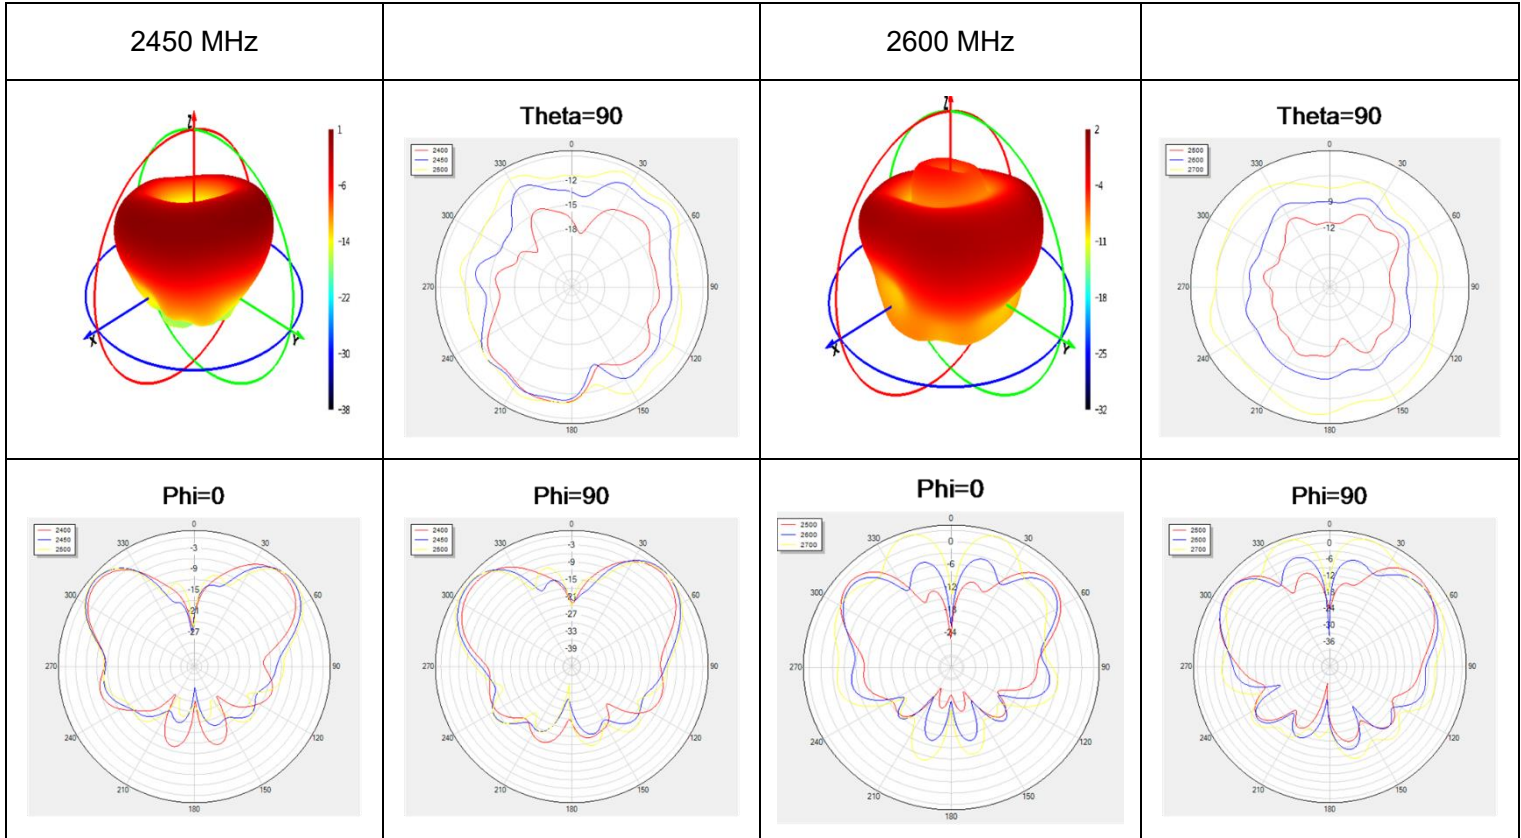


**3.2.4.2. Test Condition: Free Space**

- Test Chamber: GL-S-1

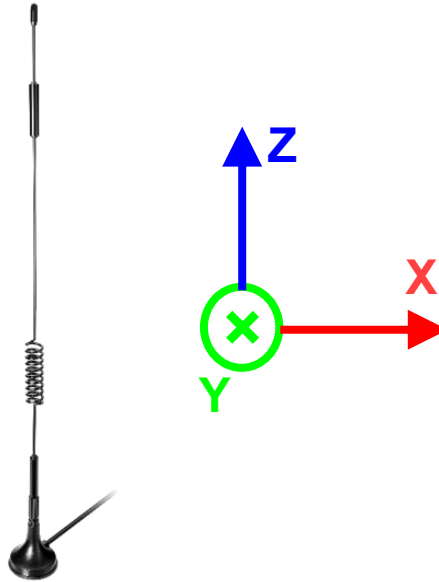


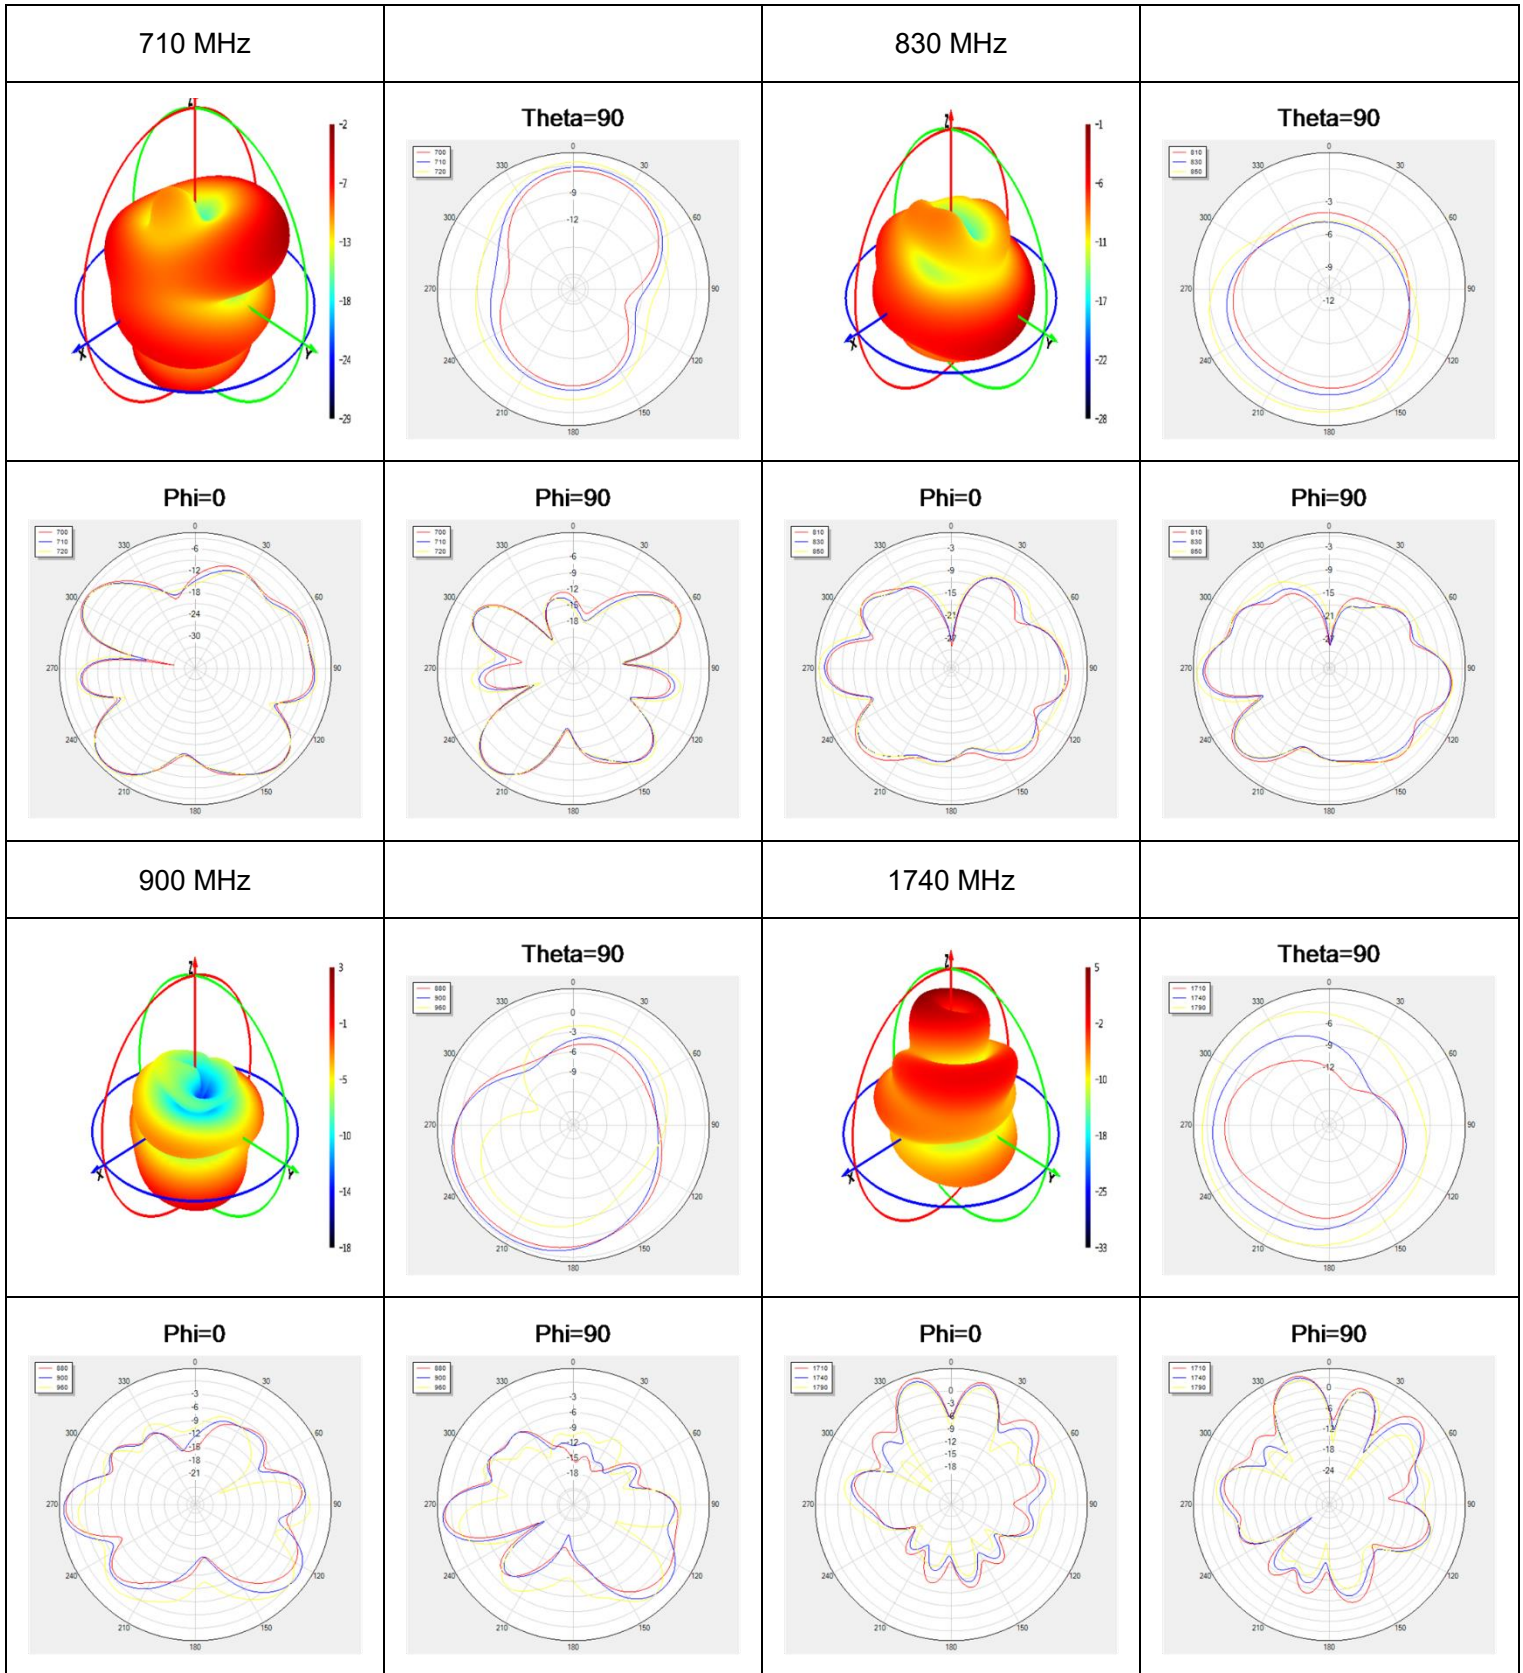


1880 MHz




Theta=90




1950 MHz




Theta=90




Phi=0




Phi=90




Phi=0




Phi=90




2140 MHz




Theta=90




2350 MHz




Theta=90




Phi=0




Phi=90




Phi=0






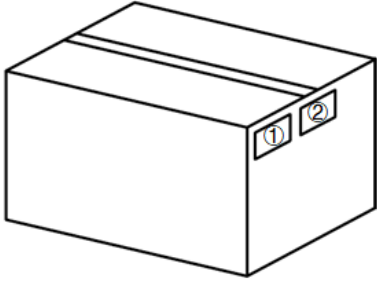
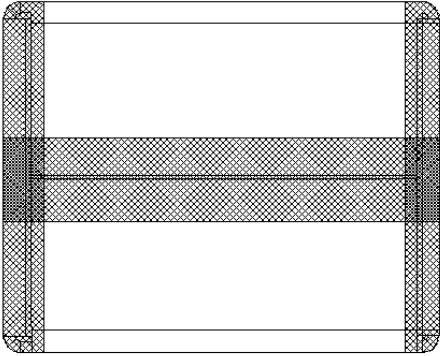
Phi=90

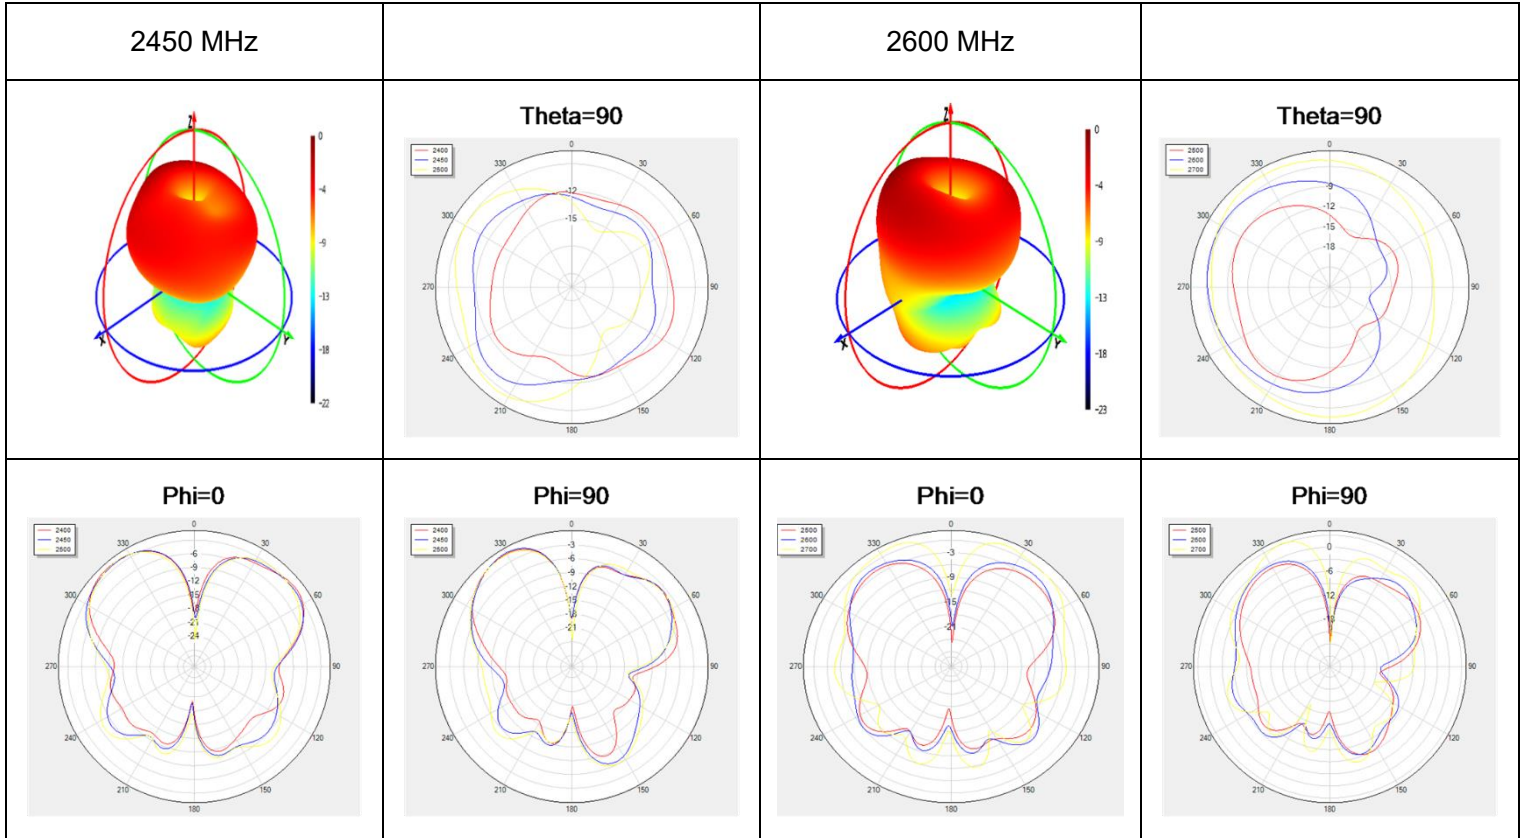



# 4 Packaging

| Step | Packaging Picture / 2D Picture  | Description  |
|------|---|--|
| 1    |   | 1 pc antenna product in a PE bag.  |
|      |  | 50 pcs antenna products in a big PE bag.   |
| 3    |  | <p>(6 PCS PE Bags / Carton Box)<br/>(300 PCS Antennas / Carton Box)</p> <p><u>Carton Size:</u><br/><u>L × W × H = 370 × 370 × 295 mm</u></p> |

|   |  |  |
|---|--|--|
| 4 |  A 3D perspective drawing of a rectangular cardboard box. On the front face, there are two small rectangular labels. The left label is marked with a circled '1' and the right label is marked with a circled '2'.                            | <p><b>Position for Attaching Labels</b></p> <ul style="list-style-type: none"><li>① Carton Label</li><li>② Quality Label</li></ul> |
| 5 |  A 3D perspective drawing of a rectangular carton with a mesh-like texture. It features a prominent H-shaped structure on the front face, consisting of two horizontal bars and two vertical bars, which likely serve as a sealing mechanism. | <p><b>Sealing Cartons</b><br/>H-shaped sealing cartons</p>   |

# Contact Us

**At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:**

**Quectel Wireless Solutions Co., Ltd.**

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: [info@quectel.com](mailto:info@quectel.com)

**Or our local offices. For more information, please visit:**

<http://www.quectel.com/support/sales.htm>.

**For technical support, or to report documentation errors, please visit:**

<http://www.quectel.com/support/technical.htm>.

Or email us at: [support@quectel.com](mailto:support@quectel.com).

# Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

## Use and Disclosure Restrictions

### License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

### Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

### Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

### Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

## Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

## Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

**Copyright © Quectel Wireless Solutions Co., Ltd. 2025. All rights reserved.**

# Revision History

| Version | Date       | Author  | Note  |
|---------|------------|---|---|
| -       | 2021-04-14 | Kenny YIN   | Creation of the document  |
| 1.0     | 2020-06-16 | Kenny YIN   | First official release  |
| 1.1     | 2020-12-11 | Kenny YIN   | Updated the antenna image (Chapter 2).  |
| 1.2     | 2021-01-12 | Kenny YIN   | Updated the efficiency data (Chapter 4).  |
| 1.3     | 2021-01-27 | Kenny YIN   | Added IP rating description and installation method.  |
| 2.0     | 2021-04-30 | Aria CHU  | Updated all test data in the datasheet.   |
| 2.1     | 2021-07-25 | Aria CHU  | <ol style="list-style-type: none"> <li>Updated working temperature (Chapter 3).</li> <li>Added detailed passive electrical specifications (Chapter 3).</li> </ol> |
| 2.2     | 2021-12-01 | Aria CHU  | Updated the product description (Chapter 1).  |
| 3.0     | 2023-02-24 | Damon ZHANG/<br>Lucky FENG/<br>David LIU/<br>Aria CHU | Updated all data and datasheet template.  |
| 3.1     | 2023-08-15 | Lucky FENG  | Updated the drawing (Chapter 2).  |
| 3.2     | 2025-03-11 | Rainey LIAO   | Updated the starting frequency to 698 MHz (Homepage and Chapter 1.1)  |
| 3.2     | 2025-04-24 | Rainey LIAO   | Updated the antenna image (Cover page).   |

**QUECTEL**

[www.quectel.com](http://www.quectel.com)